

Pigtail Cable

TL-ANT24PT3

⦿ Features:

- Easy to install and use
- Manufactured using 3m Low Loss CFD-200 cable that provides a higher performance cable with excellent flexibility
- N Male to RP-SMA Male connector, applicable in most of connections between the wireless AP/Router and antenna



⦿ Description:

The TL-ANT24PT3 pigtail cable is ideal for flexible connection between rigid outdoor cable and wireless access points/routers. It is very easy to use, no configuration or installation software required.


⦿ Specifications:

| | |
|----------------|-----------------------|
| Frequency | DC ~ 3GHz |
| Impedance | 50Ω Nominal |
| Insertion Loss | 2.9 dB |
| VSWR (MAX.) | 1.5:1 Max. |
| Connector Type | N Male to RP-SMA Male |
| Operating Temp | -10°C~+60°C |
| Storage Temp | -40°C~+80°C |

Diagram:

Outdoor Point to Point Application

Simple and Convenient Installation with Excellent Transmission Range

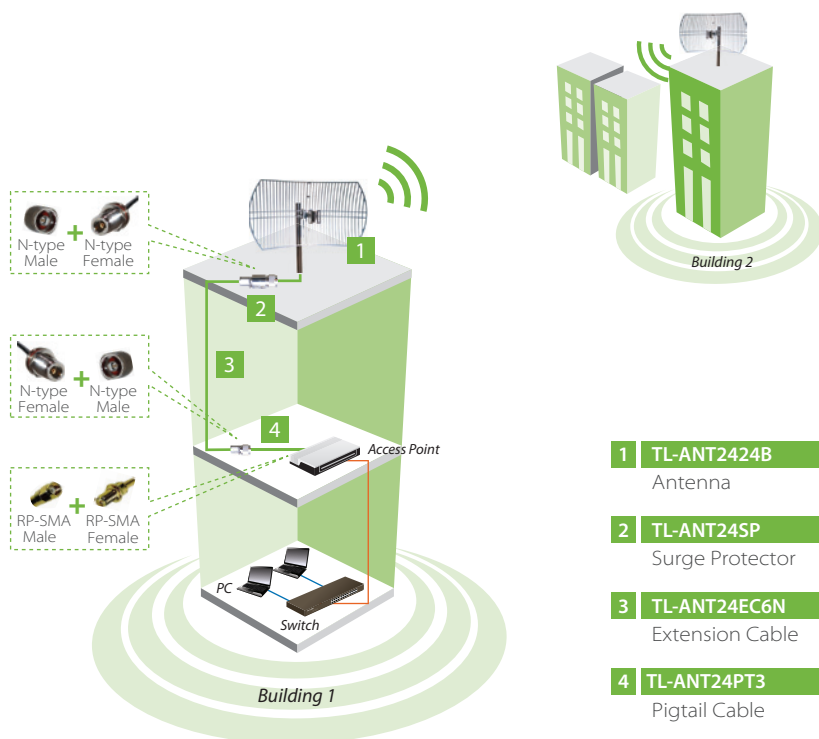

Package:

- Pigtail Cable
TL-ANT24PT3