
Overview

HPE ProLiant DL20 Generation9 (Gen9)


The dense and compact HPE ProLiant DL20 Gen9 Server powered by Intel Pentium, Core i3 and E3-1200v5 processors provides a unique blend of enterprise class capabilities & value. It offers outstanding configuration flexibility to cater to a wide variety of business requirements at an affordable price point.

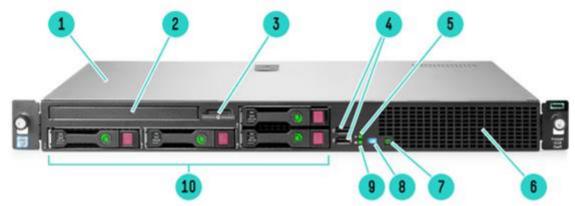

Front View

- 1 Access Panel
- 3 Serial number/iLO information pull tab
- 5 Health LED
- 7 Power On/Standby button and system power LED button
- 9 NIC status LED

- 2 Optical Drive
- 4 2 USB 2.0 connectors
- 6 Front 2 Fan Assembly
- 8 UID LED
- 10 Hard Drive Bays

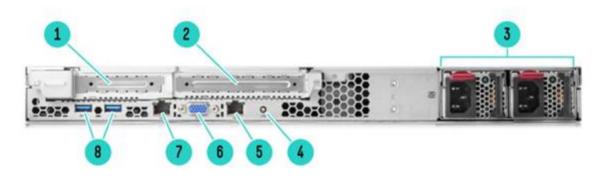


Rear view

- 1 Expansion Slot 1, PCIe x 8
- 3 Redundant Power Supply (only on SFF Chassis)
- 5 NIC Connector 2
- 7 NIC1/shared iLO connector

- 2 Expansion Slot 2, PCIe x 16
- 4 UID LED
- 6 Video Connector
- 8 USB 3.0 Connector



Overview

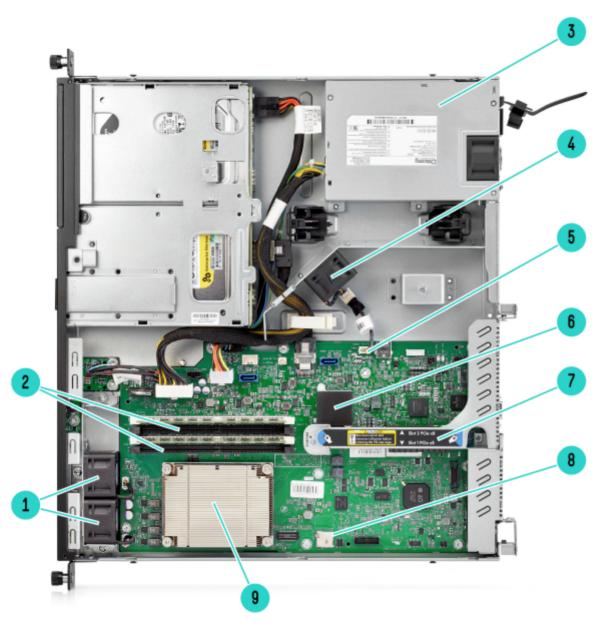

Internal View

- 1 Fan cage shown with 2 fans
- 3 (Under) Power supply (1x 290W power supply shown)
- 5 Internal USB 3.0 connector
- 7 PCle Riser
- 9 1 Processor, heatsink showing, with HP Smart Socket Guide

What's New

- Introducing HPE Non-hot Plug Entry drives and Hot plug standard drives for price sensitive customers
- 8Gb and 16Gb Fiber Channel HBA support
- Introducing TPM 2.0

- 2 DDR4 DIMM slots. 4 slots
- 4 Central Fan Assembly
- 6 Embedded HPE Smart Array B140i controller
- 8 MicroSD card slot



Standard Features

NOTE: For more information regarding Intel Xeon processors, please see the

following http://www.intel.com/xeon.

Processor One of the	Model	CPU frequency	Cores	L3 Cache	Power	DDR4 Hz	
following	G4400	3.3GHz	2	3MB	54W	2133	
depending on	G4500	3.5GHz	2	3MB	51W	2133	
model	i3-6100	3.7GHz	2	3MB	51W	2133	
	i3-6300	3.8GHz	2	4MB	51W	2133	
	E3-1220v5	3.0GHz	4	8MB	80W	2133	
	E3-1225v5	3.3GHz	4	8MB	80W	2133	
	E3-1230v5	3.4GHz	4	8MB	80W	2133	
	E3-1240v5	3.5GHz	4	8MB	80W	2133	
	E3-1270v5	3.6GHz	4	8MB	80W	2133	
	E3-1280v5	3.7GHz	4	8MB	80W	2133	
	E3-1240Lv5	2.1GHz	4	8MB	25W	2133	
	E3-1260Lv5	2.9GHz	4	8MB	45W	2133	
On System							Dood
On System Management Chipset	HPE iLO (Firmware HPE iLO4 2.0 or later), 4GB NAND NOTE: 1GB USB user space configurable via UEFI and accessible via iLO. Read and learn more in the <u>iLO QuickSpecs</u> .						
		in the <u>ILO QU</u>		<u>s</u> .			
Memory	Type: DDR4 Unbuffered Unbuffered (UDI DIMM Slots Ava Maximum Capa (UDIMM)	ed (UDIMM) IMM) ilable 4	4 DI proc		lMs per cha	2 channels pe nnel	
	Type: DDR4 Unbuffere Unbuffered (UD DIMM Slots Ava Maximum Capa	ed (UDIMM) IMM) ilable 4	4 DI proc	MM slots per cessor, 2 DIM	lMs per cha		
Memory Memory Protection One of the following depending on	Type: DDR4 Unbuffere Unbuffered (UD DIMM Slots Ava Maximum Capa (UDIMM)	ed (UDIMM) IMM) ilable 4 icity 64GB	4 DI proc (4 x 16G	MM slots per cessor, 2 DIM B UDIMM @	IMs per cha 2133MHz)		

Expansion Slots



Standard Featu	res						
Dual side Low profile riser	Expansion Techr Slots #	ology Bus Width	Connector Width	Bus Number		n Factor	Notes
	1 PCIe	3.0 x8	x8			ngth/half eight	
	2 PCle	3.0 x8	x8		Half-le	ngth/Full eight	
	NOTE: Bus Widt connector.	h data indicat	es the numb	er of phys	sical elec	trical lanes runn	ing to the
FlexibleLOM	Expansion Techn Slots #		Connector	Bus Number	Device	Form Factor	Notes
Riser	1 Flex	-	Width x8	Number	Number	Half-length/half	
	LC 2 PCIe		x8			height Half-length/Full	
	NOTE: This riser	is mandatory	for installing	FlexibleL	_OMs.	Height	
GPU Riser	Expansion Techn Slots #	ology Bus Width	Connector Width	Bus Number	Device Number	Form Factor	Notes
	1 2 PCle	3.0 x16	x16			Half-length/Full	
	NOTE: It is mand	atory to choo	se one of the	e above ri	sers.	Height	
Storage Controller One of the following depending on model	Entry Models Base Models Performance Models NOTE: B140i pro 6Gb/s and suppo NOTE: H240 pro up to 12Gb/s and NOTE: DL20 Get option to know m	rts RAID 0, 1 vides support supports RAI 19 also suppo	ic Smart Arr IO Smart Ho for up to 4 \$ & 5 on DL20 for up to 4 \$ ID 0, 1 & 5 o	ay B140i ost Bus Ad SATA driv Gen9. SAS/SATA n DL20 G	Controlle dapter res, data f A drives, c ien9.	r transmission sp data transmissio	n speeds
Internal Storage Devices One of the following depending on model	Optical Drives Hard Drives Hard Drive Bays	Non hot plug bay is availa NOTE: Drive NOTE: All P hard drive bl additional ha P/N 654961- 689745-B21 654963-B21 numbers for	andard bays total w bays total wi proLiant DL LFF and SF ble with both cage chang re-configure anks installe and drive blar B21: HPE S : HPE LFF C single HDD	ith Optical th Optical 20 Gen9 F version models. ges are no d Models ed. Should hks, they of FF Gen9 Gen9 Hard blanks be	Bay server of is in CTC ot suppor come pool the cust can order Hard Drive I Drive Bl d Drive Bl d Drive Bl dow are a	pulated with sor	rive ne ier i⁄N art iould



Standard Featu	res				
Maximum		CAPACITY	CONFIGURATION		
Internal Storage	Hot Plug SFF SAS	8TB	4 x 2TB		
One of the	Hot Plug SFF SATA	8TB	4 x 2TB		
following	Hot Plug LFF SAS	16TB	2 x 8TB		
depending on	Hot Plug LFF SATA	16TB	2 x 8TB		
model	Hot Plug SFF SAS	15.36TB	4 x3.84TB		
	SSD				
	Hot Plug SFF SATA	15.36TB	4 x3.84TB		
	SSD	15 26TD	4 x2 94TD		
	Hot Plug LFF SATA SSD	15.36TB	4 x3.84TB		
	Non Hot Plug LFF	8TB	2 x 4TB		
	SATA	OTD	2 × 410		
Power Supply One of the following depending on model	NOTE: HPE 900W Res supports 240VDC. Hewlett Packard Enter customers trying to bar while maintaining low power supply options Server. The HPE 290W FIO F features 92% power end server. The HPE 900W Gold Backplane can be corr offer only a single power loss. With an 80 Plus helps to reduce operat the data center. The power input modules. Gen9 SFF chassis mod All pre-configured server (A0K02A). This jumper option kit. If a different Cables web page local	DC Redundant Power S dundant Power Supply rprise entry-level Power lance their need for ent est possible hardware c have been designed spe Power Supply is the stan fficiency with a set of fe (Redundant) AC/240V E figured to support power ver supply bay, providing Gold power efficiency r ting expenses while pro power backplane option This Redundant power odel. vers ship with a standar er cord is also included w t power cord is required at	Supply supports100VAC to 240VAC and also Supplies provide lower-cost options for erprise class efficiency and reliability osts. The above mentioned Entry-Level ecifically for HPE ProLiant DL20 Gen9 dard, non-redundant AC power supply. It atures optimized for the DL20 Gen9 rack OC Power Input Module with Power er redundancy in ProLiant servers that g additional protection against power ating (up to 92%), this power option tecting against trapped power capacity in can support up to two (2) hot-plug AC supply option is only supported on DL20 d 6-foot IEC C-13/C-14 jumper cord with each standard AC power supply , please check the ProLiant Power		
	<u>protection/options/power-cable.html</u> To review the power requirements for your selected system, please use the HPE				
			com/go/hppoweradvisor		
System Fans		Non-redund	lant Redundant		
One of the	1P model	3 fans	NA		
following depending on model	DL20 has 3 fans,2 fro standard, non-redundant.	nt fan assemblies and ´	I center fan assembly which ship		



Standard Features

Standard Featur	es
Interfaces	Video1 rear video connectorUSB5 USB ports (standard) Front: 2xUSB 2.0 Rear: 2xUSB 3.0 Internal: 1x USB 3.0Micro SD Slot1 Micro SDNOTE: The SD slot is not a hot-pluggable device. Customers should not attempt to plug an SD card into the SD slot while the server is powered.LOM Network Ports2x1GbE portsNOTE: Customers can upgrade to next generation network (10 GbE) by installing a FlexibleLOM riser.
Operating Systems and Virtualization Software Support for ProLiant Servers	Microsoft Windows Server Red Hat Enterprise Linux (RHEL) SUSE Linux Enterprise Server (SLES) VMware NOTE: VMWare availability is dependent on General availability from the vendor. DL20 supports VMWare 5.5U3 and 6.0 U1 NOTE: For more information on the Hewlett Packard Enterprise Certified and Supported ProLiant Servers for OS and Virtualization Software and latest listing of software drivers available for your server, please visit our Support Matrix at: http://www.hp.com/go/ossupport and our driver download page http://h20566.www2.hpe.com/portal/site/hpsc? ac.admitted=1447391526103.125225703.1938120508.
Upgradeability One of the following depending on model	FlexibleLOM connector for 1 Gigabit or 10 Gigabit networking options Up to 4 DIMM slots available for higher memory capacity Up to 4SFF Drive bays or 2LFF Drive bays HPE Smart Array or Smart HBA Controller Redundant Power Supply NOTE: RPS is only compatible with DL20 SFF Chassis. Customer can upgrade from DL20 Gen9 on SFF chassis with 290W PSU to 900W redundant power supply
Industry Standard Compliance	UEFI (Unified Extensible Firmware Interface Forum) PCIe 3.0 Compliant PXE Support WOL Support Microsoft® Logo certifications USB 3.0 Support ASHRAE A3 NOTE: Refer to technical specifications section for more details.



Standard Featu	Ires
Graphics	Integrated Matrox G200 video standard On board graphics: Integrated Matrox G200 video standard
	 1280 x 1024 (32 bpp) 1920 x 1200 (16 bpp)
	HP iLO 4 On System Management Memory
	 16 MB Flash 256 MB DDR 3 with ECC (112 MB after ECC and video) HPE NVIDIA Quadro K2200 GPU Module NOTE: Install GPU riser option to support GPU card. A GPU enablement kit 811271-B21 is mandatory to support GPU.
HPE Server UEFI/Legacy ROM	Unified Extensible Firmware Interface (UEFI) is an industry standard that provides better manageability and more secured configuration than the legacy ROM while interacting with your server at boot time. HPE ProLiant Gen9 platform defaults to UEFI and can be factory or field configured for Legacy BIOS Boot Mode. NOTE: The UEFI System Utilities function is analogous to the HPE ROM-Based Setup Utility (RBSU) of legacy BIOS. For more information, please visit http://www.hpe.com/servers/uefi.
	UEFI enables numerous new capabilities specific to HPE ProLiant servers such as:
	 Secure Boot Operating system specific functionality Support for > 2.2 TB (using GPT) boot drives USB 3.0 Stack Embedded UEFI Shell Mass Configuration Deployment Tool using RESTful API for iLO 4 PXE boot support for IPv6 networks Boot support for option cards that only support a UEFI option ROM Network Stack configurations NOTE: For UEFI Boot Mode, boot environment and OS image installations should be configured properly to support UEFI. NOTE: UEFI FIO Setting (758959-B22) can be selected to configure the system in Legacy mode in the factory for your HPE ProLiant Gen9 Server.
Form Factor One of the following depending on model	1U Rack form factor 4SFF and 2LFF version: 1.70" (4.32cm) Height x 15.05" (38.22cm) Depth x 17.11" (43.46cm) Length NOTE: Depth of the chassis is measured from rear to ear at 15.05". Depth from rear to bezel is 15.5".



Standard Featu	res	
Embedded Management	HPE Integrated Lights-Out (HPE iLO)	Monitor your servers for ongoing management, service alerting, reporting and remote management with HPE iLO. Not available on ML10 Gen9. Learn more at <u>http://www.hpe.com/info/ilo</u> .
	UEFI	Configure and boot your servers securely with industry standard Unified Extensible Firmware Interface (UEFI). Learn more at http://www.hpe.com/servers/uefi .
	RESTful API	RESTful API for iLO 4 is Redfish 1.0 conformance for simplified server management such as configuration and maintenance tasks based on modern industry standards. Learn more at http://www.hpe.com/info/restfulapi .
	Intelligent Provisioning	Hassle free server and OS provisioning for 1 or few servers with Intelligent Provisioning. Learn more at http://www.hpe.com/servers/intelligentprovisioning .
	Embedded Remote Support	The Hewlett Packard Enterprise embedded remote support, when used with Insight Online direct connect or HPE Insight Remote Support, allows HPE ProLiant servers to transmit hardware events directly to Hewlett Packard Enterprise or a Hewlett Packard Enterprise Authorized Partner for automated phone home support. Learn more at <u>http://www.hpe.com/info/insightonline/explore</u> .
		Engine technologies whitepaper.
Server utilities	Smart Update	Optimize firmware and driver updates with Smart Update solutions including Smart Update Manager (SUM) and Service Pack for ProLiant (SPP) and smart components. Learn more at http://www.hpe.com/servers/smartupdatemanager.
	Insight	HPE SIM allows you to monitor the health of your HPE ProLiant Servers and HPE Integrity Servers, and also provides you with basic support for non-Hewlett Packard Enterprise servers. HPE SIM also integrates with Smart Update Manager to provide quick and seamless firmware updates. Learn more at http://www.hpe.com/servers/hpsim.
	Scripting Tool Kit and Windows PowerShell	Provision 1 to many servers using your own scripts to discover and deploy them with Scripting Tool Kit (STK) for Windows and Linux or Scripting Tools for Windows PowerShell. Learn more at http://www.hpe.com/servers/proliant/stkor http://www.hpe.com/servers/powershell.
	RESTful Interface Tool	RESTful Interface tool is a scripting tool to provision using RESTful API for iLO 4 to discover and deploy servers at scale. Learn more at <u>http://www.hpe.com/info/resttool</u> .
	HPE iLO Mobile Application	Enables the ability to access, deploy, and manage your server anytime from anywhere from select smartphones and mobile devices. For additional information please visit: <u>http://www.hpe.com/info/ilo/mobileapp</u> .
	HPE Insight	HPE Insight Online, available at no additional cost as part of your

Standard Fe	atures	
	Online	Hewlett Packard Enterprise warranty, Care Pack or contractual support agreement with Hewlett Packard Enterprise, is a personalized dashboard for simplified tracking of IT operations and support information from anywhere, anytime. Learn more at <u>http://www.hpe.com/info/insightonline/explore</u> .
Security	Power-on p Serial interf Administrat TPM 1.2 TPM 2.0 APCI 2.0b UEFI	
Warranty	and a world resellers. H date of pure date of pure Care Pack	ct is covered by a global limited warranty and supported by HPE Services dwide network of Hewlett Packard Enterprise Authorized Channel Partners ardware diagnostic support and repair is available for three years from chase. Support for software and initial setup is available for 90 days from chase. Enhancements to warranty services are available through HPE services or customized service agreements. Hard drives have either a three year warranty; refer to the specific hard drive QuickSpecs for
	with next buuse of Cust Mandatory will result w CSR parts complexity. Optional CS warranty ar	ver Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support usiness day response. Warranty repairs may be accomplished through the tomer Self Repair (CSR) parts. These parts fall into two categories: 1) CSR parts are designed for easy replacement. A travel and labor charge when customers decline to replace a Mandatory CSR part; 2) Optional are also designed for easy replacement but may involve added Customers may choose to have Hewlett Packard Enterprise replace SR parts at no charge. Additional information regarding worldwide limited and technical support is available at: 04.www1.hp.com/products/servers/platforms/warranty/index.html.



Optional Features			
Embedded Management	iLO Essentials	HPE iLO Essentials is the preferred license for small and medium business that offers full remote server management capabilities for small and medium business via the Integrated Remote Console (IRC), virtual media, and e-mail based alerts. Learn more about HPE iLO Essentials at <u>http://www.hpe.com/servers/iLO/essentials</u> .	
	iLO Scale-Out	HPE iLO Scale-Out is the preferred license built for web hosting, cloud service providers, and high performance computing data centers, managing massive scale out environments for the DL 100 and 10 series servers, not available for ML servers. This license offers sophisticated scripting tools that provides remote access through Text Console via SSH, Dynamic power capping, Email-based Alerting and proactive notifications. For more information, visit <u>http://www.hpe.com/servers/iLO/scale-out</u> .	
	iLO Advanced	HPE iLO Advanced licenses offer smart remote functionality without compromise, for all HPE ProLiant servers. The license includes the full integrated remote console, virtual keyboard, video, and mouse (KVM), multi-user collaboration, console record and replay, and GUI-based and scripted virtual media and virtual folders. You can also activate the enhanced security and power management functionality. Learn more about HPE iLO Advanced at http://www.hpe.com/servers/iloadvanced.	
Server Management	HPE Insight Control	HPE Insight Control, lets you deploy, migrate, monitor, remote control, and optimize your IT infrastructure through a single, simple management console. For more information, see <u>http://www.hpe.com/info/insightcontrol</u> .	
Rack and Powe Infrastructure	intelligent solut infrastructure s performance o help secure yo to changes in t monitor, deploy leader, Hewlet of power, cooli	Power Infrastructure products and services create highly efficient and tions for existing or new IT data centers. HPE Rack and Power solutions - rack infrastructure, power protection and management, ptimized data centers (PODs) - are the foundation you are looking for to our long-term IT success. These products are designed to help you react he industry. They deliver efficient, easy-to-use capabilities to manage, y and provision infrastructure from entry to enterprise. As an industry t Packard Enterprise is uniquely positioned to address the key concerns ing, cable management and system access. <u>HPE Rack and Power Infrastructure</u> .	
High Performance Clusters	ProLiant cluste networks and s Red Hat Enter Windows HPE	latforms are specifically engineered, factory-integrated large-scale ers optimized for High Performance Computing, with a choice of servers, software. Operating system options include specially priced offerings for prise Linux and SUSE Linux Enterprise Server, as well as Microsoft C Server. A Cluster Platform Configurator simplifies ordering. com/go/clusters.	



.

. _

Optional Featu	ies in the second s
HPC Interconnects	NOTE: High Performance Computing (HPC) interconnect technologies are available for this server under the HPE Cluster Platform product portfolio. These high-speed interconnects are fully supported by Hewlett Packard Enterprise when they are part of these configure to order clusters. Solutions can be defined with a lot of flexibility with the help of configuration tools. Please visit the following URL to configure HPEC Clusters with InfiniBand Interconnects: http://www.hp.com/techservers/clusters/ucp/index.html.
Storage Software	Whether you're a large enterprise or a smaller business, Hewlett Packard Enterprise data protection and recovery software will cost-effectively protect you against disaster and ensure business continuity.

Service and Support

- HPE Support Services HPE Technology Services delivers confidence, reduces risk and helps customers realize agility and stability. Connect to Hewlett Packard Enterprise to help prevent problems and solve issues faster. HPE Support Services enable you to choose the right service level, length of coverage and response time as you purchase your new server, giving you full entitlement to the support for need for your IT and business.
- Connect your devices Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%¹ reduction in down time, near 100%² diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All of these benefits are already available to you with your server storage and networking products, securely connected to Hewlett Packard Enterprise support. 1- IDC 2 - HP CSC reports 2014 - 2015

Recommended Basic: HPE Foundation Care NBD, three-year Support Service Support HPE Foundation Care Next Business Day connects you to Hewlett Packard Enterprise during business hours for assistance on resolving issues - This service features need based next business day hardware onsite response and software call back within two hours. In addition, Collaborative software support and provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

http://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en

Standard: HPE Foundation Care 24x7, three-year Support Service HPE Foundation Care 24x7 gives you access to Hewlett Packard Enterprise 24 hours a day, seven days a week for assistance on resolving issues. This service includes need based Hardware onsite response within four hours. In addition, collaborative software support is included in this service that provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make Hewlett Packard Enterprise your first call to help resolve hardware or software problems.

http://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en

Optimized: HPE Proactive Care* with 24x7 coverage, three year Support Service HPE Proactive Care gives customers an enhanced call experience. When your products are connected to Hewlett Packard Enterprise, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice. This service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem. This service also includes collaborative software support for Independent Software Vendors (ISVs), (Red Hat, VMWare, Microsoft, etc.) running on your Hewlett Packard Enterprise servers.

Parts and Materials Hewlett Packard Enterprise will provide Hewlett Packard Enterprise-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.



Service and Support

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product QuickSpecs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

Related ServicesHPE Server Hardware Installation

Provides for the basic hardware installation of Hewlett Packard Enterprise branded servers, storage devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner. <u>http://h20195.www2.hp.com/V2/GetPDF.aspx/5981-9356EN.pdf</u>

HPE Installation and Startup Service

Provides for the installation and startup of Hewlett Packard Enterprise technology including BladeSystems, C-Class enclosure, HPE ProLiant c-Class and Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and Fibre Channel), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operating system type (Windows® or Linux).

HPE Technology Services Support Credits Offer flexible services and technical skills to meet your changing IT demands. With a menu of service that is tailored to suit your needs, you get additional resources and specialist skills to help you maintain peak performance of your IT. Offered as annual credits, you can plan your budgets while proactively responding to your dynamic business.

HPE EducationKeep your IT staff trained making sure they have the right skills to deliver on yourServicesbusiness outcomes. Book on a class today and learn how to get the most from your
technology investment. http://www.hpe.com/ww/learn

HPE Support The HPE Support Center is a personalized online support portal with access to information, tools and experts to support Hewlett Packard Enterprise business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers.

Learn more http://www.hpe.com/support/hpesc

The Hewlett Packard Enterprise Support Center Mobile App* allows you to resolve issues yourself or quickly connect to an agent for live support. Now, you can get access to personalized IT support anywhere, anytime. HPE Insight Remote Support and HPE Support Center are available at no additional cost with a Hewlett Packard Enterprise warranty, HPE Support Service or Hewlett Packard Enterprise contractual support agreement.

*HPE Support Center Mobile App is subject to local availability.

For more information: http://www.hpe.com/services



Pre-configured Models

Entry Modele	Base Models
	823556-B21
	HPE ProLiant DL20 Gen9 E3-
	1220v5 8GB-U B140i 2LFF 290W
	PS Base Server
Intel® Pentium® G4400	Intel® Xeon® E3-1220v5
	One
4GB (1x4GB UDIMMs, 2133	8GB (1x8GB UDIMMs, 2133 MHz)
MHz)	
HPE embedded 1Gb 2-	port 332i network Adapter
HPE Dynamic	Smart Array B140i
None ship standard; includes 2	None ship standard
LFF hard drive blanks	
2 LFF HDD Bays (Non Hot Plug)	2 LFF HDD Bays (Hot Plug)
1: (Optional: DV	D-ROM, DVD-RW)
None	
2 PCle 3.0 slots	
(1) 290W Non Hot Plug Power Supply	
3 non hot plug, non-redundant	
iLO Management (standard), Inte	lligent Provisioning (standard), iLO
	le-out (optional only for DL), iLO
	ed (optional)
	Short Friction Rail kit
Server Warranty includes 1-Year	Parts, 1-Year Labor, 1-Year Onsite
support with next b	usiness day response
	4GB (1x4GB UDIMMs, 2133 MHz) HPE embedded 1Gb 2- HPE Dynamic 3 None ship standard; includes 2 LFF hard drive blanks 2 LFF HDD Bays (Non Hot Plug) 1; (Optional: DV 2 PCle (1) 290W Non Ho 3 non hot plug iLO Management (standard), Inte Essentials (optional), iLO Sca Advance Rack (1U), HPE 3 Server Warranty includes 1-Year

	Performa	ance Models	
[SKU Number]	823559-B21	823562-B21	
Model Name	HPE ProLiant DL20 Gen9 E3- 1240v5 8GB-U H240 4SFF 290W PS Performance Server	HPE ProLiant DL20 Gen9 E3- 1240v5 8GB-U H240 4SFF 900W RPS Performance Server	
Processor	Intel® Xeo	n® E3-1240v5	
Number of Processors		One	
Memory	8GB (1x8GB UE	DIMMs, 2133 MHz)	
Network Controller	HPE embedded 1Gb 2-	port 332i network Adapter	
Storage Controller	HPE H240 Smar	rt Host Bus Adapter	
Hard Drive	None sh	nip standard	
Internal Storage	4 SFF	HDD Bays	
Optical Drive Bay	1; (Optional: DV	D-ROM, DVD-RW)	
Optical Drive	1	None	
PCI-Express Slots	2 PCIe	e 3.0 slots	
Power Supply	(1) 290W Non Hot Plug Power Supply	(1) HPE 900W Redundant Power Supply and RPS Backplane kit	
Fans	3 non hot plug	3 non hot plug, non-redundant	
Management	Essentials (optional), iLO Scale-ou	iLO Management (standard), Intelligent Provisioning (standard), iLO Essentials (optional), iLO Scale-out (optional only for DL), iLO Advanced (optional)	
Energy Star		Meets Energy Star requirements	
Form Factor	Rack (1U), HPE S	Short Friction Rail kit	

Pre-configured Models

Warranty	Server Warranty includes 1-Year Parts, 1-Year Labor, 1-Year Onsite support with next business day response
redundancy. The BTO includes the	dd additional 900W Redundant Power supply input module for e backplane cable kit and need not be added additionally. ertification would be available latest by end of May 2016.
Country Code = xx1 = B21	Worldwide

Country Code	xx1 = B21	Worldwide
Key	xx1 = 291	Japan
	xx1 = AA1	PRC



Configuration Information - Factory Integrated Models

This section lists some of the steps required to configure a Factory Integrated Model. To ensure only valid configurations are ordered. Hewlett Packard Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for information on configurable product offerings and requirements.

1. Factory Integrated Models must start with a CTO Server.

2. FIO indicates that this option is only available as a factory installable option.

3. All Factory Integrated Models will be populated with sufficient hard drive blanks based on the number of initial hard drives ordered with the server.

4. Some options may not be integrated at the factory. Contact your local sales representative for additional information.

Step 1: Base Configuration (choose one of the following configurable models)

[Chassis]	HPE ProLiant DL20 Gen9	HPE ProLiant DL20 Gen9	HPE ProLiant DL20 Gen9
	Non-hot Plug 2LFF	2LFF Configure-to-order	4SFF Configure-to-order
	Configure-to-order Server	Server	Server
		040705 004	040700 D04
SKU Number	819784-B21	819785-B21	819786-B21
Processor	1	1	1
DIMM Slots	4 DIMM slots for UDIMM DDR4 Memory		
Storage	HPE Dynamic Smart Array B140i		
Controller			
PCle		2 PCIe 3.0 Slots	
Drive Cage	2LFF Non Hot Plug	2LFF Hot Plug	4SFF Hot Plug
Network	HPE embedded 1Gb 2-port 332i network Adapter		
Controller			
Fans	3 non hot plug, non-redundant		
Management	iLO Management (standard), Intelligent Provisioning (standard)		
USB	2 front, 1 internal, 2 rear		
Ears	HPE Thumbscrew Ears		

Step 2: Choose Required Options (only one of the following from each list unless otherwise noted)

HPE Processors Select one processor from Core options-Processor section below

- Select one xxxxxx-L21.
- Only one processor supported.
- DDR4 speed is the maximum memory speed of the processor. Actual memory speed may depend on the quantity and type of DIMMs installed.

For the Intel® C232 Chipset E3-1200 Series, the letter preceding the model number indicates the Product Line (E3, E5, E7); 1200x v#, 1 is the number of CPU, 2 is socket type/segment designation, 00 = Processor SKU, x = L for low power SKUs and v# (not yet designated) is the version number.

HPE Memory

Select one or more memory from Core options-Memory section below,

- HPE memory from previous generation servers are not qualified or warranted with this HPE ProLiant Server.
- HPE Standard Memory (UDIMM) is required to realize the memory performance improvements and enhanced functionality listed in this document for this HPE ProLiant Server.
- With one processor installed, four DIMMs slots are available.
- For more information on ProLiant Energy Efficient Features, see:



Configuration Information - Factory Integrated Models

http://www.hp.com/go/proliant-energy-efficient.

• Depending on the memory configuration and processor model, the memory speed would run at 2133MHz. Please see Memory Population Table or the Online Memory Configuration Tool at: <u>http://www.hp.com/go/ddr4config</u>.

HPE Power Supplies

- Select power supply from Core Options-Power Supplies section below:
 - Prior to selecting a power supply option, it is highly recommended that you review your server configuration in the HPE Power Advisor tool to determine the right size power supply for your server configuration. The HPE Power Advisor is located at: http://www.hp.com/go/hppoweradvisor.

On RPS Enablement Kit power options, mixing of power supplies in the same RPS enablement kit is not supported. All power supplies must be of the same input voltage, output rating, and efficiency rating. If non-matching power supplies are installed, you may receive an error message and/or experience operational issues with your server.

• HPE RPS require Redundant backplane kit and an RPS cable kit option for redundancy

Step 3: Choose Additional Factory Integratable Options

HPE Unique Options	Select one or more Unique options from Core options section below.		
Options	 This section may contain FIO options, please see the Unique options section below. 		
HPE Drives	 FIO indicates that this option is only available as a factory installable option. Select one or more drives from Core options-HPE Drives section below: 		
	 The components of a storage subsystem (e.g. the drive, the HBA/controller, firmware, and the server backplane) should operate at the same data transfer rate or the system bandwidth will be negotiated down to an acceptable level for all components. Hard drives have either a one year or three year warranty; refer to the specific hard 		
	 drive QuickSpecs for details. The HPE ProLiant Gen9 Smart Storage solutions are equipped with re-designed Small Form Factor (SFF 2.5 in) and Large Form Factor (LFF 3.5 in) hot plug carriers for HPE Qualified Hard Drives and Solid State Drives. These new carriers provide status and activity indicators as well as caution indicators for "Do Not Remove". 		
HPE Flexible LOM	Select a FlexibleLOM from Core options-Networking section below,		
20	 Only one FlexibleLOM can be added to the server. These options are upgradeable and can be changed from the original configuration after the server is shipped. For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter. 		
	 Please see the QuickSpecs for Technical Specifications and additional information: <u>http://www.hp.com/go/ProLiantNICs</u>. 		
HPE Networking	Select a standup NIC adapter from Core options-Networking section below,		
	 Please see the QuickSpecs for Technical Specifications and additional information: <u>http://www.hp.com/go/ProLiantNICs</u>. These options are upgradeable and can be changed from the original configuration after the server is shipped. For 10Gb adapters, a minimum of two Gigabytes (2 GB) of server memory is required per each adapter. 		
HPE Storage Controllers	Select one or more Storage options from Additional options section below.		



HPE I/O

Options

Expansion

HPE Rail Kits

- The embedded B140i controller will operate in UEFI only mode. For legacy support an additional controller will be needed, and for CTO orders please also select the Legacy mode settings part, 758959-B22
- This section may contain FIO options, please see HPE Storage Controllers section below.
- FIO indicates that this option is only available as a factory installable option.

Select one Riser Kit options from Core options section below.

- It is mandatory to choose one riser kit option for DL20 Gen9 configurations
- This section may contain FIO options, please see HPE I/O Expansion Options section below.
- FIO indicates that this option is only available as a factory installable option

One short friction rail kit option is supported on this HPE ProLiant Server as given below.

- Please take a moment to review the installation documentation that comes with the server to help you with the installation of your Gen9 server.
- See HPE Rack Options in Additional Options section of this QuickSpecs for more rack kit choices.

CAUTION: Please refer to your installation instructions for proper tools and number of people to use for any installation.

Hewlett Packard Enterprise recommends that a minimum of two people are required for all Rack Server installations.



ordered,	Some options may not be integrated at the factory. To ensure only valid c Hewlett Packard Enterprise recommends the use of a Hewlett Packard I	
HPE Unique Options	tor. Contact your local sales representative for additional information. HPE DL20 Gen9 2LFF Mini SAS P440 Cable Kit NOTE: This cable kit is required to support P440 controller on 2LFF chassis	811279-B21
optione	HPE DL20 Gen9 4SFF Mini SAS P440 Cable Kit NOTE: This cable kit is required to support P440 controller on 4SFF chassis	811282-B21
	HPE DL20 Gen9 Smart Storage Battery Holder NOTE: This holder is required to install the HPE Smart Storage battery (727258-B21) on P440 controller with FBWC (820834-B21, 726821-B21).	822451-B21
	HPE DL20 Gen9 Redundant Power Supply Backplane Cable Kit NOTE: It is mandatory to choose this back plane cable kit to support 828734-B21, 775595-B21 Redundant Power Supply Input Module. This cable kit is required in instances of single or double 900W PSU unit.	820306-B21
	HPE DL20 Gen9 M.2 RA and Optical Disk Drive Power Cable Kit NOTE: This cable kit is required to support M.2 and or ODD.	816284-B21
	HPE DL20 Gen9 Flexible LOM Riser Kit NOTE: This option is required to upgrade to next generation networking capabilities like 10GbE.	811259-B21
	HPE DL20 Gen9 PCIe Low Profile Riser Kit NOTE: It is mandatory to choose a riser kit to enable PCIe slots.	811265-B21
	HPE DL20 Gen9 PCIe Low Profile Riser FIO Kit HPE DL20 Gen9 GPU Enablement Kit NOTE: It is mandatory to choose the GPU enablement kit to support qualified GPU card	854846-B21 811271-B21
HPE Pro	cessorsEntry Processors	
	HPE ProLiant DL20 Gen9 Intel® Core™ i3-6100 (3.7GHz/2- core/3MB/51W) FIO Processor Kit	840010-L21
	HPE ProLiant DL20 Gen9 Intel® Core™ i3-6300 (3.8GHz/2- core/3MB/51W) FIO Processor Kit	840012-L21
	HPE ProLiant DL20 Gen9 Intel® Pentium® G4500 (3.5GHz/2- core/3MB/51W) FIO Processor Kit	840016-L21
	HPE ProLiant DL20 Gen9 Intel® Pentium® G4400 (3.3GHz/2- core/3MB/54W) FIO Processor Kit Base Processors	840018-L21
	HPE DL20 Gen9 E3-1220v5 (3.0GHz/4-core/8MB/80W) FIO Processor Kit	822425-L21
	HPE DL20 Gen9 E3-1225v5 (3.3GHz/4-core/8MB/80W) FIO Processor Kit NOTE: On E3-1225v5 we do not support embedded graphics capability.	836037-L21



Core Options		
	HPE DL20 Gen9 E3-1240v5 (3.5GHz/4-core/8MB/80W) FIO Processor Kit	822429-L21
	HPE DL20 Gen9 E3-1270v5 (3.6GHz/4-core/8MB/80W) FIO Processor Kit	822431-L21
	HPE DL20 Gen9 E3-1280v5 (3.7GHz/4-core/8MB/80W) FIO Processor Kit	822433-L21
	HPE DL20 Gen9 E3-1260Lv5 (2.9GHz/4-core/8MB/45W) FIO Processor Kit	822437-L21
	HPE DL20 Gen9 E3-1240Lv5 (2.1GHz/4-core/8MB/25W) FIO Processor Kit	822435-L21
HPE Memory	Unbuffered DIMMs (UDIMMs) HPE 16GB (1x16GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Unbuffered Standard Memory Kit	805671-B21
	HPE 8GB (1x8GB) Dual Rank x8 DDR4-2133 CAS-15-15-15 Unbuffered Standard Memory Kit	805669-B21
	HPE 8GB (1x8GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Unbuffered Standard Memory Kit	819880-B21
	HPE 4GB (1x4GB) Single Rank x8 DDR4-2133 CAS-15-15-15 Unbuffered Standard Memory Kit	805667-B21
	NOTE: Depending on the processor selected these memory will run at	t 2133MHz.
HPE Optical Drives	HP 9.5mm SATA DVD-ROM JackBlack Gen9 Optical Drive HP 9.5mm SATA DVD-RW JackBlack G9 Optical Drive NOTE: It is mandatory to choose a cable kit 816284-B21 with the above	726536-B21 726537-B21 re options.
HPE Drives	SATA Non-Hot Plug LFF (3.5-inch) Midline (MDL) Drives HP 4TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr	801888-B21 628065-B21
	Warranty Hard Drive HP 3TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr	801886-B21
	Warranty Hard Drive HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr	659339-B21
	Warranty Hard Drive HP 2TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr	801884-B21
	Warranty Hard Drive HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659337-B21
	HP 1TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Standard 1yr Warranty Hard Drive	801882-B21
	HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) Non-hot plug Midline 1yr Warranty Hard Drive	659341-B21
	SATA Non-Hot Plug LFF (3.5-inch) Entry(ETY) Drives HP 4TB 6G SATA 5.9K rpm LFF (3.5in) Non-hot Plug Entry 512e 1yr Warranty Hard Drive	815635-B21
	HPE 500GB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Entry 512e 1yr Warranty Hard Drive	843264-B21
	HPE 1TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Entry 512e 1yr Warranty Hard Drive	843266-B21
	HPE 2TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Entry 512e 1yr Warranty Hard Drive	843268-B21
	HPE 3TB 6G SATA 7.2K rpm LFF (3.5in) Non-hot Plug Entry 512e 1yr Warranty Hard Drive	843270-B21

NOTE: These Entry drives will have lower performance and workload ra comparison to HPE enterprise drives. SATA Hot Plug LFF (3.5-inch) Midline (MDL) Drives	ting in
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765255-B21
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	753874-B21
HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765253-B21
HP 4TB 6G SATA 7.2k rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	693687-B21
HP 3TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	628061-B21
HP 2TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	658079-B21
HP 1TB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive HP 500GB 6G SATA 7.2K rpm LFF (3.5-inch) SC Midline 1yr	657750-B21 658071-B21
Warranty Hard Drive SAS Hot Plug SFF (2.5-inch) Enterprise (ENT) Drives	000071-021
HP 1.2TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	781518-B21
HP 1.2TB 6G SAS 10K rpm SFF (2.5-inch) SC Dual Port Enterprise 3yr Warranty Hard Drive	718162-B21
HP 900GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	785069-B21
HP 900GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652589-B21
HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive HP 600GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr	759212-B21 781516-B21
Warranty Hard Drive HP 600GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr	652583-B21
Warranty Hard Drive HP 450GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr	759210-B21
Warranty Hard Drive HP 450GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr	652572-B21
Warranty Hard Drive HP 300GB 12G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr	759208-B21
Warranty Hard Drive HP 300GB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	785067-B21
HP 300GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652611-B21
HP 300GB 6G SAS 10K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652564-B21
HP 146GB 6G SAS 15K rpm SFF (2.5-inch) SC Enterprise 3yr Warranty Hard Drive	652605-B21
HP 1.8TB 12G SAS 10K rpm SFF (2.5-inch) SC Enterprise 512e 3yr Warranty Hard Drive	791034-B21
SAS Hot Plug SFF (2.5-inch) Midline (MDL) Drives HP 1TB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty	652749-B21
Hard Drive HP 500GB 6G SAS 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	652745-B21



SAS Hot Plug LFF (3.5-inch) Enterprise (ENT) Drives	
HP 600GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	765424-B21
HP 450GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737394-B21
HP 300GB 12G SAS 15K rpm LFF (3.5-inch) SC Converter Enterprise 3yr Warranty Hard Drive	737261-B21
SAS Hot Plug LFF (3.5-inch) Midline (MDL) Drives	
HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765259-B21
HP 6TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	761477-B21
HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 512e 1yr Warranty Hard Drive	765257-B21
HP 4TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	695510-B21
HP 3TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652766-B21
HP 2TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652757-B21
Hard Drive HP 1TB 6G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr Warranty Hard Drive	652753-B21
HPE 2TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr	818365-B21
Warranty Hard Drive HPE 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC Midline 1yr	818367-B21
Warranty Hard Drive SATA Hot Plug SFF (2.5-inch) Midline (MDL) Drives	
HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	655710-B21
HAIG DIVE HP 500GB 6G SATA 7.2K rpm SFF (2.5-inch) SC Midline 1yr Warranty Hard Drive	655708-B21
6G SATA Hot Plug SFF (2.5-inch) SC 512e Drives	
HP 2TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765455-B21
Hard Drive HP 1TB 6G SATA 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty Hard Drive	765453-B21
6G SATA Hot Plug LFF (3.5-inch) SC 512e Performance Drives	
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drive	793667-B21
HP 4TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Performance 1yr Warranty Hard Drives	793665-B21
HP 6TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive	793683-B21
HP 8TB 6G SATA 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr Warranty Hard Drive	793695-B21
6G SATA Hot Plug SFF (2.5-inch) SC Mixed Use Solid State Drives	
HP 200GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804613-B21
HP 1.6TB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804631-B21
HP 120GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816965-B21
HP 800GB 6G SATA Mixed Use-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804625-B21



12G SAS Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives HP 1.6TB 12G SAS Value Endurance SFF 2.5-in SC Enterprise	762263-B21
Value 3yr Wty Solid State Drive	
HP 800GB 12G SAS Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty Solid State Drive	762261-B21
12G SAS Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives	
HP 1.6TB 12G SAS Value Endurance LFF 3.5-in SC Enterprise	762272-B21
Value 3yr Wty Solid State Drive	
HP 800GB 12G SAS Value Endurance LFF 3.5-in SC Enterprise	762270-B21
Value 3yr Wty Solid State Drive	
12G SAS Hot Plug SFF (2.5-inch) SC 512e Drives	
HP 2TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty	765466-B21
Hard Drive	
HP 1TB 12G SAS 7.2K rpm SFF (2.5-inch) SC 512e 1yr Warranty	765464-B21
Hard Drive	
HP 600GB 12G SAS 15K rpm SFF (2.5-inch) SC 512e Enterprise	748387-B21
3yr Warranty Hard Drive	
HPE 1TB 12G SAS 7.2K rpm SFF (2.5in) SC Midline 1yr Warranty	832514-B21
Hard Drive	
12G SAS Hot Plug LFF (3.5-inch) SC 512e Performance Drives	
HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance	793671-B21
1yr Warranty Hard Drive	
HP 4TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Performance	793669-B21
1yr Warranty Hard Drive	100000 221
HP 8TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr	793703-B21
Warranty Hard Drive	100100 221
HP 6TB 12G SAS 7.2K rpm LFF (3.5-inch) SC 512e Helium 1yr	793699-B21
Warranty Hard Drive	100000 821
12G SAS Hot Plug SFF (2.5-inch) SC Read/Write Intensive Solid State I	Drives
HP 1.92TB 12G SAS Read Intensive SFF 2.5-in SC 3yr Wty Solid	802891-B21
State Drive	BOLCOT BET
HP 800GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid	802586-B21
State Drive	002000 221
HP 400GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid	802582-B21
State Drive	002002 821
HP 200GB 12G SAS Write Intensive SFF 2.5-in SC 3yr Wty Solid	802578-B21
State Drive	
HPE 800GB 12G SAS Write Intensive-1 SFF (2.5in) SC 3yr Wty	846430-B21
Solid State Drive	
HPE 1.6TB 12G SAS Write Intensive-1 SFF (2.5in) SC 3yr Wty	846432-B21
Solid State Drive	•••••
6G SATA Hot Plug SFF (2.5-inch) Enterprise Value Solid State Drives	
HP 600GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	739898-B21
Value 3yr Wty Solid State Drive	· · · · · · · · · · · · · · · · · · ·
12G SAS Mainstream Endurance Hot Plug SFF (2.5-inch) Enterprise	
Mainstream H2 Solid State Drives	



Core Options		
-	HP 1.6TB 12G SAS Mainstream Endurance SFF 2.5-in ENT	779176-B21
	Mainstream SC 3yr Wty H2 Solid State Drive	
	HP 800GB 12G SAS Mainstream Endurance SFF 2.5-in ENT	779172-B21
	Mainstream SC 3yr Wty H2 Solid State Drive	
	HP 400GB 12G SAS Mainstream Endurance SFF 2.5-in ENT	779168-B21
	Mainstream SC 3yr Wty H2 Solid State Drive HP 200GB 12G SAS Mainstream Endurance SFF 2.5-in ENT	779164-B21
	Mainstream SC 3yr Wty H2 Solid State Drive	119104-D21
	HP 400GB 6G SATA Mainstream Endurance SFF 2.5-in SC	691866-B21
	Enterprise Mainstream 3yr Wty Solid State Drive	
	HP 800GB 6G SATA Mainstream Endurance SFF 2.5-in SC	691868-B21
	Enterprise Mainstream 3yr Wty Solid State Drive	
	6G SATA Hot Plug SFF Value Endurance (2.5-inch) Enterprise Value M1	
	Solid State Drives	764000 004
	HP 800GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise Value 3yr Wty M1 Solid State Drive	764929-B21
	HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	764927-B21
	Value 3yr Wty M1 Solid State Drive	101021 821
	HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	764925-B21
	Value 3yr Wty M1 Solid State Drive	
	HP 120GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	764923-B21
	Value 3yr Wty M1 Solid State Drive	
	6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise	
	Value G1 Solid State Drives HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter	756660-B21
	ENT Value 3yr Wty G1 Solid State Drive	750000-021
	6G SATA Hot Plug LFF Value Endurance (3.5-inch) Converter Enterprise	
	Value M1 Solid State Drives	
	HP 800GB 6G SATA Value Endurance LFF 3.5-in SC Converter	764945-B21
	ENT Value 3yr Wty M1 Solid State Drive	
	HP 480GB 6G SATA Value Endurance LFF 3.5-in SC Converter	764943-B21
	ENT Value 3yr Wty M1 Solid State Drive	704044 004
	HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter ENT Value 3yr Wty M1 Solid State Drive	764941-B21
	HP 120GB 6G SATA Value Endurance LFF 3.5-in SC Converter	764939-B21
	ENT Value 3yr Wty M1 Solid State Drive	101000 B21
	HP 200GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid	804616-B21
	State Drive	
	HP 800GB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid	804628-B21
	State Drive	
	HP 1.6TB 6G SATA Mixed Use-2 LFF 3.5-in SCC 3yr Wty Solid	804634-B21
	State Drive	
	6G SATA Hot Plug LFF (3.5-inch) Enterprise Value Solid State Drives HP 100GB 6G SATA Mainstream Endurance SFF 2.5-in SC	691862-B21
	Enterprise Mainstream 3yr Wty Solid State Drive	001002-D21
	HP 240GB 6G SATA Value Endurance LFF 3.5-in SC Converter	756639-B21
	ENT Value 3yr Wty G1 Solid State Drive	· · · · ·
	6G SATA Hot Plug SFF (2.5-inch) SC Read Intensive Solid State Drives	



HP 480GB 6G SATA Read Intensive SFF 2.5-in SC 3yr Wty Solid	789145-B21
State Drive HP 80GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid	804575-B21
State Drive	
HP 120GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804581-B21
HP 240GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid	804587-B21
State Drive	004500 004
HP 480GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804593-B21
HP 800GB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid	804599-B21
State Drive	
HP 1.6TB 6G SATA Read Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804605-B21
6G SATA Hot Plug LFF (3.5-inch) SC Read Intensive Solid State Drives	
HP 480GB 6G SATA Read Intensive LFF 3.5-in SC Converter 3yr	789147-B21
Wty Solid State Drive	
HP 80GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid	804578-B21
State Drive HP 120GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty	804584-B21
Solid State Drive	004304-DZ I
HP 240GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty	804590-B21
Solid State Drive	
HP 480GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty	804596-B21
Solid State Drive HP 800GB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty	804602-B21
Solid State Drive	001002 821
HP 1.6TB 6G SATA Read Intensive-2 LFF 3.5-in SCC 3yr Wty Solid	804608-B21
State Drive	- 01
6G SATA Value Endurance Hot Plug SFF (2.5-inch) SC Enterprise Value Solid State Drives	eGi
HP 480GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	756657-B21
Value 3yr Wty G1 Solid State Drive	
HP 240GB 6G SATA Value Endurance SFF 2.5-in SC Enterprise	756636-B21
Value 3yr Wty G1 Solid State Drive	
6G SATA Hot Plug RI-3 SFF (2.5-inch) SC Solid State Drives HP 120GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid	816879-B21
State Drive	010079-021
HP 240GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid	816889-B21
State Drive	
HP 480GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid	816899-B21
	040000 D04
HP 960GB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816909-B21
HP 1.92TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid	816919-B21
State Drive	
HP 3.84TB 6G SATA Read Intensive-3 SFF 2.5-in SC 3yr Wty Solid	816929-B21
State Drive	
6G SATA Hot Plug LFF (3.5-inch) MU-3 SCC SSD	



HP 120GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816969-B21
HP 240GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816979-B21
HP 480GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816989-B21
HP 960GB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816999-B21
HP 1.92TB 6G SATA Mixed Use-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	817015-B21
6G SATA Hot Plug MU-3 SFF (2.5-inch) SC Solid State Drives	
HP 240GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid	816975-B21
HP 480GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816985-B21
HP 960GB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid State Drive	816995-B21
HP 1.92TB 6G SATA Mixed Use-3 SFF 2.5-in SC 3yr Wty Solid	817011-B21
State Drive HPE 800GB 12G SAS Mixed Use-1 SFF (2.5in) SC 3yr Wty Solid	846434-B21
State Drive HPE 1.6TB 12G SAS Mixed Use-1 SFF (2.5in) SC 3yr Wty Solid	846436-B21
State Drive	
6G SATA Hot Plug LFF (3.5-inch) RI-3 SCC SSD	040000 004
HP 120GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816883-B21
HP 240GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816893-B21
HP 480GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr	816903-B21
Wty Solid State Drive HP 960GB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr	816913-B21
Wty Solid State Drive HP 1.92TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr	816923-B21
Wty Solid State Drive	
HP 3.84TB 6G SATA Read Intensive-3 LFF 3.5-in SC Converter 3yr Wty Solid State Drive	816933-B21
6G SATA Hot Plug SFF (2.5-inch) SC Write Intensive Solid State Driv	/es
HP 200GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804639-B21
HP 400GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804665-B21
HP 800GB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid State Drive	804671-B21
HP 1.2TB 6G SATA Write Intensive-2 SFF 2.5-in SC 3yr Wty Solid	804677-B21
State Drive	22
6G SATA Hot Plug LFF (3.5-inch) SC Write Intensive Solid State Driv HP 200GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty	804642-B21
Solid State Drive	001012 821
HP 400GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty	804668-B21
Solid State Drive HP 800GB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty	804674-B21
Solid State Drive HP 1.2TB 6G SATA Write Intensive-2 LFF 3.5-in SCC 3yr Wty Solid	804680-B21
State Drive M.2 SSD	



Core Options		
	HP Dual 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers	777894-B21
	HP 120GB Value Endurance Solid State M.2 Enablement Kit for ProLiant ML/DL Servers	788028-B21
	HPE 340GB Read Intensive-2 Solid State M.2 Enablement Kit for ProLiant ML/DL Servers	835563-B21
	HPE Dual 340GB Read Intensive-2 Solid State M.2 Enablement Kit for ProLiant ML/DL Servers	835565-B21
	HPE DL20 Gen9 M.2 RA and Optical Disk Drive Power Cable Kit NOTE: 816284-B21 cable kit is a mandatory option required to support M.2 SSDs NOTE: M.2 drives go in PCIe slot and use B140i SATA controller.	816284-B21
	Hard Drive Blank Kits HP Large Form Factor Hard Drive Blank Kit	666986-B21
	HP Small Form Factor Hard Drive Blank Kit	666987-B21
HPE Networkin	g 1 Gigabit Ethernet adapters	
	HP Ethernet 1Gb 4-port 331T Adapter	647594-B21
	HP Ethernet 1Gb 4-port 366T Adapter	811546-B21
	HP Ethernet 1Gb 2-port 361T Adapter	652497-B21
	HP Ethernet 1Gb 2-port 332T Adapter	615732-B21
	HP PS1810-24G Switch	J9834A
	10 Gigabit Ethernet adapters	
	HP Ethernet 10Gb 2-port 530T Adapter	656596-B21
	HP Ethernet 10Gb 2-port 561T Adapter	716591-B21
	HP Ethernet 10Gb 2-port 530SFP Adapter	652503-B21
	HP Ethernet 10Gb 2-port 546SFP+ Adapter	779793-B21
	HP Ethernet 10Gb 2-port 546FLR-SFP+ Adapter	779799-B21
	HP FlexFabric 10Gb 2-port 556FLR-SFP+ Adapter	727060-B21
	HP Ethernet 10Gb 2-port 557SFP+ Adapter	788995-B21
	HP Ethernet 10Gb 2-port 560SFP+ Adapter	665249-B21
	HP Ethernet 10Gb 2-port 560FLR-SFP+ Adapter	665243-B21
	NOTE: A minimum of two Gigabytes (2GB) of server memory is rec NOTE: Direct Attach Cable (DAC) for copper environments or fiber	transceivers and cables
	for fiber-optic environments must be purchased separately. See ca	bies/options below.
	FlexibleLOM Adapters	700759-B21
	HP FlexFabric 10Gb 2-port 533FLR-T Adapter HP FlexFabric 10Gb 2-port 534FLR-SFP+ Adapter	700759-B21 700751-B21
	• •	700751-B21 700699-B21
	HP Ethernet 10Gb 2-port 561FLR-T Adapter	629135-B22
	HP Ethernet 1Gb 4-port 331FLR Adapter HP Ethernet 1Gb 4-port 366FLR Adapter	665240-B21
	NOTE: Please see the QuickSpecs for Technical Specifications an http://www.hp.com/go/ProLiantNICs.	
HPE I/O	HPE DL20 Gen9 PCIe Low Profile Riser FIO Kit	854846-B21
Expansion	HPE DL20 Gen9 Flexible LOM Riser Kit	811259-B21
Options	HPE DL20 Gen9 GPU Enablement Kit	811271-B21
	NOTE: It is mandatory to choose any of the above riser kit for CTO	configurations.



Core Options		
HPE Power Supplies	 HPE ProLiant Gen9 Essential Server Power Supplies - Non-Redundant HPE DL20 Gen9 290W FIO Power Supply Unit Kit NOTE: 290W PSU is a Non hot plug power supply. NOTE: This FIO option can only be bought integrated in the server. It cannot be ordered as a standalone option after server purchase. HPE ProLiant Gen9 Essential Server Power Supplies - Redundant 	816283-B21
	HPE 900W AC 240VDC Power Input Module FIO Kit NOTE: This Power supply supports both 100-240V AC and 240V DC.	828734-B21
	HPE 900W AC 240VDC RPS Power Backplane FIO Kit NOTE: The backplane kit and the backplane cable kit (820306- B21) are mandatory with the power input module. NOTE: This FIO option can only be bought integrated in the server.	828735-B21
	It cannot be ordered as a standalone option after server purchase. HPE 900W AC 240VDC Redundant Power Supply Kit NOTE: This Redundant Power supply kit includes 2 power supply input modules and 1 backplane kit. Backplane cable kit (820306- B21) is mandatory for this option.	820792-B21
	HPE 900W AC 240VDC Power Input Module NOTE: This part number can only be bought standalone and is for field integration only.	775595-B21
	HPE 900W AC 240VDC RPS Power Backplane NOTE: This part number can only be bought standalone and is for field integration only. NOTE: The backplane kit and the backplane cable kit (820306-	814835-B21
	 B21) are mandatory with the power input module. HPE DL20 Gen9 Redundant Power Supply Backplane Cable Kit NOTE: This RPS backplane Cable kit is mandatory to be chosen along with 900W backplane. NOTE: This Power supply supports both 100-240V AC and 240V DC. 	820306-B21
	NOTE: Supports Gold-level efficiency (92%) with a standard C14 inlet co support for HPE	onnector. No
	Power Discovery Services. Only compatible with select HPE ProLiant Gen9 Essential servers.	
	NOTE: HPE 900W Gold (Redundant) AC 240VDC Power Input Module (775595-B21/ 828734-B21) must be used with Power Backplane (814835-B21/828735-B21).	
	NOTE: Each Redundant Power Supply Backplane can support up to two (2) power input modules.	
	NOTE: DL20 Gen9 Backplane cable kit is a mandatory option with the backplane for DL20 Gen9.	
	NOTE: Redundant AC Power Input Modules do not share power. Redund Input Module #1 is the primary AC Power Input Module. Redundant AC P Module #2 is the backup AC Power Input Module.	
HPE Computation and Graphics	HP NVIDIA Quadro K2200 Graphics Accelerator NOTE: 1 GPU supported per Server.	J0G89A

Accelerators

NOTE: 1 GPU supported per Server.
NOTE: 1 GPU Enablement kit 779611-B21 must be selected when adding a GPU option.
NOTE: Only the above listed Graphics cards are Hewlett Packard Enterprise standard supported options in this server.
NOTE: The NVIDIA Quadro modules are supported only on 64-bit versions of Linux and Windows operating systems as well as on Virtual Machine client operating systems. The supported bare metal operating systems are RHEL6, SLES 11 and Windows Server 2012



Core Options

R2.

NOTE: Please see the HPE Power Advisor for estimated power consumption of your individual system configuration prior to installing GPUs. The HPE Power Advisor is located at: <u>http://www.hp.com/go/hppoweradvisor</u>.

Additional Options

NOTE: Some options may not be integrated at the factory. To ensure only valid configurations are ordered, Hewlett F Enterprise recommends the use of a Hewlett Packard Enterprise approved configurator. Contact your local sales representative for additional information.

HPE Insight Software	HPE Insight Control HP Insight Control including 1yr 24x7 Technical Support and Updates Single Server License HP Insight Control including 1yr 24x7 Technical Support and Updates Electronic License	C6N27A C6N28ABE
	HP Insight Management Media Kit HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL- bundle Single Server FIO License	C6N31A C6N36A
	HP Insight Control including 1yr 24x7 Support ProLiant ML/DL/BL- bundle FIO Electronic License	C6N36ABE
	NOTE: Electronic and Flexible-Quantity licenses can be used to purcl licenses with a single activation key.	hase multiple
	NOTE: Customer will receive a license entitlement certificate. The lice certificate must be redeemed online or via fax in order to obtain the lice key(s). Includes one year of 24x7 HPE Software Technical Support an NOTE: Licenses ship without media. The HPE Insight Control Media & separately, or can be downloaded at: <u>http://www.hp.com/go/insightupe</u> NOTE: For additional license options please see the <u>HPE Insight Control</u>	ense activation Id Update Service. Kit can be ordered <u>dates</u> .
Embedded Management	HPE iLO Advanced HP iLO Advanced including 1yr 24x7 Technical Support and	512485-B21
-	Updates Single Server License HP iLO Advanced including 1yr 24x7 Technical Support and Updates Flexible Quantity License	512486-B21
	HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates	BD505A
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Tracking License	512487-B21
	HP iLO Advanced Flexible Qty License with 3yr 24x7 Tech Support and Updates	BD506A
	HP iLO Advanced Tracking License with 3yr 24x7 Tech Support and Updates	BD507A
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU	E6U59ABE
	HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU HPE iLO Essentials	E6U64ABE
	HP Integrated Lights-Out Essentials including 3yr 24x7 Tech Support and Updates Single Svr License	BD774A
	HP Integrated Lights-Out Essentials including 3yr 24x7 Technical Support and Updates E-LTU	E6U61ABE
	HP Integrated Lights-Out Essentials including 1yr 24x7 Technical Support and Updates E-LTU	E6U62ABE
	HP Integrated Lights-Out Essentials including 1yr 24x7 Tech Support and Updates Single Svr License HPE iLO Scale-out	BD775A



Additional Option	ons		
	HP Integrated Lights-Out Scale-Out 1yr 24x7 Tech Support and Updates Flex Quantity License	BD778A	
	HP Integrated Lights-Out Scale-Out 3yr 24x7 Tech Support and Updates Flex Quantity License	BD776A	
	HP Integrated Lights-Out Scale-Out including 3yr 24x7 Tech Support and Updates Flex Qty E-LTU	BD776AAE	
	HP Integrated Lights-Out Scale-Out including 3yr 24x7 Tech Support and Updates Tracking License	BD777A	
	HP Integrated Lights-Out Scale-Out including 1yr 24x7 Tech Support and Updates Flex Qty E-LTU	BD778AAE	
	HP Integrated Lights-Out Scale-Out including 1yr 24x7 Tech Support and Updates Tracking License	BD779A	
HPE iLO	HPE iLO Advanced		
Advanced License	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Single Server License	512485-B21	
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Flexible Quantity License	512486-B21	
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates Tracking License	512487-B21	
	HP iLO Advanced 1 Server License with 3yr 24x7 Tech Support and Updates	BD505A	
	HP iLO Advanced Flexible Qty License with 3yr 24x7 Tech Support and Updates	BD506A	
	HP iLO Advanced Tracking License with 3yr 24x7 Tech Support and Updates	BD507A	
	HP iLO Advanced including 1yr 24x7 Technical Support and Updates E-LTU	E6U59ABE	
	HP iLO Advanced including 3yr 24x7 Technical Support and Updates E-LTU	E6U64ABE	
High	HPE Cluster Management Utility		
Performance Clusters	HP Insight Cluster Management Utility 3yr 24x7 Flexible License HP Insight Cluster Management Utility 1yr 24x7 Flexible License	BD476A QL803B	
-	HP Insight Cluster Management Utility Media	BD477A	
HPE Security	HP Trusted Platform Module 2.0 Kit HP Trusted Platform Module Option HP 1U Security Bezel Kit NOTE: Quick Release Ear option kit (P/N 811254-	745823-B21 488069-B21 664918-B21	
	 B21) is mandatory for installing security bezel. HPE DL20 Gen9 Quick Release Ear FIO Kit NOTE: DL20 Gen9 ships with thumbscrew ear attachments (BTO and CTO) as standard. The Quick Release Ear kit needs to be purchased if you want to have a security bezel installed. 	811254-B21	



Additional Options

HPE Storage Controllers	SAS Controllers HPE Smart Array Controllers	
Controllers	HP Smart Array P440/2GB FBWC 12Gb 1-port Int SAS Controller	820834-B21
	NOTE: The above SKUs include 96W Smart Storage Battery.	700004 004
	HP Smart Array P440/4GB FBWC 12Gb 1-port Int SAS Controller NOTE: The option requires a 96W Smart Storage Battery p/n 727258-B21.	726821-B21
	HP Smart Array P440/4GB FBWC 12Gb 1-port Int FIO SAS Controller	761872-B21
	NOTE: The above SKUs include 96W Smart Storage Battery.	
	HP Smart Array P441/4GB FBWC 12Gb 2-ports Ext SAS Controller	726825-B21
	HP Smart Array P841/4GB FBWC 12Gb 4-ports Ext SAS Controller	726903-B21
	NOTE: P440 needs to be populated in slot 2 (Full Height).	
	HPE Smart Host Bus Adapters	
	HP H240 12Gb 2-ports Int Smart Host Bus Adapter	726907-B21
	HP H240 12Gb 2-ports Int FIO Smart Host Bus Adapter	761873-B21
	HP H241 12Gb 2-ports Ext Smart Host Bus Adapter	726911-B21
	NOTE: H240 needs to be populated in slot 2 (Full Height).	
	HPE Cable Options	
	HPE DL20 Gen9 2LFF Mini SAS P440 Cable Kit	811279-B21
	HPE DL20 Gen9 4SFF Mini SAS P440 Cable Kit	811282-B21
	NOTE: One of the above cables is required to be selected depending on	the
	combination of server and storage controller. Cable option kit description	s include
	the right server and storage controller names.	
	NOTE: FIO indicates that this option is only available as a factory installa	ble option.
	Please select FIO option if you want the option to be factory installed.	
	NOTE: All the server chassis (Mod-x) includes min-SAS cables required to connect	
	drives to embedded B140i SATA controller or HBA240 controller (HBA240 is	
	optional).	
	Optional Software	
	HP Secure Encryption per Svr Entitlement	C9A82AAE
	HP SmartCache No Media 24x7 Technical Support 1 Svr License	D7S26A
	HP SmartCache No Media 24x7 Technical Support Flexible License	D7S27A
	HP SmartCache No Media 24x7 Technical Support Electronic	D7S27AAE
	License	
	Optional Upgrades	707050 004
	HP 96W Smart Storage Battery with 145mm Cable for DL/ML/SL	727258-B21
	Servers	
	NOTE: This option is mandatorily required with HPE Smart Array	
	controllers. One server can accommodate only 1 Smart Storage Battery that would suffice the requirement of all HPE Smart Array	
	controllers.	
	Battery Holder	
	HPE DL20 Gen9 Smart Storage Battery Holder	822451-B21
	NOTE: This holder is mandatorily required with Smart Storage	
	Battery.	
	,	



Additional Options

HPE Tape Backup	 NOTE: For the complete range of tape drives, autoloaders, libraries and media see: <u>http://www.hp.com/go/tape</u>. For hardware and software compatibility of HPE tape backup products see: <u>http://www.hp.com/storage/SPOCK</u> and <u>http://www.hp.com/go/ebs</u>. NOTE: For Internal drives to be connected to DL servers please make sure that you order rack mount kit as well. Tape Drives SAS Rack-Mount Tape Solutions 		
	HP StoreEver LTO-6 Ultrium 6650 SAS External Tape Drive	EH964A	
	HP StoreEver LTO-6 Ultrium 6250 Tape Drive in 1U Rack-mount Kit	C0L99A	
	HP StoreEver LTO-6 Ultrium 6250 External Tape Drive	EH970A	
	HP StoreEver LTO-5 Ultrium 3000 SAS Tape Drive in 1U Rack- mount	EJ014B	
	HP StoreEver LTO-5 Ultrium 3000 SAS External Tape Drive	EH958B	
	HP StoreEver LTO-5 Ultrium 3280 SAS External Tape Drive	EH900B	
	HP StoreEver LTO-4 Ultrium 1760 SAS (1) in 1U Rack-mount Kit	EH946C	
	HP StoreEver LTO-4 Ultrium 1760 SAS External Tape Drive	EH920B	
	HP StoreEver LTO-3 Ultrium 920 SAS External Tape Drive	EH848B	
	HP StoreEver 1U SAS Rack-mount Kit	AE459B	
	HPE StoreEver Mini-SAS High Density to 4-lane Mini-SAS External Fanout 2m Cable	K2R09A	
	HPE StoreEver Mini-SAS High Density to 4-lane Mini-SAS External Fanout 4m Cable	K2R10A	
	HPE DAT Autoloader HPE StoreEver 1/8 G2 LTO-6 Ultrium 6250 Fibre Channel Tape Autoloader	C0H19A	
	HPE MSL2024 Tape Library HPE StoreEver MSL2024 0-drive Tape Library HPE MSL4048 Tape Library	AK379A	
	HPE StoreEver MSL4048 0-drive Tape Library HPE StoreEver MSL6480	AK381A	
	HPE StoreEver MSL6480 Scaleable Expansion Module	QU626A	
	HPE StoreEver MSL6480 Scalable Base Module	QU625A	
HPE Disk	HPE RDX Removable Disk Backup System		
Backup	HP D3700 Enclosure	QW967A	
	HP D3600 Enclosure	QW968A	
	HPE StoreOnce 5100 48TB System	BB915A	
	HPE StoreOnce 3540 24TB System	BB914A	
	HPE StoreOnce 3520 12TB System	BB922A	
	HPE StoreOnce 3100 8TB System	BB913A	
	NOTE: For the complete range of RDX drives and media see: <u>http://ww</u>		
	For hardware and software compatibility of Hewlett Packard Enterprise disk backup products see: <u>http://www.hp.com/storage/SPOCK</u> .		
HPE Storage	Emulex Fibre Channel HBAs		
Options	HP 82E 8Gb 2-port PCIe Fibre Channel Host Bus Adapter	AJ763B	
	HP StoreFabric SN1100E 16Gb Dual Port Fibre Channel Host Bus Adapter	C8R39A	
	QLogic Fibre Channel HBAs		
	HP 82Q 8Gb 2-port PCIe Fibre Channel Host Bus Adapter HP StoreFabric SN1000Q 16GB 2-port PCIe Fibre Channel Host Bus Adapter	AJ764A QW972A	



Additional Options HPE Disk **Disk Enclosures** Storage Systems HP D6000 w/70 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL **M0T59A** HDD 560TB Bundle HP D6000 w/70 6TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL M0T57A HDD 420TB Bundle HP D6000 w/35 8TB 12G SAS 7.2K LFF (3.5in) Dual Port MDL **M0T58A** HDD 280TB Bundle HP D6000 w/35 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 140TB E7W30A Bundle HP D6000 w/70 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 280TB E7W31A Bundle HP D6000 Dual I/O Module Disk Enclosure QQ695A HP D6000 w/35 2TB 6G SAS 7.2K LFF Dual port MDL HDD 70TB QQ697A Bundle HP D6000 w/70 2TB 6G SAS 7.2K LFF Dual port MDL HDD 140TB QQ698A **Bundle** HP D6000 w/35 3TB 6G SAS 7.2K LFF Dual port MDL HDD 105TB QQ699A Bundle HP D6000 w/70 3TB 6G SAS 7.2K LFF Dual port MDL HDD 210TB QQ700A Bundle HP D2600 w/12 4TB 6G SAS 7.2K LFF Dual Port MDL HDD 48TB E7W32A Bundle HPE Data HPE Advanced Series Racks Center Racks HPE 11648 1075mm Pallet Universal Rack H6J87A HPE 11648 1075mm Shock Universal Rack H6J88A HPE 11642 1075mm Pallet Universal Rack H6J65A HPE 11642 1075mm Shock Universal Rack H6J66A HPE 11642 1200mm Pallet Universal Rack H6J67A HPE 11642 1200mm Shock Universal Rack H6J68A HPE 11636 1075mm Pallet Universal Rack H6J77A HPE 11636 1075mm Shock Universal Rack H6J78A HPE 11622 G2 1075mm Shock Universal Rack H6J83A HPE 11622 G2 1075mm Shock Universal Rack H6J84A HPE 11614 1075mm Shock Universal Rack H6J82A NOTE: Please see the HPE Advanced Series Racks QuickSpecs for information on additional racks options and rack specifications.

HPE Enterprise Series Racks



Additional Options

	HPE 647 1075mm Pallet Intelligent Series Rack	BW911A
	HPE 647 1075mm Shock Intelligent Series Rack	BW912A
	HPE 647 1200mm Pallet Intelligent Series Rack	BW913A
	HPE 647 1200mm Shock Intelligent Series Rack	BW914A
	HPE 642 1075mm Pallet Intelligent Series Rack	BW903A
	HPE 642 1075mm Shock Intelligent Series Rack	BW904A
	HPE 642 1200mm Pallet Intelligent Series Rack	BW907A
	HPE 642 1200mm Shock Intelligent Series Rack	BW908A
	HPE 636 1075mm Pallet Intelligent Series Rack	BW895A
	HPE 636 1075mm Shock Intelligent Series Rack	BW896A
	HPE 842 1075mm Pallet Intelligent Series Rack	BW917A
	HPE 842 1075mm Shock Intelligent Series Rack	BW918A
	NOTE: Please see the <u>HPE Enterprise Series Racks QuickSpecs</u> for information on additional racks options and rack specifications. HPE Standard Series Rack HPE V142 1075mm deep Pallet 100 series Rack NOTE: Please see the <u>HPE Standard Series Racks QuickSpecs</u> for information on additional racks options and rack specifications.	AF046A
HPE Power Distribution Units (PDUs)	HPE Basic Power Distribution Units (PDU) HPE Basic 1.9kVA/L5-20P 16A/120V Outlets (12) 5-20R/Horizontal NA/JP PDU	H5M54A
	HPE Basic 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU	H5M56A
	HPE Basic 2.8kVA/L5-30P 24A/120V Outlets (18) 5-20R/Vertical NA/JP PDU	H5M55A
	HPE Basic 4.9kVA/60320 C20 Detachable 16A/230V Outlets (20) C13/Vertical WW PDU	H5M57A
	HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (20) C13/Vertical NA/JP PDU	H5M58A
	HPE Basic 7.3kVA/60309 5-wire 32A/230V Outlets (20) C13/Vertical INTL PDU	H5M68A
	HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13/Vertical NA/JP PDU	H5M61A
	HPE Basic 4.9kVA/L6-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU	H5M59A
	HPE Basic 7.3kVA/60309 3-wire 32A/230V Outlets (24) C13 (6) C19/Vertical INTL PDU	H5M70A
	HPE Basic 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (6) C19/Vertical NA PDU	H5M60A
	HPE Basic 11kVA/60309 63A 3-wire 48A/230V Outlets (30) C13 (6) C19/Vertical INTL PDU	H5M71A



Additional Options

HPE Basic 9.2kVA/50A Terminal Block 40A/230V Outlets (30) C13 (6) C19/Vertical WW PDU	H5M75A
HPE Basic 3Ph 5.7kVA/ L21-20P 16A/120-208V Outlets (24) C13 (3) 5-20R/Vertical NA/JP PDU	H5M63A
HPE Basic 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (24) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU	H5M64A
HPE Basic 3Ph 8.6kVA/L15-30P 24A/208V Outlets (24) C13 (6) C19/Vertical NA/JP PDU	H5M62A
HPE Basic 3Ph 11kVA/60309 5-wire 16A/230V Outlets (24) C13 (6) C19/Vertical INTL PDU	H5M72A
HPE Basic 3Ph 11kVA/60309 5-wire 16A/230V Outlets (36) C13 (6) C19/Vertical INTL PDU	H5M73A
HPE Basic 3Ph 11kVA/60309 16A/240V Outlets (36) C13 (6) C19/Vertical NA PDU	H5M67A
HPE Basic Modular 2.8kVA/L5-30P 24A/120V Outlets (4) C19/Horizontal NA/JP PDU	252663-D71
HPE Basic Modular 4.9kVA/L6-30P 24A/208V Outlets (4) C19/Horizontal NA/JP Core Only PDU	252663-D74
HPE Basic Modular 8.3kVA/CS8265C 40A/208V Outlets (4) C19/Horizontal NA/JP PDU	252663-D75
HPE Basic Modular 7.3kVA/60309 3-wire 32A/230V Outlets (4) C19/Horizontal INTL Core Only PDU	252663-B33
HPE Basic Modular 9.2kVA/60309 63A 3-wire 40A/230V Outlets (4) C19/Horizontal INTL PDU	252663-B34
HPE Basic Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF512A
HPE Basic Modular 3Ph 11kVA/60309 5-wire 16A/230V Outlets (6) C19/Horizontal INTL PDU	AF513A
HPE Basic Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF519A
HPE Basic Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF511A
HPE Basic Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU	AF518A
NOTE: Please see the <u>HPE Basic Power Distribution Units (PDU) Qu</u> information on additional options and product specifications.	ICKSpecs for
HPE Metered Power Distribution Units (PDU)	



HPE Metered 2.8kVA/L5-30P 24A/120V Outlets (12) 5-	D9N43A
20R/Horizontal NA/JP PDU HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (12) C13/Horizontal WW PDU	D9N46A
HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (12) C13/Horizontal NA/JP PDU	D9N44A
HPE Metered 3.6kVA/60320 C20 Detachable 16A/230V Outlets (16) C13/Vertical WW PDU	D9N45A
HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (12) C13/Vertical NA/JP PDU	G9Z05A
HPE Metered 7.3kVA/60309 3-wire 32A/230V Outlets (12) C13/Vertical INTL PDU	G9Z06A
HPE Metered 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (4) C19/Vertical NA/JP PDU	D9N47A
HPE Metered 7.3kVA/60309 32A 3-wire/230V Outlets (20) C13 (4) C19/Vertical INTL PDU	D9N48A
HPE Metered 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13 (3) C19/Vertical NA/JP PDU	D9N51A
HPE Metered 3Ph 5.7kVA/L21-20P 16A/120-208V Outlets (13) C13 (3)5-20R/Vertical NA/JP PDU	D9N52A
HPE Metered 3Ph 8.6kVA/L21-30P 24A/120-208V Outlets (18) C13 (3) C19 (3) 5-20R/Vertical NA/JP PDU	D9N53A
HPE Metered 3Ph 11kVA/60309 5-wire 16A/230V Outlets (18) C13 (3) C19/Vertical INTL PDU	D9N55A
HPE Metered 8.3kVA/CS8265C 40A/208V Outlets (30) C13 (3) C19/Vertical NA PDU	D9N49A
HPE Metered 7.3kVA/60309 32A 3-wire/230V Outlets (32) C13 (4) C19/Vertical INTL PDU	D9N50A
HPE Metered 3Ph 11kVA/60309 5-wire 16A/230V Outlets (30) C13 (3) C19/Vertical INTL PDU	D9N57A
HPE Metered 3Ph 14.4kVA/CS8365C 40A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	D9N58A
HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (30) C13 (3) C19/Vertical NA/JP PDU	D9N61A
HPE Metered 3Ph 16.6kVA/60309 32A-30A 5-wire 24A/230V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	D9N62A
HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (24) C13 (3) C19/Vertical NA/JP PDU	D9N54A
HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	D9N59A
HPE Metered 3Ph 17.3kVA/60309 60A 4-wire 48A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	G9Z07A
HPE Metered 3Ph 19.9kVA/L22-30P 24A/277V Outlets (30) RF- 203P-HP/Vertical NA PDU	D9N63A
HPE Metered 3Ph 22kVA/60309 5-wire 32A/230V Outlets (30) C13 (3) C19/Vertical INTL PDU	D9N56A
HPE Metered 3Ph 22kVA/60309 5-wire 32A/230V Outlets (12) C13 (12) C19/Vertical INTL PDU	D9N60A
HPE Metered 3Ph 22kVA/60309 5-wire WT 32A/230V Outlets (12) C13 (12) C19/Vertical INTL PDU	G9Z08A
HP Environmental Sensor for Remote Monitored and Managed PDUs	E2D53A
NOTE: Please see the <u>HPE Metered Power Distribution Units (PDU) Quic</u> for information on additional options and product specifications.	<u>KOPECS</u>
HPE Intelligent Power Distribution Unit (PDU)	



Additional Options

HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF520A
HPE Intelligent Modular 8.3kVA/CS8265C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF521A
HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF522A
HPE Intelligent Modular 3Ph 17.3kVA/60309 60A 4-wire 48A/208V (6) C19/Horizontal NA/JP PDU	AF523A
HPE Intelligent Modular 3Ph 11kVA/L22-20P 16A/240V Outlets (6) C19/Horizontal NA/JP PDU	AF900A
HPE Intelligent Modular 3Ph 17.3kVA/60309 30A 5-wire 24A/240V (6) C19/Horizontal NA/JP PDU	AF901A
HPE Intelligent Modular 7.3kVA/60309 3-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU	AF525A
HPE Intelligent Modular 3Ph 11kVA/60309 5-wire 16A/230V Outlets (6) C19/Horizontal INTL PDU	AF526A
HPE Intelligent Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU	AF527A
HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 60A 4-wire 48A/208V (12) C19/Horizontal NA/JP PDU	AF535A
HPE Intelligent Modular 3Ph 17.3kVA/IEC 60309 30A 5-wire 24A/240V (12) C19/Horizontal NA/JP PDU	AF537A
HPE Intelligent Modular 3Ph 22kVA/60309 5-wire 32A/230V Outlets (12) C19/Horizontal INTL PDU	AF538A
HPE Intelligent Modular 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (6) C19/Horizontal NA/JP PDU	AF531A
HPE Intelligent Modular 3Ph 8.6kVA/L15-30P 24A/208V Outlets (20) C13 (6) C19/Horizontal NA/JP PDU	AF532A
HPE Intelligent Modular 3Ph 14.4kVA/CS8365C 40A/208V Outlets (6) C19/Horizontal NA/JP PDU	AF533A
HPE Intelligent Modular 7.3kVA/60309 3-wire 32A/230V Outlets (6) C19/Horizontal INTL PDU Kit	AF534A
HP 5xC13 Intelligent PDU Extension Bar G2 Kit HP 5xC13 Outlets Power and UID LEDs Pair Standard Extension	AF547A AF528A
Bar	
NOTE: Please see the <u>HPE Intelligent Power Distribution Unit (PDU) Quic</u> for information on additional options and product specifications.	<u>KSpecs</u>
UPE Material and Switched Review Distribution Units (DDU)	

HPE Metered and Switched Power Distribution Units (PDU)



HPE Metered Switched 2.8kVA/L5-30P 24A/120V Outlets (24) 5- 20R /Vertical NA/JP PDU	H8B48A
HPE Metered Switched 3.6kVA/60320 C20 Detachable 16A/230V Outlets (7) C13 (1) C19/Vertical WW PDU	H8B49A
HPE Metered Switched 4.9kVA/L6-30P 24A/208V Outlets (20) C13 (4) C19/Vertical NA/JP PDU	H8B50A
HPE Metered Switched 7.3kVA/60309 3-wire 32A/230V Outlets (20) C13 (4) C19/Vertical INTL PDU	H8B51A
HPE Metered Switched 3Ph 8.6kVA/L15-30P 24A/208V Outlets (18) C13 (6) C19/Vertical NA/JP PDU	H8B52A
HPE Metered Switched 3Ph 8.6kVA/L2190-30P 24A/208V Outlets (23) C13 C19 (1) 520R/Vertical NA/JP PDU	H8B53A
HPE Metered Switched 3Ph 11kVA/60309 5-wire 16A/230V Outlets (21) C13 (3) C19/Vertical INTL PDU	H8B54A
HPE Metered Switched 3Ph 14.4kVA/CS8365C 40A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	H8B55A
HPE Metered Switched 3Ph 17.3kVA/60309 4-wire 48A/208V Outlets (12) C13 (12) C19/Vertical NA/JP PDU	H8B56A
HP 800VA - 277V Input / 230V Output NA Rack Mount Transformer NOTE: Please see the <u>HPE Metered and Switched Power Distribution Un</u>	H3X09A <u>its (PDU)</u>
QuickSpecs for information on additional options and product specifications.	
NOTE: To learn more, please visit the <u>HPE Uninterruptible Power System</u> page.	<u>is (UPS) web</u>

HPE Rack	Rail Kits	
Mount Consoles	,HP 1U Short Friction Rail Kit	775612-B21
KVM Switches,	HPE Location Discovery Services	
and Keyboards	HP Location Discovery Services LCD8500 Kit	TL052A
	HPE Rack Mount Consoles	
	HP LCD8500 1U US Rackmount Console Kit	AF630A
	HP LCD8500 1U UK Rackmount Console Kit	AF631A
	HP LCD8500 1U DE Rackmount Console Kit	AF632A
	HP LCD8500 1U FR Rackmount Console Kit	AF633A
	HP LCD8500 1U JP Rackmount Console Kit	AF642A
	HP LCD8500 1U RU Rackmount Console Kit	AF643A
	HP LCD8500 1U INTL Rackmount Console Kit	AF644A
	HP LCD8500 1U US TAA Rackmount Console Kit	AF645A
	HPE KVM Switches	



Additional Options

HP 0x1x8 G3 KVM Console Switch	AF651A
HP 0x2x16 G3 KVM Console Switch	AF652A
HP TAA 0x2x16 G3 KVM Console Switch	
	AF653A
HP USB Remote Access Key for G3 KVM Console Switches	AF650A
HP KVM Console USB Interface Adapter	AF628A
HP 0x2x16 KVM Server Console Switch G2 with Virtual Media CAC	AF618A
Software	
HP 0x2x32 KVM Server Console Switch G2 with Virtual Media CAC	AF619A
Software	
HP KVM Console USB 2.0 Virtual Media CAC Interface Adapter	AF629A
•	
HP 1x4 USB/PS2 KVM Console Switch	AF611A
HP 1x1Ex8 KVM IP Console Switch G2 with Virtual Media CAC	AF620A
Software	
HP 2x1Ex16 KVM IP Console Switch G2 with Virtual Media CAC	AF621A
Software	
HP 4x1Ex32 KVM IP Console Switch G2 with Virtual Media CAC	AF622A
Software	/
NOTE: To learn more, please visit the <u>HPE KVM Switches web</u>	
HPE USB Keyboard and Mouse	004044 504
HP USB BFR with PVC Free US Keyboard/Mouse Kit	631341-B21
HP USB BFR with PVC Free UK Keyboard/Mouse Kit	631344-B21
HP USB BFR with PVC Free FR Keyboard/Mouse Kit	631346-B21
HP USB BFR with PVC Free ES Keyboard/Mouse Kit	631348-B21
HP USB BFR with PVC Free DE Keyboard/Mouse Kit	631358-B21
HP USB BFR with PVC Free JP Keyboard/Mouse Kit	631360-B21
HP USB BFR with PVC Free IT Keyboard/Mouse Kit	631362-B21
•	
HP USB BFR with PVC Free CN Keyboard/Mouse Kit	631364-B21
HP USB BFR with PVC Free AE Keyboard/Mouse Kit	638212-B21
HP USB BFR with PVC Free RU Keyboard/Mouse Kit	638214-B21
HP USB BFR with PVC Free IN Keyboard/Mouse Kit	672097-D63
HP USB BFR with PVC Free AP-Intl Keyboard/Mouse Kit	672097-373
HP USB BFR with PVC Free Intl Keyboard/Mouse Kit	672097-B33
HP USB BFR with PVC Free PT Keyboard/Mouse Kit	672097-133
HP USB BFR with PVC Free TR Keyboard/Mouse Kit	672097-143
•	
HP USB BFR with PVC Free CZ Keyboard/Mouse Kit	672097-223
HP USB BFR with PVC Free FI Keyboard/Mouse Kit	672097-353
HP USB BFR with PVC Free SE Keyboard/Mouse Kit	672097-103
HP USB BFR with PVC Free CH Keyboard/Mouse Kit	672097-113
HP USB BFR with PVC Free KR Keyboard/Mouse Kit	672097-KD3
HPE Other Options	
HP Rack LED Light Kit	BW939A
HP Advanced Power Manager Kit	741192-B21
HP Kit LCD 1.83m Latch Display Port Cable	G7T29A
HP ConvergedSystem Door Branding Kit	TK815A
HP ConvergedSystem Rack Light Kit	TK816A
HP ConvergedSystem Rack Side Panel 1075mm Kit	TK817A

HPE Uninterruptible HPE DirectFlow Three Phase UPS



Power Systems	Power Unit (1U UPS)	
(UPS)	HP R12000 DirectFlow - 1U Rackmount Uninterruptible Power System	G9Y75A
	HP R12000 DirectFlow - POD 1U Rackmount Uninterruptible Power System	AF478A
	HP RP12000/3 12000VA Three Phase INTL 6U Rackmount Uninterruptible Power System	AF437A
	Input/Output Module Options for 1U UPS HP 32A 400-415 Volt Three Phase INTL R12000 DirectFlow UPS	AF488A
	IEC309 Input/Output Module HP 30A 400-415 Volt Three Phase NA R10000 DirectFlow UPS IEC309 Input/Output Module	AF489A
	HP 32A 380 Volt Three Phase China R12000 DirectFlow UPS Unterminated Input/Output Module	AF490A
	HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS L22-30 Input/Output Module	AF491A
	HP 30A 480 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	AF492A
	HP 30A 400-415 Volt Three Phase NA R12000 DirectFlow UPS IEC309 Input/Output Module	G9Y76A
	Power Unit (2U UPS) HP R18000 DirectFlow - 2U Rackmount Uninterruptible Power System	AF479A
	HP DirectFlow UPS Management Card Input/Output Module Options for 2U UPS	AF493A
	HP 32A 400-415 Volt Three Phase INTL R18000 DirectFlow UPS IEC309 Input/Output Module	AF483A
	HP 30A 380 Volt Three Phase China R18000 DirectFlow UPS Unterminated Input/Output Module	AF485A
	HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF486A
	HP 30A 480 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	AF487A
	HP 30A 400 Volt Three Phase NA R18000 DirectFlow UPS IEC309 Input/Output Module	D9Q02A
	HP 30A 400-415V Three Phase NA R18000 DirectFlow UPS 1:1 IEC309 Input/Output Module NOTE: All Input/Output Modules support dual output outlets except the AF484A.	AF484A
	Battery Pack Options	
	HP DirectFlow UPS - 1U Rackmount Lithium-ion Battery Pack	AF480A
	HP DirectFlow UPS - 3U Rackmount VRLA Battery Pack	AF482A
	HP WW DirectFlow Secondary Battery Cable	AF497A
	NOTE: Please see the <u>HPE DirectFlow Three Phase Uninterruptible Powe</u>	<u>r System</u>
	QuickSpecs for information on additional options and product specifications.	
	HPE Tower UPS	



HPE T750 G4 UPS Models	
HP T750 G4 NA/JP Uninterruptible Power System	J2P85A
HP T750 G4 INTL Uninterruptible Power System	J2P88A
HPE T1000 G4 UPS Models	021 00/1
HP T1000 G4 NA/JP Uninterruptible Power System	J2P86A
HP T1000 G4 INTL Uninterruptible Power System	J2P89A
HPE T1500 G4 UPS Models	521 05A
HP T1500 G4 NA/JP Uninterruptible Power System	J2P87A
HP T1500 G4 INTL Uninterruptible Power System	J2P90A
HPE Rack-mountable UPS	021 JUA
HPE R/T2200 G4 UPS Models	
HP R/T2200 G4 NA/JP Uninterruptible Power System	J2R00A
HPE R/T3000 G4 UPS Models	02110071
HP R/T3000 G4 Low Voltage NA/JP Uninterruptible Power System	J2R01A
HP R/T3000 G4 High Voltage NA/JP Uninterruptible Power System	J2R02A
HP R/T3000 G4 High Voltage INTL Uninterruptible Power System	J2R04A
R1500 G4 Models	
HP R1500 G4 NA Uninterruptible Power System	J2Q99A
HP R1500 G4 JP/TWN Uninterruptible Power System	J2R05A
HP R1500 G4 INTL Uninterruptible Power System	J2R03A
R7000 Uninterruptible Power System (UPS)	
HP R7000 4U 50A High Voltage NA/JP Uninterruptible Power	AF462A
System	
HP R7000 4U IEC-32A High Voltage INTL Uninterruptible Power	AF463A
System	
R5000 Uninterruptible Power System (UPS)	
HP R5000 3U L630 High Voltage NA/JP Uninterruptible Power	AF460A
System	
HP R5000 3U IEC309-32A High Voltage INTL Uninterruptible Power	AF461A
System	
HPE UPS Options	10000
HP R/T2200 G4 Extended Runtime Module	J2R09A
HP R/T3000 G4 Extended Runtime Module	J2R10A
HP 2U Rack/Tower UPS Shipping Kit	L4Q11A
NOTE: Please see the HPE Line Interactive Single Phase UPS QuickSpecs	<u>-</u>
for information on additional options and product specifications.	
NOTE: To learn more, please visit the <u>HPE Uninterruptible Power Systems</u>	<u>(UPS) web</u>
page.	
HPE Enterprise Mainstream Flash Media Kits for Memory Cards	

HPE USB and	HPE Enterprise Mainstream Flash Media Kits for Memory Cards	
SD Options	HP 32GB microSD Enterprise Mainstream Flash Media Kit	700139-B21
-	HP 8GB microSD Enterprise Mainstream Flash Media Kit	726116-B21
	HP 8GB USB Enterprise Mainstream Flash Media Drive Key Kit	737953-B21
	HP Dual 8GB microSD Enterprise Midline USB Kit	741279-B21
	-	



7WZ5E 7WZ7E
1AH3E
1AH4E
1AH9E
1AJ0E 1AP0E
1AN7E
11AJ1E 11AJ2E 1AP1E
7W 1A 1A 1A 1A 1A 1A 1A




Memory

HPE Standard Memory UDIMMs has passed the rigorous Hewlett Packard Enterprise qualification and testing processes.

The memory subsystem in this server supports UDIMMs. The server supports single-rank and dual-rank DDR4 UDIMMs operating

at up to 2133 MHz DIMM speeds.

Memory The server supports two channels per processor with two DIMMs per channel for a total of four DIMMs per DL20 Gen9 Server.

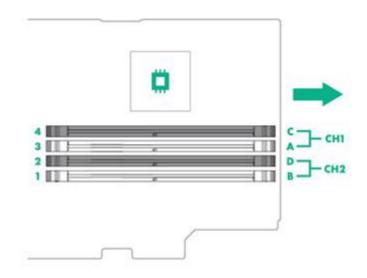

General Memory Population Rules and Guidelines:

- . Only UDIMMs are supported on DL20 Gen9. No support for RDIMMs and LRDIMMs
- . All the channels in a system run at the fastest common frequency
- . Mixing ECC and non-ECC UDIMMs on the platform are not supported
- . Both single DIMM per channel and dual DIMMs per channel are supported at 2133MHz

Intel Gen9 Supported Memory Bandwidth for HPE ProLiant Gen9 Intel® Xeon® E3-1200v5 Series Processor Family

Memory Bandwidth ar	nd Capacity			
[DIMM Type]	Unbuffered with ECC DIMMs (UDIMMs)			
DIMM Rank	Single Rank	Single Rank	Dual Rank	Dual Rank
DIMM Capacity	4GB	8GB	8GB	16GB
DIMM Native Speed (MT/s)	2133	2133	2133	2133
Voltage	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V	Std Voltage 1.2V
SLOTS THAT CAN BE POPULATED				
4 slot servers	4	4	4	4
MAXIMUM CAPACITY (GB)				
	16	32	32	64
POPULATED DIMM SPEED (MT/s)				



Memory

1 DIMM Per Channel	2133	2133	2133	2133
2 DIMM Per Channel	2133	2133	2133	2133
3 DIMM Per Channel				

DIMM slot and configuration diagram

ration UDIMM		maxii	d configuration diagrams mum configuration (1 CPU i der; start with "A" first, "B" s		
			CPU 1		
		Slot #	population order		
		,	1	- -	
	Chnl 2	1	В		
		2	D		
			CPU 1		1
		Slot #	population order		
	Chnl 1	3	A		
		4	С		

Memory Speed	Processor Models	Supported Memory Speeds
by Processor Model	i3-6100, i3-6300, G4500, G4400, E3- 1220v5, E3-1225v5, E3-1230v5, E3- 1240v5, E3-1270v5, E3-1280v5, E3- 1260Lv5, E3-1240Lv5	2133MHz

Standard and Maximum Memory	Pre Configured Models	Standard Memory	Maximum Memory Plus Optional Memory	Standard Memory Replaced with Optional Memory
Capacity (Pre- configured	G4400	4GB (1x4GB)	52GB (3x16GB, 1x4GB)	64GB (4x16GB)
Models)	E3-1220v5, E3- 1240v5	8GB (1x8GB)	56GB (3x16GB, 1x8GB)	64GB (4x16GB)




Memory

DDR4 memory options part number decoder

NOTE: Capacity references are rounded to the common gigabyte (GB) values.

- 4GB = 4,096MB
- 8GB = 8,192MB
- 16GB = 16,384MB

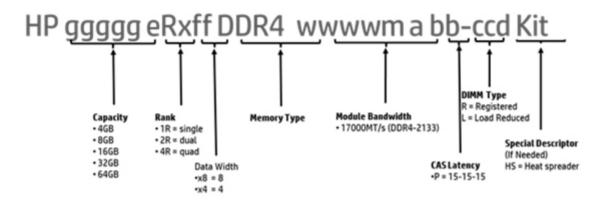



Storage





- 1	+C3 .	£3522	Server State	Parcel 212010 2120 2011	a 1 - 2
Θ	21	32	100 Har	Land Content	Θ
° 1		32	100 H H I		1

- 4 x SFF SATA/SAS/SSD Hot Pluggable Hard Drive Bays
- 2 x LFF SATA/SAS/SSD Hot Pluggable and Non hot Pluggable Hard Drives Bays
- 2 x LFF SATA Non hot Pluggable Hard Drives Bays



Technical Specifications

System Unit	Dimensions (H x W x D) Weight (approximate)	4 SFF - 1.70 x 17.11 x 15.05 inches (4.32 x 43.46 x 38.22 cm) 2 LFF - 1.70 x 17.11 x 15.05 inches (4.32 x 43.46 x 38.22 cm) NOTE: Depth of the chassis from rear to bezel is 15.5". Non hot Plug 2 17.37lb (7.88kg) LFF fully loaded (all hard drives, power supplies, and processors installed) Hot Plug 2LFF 17.41lb (7.9kg) fully loaded (one hard drive, power supply, and processor
		installed) 4 SFF Fully 19.18lb (8.7kg) loaded
	290W Non-ho	t Plug Power Supply
	Input Requirements	Range Input 100 to 240 VAC
		Rated Input 5.5 A max (at 100 VAC) Current
		Rated Input 50 to 60 Hz Frequency
		Rated Input 550 W (at 100 VAC) Power
	BTU Rating	Maximum 1130 BTU per hr (at 115 VAC) 1126 BTU per hr (at 230 VAC)
	Power Specifications	To review typical system power ratings use the Power Advisor which is available via the online tool located at URL: www.hp.com/go/proliant- energy-efficient or www.hp.com/go/hppoweradvisor - Click on the system of interest. Example: DL20 Gen9- Follow the instructions of the next screens.
	Power Supply Output	
		Peak Power
		ant Power Supply Pated Input 100 to 127 VAC
	Input Requirements	Rated Input100 to 127 VACVoltage200 to 240VAC
		Rated Input 50 to 60 Hz Frequency
		Rated Input6.3 A at 100 V ACCurrent4.9 A at 200 V ACMaximum rated 619 W at 100 VACinput power976 W at 200 VACBTUs per hour2112 at 100 VACnon redundant3329 at 200 VAC
	Power Specifications	To review typical system power ratings use the Power Advisor which is available via the online tool located at URL: www.hp.com/go/proliant- energy-efficient or www.hp.com/go/hppoweradvisor - Click on the system of interest. Example: DL20 Gen9- Follow the instructions of the next screens.



<u>vuickspecs</u>		HPE ProLiant DL20 Generation
Technical Specifications		
Power Supply Output		550 W at 100 VAC to 127 VAC input 900 W at 200 VAC to 240 VAC input
System Inlet	Maximum Peak Power Standard	•
System Inlet Temperature	Operating Support	10° to 35°C (50° to 95°F) at sea level with an altitude derating of 1.0°C per every 305 m (1.8°F per every 1000 ft) above sea level to a maximum of 3050 m (10,000 ft), no direct sustained sunlight. Maximum rate of change is 20°C/hr (36°F/hr). The upper limit and rate of change may be limited by the type and number of options installed. System performance during standard operating support may be reduced if operating with a fan fault or above 30°C (86°F).
	Extended Ambient Operating Support	For approved hardware configurations, the supported system inlet range is extended to be: 5° to 10°C (41° to 50°F) and 35° to 40°C (95° to 104°F) at sea level with an altitude derating of 1.0°C per every 175 m (1.8°F per every 574 ft) above 900 m (2953 ft) to a maximum of 3050 m (10,000 ft). The approved hardware configurations for this system are listed at the URL: <u>http://www.hp.com/go/proliant/ashrae</u> System performance may be reduced if operating in the extended ambient operating range or with a fan fault. NOTE: Supports A3 extended ambient.
Relative Humidity	Non-operatin Operating	 -30°C to 65°C (-22°F to 149°F) Minimum to be the higher (more moisture) of -12°C (10.4°F) dew point or 8% relative humidity. Maximum to be the lower (less moisture) of 24°C (75.2°F) dew point or 90% relative humidity.
(non- condensing) Altitude	Non- operating Operating Non-	5% to 95% relative humidity (Rh), 38.7°C (101.7°F) maximum wet bulb temperature 3050 m (10,000 ft). This value may be limited by the type and number of options installed. Maximum allowable altitude change rate is 457 m/min (1500 ft/min). 9144 m (30,000 ft). Maximum allowable altitude change
Acoustic Noise	declared ave levels (LpAm environment	rate is 457 m/min (1500 ft/min). e declared A-Weighted sound power levels (LWAd) and erage bystander position A-Weighted sound pressure a) when the product is operating in a 23°C ambient . Noise emissions were measured in accordance with ISO . 74) and declared in accordance with ISO 9296 (ECMA
	L WAd	Entry 3.7 B Base 3.8 B Performance 3.4B
	L pAm	Entry 20.0 dBA Base 20.0 dBA

Operating



Technical Specifications

		WAd oAm	Entry 3.7 B Base 4.7 B Performance 5.6 B Entry 20.0 dBA Base 30.0 dBA Performance 34.0 dBA
	Classification No (EMC) Sta	andards DTE: Prod sample (t	CISPR 22; EN55022; EN55024; FCC CFR 47, Pt 15; ICES-003; CNS13438; GB9254; K22;K24; EN 61000-3-2; EN 61000-3-3; EN 60950-1; IEC 60950-1 uct conformance to cited product specifications is based ype) testing, evaluation, or assessment. This product or ducts is eligible to bear the appropriate compliance logos
HPE Dynamic Smart Array B140i Controller	Number of PCI links PCI link rate Storage protocol support SAS/SATA peak data transfer rate Number of SAS/SATA connectivity Expander support Software management Warranty HPE Secure Encryption license HPE Smart Storage Administrator	6 Gb/s 10 links 2x4 conr t No Up to 10 0, 1, 10, HPE SS/ Server w Not Supp	5 SATA A, SMH, SIM varranty ported
	Notwork 1		100Raaa TX/1000Raaa TX

HPE Ethernet Network 1Gb 2-port 332i Interface

10Base-T/100Base-TX/1000Base-TX



Technical Specifications

Adapter	Compatibility Data Transfer	IEEE 802.3 10Base-T IEEE 802.3ab 1000Base-T IEEE 802.3u 100Base-TX Energy Efficient Ethernet (EEE) compliant with IEEE Std 802.3az (default is disabled) PCI Express, two lanes (x2)				
	Method Controller Network Transfer Rate Connector Cable Support	BCM572010Base-T (Half- Duplex)10 Mb/s per port, 20 Mb/s Combined10Base-T (Full- Duplex)20 Mb/s per port, 40 Mb/s Combined100Base-TX (Half-Duplex)100 Mb/s per port, 200 Mb/s Combined100Base-TX (Full-Duplex)200 Mb/s per port, 200 Mb/s Combined100Base-TX (Full-Duplex)200 Mb/s per port, 200 Mb/s Combined1000Base-TX (Full-Duplex)1000Mb/s per port, 2000 Mb/s Combined1000Base-TX (Full-Duplex)1000Mb/s per port, 2000 Mb/s Combined1000Base-TX (Full-Duplex)2000Mb/s per port, 4000 Mb/s Combined				
		10/100/1000 Base- Category 5 or higher UTP; up to 328 ft (100 m) TX				
Environment- friendly Products and Approach	Management and	Hewlett Packard Enterprise offers end-of-life Hewlett Packard Enterprise product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to: <u>http://www.hp.com/go/green</u> . To recycle your product, please go to: <u>http://www.hp.com/go/green</u> or contact your nearest Hewlett Packard Enterprise sales office. Products returned to Hewlett Packard Enterprise will be recycled, recovered or disposed of in a responsible manner.				
		The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard Enterprise web site at: <u>http://www.hp.com/go/green</u> . These instructions may be used by recyclers and other WEEE treatment facilities as well as Hewlett Packard Enterprise OEM customers who integrate and re- sell Hewlett Packard Enterprise equipment.				



Summary of Changes

Date	Version History	Action	Description of Change
06-May-2016	From Version 6 to 7	Changed	Energy Star certification in Pre-Configured Models section was revised.
08-Apr-2016	From Version 5 to 6	Changed	HPE Processors section was revised.
31-Mar-2016	From Version 4 to 5	Added	Added new HPE Non-hot Plug Entry drives and Hot plug standard drives. Added new 8Gb and 16Gb Fiber Channel HBA support. Added new TPM 2.0 security module.
		Changed	Maximum Internal Storage, Graphics, Embedded Management, Security, Service and Support, Pre-configured Models, Power Supplies, and Storage Options sections were revised.
		Removed	Obsolete SKUs were removed from the QuickSpecs.
16-Feb-2016	From Version 3 to 4	Added	
		Changed	
12-Jan-2016	From Version 2 to 3	Changed	Upgradeability and HPE Power Supplies were revised.
17-Dec-2015	From Version 1 to 2	Added	Smart Buy models were added to the NA version.
		Changed	Power Supply, Upgradeability, and Technical Specifications were revised.



12

Sign up for updates

120

© Copyright 2016 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

 ${\sf Intel} \ensuremath{\mathbb{R}}$ and Xeon $\ensuremath{\mathbb{R}}$ are registered trademarks of Intel Corporation in the U.S. and other countries.

 ${\tt Microsoft} @, {\tt Windows} @, and {\tt Windows} {\tt Server} @$ are U.S. registered trademarks of the Microsoft group of companies.

For hard drives, 1GB = 1 billion bytes. Actual formatted capacity is less

c04834947 - 15474 - Worldwide - V7 - 6-May-2016



