



Overview

HP recommends Windows Vista®
Business

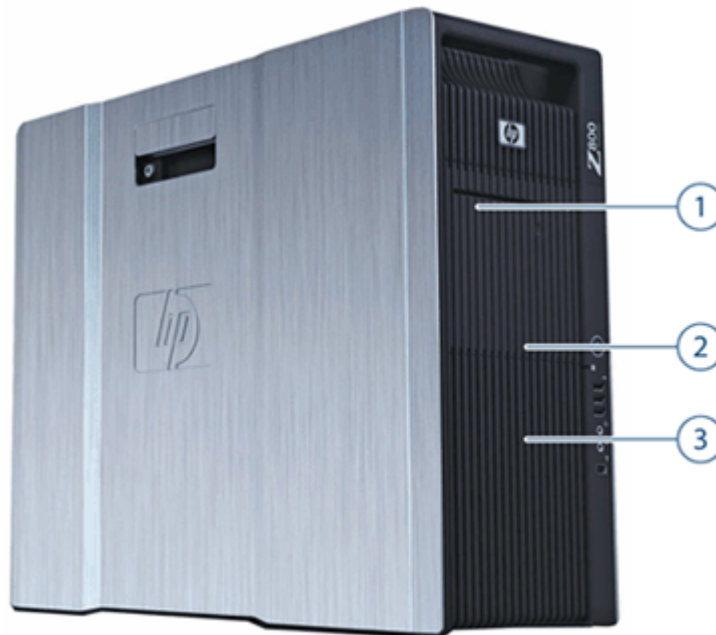

1. 3 External 5.25" Bays
 2. Power Button
 3. Front I/O: 3 USB 2.0, 1 IEEE 1394a, 1 Headphone out, 1 Microphone in
-

Overview

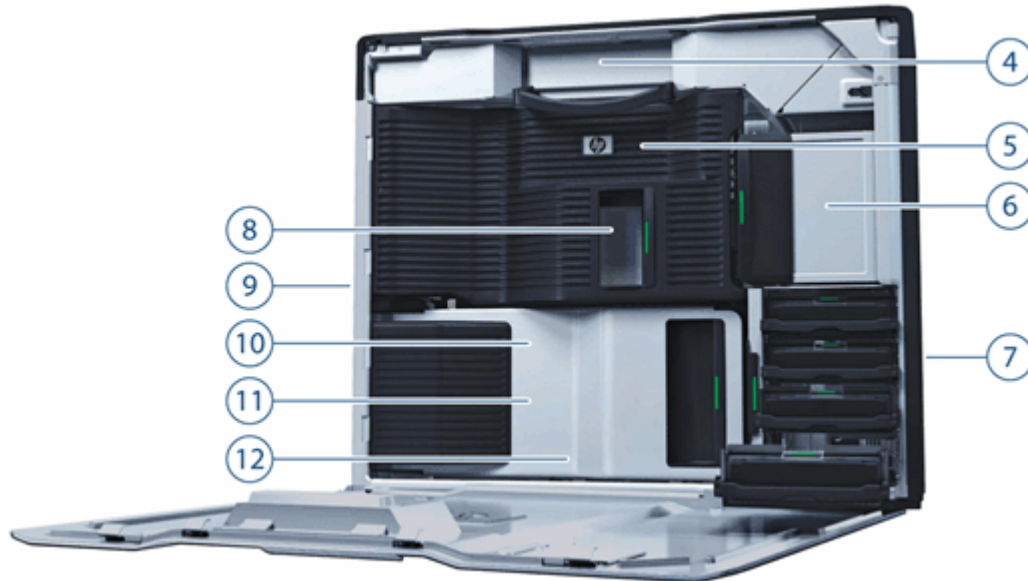

- | | |
|---|--|
| <ul style="list-style-type: none"> 4. Choice of 850W, 85% or 1110W, 89% Power Supplies 5. 12 DIMM Slots for DDR3 ECC Memory 6. 3 External 5.25" Bays 7. 4 Internal 3.5" Bays 8. 2 Quad Core Intel 5500 Series Processors | <ul style="list-style-type: none"> 9. Rear I/O: 1 IEEE 1394a, 6 USB 2.0, 1 serial, PS/2 keyboard/mouse
2 RJ-45 to Integrated Gigabit LAN
1 Audio Line In, 1 Audio Line Out, 1 Microphone In 10. 2 PCIe x16 Gen2 Slots 11.. 2 PCIe x8 Gen2, 1 PCIe x4 Gen2, 1 PCIe x4 Gen1, 1 PCI Slot 12. 3 Internal USB 2.0 ports |
|---|--|

Form Factor	Rackable Minitower
Compatible Operating Systems	<p>Genuine Windows Vista® Business 32-bit*</p> <p>Genuine Windows Vista® Business 64-bit*</p> <p>Genuine Windows Vista® Business 32-bit with downgrade to Windows® XP Professional 32-bit custom installed**</p> <p>Genuine Windows Vista® Business 64-bit with downgrade to Windows® XP Professional x64 custom installed**</p> <p>HP Linux Installer Kit for Linux (includes drivers for both 32-bit & 64-bit OS versions of Red Hat Enterprise Linux WS4 and WS5 - see: http://www.hp.com/workstations/software/linux)</p> <p>For detailed OS/hardware support information for Linux, see: http://www.hp.com/support/linux_hardware_matrix</p> <p>*Certain Windows Vista product features require advanced or additional hardware. See http://www.microsoft.com/windowsvista/getready/hardwarereqs.msp and http://www.microsoft.com/windowsvista/getready/capable.msp for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit http://www.windowsvista.com/upgradeadvisor.</p> <p>**Windows Vista Business disk may also be included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order at least 25 customer systems with the same custom image.</p>

Overview

<p>Available Processors</p>	<p>Intel® Xeon® Processor W5580 QC 3.20 GHz, 130W, 8M Cache, 6.4GT/sec QPI, DDR3 1333MHz, HT, Turbo Intel Xeon Processor X5570 QC 2.93 GHz, 95W, 8M cache, 6.4GT/s QPI, DDR3 1333MHz, HT, Turbo Intel Xeon Processor X5560 QC 2.80 GHz, 95W, 8M cache, 6.4GT/s QPI, DDR3 1333MHz, HT, Turbo Intel Xeon Processor X5550 QC 2.66 GHz, 95W, 8M cache, 6.4GT/s QPI, DDR3 1333MHz, HT, Turbo Intel Xeon Processor E5540 QC 2.53 GHz, 80W, 8M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo Intel Xeon Processor E5530 QC 2.40 GHz, 80W, 8M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo Intel Xeon Processor E5520 QC 2.26 GHz, 80W, 8M cache, 5.86GT/s QPI, DDR3 1066MHz, HT, Turbo Intel Xeon Processor E5506 QC 2.13 GHz, 80W, 4M cache, 4.8GT/s QPI, DDR3 800 Intel Xeon Processor E5504 QC 2.00 GHz, 80W, 4M cache, 4.8GT/s QPI, DDR3 800</p>
<p>Available Processor Disclaimers</p>	<p>When ordering two processors, the second processor must be the same as the first. Processor numbers differentiate features within each processor family, not across different processor families. See: http://www.intel.com/products/processor_number/ for details.</p> <p>Quad-Core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits; check with software provider to determine suitability; Not all customers or software applications will necessarily benefit from use of these technologies.</p> <p>64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processors will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See: http://www.intel.com/info/em64t for more information.</p> <p>Intel's numbering is not a measurement of higher performance.</p>
<p>Additional Details</p>	<p>Intel® Nehalem Architecture Up to 6.4GT/s QPI support 3-channel 800/1066/1333 MHz DDR3* memory subsystem Up to 192GB memory capacity PCI Express I/O and PCIe x16 Gen2 graphics Dual integrated Broadcom 5764 Gigabit LAN on Motherboard (LOM) 6 channels of Serial ATA (SATA) and 8 channels of Serial Attached SCSI (SAS) 3.0 Gb/s natively supported internally; SATA RAID level 0, 1, 5 and 10 and SAS RAID** level 0, 1, 10 available on motherboard* SATA optical drives High Definition integrated audio with internal speaker Choice of 850W 85% efficient or 1110W 89% efficient power supply ENERGY STAR® qualification and energy-saving features available on selected configurations (Not supported by Linux) Protected by HP Services, including a 3 years parts, 3 years labor, and 3 years onsite service (3/3/3) standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.</p> <p>*Each processor supports up to 3 channels of DDR3 memory. To realize full performance at least 1 DIMM must be inserted into each channel. To get full 6 channel support, 2 processors MUST be installed. **SATA hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf for RAID capabilities with Linux.</p>



Overview

Color	Black/Silver	
I/O Slots (see system board section for more details)	<ul style="list-style-type: none"> • 2 PCI Express Gen2 x16 slots (full-length, full-height) • 2 PCI Express Gen2 x8 slots - with x8 connectors (full-length, full-height) • 1 PCI Express Gen2 x4 slot - with x8 connector (half-length, full-height) • 1 PCI Express Gen1 x4 slot - with x8 connector (full-length, full-height) • 1 PCI 32bit/33MHz slot, (full-length, full-height) • 1 Mechanical-only slot, supporting cards which mount only to the I/O bulkhead and not the motherboard (half-length, full-height) • The PCIe x8 connectors are open ended, allowing a PCIe x16 card to be seated in the slot. 	
Bays (see storage section for more details)	Total Bays = 7	
Internal Bays	4 internal 3.5" bays (4 with acoustic dampening rail assemblies)	
External Bays	3 external 5.25" bays Top bay device depth limit: 175mm Middle bay device depth limit: 206mm Bottom bay device depth limit: 206mm	
Front I/O	3 USB 2.0, 1 Headphone Out, 1 Microphone In, and 1 IEEE 1394a	
Rear I/O	1 IEEE-1394a 6 USB 2.0 1 Serial PS/2 keyboard and mouse 2 RJ-45 to integrated Gigabit LAN 1 Audio Line In, 1 Audio Line Out, 1 Microphone In; audio ports can be retasked to function as line in, line out, microphone, or headphone.	
Internal USB	3 USB 2.0 header	
Chassis Dimensions (H x W x D)	17.5 x 8.0 x 20.7 inches; 44.4 x 20.3 x 52.5 cm	
System Weight	Exact weights depend upon configuration Minimum config – 43 lb (19.5 kg) Typical config – 46 lb (21 kg) Maximum config – 64 lb (29 kg)	
Temperature	Operating:	40° to 95° F (5° to 35° C)
	Non-operating	-40° to 140° F (-40° to 60° C)
Humidity	Operating:	8% to 85%
	Non-operating	8% to 90%
Maximum Altitude (non-pressurized)	Operating:	10,000 feet; 3,000 m
	Non-operating	30,000 feet; 9,100 m
Power Supply	Choice of: <ul style="list-style-type: none"> • 850W 85% (BRONZE) Efficient wide-ranging, active Power Factor Correction • 1110W 89% (SILVER) Efficient wide-ranging, active Power Factor Correction <p>NOTE: The 1110W power supply can also supply 1250W of output power when the input voltage is greater than 105V. If the input voltage is less than 105V, but greater than 90V for any reason, the maximum power that can be drawn is 1110W. An uninterruptible power supply (UPS) is highly recommended if 1250W output power is desired.</p>	

Overview

Interfaces Supported	<ul style="list-style-type: none">• 6-channel SATA 3.0 Gb/s Interface (6 Serial-ATA connectors on the motherboard, 4 channels are eSATA configurable for use with eSATA CTO/AMO Kit)• 8-channel SAS interface (8 SAS connectors on the motherboard), SAS ports can be ported externally by using the SAS Bulkhead and/or Back Panel connector Kits• 1 Floppy interface (1 Floppy connector), IEEE 1394a, USB 2.0
Hard Drive Controller Supported	SATA and SAS controllers

Supported Components

Processors

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Quad-Core Intel Xeon Processor 5500 Series with Intel® 64 Architecture				
Intel Xeon X5570, 2.93GHz, 8MB cache, 1333MHz Memory, 6.4 GT/s QPI, 95W	Y	Y		
Intel Xeon X5560, 2.80GHz, 8MB cache, 1333MHz Memory, 6.4 GT/s QPI, 95W	Y	Y		
Intel Xeon X5550, 2.66GHz, 8MB cache, 1333MHz Memory, 6.4 GT/s QPI, 95W	Y	Y		
Intel Xeon E5540, 2.53GHz, 8MB cache, 1066MHz Memory, 5.86 GT/s QPI, 80W	Y	Y		
Intel Xeon E5530, 2.40GHz, 8MB cache, 1066MHz Memory, 5.86 GT/s QPI, 80W	Y	Y		
Intel Xeon E5520, 2.26GHz, 8MB cache, 1066MHz Memory, 5.86 GT/s QPI, 80W	Y	Y		
Intel Xeon E5506, 2.13GHz, 4MB cache, 800MHz Memory, 4.8 GT/s QPI, 80W	Y	Y		
Intel Xeon E5504, 2.00GHz, 4MB cache, 800MHz Memory, 4.8 GT/s QPI, 80W	Y	Y		
Quad-Core Intel Xeon Processor 5500 Series with Intel® 64 Architecture – High Power				
Intel Xeon W5580, 3.20GHz, 8MB L3, 1333MHz Memory, 130W	Y	Y		

Sub-Section Description/Notes

Note 1: NCQ (Native Command Queuing) not supported in Red Hat Enterprise Linux

For hard drives, 1 GB = 1 billion bytes; TB = 1 trillion bytes. Actual formatted capacity is less. Up to 12 GB of hard drive (or system disk) is reserved for the system recovery software (XP and XP Pro). Up to 3 GB of system disk is reserved for system recovery software (Vista).

SAS Hard Drives

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations				
146 GB 15K rpm SAS 3.0 Gb/s 3.5" Hard Drive	Y	Y	EA330AA	
300 GB 15K rpm SAS 3.0 Gb/s 3.5" Hard Drive	Y	Y	EM174AA	
450 GB 15K rpm SAS 3.0 Gb/s 3.5" Hard Drive	Y	Y	FM803AA	

Sub-Section Description/Notes

Up to 5 SATA drives, 5 SAS, drives, or 6 SATA 2.5", Small Form Factor (SFF) drives
If 1st drive is SATA, 2nd drive can be EITHER SATA or SAS

SATA Hard Drives

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
SATA (Serial ATA) Hard Drives for HP Workstations				
160 GB 7,200 rpm SATA 3.0 Gb/s with NCQ 3.5" Hard Drive	Y	Y	PV944A	See note 1



Supported Components

250 GB 7,200 rpm SATA 3.0 Gb/s with NCQ 3.5" Hard Drive	Y	Y	EA788AA	See note 1
320 GB 7,200 rpm SATA 3.0 Gb/s with NCQ 3.5" Hard Drive	Y	Y	FH963AA	
500 GB 7,200 rpm SATA 3.0 Gb/s with NCQ 3.5" Hard Drive	Y	Y	PV943A	See note 1
1 TB 7,200 rpm SATA 3.0 Gb/s with NCQ 3.5" Hard Drive	Y	Y	GE262AA	See note 1
160 GB 10K rpm SATA with NCQ 2.5" Hard Drive	Y	Y	EW222AA	See note 1
300 GB 10K rpm SATA with NCQ 2.5" Hard Drive	Y	Y	FM802AA	

NOTE: 8 port SAS Controller included on the system board

Hard Drive Controllers

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Factory integrated RAID on motherboard for SATA drives				
RAID 0 Configuration - Striped Array	Y	Y		See note 1
RAID 0 Data Configuration -- Boot/OS Drive + 2 Drive Striped Array	Y	Y		See note 2
RAID 1 Configuration - Mirrored Array	Y	Y		See note 3
RAID 10 Configuration - Striped/Mirrored Array	Y	Y		
RAID 5 Configuration - Parity Array	Y	Y		See note 3
Integrated SATA 3.0 Gb/s Controller				
Integrated SATA 3.0 Gb/s Controller, RAID 0, 1, 10, 5 supported	Y	Y		
Integrated SAS controller With RAID 0, 1/1E				
Integrated SAS controller With RAID 0 (IS), RAID 1(IM), RAID 10(IME) capability	Y	Y		
HP SAS Back Panel Connector kit				
HP SAS Back Panel Connector kit	Y	Y		Must have 4 or fewer SAS hard drives to configure this option
HP SAS Back Panel Bulkhead Connector Kit				
HP SAS Back Panel Bulkhead Connector Kit	Y	Y		HP SAS Back Panel Connector kit required. Internal SAS HD drives are not supported
LSI MegaRAID® SAS 8888ELP Host Bus Adapter (HBA)				
LSI 8888ELP 8-port SAS HW RAID Card	Y	Y	GE258AA	
All RAID arrays must be less than 2 TB in size				



Supported Components

NOTE 1: Minimum of 2 hard drives needed. All hard drives must be identical (size/speed/type/bus/functional capabilities). Must have 2, 3 or 4 HD Drives.

NOTE 2: Minimum of 3 SATA hard drives needed. All hard drives must be identical (size/speed/type/bus/functional capabilities).

At least 3 HD Drives required. May have 4th and 5th HD Drives. Drives must be the same drive (size/speed/type/functional capability).

NOTE 3: 2 SATA or 2 SAS hard drives required. All hard drives must be identical (size/speed/type/bus/functional capabilities).

NOTE 4: Minimum of 3 SATA hard drives needed. All SATA hard drives must be identical (size/speed/type/bus/functional capabilities). Must have 3 or 4 HD Drives. 5 HD Drives not allowed. SATA hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit <http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf> for RAID capabilities with Linux.

IS: Striping of 2 or more HDDs into a single logical volume

IM: Mirroring of 2 HDDs into a single logical volume

IME: Mirroring of 3 or more HDDs into a single logical volume

NOTE: Specific user-configured hardware SAS RAID configurations are supported on this Linux system. Please visit: http://www.hp.com/support/linux_hardware_matrix for details

Graphics

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes	Supported Multi Mixed
Professional 2D					
NVIDIA Quadro NVS 295 256MB Graphics Card					
Entry 3D					
ATI FirePro V3700 256MB PCIe Graphics Card	Y	Y	FY944AA		1
NVIDIA Quadro FX 380 256MB PCIe Graphics Card	Y	Y	NB769AA		1
NVIDIA Quadro FX 580 512MB PCIe Graphics Card	Y	Y	FY945AA		1
Mid-range 3D					
NVIDIA Quadro FX 1800 768MB PCIe Graphics Card	Y	Y	FY946AA		1
ATI FirePro V5700 512MB PCIe Graphics Card	Y	Y	FY947AA		1
High End 3D					
NVIDIA Quadro FX 3800 1.0GB PCIe Graphics Card (AVAILABLE JUNE 2009)	Y	Y	FY949AA		1
NVIDIA Quadro FX 4800 1.5GB PCIe Graphics Card	Y	Y	FQ138AA		1
NVIDIA Quadro CX - The Accelerator for Creative Suite 4	Y	Y			1
NVIDIA Quadro FX 5800 4GB PCIe Graphics Card	Y	Y	FZ559AA		1

Supported Components

ATI FirePro V7750 1.0GB PCIe Graphics Card	Y	Y	FY948AA	1
--	---	---	---------	---

NOTE 1: This card consumes 2 PCIe slots, reducing the maximum number of PCI cards in a system

Memory

CTO

PC3-10600 DDR3-1333 ECC Registered DIMMs CTO

24GB (6x4GB) DDR3-1333 ECC Registered RAM 2-CPU

32GB (8x4GB) DDR3-1333 ECC Registered RAM 2-CPU

48GB (12x4GB) DDR3-1333 ECC Registered RAM 2-CPU

96GB (12x8GB) DDR3-1333 ECC Registered RAM 2-CPU

64GB (8x4GB+4x8GB) DDR3-1333 ECC Registered RAM 2-CPU

PC3-10600 DDR3-1333 ECC Unbuffered DIMMs CTO

1GB (1x1GB) DDR3-1333 ECC Unbuffered RAM 1-CPU

2GB (2x1GB) DDR3-1333 ECC Unbuffered RAM 1-CPU

3GB (3x1GB) DDR3-1333 ECC Unbuffered RAM 1-CPU

2GB (2x1GB) DDR3-1333 ECC Unbuffered RAM 2-CPU

After Market Options (AMO)

PC3-10600 DDR3-1333 ECC Registered DIMMs AMO

4GB (1x4GB) DDR3-1333 ECC Registered RAM

8GB (1x8GB) DDR3-1333 ECC Registered RAM

PC3-10600 DDR3-1333 ECC Unbuffered DIMMs AMO

1GB (1x1GB) DDR3-1333 ECC Unbuffered RAM

2GB (1x2GB) DDR3-1333 ECC Unbuffered RAM

NOTE: You cannot intermix registered and unbuffered DIMMs. The system will not work.

Support Notes

2 Processors Required

2 Processors Required

2 Processors Required

2 Processors Required

2 Processors Required

1 Processor Configuration

1 Processor Configuration

1 Processor Configuration

2 Processors Required

Multimedia and Audio Devices

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Intel/Realtek HD ALC262 Audio	Y	N		
HP Thin USB Powered Speakers	Y	Y	KK912AA	
Creative X-Fi Titanium PCIe Audio Card	Y	Y	NH222AA	

Supported Components

Optical and Removable Storage

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP DVD-ROM Drive	Y	Y	AR629AA	See note 2
HP DVD+/-RW Drive	Y	Y	EW269AA	See note 3
HP Slot Load DVD+/-RW Drive	Y	N		See note 1
HP Blu-Ray Writer	Y	Y	AR482AA	Available May 2009
HP 22-in-1 Media Card Reader Kit (Workstations)	N	Y	NK361AA	
HP DX115 Removable Drive Enclosure				
HP DX115 Carrier with 160GB SATA HDD	Y	Y	FZ577AA	
HP DX115 Removable HDD Frame/Carrier	N	Y	FX576AA	
HP DX115 Removable HDD Carrier	N	Y	NB792AA	

Actual speeds may vary. Does not permit copying of commercially available DVD movies or other copyright protected materials. Intended for creation and storage of your original material and other lawful uses. Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players. As Blu-Ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-Ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.

NOTE 1: May only order one.

NOTE 2: Cannot be 2nd drive.

NOTE 3: LightScribe, is supported on Windows ONLY and creates a grayscale image similar to black and white photography. LightScribe media required and sold separately. Double-layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

Controller Cards

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP IEEE 1394b FireWire PCIe Card	Y	Y	NK653AA	

Supported Components

Monitors

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP LP1965 19-inch LCD Monitor	Y	Y	RA373A	
HP LP2275w 22-inch Widescreen LCD Monitor	Y	Y	KE289A	
HP LP2475w 24-inch Widescreen LCD Monitor	Y	Y	KD911A	
HP DreamColor LP2480zx Professional Display	Y	Y	GV546A	
HP LP3065 30-inch Widescreen LCD Monitor	Y	Y	EZ320A	

NOTE: Supported by all Operating Systems available from HP (screen size diagonally measured)

Networking and Communications

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Broadcom 5764 PCIe LOM Controller	Y	N		
Broadcom NetXtreme Gigabit Ethernet Plus NIC (PCIe)	Y	Y	FS215AA	
HP NC360T PCI Express Dual Port Gigabit NIC	N	Y	KU004AA	
Intel Gigabit CT Desktop NIC	N	Y	FH969AA	

"Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

Racking and Physical Security

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Security Cable with Kensington Lock	N	Y	PC766A	
HP Chassis Intrusion Sensor	Y	N		
HP Z6/Z8 Adjustable Sliding Rail Rack Kit	N	Y	NN124AA	

Input Devices

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP PS/2 Standard Keyboard	Y	Y	DT527A	
HP USB Standard Keyboard	Y	Y	DT528A	
HP PS/2 Optical Scroll Mouse	Y	Y	EY703AA	
HP USB 2-Button Optical Scroll Mouse	Y	Y	DC172B	
HP USB Laser Mouse	Y	Y	GW405AA	
HP USB Optical 3-Button Mouse	Y	Y	DY651A	
HP USB Smart Card Keyboard	N	Y	ED707AA	
HP 2.4GHz Wireless Keyboard & Mouse	N	Y	NB896AA	
HP USB Optical 3-Button 2.9M OEM Mouse	N	Y	ET424AA	
HP SpaceExplorer 3D USB Controller	N	Y	RY429AA	
HP SpacePilot 3D USB Intelligent Controller	N	Y	EF390AA	

Supported Components

Other Hardware

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Internal USB Port Kit	Y	Y	EM165AA	
HP SAS Back Panel Connector	Y	Y	EM164AA	
HP eSATA PCI Cable Kit	Y	Y		
HP Power Cord Kit	Y	Y		
HP ENERGY STAR 5.0 Enabled Configuration	Y	Y		

Software

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Performance Tuning Framework	Y	N		
Roxio Easy Media Creator (CD or DVD burner)	Y	N		
Intervideo WinDVD with DVD player	Y	N		
HP Backup and Recovery	Y	N		Supported on Windows XP ONLY
PDF Complete	Y	N		
Microsoft Office 2007 Small Business Edition	Y	N		
Microsoft Office 2007 Trial Edition	Y	N		
HP Client Manager Software v6.2 (optional download)	Y	N		
HP ProtectTools Security	Y	N		Must select as a Configure to Order Option. Delivered as a "Drop in the Box" CD

Supported Components

Operating Systems

Genuine Windows Vista® Business 32-bit

Support Notes

Certain Windows Vista product features require advanced or additional hardware. See www.microsoft.com/windowsvista/getready/hardwarereqs.mspx and www.microsoft.com/windowsvista/getready/capable.mspx for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit www.windowsvista.com/upgradeadvisor.

Genuine Windows Vista® Business 64-bit

Certain Windows Vista product features require advanced or additional hardware. See www.microsoft.com/windowsvista/getready/hardwarereqs.mspx and www.microsoft.com/windowsvista/getready/capable.mspx for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit www.windowsvista.com/upgradeadvisor.

Genuine Windows Vista® Business 32-bit with downgrade to Windows® XP Professional 32-bit custom installed

Windows Vista Business disk may also be included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order at least 25 customer systems with the same custom image.

Genuine Windows Vista® Business 64-bit with downgrade to Windows® XP Professional x64 custom installed

Windows Vista Business disk may also be included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order at least 25 customer systems with the same custom image.

HP Linux Installer Kit

see: <http://www.hp.com/workstations/software/linux>

System Technical Specifications

System Board																																																																																																																																																																																																																																																																														
System Board Form Factor	Custom Form Factor, 13" x 14.25"																																																																																																																																																																																																																																																																													
Processor Socket	Dual LGA 1366																																																																																																																																																																																																																																																																													
CPU Bus Speed	QPI: Up to 6.4GT/sec																																																																																																																																																																																																																																																																													
Chipset	Intel® 5520																																																																																																																																																																																																																																																																													
Super I/O Controller	SMSC SCH5327, Rev B																																																																																																																																																																																																																																																																													
Memory Expansion Slots	12 slots (6 slots per CPU)																																																																																																																																																																																																																																																																													
Memory Type Supported	DDR3, RDIMM (Registered) or UDIMM (Unbuffered), ECC																																																																																																																																																																																																																																																																													
Memory Modes	NUMA (Non-Uniform Memory Architecture), Memory Node Interleave																																																																																																																																																																																																																																																																													
Memory Speed Supported	800MHz, 1066MHz, & 1333MHz																																																																																																																																																																																																																																																																													
Memory																																																																																																																																																																																																																																																																														
Maximum Memory	Supports up to 24GB using UDIMMs Supports up to 192GB using RDIMMs																																																																																																																																																																																																																																																																													
	<p>Single Processor Memory Loading</p> <table border="1"> <thead> <tr> <th rowspan="2">Capacity</th> <th colspan="6">Single Processor – CPU0</th> </tr> <tr> <th>DIMM1</th> <th>DIMM2</th> <th>DIMM3</th> <th>DIMM4</th> <th>DIMM5</th> <th>DIMM6</th> </tr> </thead> <tbody> <tr> <td>1 GB</td> <td>1GB</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>2 GB</td> <td>1GB</td> <td></td> <td>1GB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3 GB</td> <td>1GB</td> <td></td> <td>1GB</td> <td></td> <td>1GB</td> <td></td> </tr> <tr> <td>4 GB</td> <td>2GB</td> <td></td> <td>2GB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>6 GB</td> <td>2GB</td> <td></td> <td>2GB</td> <td></td> <td>2GB</td> <td></td> </tr> <tr> <td>8 GB</td> <td>2GB</td> <td>2GB</td> <td>2GB</td> <td></td> <td>2GB</td> <td></td> </tr> <tr> <td>12 GB</td> <td>2GB</td> <td>2GB</td> <td>2GB</td> <td>2GB</td> <td>2GB</td> <td>2GB</td> </tr> </tbody> </table> <p>Dual Processor Memory Loading</p> <table border="1"> <thead> <tr> <th rowspan="2">Capacity</th> <th colspan="6">CPU0</th> <th colspan="6">CPU1</th> </tr> <tr> <th>DIMM1</th> <th>DIMM2</th> <th>DIMM3</th> <th>DIMM4</th> <th>DIMM5</th> <th>DIMM6</th> <th>DIMM1</th> <th>DIMM2</th> <th>DIMM3</th> <th>DIMM4</th> <th>DIMM5</th> <th>DIMM6</th> </tr> </thead> <tbody> <tr> <td>2GB</td> <td>1GB</td> <td></td> <td>1GB</td> <td></td> <td></td> <td></td> <td>1GB</td> <td></td> <td>1GB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4GB</td> <td>1GB</td> <td></td> <td>1GB</td> <td></td> <td></td> <td></td> <td>1GB</td> <td></td> <td>1GB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>6GB</td> <td>1GB</td> <td></td> <td>1GB</td> <td></td> <td>1GB</td> <td></td> <td>1GB</td> <td></td> <td>1GB</td> <td></td> <td>1GB</td> <td></td> </tr> <tr> <td>8GB</td> <td>2GB</td> <td></td> <td>2GB</td> <td></td> <td></td> <td></td> <td>2GB</td> <td></td> <td>2GB</td> <td></td> <td></td> <td></td> </tr> <tr> <td>12GB</td> <td>2GB</td> <td></td> <td>2GB</td> <td></td> <td>2GB</td> <td></td> <td>2GB</td> <td></td> <td>2GB</td> <td></td> <td>2GB</td> <td></td> </tr> <tr> <td>16GB</td> <td>2GB</td> <td>2GB</td> <td>2GB</td> <td></td> <td>2GB</td> <td></td> <td>2GB</td> <td>2GB</td> <td>2GB</td> <td></td> <td>2GB</td> <td></td> </tr> <tr> <td>24GB</td> <td>4GB</td> <td></td> <td>4GB</td> <td></td> <td>4GB</td> <td></td> <td>4GB</td> <td></td> <td>4GB</td> <td></td> <td>4GB</td> <td></td> </tr> <tr> <td>32GB</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> <td></td> <td>4GB</td> <td></td> <td>4GB</td> <td>4GB</td> <td>4GB</td> <td></td> <td>4GB</td> <td></td> </tr> <tr> <td>48GB</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> </tr> <tr> <td>64GB</td> <td>8GB</td> <td>4GB</td> <td>8GB</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> <td>8GB</td> <td>4GB</td> <td>8GB</td> <td>4GB</td> <td>4GB</td> <td>4GB</td> </tr> <tr> <td>96GB</td> <td>8GB</td> <td>8GB</td> <td>8GB</td> <td>8GB</td> <td>8GB</td> <td>8GB</td> <td>8GB</td> <td>8GB</td> <td>8GB</td> <td>8GB</td> <td>8GB</td> <td>8GB</td> </tr> <tr> <td>144GB</td> <td>16GB</td> <td>8GB</td> <td>16GB</td> <td>8GB</td> <td>16GB</td> <td>8GB</td> <td>16GB</td> <td>8GB</td> <td>16GB</td> <td>8GB</td> <td>16GB</td> <td>8GB</td> </tr> <tr> <td>160GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> </tr> <tr> <td>192GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> <td>16GB</td> </tr> </tbody> </table>	Capacity	Single Processor – CPU0						DIMM1	DIMM2	DIMM3	DIMM4	DIMM5	DIMM6	1 GB	1GB						2 GB	1GB		1GB				3 GB	1GB		1GB		1GB		4 GB	2GB		2GB				6 GB	2GB		2GB		2GB		8 GB	2GB	2GB	2GB		2GB		12 GB	2GB	2GB	2GB	2GB	2GB	2GB	Capacity	CPU0						CPU1						DIMM1	DIMM2	DIMM3	DIMM4	DIMM5	DIMM6	DIMM1	DIMM2	DIMM3	DIMM4	DIMM5	DIMM6	2GB	1GB		1GB				1GB		1GB				4GB	1GB		1GB				1GB		1GB				6GB	1GB		1GB		1GB		1GB		1GB		1GB		8GB	2GB		2GB				2GB		2GB				12GB	2GB		2GB		2GB		2GB		2GB		2GB		16GB	2GB	2GB	2GB		2GB		2GB	2GB	2GB		2GB		24GB	4GB		4GB		4GB		4GB		4GB		4GB		32GB	4GB	4GB	4GB		4GB		4GB	4GB	4GB		4GB		48GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	64GB	8GB	4GB	8GB	4GB	4GB	4GB	8GB	4GB	8GB	4GB	4GB	4GB	96GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	144GB	16GB	8GB	16GB	8GB	16GB	8GB	16GB	8GB	16GB	8GB	16GB	8GB	160GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	192GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB
Capacity	Single Processor – CPU0																																																																																																																																																																																																																																																																													
	DIMM1	DIMM2	DIMM3	DIMM4	DIMM5	DIMM6																																																																																																																																																																																																																																																																								
1 GB	1GB																																																																																																																																																																																																																																																																													
2 GB	1GB		1GB																																																																																																																																																																																																																																																																											
3 GB	1GB		1GB		1GB																																																																																																																																																																																																																																																																									
4 GB	2GB		2GB																																																																																																																																																																																																																																																																											
6 GB	2GB		2GB		2GB																																																																																																																																																																																																																																																																									
8 GB	2GB	2GB	2GB		2GB																																																																																																																																																																																																																																																																									
12 GB	2GB	2GB	2GB	2GB	2GB	2GB																																																																																																																																																																																																																																																																								
Capacity	CPU0						CPU1																																																																																																																																																																																																																																																																							
	DIMM1	DIMM2	DIMM3	DIMM4	DIMM5	DIMM6	DIMM1	DIMM2	DIMM3	DIMM4	DIMM5	DIMM6																																																																																																																																																																																																																																																																		
2GB	1GB		1GB				1GB		1GB																																																																																																																																																																																																																																																																					
4GB	1GB		1GB				1GB		1GB																																																																																																																																																																																																																																																																					
6GB	1GB		1GB		1GB		1GB		1GB		1GB																																																																																																																																																																																																																																																																			
8GB	2GB		2GB				2GB		2GB																																																																																																																																																																																																																																																																					
12GB	2GB		2GB		2GB		2GB		2GB		2GB																																																																																																																																																																																																																																																																			
16GB	2GB	2GB	2GB		2GB		2GB	2GB	2GB		2GB																																																																																																																																																																																																																																																																			
24GB	4GB		4GB		4GB		4GB		4GB		4GB																																																																																																																																																																																																																																																																			
32GB	4GB	4GB	4GB		4GB		4GB	4GB	4GB		4GB																																																																																																																																																																																																																																																																			
48GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB																																																																																																																																																																																																																																																																		
64GB	8GB	4GB	8GB	4GB	4GB	4GB	8GB	4GB	8GB	4GB	4GB	4GB																																																																																																																																																																																																																																																																		
96GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB																																																																																																																																																																																																																																																																		
144GB	16GB	8GB	16GB	8GB	16GB	8GB	16GB	8GB	16GB	8GB	16GB	8GB																																																																																																																																																																																																																																																																		
160GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB																																																																																																																																																																																																																																																																		
192GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB	16GB																																																																																																																																																																																																																																																																		
Memory Configuration (Supported)	<ul style="list-style-type: none"> Not all memory configurations possible are represented below. Also, 512 MB configurations are not supported for 64-Bit operating systems. Only ECC DIMMs are supported. RDIMM and UDIMM memory modules cannot be mixed in the system. Do not install memory modules into memory slots if corresponding processor is not installed. Dual processor configurations with memory modules installed for only one processor is not supported. The 4GB DIMM for Z4 and Z6 is not compatible with the Z8 4GB DIMM. They are not interchangeable. 																																																																																																																																																																																																																																																																													

System Technical Specifications

PCI Express Connectors (Gen2 Rev 0.7 connectors)	PCIe2 x16, qty 2 PCIe2 x16 (8), qty 2 PCIe2 x8 (4), qty 1 PCIe x8 (4), qty 1	
PCI Connectors (5.0V)	PCI 32b, 33MHz (supports 64-bit cards), qty 1	
Interfaces Supported	SATA	Integrated 6-channel SATA 3.0Gb/sec controller with RAID 0, 1, 5, 10 and NCQ. (Factory integrated RAID is Microsoft Windows only)
Serial Attached SCSI	Integrated 8-channel SAS 3.0Gb/sec controller with HW RAID 0, 1, 10.	
Integrated RAID	<ul style="list-style-type: none"> • SATA: RAID 0, 1, 5, 10 • AS: HW RAID 0, 1, 10 	
Integrated Graphics	None	
Network Controller	Dual Controller Broadcom 5764 PCI-E LAN Controller Memory Integrated 48KB receive buffer and 8KB transmit buffer Data rates supported 10/100/1000 Mbps Compliance IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control Bus architecture PCIe 1.0a Data path width X1 to each controller Data path speed 2.5Gbit per sec per direction transfer rate Data transfer mode Bus-master DMA Power requirement 1.0 watts @ +3.3V AUX supply Boot ROM support Yes Network transfer rate 10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Management capabilities WOL, PXE 2.1 and ASF 2.0	
PCI-X Connectors	None	
PCI Card Guide	Yes	
Wake on LAN	Yes	
Integrated Trusted Platform Module	TPM 1.2	
ASF 1.0 & 2.0 (Alert Standard Format)	Yes	
SATA Connectors	6 ports/connectors (Included are 4 eSATA configurable with optional eSATA After-Market Option cable kit)	
IEEE 1394 Connector(s)	Front	Yes, 1394a
	Rear	Yes, 1394a
	Internal	None
USB Connector(s)	Front	Yes, qty 3
	Rear	Yes, qty 6
	Internal	Yes, qty 3
HD Integrated Audio	Yes	
Flash ROM	Yes, SPI Rom	

System Technical Specifications

Clear Fan Header	No
CPU Fan Header	Yes, qty 2
Chassis Fan Header	Yes, a single fan header for 2 fans.
Front PCI Fan Header	Yes, qty 2
Front Control Panel/Speaker Header	Yes
CMOS Battery Holder - Lithium	Yes
Integrated Trusted Platform Module	Integrated TPM 1.2
Power Supply Headers	Yes: 9x2, 5x2, 4x2
Power Switch, Power LED & Hard Drive LED Header	Yes
Clear Password Jumper	Yes
Serial Port	Yes, on rear panel
Parallel Port	No
Keyboard/Mouse	Yes
Power Supply	850W 85% Efficient Wide-Ranging, Active PFC, Custom 1110W 89% Efficient Wide-Ranging, Active PFC, Custom NOTE: The 1110W power supply can also supply 1250W of output power when the input voltage is greater than 105V. If the input voltage is less than 105V, but greater than 90V for any reason, the maximum power that can be drawn is 1110W. An uninterruptible power supply (UPS) is highly recommended if 1250W output power is desired.
Operating Voltage Range	90-269 VAC
Rated Voltage Range	100-240 VAC 118 VAC
Rated Line Frequency	50-60 Hz 400 Hz
Operating Line Frequency Range	47-66 Hz 393 - 407 Hz
Rated Input Current	850W: 11A @ 100-127V, 5.5A @ 200-240V, 11A @ 118V 1110W: 12A @ 100V 1250W: 12A @ 115V, 10A @ 200-240V, 12A @ 118V
Heat Dissipation	850W: Typical = TBD, Max = TBD 1110W: Typical = TBD, Max = TBD
Power Supply Fan	850W: 2x80x25 mm variable speed 1110W: 2x80x25 mm variable speed
ENERGY STAR® qualified (Config Dependent)	Yes
80 PLUS Compliant	850W 85% BRONZE 1110W 89% SILVER
FEMP Standby Power Compliant 115V (Wake-on LAN disabled) (<2W in S5 - Power Off)	Yes

System Technical Specifications

Power consumption in sleep mode (as defined by ENERGY STAR) - Suspend to RAM (S3)	850W: <20W 1110W: <20W		
Built-in Self Test (BIST) LED	Yes		
Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)	Yes		
ENERGY STAR® qualified	Yes		
AUX IN (audio)	No		
Clear CMOS Button	Yes		
Chassis Speaker Header	Yes, as part of Front UI (Control Panel) cable header		
Multibay Header	No		
Integrated Gigabit Ethernet	Yes, dual port.		
Access Panel Solenoid Lock Header	Yes		
Access Panel Intrusion Sensor Header	Yes, as part of Front UI (Control Panel) cable header		
Memory Fan Connector	Yes, blind-mate		
Z800 Required Power Supply Info			
Power Supply	850W Custom PSU - (Wide Ranging Active PFC)		1110W/1250W* Custom PSU - (Wide Ranging Active PFC)
Operating Voltage Range	90 - 269 VAC		90 - 269 VAC
Rated Voltage Range	100 - 240 VAC	118 VAC	100 - 240 VAC 118 VAC
Rated Line Frequency	50-60 Hz	400 Hz	50-60 Hz 400 Hz
Operating Line Frequency Range	47 - 66 Hz	393 - 407 Hz	47 - 66 Hz 393 - 407 Hz
Rated Input Current	11.0A @ 110-127 VAC 5.5A @ 200-240 VAC	11.0A @ 118 VAC	12A @ 100 VAC, 1110 W 12A @ 115 VAC, 1250 W 10A @ 200-240 VAC, 1250 W 12A @ 118 VAC, 1250W
Heat Dissipation (Configuration and software dependent)	Typical 1707 btu/hr (430 kg-cal/hr) Max 3558 btu/hr (892 kg-cal/hr)		Typical 2128 btu/hr (536 kg-cal/hr) Max1 4457 btu/hr (1123 kg-cal/hr) Max2 5019 btu/hr (1265 kg-cal/hr)
Power Supply Fan	2x80x25 mm variable speed		2x80x25 mm variable speed
Energy Star Compliant (config dependent)	YES		YES
80 PLUS® Compliant	Yes, Bronze		Yes, Silver

System Technical Specifications

FEMP Standby Power Compliant@115V (Wake-on LAN disabled)(<2W in S5-Power Off)	YES	YES
EuP Compliant@230V (<1 W in S5-Power Off)	YES	YES
Power Consumption in sleep mode (as defined by ENERGY STAR) - Suspend to RAM (S3) (Instantly Available PC) measured at 115V.	<20W	<20W
Built-in Self Test LED	YES	YES
Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)	YES	YES
	*Input Voltage Restrictions	

System Configuration		
Example Configuration #1	Processor Info	1xXeon E5504 (2.00GHZ, 4MB/800)
	Memory Info	3x1GB DR 1067 MHz (UDIMM)
	Graphics Info	1xFX1800
	Disks/Optical/Floppy	1x250GB SATA / 1 Optical / 1 Floppy
	PSU	850W 80 PLUS® BRONZE

Energy Consumption	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	130.5 W		127.4 W		130.5 W	
Windows Busy Typ (S0)	205.32 W		201.97 W		208.41 W	
Windows Busy Max (S0)	240.84		235.49 W		245.00 W	
Sleep (S3)	6.39 W	6.02 W	6.82 W	6.43 W	6.37 W	5.98 W
Off (S5)	1.43 W	1.20 W	1.85 W	1.65 W	1.39 W	1.17 W
Zero Power Mode (EuP)	0.40 W		0.85 W		0.37 W	

System Technical Specifications

Heat Dissipation**	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	445.4 btu/hr		445.4 btu/hr		445.4 btu/hr	
Windows Busy Typ (S0)	700.76 btu/hr		689.32 btu/hr		711.3 btu/hr	
Windows Busy Max (S0)	821.99 btu/hr		803.73 btu/hr		836.19 btu/hr	
Sleep (S3)	21.8 btu/hr	20.6 btu/hr	23.3 btu/hr	21.9 btu/hr	21.7 btu/hr	20.4 btu/hr
Off (S5)	4.88 btu/hr	4.10 btu/hr	6.31 btu/hr	5.63 btu/hr	4.74 btu/hr	3.99 btu/hr
Zero Power Mode (EuP)	1.37 btu/hr		2.90 btu/hr		1.26 btu/hr	

Example Configuration #2	Processor Info	2xXeon E5570 (2.93GHZ, 8MB/1333)
	Memory Info	6x1GB DR 1333 MHz (UDIMM)
	Graphics Info	1xFX3800
	Disks/Optical/Floppy	2x250GB SATA / 2 Optical / 1 Floppy
	PSU	850W 80 PLUS® BRONZE

Energy Consumption	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	199.10 W		196.20 W		198.20 W	
Windows Busy Typ (S0)	445.20 W		434.90 W		443.40 W	
Windows Busy Max (S0)	516.50 W		504.00 W		524.60 W	
Sleep (S3)	7.84 W	7.49 W	8.29 W	7.89 W	7.92 W	7.47 W
Off (S5)	1.43 W	1.21 W	1.86 W	1.64 W	1.39 W	1.18 W
Zero Power Mode (EuP)	0.41 W		0.84 W		0.38 W	

Heat Dissipation**	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	679.53 btu/hr		669.63 btu/hr		676.46 btu/hr	
Windows Busy Typ (S0)	1519.47 btu/hr		1484.31 btu/hr		1513.32 btu/hr	
Windows Busy Max (S0)	1762.81 btu/hr		1720.15 btu/hr		1790.46 btu/hr	
Sleep (S3)	26.8 btu/hr	25.6 btu/hr	28.3 btu/hr	26.9 btu/hr	27.1 btu/hr	25.5 btu/hr
Off (S5)	4.88 btu/hr	4.13 btu/hr	6.35 btu/hr	5.60 btu/hr	4.74 btu/hr	4.03 btu/hr
Zero Power Mode (EuP)	1.40 btu/hr		2.87 btu/hr		1.30 btu/hr	

Example Configuration #3	Processor Info	2xW5580 (3.2GHZ, 8MB/1333)
	Memory Info	6x4GB DR 1333 MHz (RDIMM)
	Graphics Info	1xFX4800
	Disks/Optical/Floppy	2x300GB 15k SAS / 2 Optical / 1 Floppy
	PSU	1110W 80 PLUS® SILVER

System Technical Specifications

Energy Consumption	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	259.5 W		253.10 W		260.10 W	
Windows Busy Typ (S0)	624.90 W		615.60 W		638.70 W	
Windows Busy Max (S0)	738.10 W		732.40 W		749.70 W	
Sleep (S3)	12.53 W	11.58 W	12.59 W	11.63 W	12.56 W	11.56 W
Off (S5)	2.12 W	1.32 W	2.56 W	1.73 W	2.10 W	1.30 W
Zero Power Mode (EuP)	0.46 W		0.87 W		0.43 W	

Heat Dissipation**	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	885.67 btu/hr		896.83 btu/hr		887.72 btu/hr	
Windows Busy Typ (S0)	2132.78 btu/hr		2101.04 btu/hr		2179.88 btu/hr	
Windows Busy Max (S0)	2519.14 btu/hr		2499.68 btu/hr		2558.73 btu/hr	
Sleep (S3)	42.8 btu/hr	39.5 btu/hr	42.9 btu/hr	39.7 btu/hr	42.9 btu/hr	39.5 btu/hr
Off (S5)	7.24 btu/hr	4.51 btu/hr	8.74 btu/hr	5.90 btu/hr	7.15 btu/hr	4.44 btu/hr
Zero Power Mode (EuP)	1.40 btu/hr		2.87 btu/hr		1.30 btu/hr	

Example Configuration #4	Processor Info	2xW5580 (3.2GHZ, 8MB/1333)
	Memory Info	8x4GB DR 1333 MHz (RDIMM)
	Graphics Info	2xFX5800
	Disks/Optical/Floppy	4x300GB 15k SAS / 2 Optical / 1 Floppy
	PSU	1110W 80 PLUS® SILVER

Energy Consumption	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	436.40 W		426.60 W		433.60 W	
Windows Busy Typ (S0)	845.60 W		811.90 W		855.30 W	
Windows Busy Max (S0)	970.30 W		966.30 W		994.50 W	
Sleep (S3)	13.82 W	12.70 W	14.00 W	13.06 W	13.88 W	12.75 W
Off (S5)	2.12 W	1.33 W	2.54 W	1.73 W	2.10 W	1.30 W
Zero Power Mode (EuP)	0.46 W		0.86 W		0.43 W	

System Technical Specifications

Heat Dissipation**	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)	1489.43 btu/hr		1455.99 btu/hr		1479.88 btu/hr	
Windows Busy Typ (S0)	2886.03 btu/hr		2771.01 btu/hr		2919.14 btu/hr	
Windows Busy Max (S0)	3311.63 btu/hr		3297.98 btu/hr		3394.23 btu/hr	
Sleep (S3)	47.2 btu/hr	43.4 btu/hr	47.8 btu/hr	44.6 btu/hr	47.4 btu/hr	43.5 btu/hr
Off (S5)	7.24 btu/hr	4.54 btu/hr	8.67 btu/hr	5.90 btu/hr	7.65 btu/hr	4.44 btu/hr
Zero Power Mode (EuP)	1.40 btu/hr		2.87 btu/hr		1.30 btu/hr	

Example Configuration #5	Processor Info	2xIntel Xeon W5580 (3.2GHZ, 8MB/1333)
	Memory Info	8x2GB DR 1333 MHz (UDIMM)
	Graphics Info	1xFX5800
	Disks/Optical/Floppy	2x1000GB SATA / 1 Optical / 1 Floppy
	PSU	1110W 80 PLUS® SILVER

Energy Consumption	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
<i>On-Idle (ENERGY STAR* Idle (S0))</i>	174.0 W		169.9 W		172.1 W	
<i>ENERGY STAR = PMAX Windows running Unneck and Viewperf</i>	569.4 W		556.7 W		570.1 W	
<i>ENERGY STAR "Sleep" (S3)</i>	9.4 W	–	9.8 W	–	9.7 W	–
<i>ENERGY STAR "Standby" (Off) (S5)</i>	2.1W	–	2.6 W	–	2.2 W	–

Heat Dissipation**	115 VAC		230 VAC		100 VAC	
	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
<i>On-Idle (ENERGY STAR* Idle (S0))</i>	593.9 btu/hr		579.9 btu/hr		587.4 btu/hr	
<i>ENERGY STAR = PMAX Windows running Unneck and Viewperf</i>	1943.4 btu/hr		1900.0 btu/hr		1945.8 btu/hr	
<i>ENERGY STAR "Sleep" (S3)</i>	32.1 btu/hr	–	33.4 btu/hr	–	33.1 btu/hr	–
<i>ENERGY STAR "Standby" (Off) (S5)</i>	7.2 btu/hr	–	8.9btu/hr	–	7.5 btu/hr	–

NOTES:

*Energy Star low energy mode

** Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.



System Technical Specifications

Declared Noise Emissions (Entry-level and High-end configurations)		
System Configuration (Entry level)	Processor Info	Dual Intel Xeon X5570 quad-core 2.93 GHz
	Memory Info	4 x 1GB DDR3 1333 MHz
	Graphics Info	Single nVidia NVS 290
	Disks/Optical/Floppy	2 x 250 GB 7200 RPM SATA/ CD/DVD-ROM/ TEAC 3.5" Floppy

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure
	Idle	3.9	21
	SATA Hard drive Operating (random reads)	3.9	22
	Floppy Drive Operating (continuous copy)	Not Tested	Not Tested
	DVD-ROM Operating (sequential reads)	5.0	36

System Configuration (High-end)	Processor Info	Dual Intel Xeon W5580 quad-core 3.2 GHz
	Memory Info	4 x 1GB DDR3 1333 MHz
	Graphics Info	Single nVidia FX 4800
	Disks/Optical/Floppy	2 x 450 GB 15K SAS/ CD/DVD-ROM/ TEAC 3.5" Floppy

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)		Sound Power (LWAd, bels)	Deskside Sound Pressure
	Idle	4.6	28
	SATA Hard drive Operating (random reads)	4.9	
	Floppy Drive Operating (continuous copy)	Not Tested	
	DVD-ROM Operating (sequential reads)	5.1	

System Technical Specifications

Environmental Requirements	Temperature	Operating: 40° to 95° F (5° to 35° C) Non-operating: -40° to 140° F (-40° to 60° C)
	Humidity	Operating: 8% to 85% RH, non-condensing Non-operating: 8% to 90% RH, non-condensing
	Maximum Altitude	Operating: 10,000 feet (3,000 m) Non-operating: 30,000 feet (9,100 m)
	Dynamic (new)	Shock Operating: ½-sine: 40g, 2-3ms Non-operating: ½-sine: 160 cm/s, 2-3ms (~100g) square: 422 cm/s, 20g NOTE: Values represent individual shock events and do not indicate repetitive shock events. Vibration Operating random: 0.5g (rms), 5-300 Hz Non-operating random: 2.0g (rms), 10-500 Hz NOTE: Values do not indicate continuous vibration.
	Cooling	Above 5000 ft (1524 m) altitude, maximum operating temperature is de-rated by 1.8° F (1° C) per 1000 ft (305 m) elevation increase

Physical Security and Serviceability	
Access Panel	Tool-less Includes system board and memory information
Optical Drive	Tool-less, no carrier or rails required
Floppy Drive	Tool-less
Hard Drives	Tool-less
Expansion Cards	Tool-less
Processor Socket	Tool-less
Green User Touch Points	Yes, on tool-free internal chassis components
Color-coordinated Cables and Connectors	Yes
Memory	Tool-less
System Board	Tool-less, retained by Front PCI Card Guide
Dual Color Power and HD LED on Front of Computer	Yes
Configuration Record SW	Yes
Over-Temp Warning on Screen	Yes
Restore CD Set	Restores the computer to its original factory shipping image - Can be obtained via HP Support
Dual Function Front Power Switch	Yes, causes a fail-safe power off when held for 4 seconds
Padlock Support	No

System Technical Specifications

Cable Lock Support	Yes, Kensington Cable Lock (optional): Prevents entire system theft only. 3mm x 7mm slot at rear of system
Universal Chassis Clamp Lock Support	No
Solenoid Lock and Hood Sensor	No
Rear Port Control Cover	Yes, locks rear IO cables to prevent cable theft
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Yes
Removable Media Write/Boot Control	Yes, prevents ability to boot from removable media on supported devices (and can disable writes to media)
Power-On Password	Yes, prevents an unauthorized person from booting up the workstation
Setup Password	Yes, prevents an unauthorized person from changing the workstation configuration
3.3V Aux Power LED on System PCA	No
NIC LEDs (integrated) (Green & Amber)	Yes
CPUs and Heatsinks	A torx driver (T15) is needed to remove the CPU heatsink(s) before the CPU can be removed. CPU removal is tool-less
Power supply diagnostic LED	Yes
Power Button	Yes
Power LED	Yes, blue (normal), red (fault)
Hard drive activity LED	Yes, green
Internal speaker	Yes
System/Emergency ROM Flash Recovery	Recovers corrupted system BIOS.
OS CD (Restore OS CD)	Restores computer to its original factory shipping Operating System - No recovery CDs will ship with Windows XP, Vista or Linux - an ISO image will be available on an HD partition.
ASF 2.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
Cooling Solutions	Air cooled forced convection, liquid cooling (optional)
Power Supply Fans	2x - 80mm x 25mm
CPU Heatsink Fan(s)	Mainstream (<=95W): 80mm x 15mm Performance (>95W): 92mm x 15mm
Chassis Fans	Rear: 2x - 92mm x 25mm Front (850W config): 1x - 92mm x 25mm (upper position) Front (1110W config): 2x - 92mm x 25mm
Memory Fans	2x - 80mm x 25mm
Insight Diagnostics	<ul style="list-style-type: none"> HP Insight Diagnostics Offline Edition The diagnostics utility enables you to perform testing and to view critical computer hardware and software configuration information from various sources. This utility enables you to: Run diagnostics

System Technical Specifications

	<ul style="list-style-type: none"> View the hardware configuration of the system <p>Key features and benefits HP Insight Diagnostics simplifies the process of effectively identifying, diagnosing, and isolating the hardware issues. In addition to robust management tools, service tools can be invaluable in quickly resolving system problems. To streamline the service process and resolve problems quickly, it is necessary to have the right information available at the time that a service call is placed. The primary information requirement, which is also the one that provides the greatest insight into potential system issues, is the configuration of the system. Insight Diagnostics helps provide higher system availability. Typical uses of the Insight Diagnostics are:</p> <ul style="list-style-type: none"> Testing and diagnosing apparent hardware failures Documenting system configurations for upgrade planning, standardization, inventory tracking, disaster recovery, and maintenance Sending configuration information to another location for more in-depth analysis
Access Panel Key Lock	Yes, prevents removal of the access panel and all internal components including optical and floppy drives
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI). <ul style="list-style-type: none"> Allows the system to wake from a low power mode. Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system
Trusted Platform Module Chip with optional ProtectTools Software	Yes
Integrated Chassis Handles	Yes
Power Supply	Tool-less, direct-connect (blind-mate)
PCI Card Retention	Yes, rear (all), middle (full-height cards), front (full-length with extender cards)
Flash ROM	Yes. SPI ROM
Diagnostic Power Switch LED on board	Yes
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder for easy Replacement	Yes
DIMM Connectors for easy Upgrade	Yes
HP ProtectTools Security Manager	Yes - not supported on Microsoft XP x64 or Linux

BIOS	
BIOS 32-bit Services	Standard BIOS 32-Bit Service Directory Proposal v0.4.
PCI 3.0 Support	Full BIOS support for PCI Express through industry standard interfaces.
ATAPI	ATAPI Removable Media Device BIOS Specification Version 1.0.
BBS	BIOS Boot Specification v1.01



System Technical Specifications

WMI Support	WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications.
BIOS Boot Spec 1.01 +	Provides more control over how and from what devices the workstation will boot.
BIOS Power On	Users can define a specific date and time for the system to power on.
ROM Based Computer Setup Utility (F10)	Review and customize system settings controlled by the BIOS.
System/Emergency ROM Flash Recovery with Video	Recovers system BIOS in corrupted Flash ROM.
Replicated Setup	Saves BIOS settings to diskette or USB flash drive in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering Computer Configuration Utility (F10 setup).
SMBIOS	System Management BIOS 2.6, for system management information
Boot Control	Disables the ability to boot from removable media on supported devices.
Memory Change Alert	Alerts management console if memory is removed or changed.
Thermal Alert	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> ● NORMAL - normal temperature ranges ● ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown ● SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console.
ACPI (Advanced Configuration and Power Management Interface)	<ul style="list-style-type: none"> ● Allows the system to enter and wake from low power modes (sleep states). ● Enables an operating system to control system power consumption based on the dynamic workload. ● Makes it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. ● Supports ACPI 2.0 for full compatibility with 64-Bit operating systems.
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen.
Remote Wakeup/Remote Shutdown	System administrators can power on, restart, and power off a client computer from a remote location.
ASF 2.0 Compliant	Allows workstation status to be monitored on a remote console.
Instantly Available PC (Suspend to RAM - ACPI sleep state S3)	Allows for very low power consumption with quick resume time
Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system.
ROM revision levels	Reports the system BIOS revision level in Computer Configuration Utility (F10 Setup). Version is available through an industry standard interface (SMBIOS) so that management SW applications can use and report this information.
System board revision level	<ul style="list-style-type: none"> ● Allows management SW to read the revision level of the system board ● Revision level is digitally encoded into the HW and cannot be modified.
Start-up Diagnostics (Power-on Self-Test)	Assesses system health at boot time with selectable levels of testing.es

System Technical Specifications

Auto Setup when new hardware installed	System automatically detects addition of new hardware.
Keyboard-less Operation	The system can be booted without a keyboard.
Localized ROM Setup	Common BIOS image supports System Configuration Utility (F10 Setup) menus in 12 languages with local keyboard mappings.
Asset Tag	Allows the user or MIS to set a unique tag string in non-volatile memory.
Per-slot Control	Allows I/O slot parameters (option ROM enable/disable, bus latency) to be configured individually.
Adaptive Cooling	Fan control parameters are set according to detected hardware configuration for optimal acoustics.
Pre-boot Diagnostics	Early (pre-video) critical errors are reported via beeps and blinks on the power LED.
Industry Standard Specification Support	
Industry Standard	Revision Supported by the BIOS
ACPI	Advanced Configuration and Power Management Interface, Version 2.0c
ASF	Alert Standard Format Specification, Version 2.0
ATA (IDE)	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
CD Boot	"El Torito" Bootable CD-ROM Format Specification Version 1.0
EDD	<ul style="list-style-type: none"> Enhanced Disk Drive Specification Version 1.1 BIOS Enhanced Disk Drive Specification Version 3.0
EHCI	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
PCI	<ul style="list-style-type: none"> PCI Local Bus Specification, Revision 2.3 PCI Power Management Specification, Revision 1.1 PCI Firmware Specification, Revision 3.0, Draft .7
PCI Express	<ul style="list-style-type: none"> PCI Express Base Specification, Revision 2.0
PMM	POST Memory Manager Specification, Version 1.01
SATA	<ul style="list-style-type: none"> Serial ATA Specification, Revision 1.0a Serial ATA 3.0Gb/s: Extensions to Serial ATA 1.5Gb/s, Revision 1.0
SPD	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
TPM	Trusted Computing Group TPM Specification Version 1.2
UHCI	Universal Host Controller Interface Design Guide, Revision 1.1
USB 1.1	Universal Serial Bus Revision 1.1 Specification
USB 2.0	Universal Serial Bus Revision 2.0 Specification
SMBIOS	System Management BIOS Reference Specification, Version 2.6

System Software Management and Updating

HP Client Management Solutions	Visit: http://www.hp.com/go/easydeploy
Product Change	<ul style="list-style-type: none"> Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile. PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition. Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support.
Support Software CD & WWW	Yes



System Technical Specifications

HP Client Manager	Visit: http://www.hp.com/go/easydeploy
System Software Manager (free)	Visit: http://www.hp.com/go/ssm
Social and Environmental Responsibility	
Eco-Label Certifications & Declarations	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> ● ENERGY STAR qualified selectable configurations (Not in Linux) ● US Federal Energy Management Program (FEMP) ● China Energy Conservation Program ● IT ECO declaration ● Japan PC Green label* <p>*This product conforms to the examination standards (2003 version) under JEITA's 'PC Green Label System.'</p>
Recycled Content and Design for Recycling	<ul style="list-style-type: none"> ● This product is >90% recycle-able when properly disposed of at end of life. ● Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043. ● This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.
Batteries	<p>This product complies with ISO standards:</p> <ul style="list-style-type: none"> ● EU Directive 91/ 157/ EEC ● EU Directive 93/ 86/ EEC ● EU Directive 98/ 101/ EEC <p>Batteries used in the product do not contain:</p> <ul style="list-style-type: none"> ● Mercury greater than 5ppm by weight ● Cadmium greater than 10ppm by weight ● Lead greater than 4000ppm by weight <p>Battery size: CR2032 (coin cell) Battery type: Lithium</p>
Restricted Material Usage	<p>This product does not contain any of the following substances in excess of regulatory limits (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):</p> <ul style="list-style-type: none"> ● Asbestos ● Batteries - Mercury ● Batteries - Cadmium ● Batteries - Lead (non-rechargeable) ● Batteries - Non-rechargeable Alkaline and Carbon-Zinc Batteries ● Batteries - Classification as "Not Restricted" for Transport ● Brominated Flame Retardants (PBBs, PBDEs, including DecaBDE) ● Brominated Flame Retardants (all BFRs in external case plastic parts) ● Cadmium and its compounds ● Certain Azo Colorants ● Chlorinated Hydrocarbons ● Chlorinated Paraffins ● Formaldehyde

System Technical Specifications

	<ul style="list-style-type: none"> ● Formaldehyde - emissions ● Hexavalent Chromium and its compounds in metallic applications ● Hexavalent Chromium and its compounds in non-metallic applications ● Lead and its compounds ● Lead in paint ● Lead in Polyvinyl Chloride (PVC) coating of external cables, wires and cords ● Mercury and its compounds ● Nickel on external surfaces ● Ozone Depleting Substances (ODS) ● Polycyclic Aromatic Hydrocarbons (PAH) ● Perfluorooctane sulfonates (PFOS) in parts ● Perfluorooctane sulfonates (PFOS) in preparations ● Polychlorinated Biphenyls (PCBs) and Polychlorinated Terphenyls (PCTs) ● Polychlorinated Naphthalenes ● Polyvinyl Chloride (PVC) in external case plastic parts ● Radioactive Substances ● Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
Packaging	<p>HP Workstation product packaging meets the following (refer to the HP General Specification for the Environment at http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):</p> <ul style="list-style-type: none"> ● Does not contain restricted substances listed in HP Standard 011-1 General Specification for the Environment (see link above). ● Does not contain ozone-depleting substances (ODS). ● Design packaging materials for ease of disassembly. ● Does not contain heavy metals (lead, mercury, cadmium or hexavalent chromium) in excess of 100 ppm sum total for all heavy metals listed. ● Maximizes the use of post-consumer recycled content materials in packaging materials. ● All packaging material is recyclable. ● Reduces size and weight of packages to improve transportation fuel efficiency. ● Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.
Longevity and Upgrading	<ul style="list-style-type: none"> ● This product is designed to be upgraded, possibly extending its useful life by several years. Spare parts are available throughout the warranty period and for up to 5 years after the end of production. Upgradeability features contained in the product include: <ul style="list-style-type: none"> ● Intel LGA775 processor sockets ● 8 USB ports ● 1 PCI 32-bit/33MHz slot, 1 PCI-X slot and 5 PCI Express slots ● 8 expansion bays ● 8 - 16 memory slots, depending on configuration
Packaging Materials	
External	Cardboard carton and insert: 1.842 kg
Internal	LDPE Foam: .592 kg
End-of-Life Management and Recycling	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.</p>
Hewlett-Packard Corporate Environmental Information	<p>For more information about HP's commitment to the environment: [link to new HP white paper now in progress] Global Citizenship Report: http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html Eco-label certifications: http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html ISO 14001 certificates:</p>



System Technical Specifications

Service, Support and Warranty	<p>http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html</p> <p>On-site Warranty and Service (Note 1): This three-year, limited warranty and service offering delivers three years of on-site, next business-day (Note 2) service for parts and labor and includes free telephone support (Note 3) 8am - 5pm. Global coverage (Note 2) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering</p> <p>NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply.</p> <p>NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.</p> <p>NOTE 3: Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.</p> <p>HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at http://www.hp.com/go/lookuptool. Additional HP Care Pack Services information by product is available at http://www.hp.com/hps/carepack. Service levels and response times for HP Care Packs may vary depending on your geographic location</p>
Additional Information	<ul style="list-style-type: none">• This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.• This product contains 0% recycled materials (by wt.)

Technical Specifications - Processors

Processors	Intel Xeon W5580, 3.20GHz, 8MB L3, 1333MHz Memory, 130W
	Intel Xeon E5504, 2.00GHz, 4MB cache, 800MHz Memory, 4.80 GT/s QPI, 80W
	Intel Xeon E5506, 2.13GHz, 4MB cache, 800MHz Memory, 4.80 GT/s QPI, 80W
	Intel Xeon E5520, 2.26GHz, 8MB cache, 1066MHz Memory, 5.86 GT/s QPI, 80W
	Intel Xeon E5530, 2.40GHz, 8MB cache, 1066MHz Memory, 5.86 GT/s QPI, 80W
	Intel Xeon E5540, 2.53GHz, 8MB cache, 1066MHz Memory, 5.86 GT/s QPI, 80W
	Intel Xeon X5550, 2.66GHz, 8MB cache, 1333MHz Memory, 6.40 GT/s QPI, 95W
	Intel Xeon X5560, 2.80GHz, 8MB cache, 1333MHz Memory, 6.40 GT/s QPI, 95W
	Intel Xeon X5570, 2.93GHz, 8MB cache, 1333MHz Memory, 6.40 GT/s QPI, 95W

Introduction

Intel's latest-generation microarchitecture represents the next step in unprecedented processor performance and dynamic scalability. Designed from the ground up to take advantage of hafnium-based Intel® 45nm hi-k metal gate silicon technology, Intel® Microarchitecture (Nehalem) unleashes parallel processing performance enabled by Intel® QuickPath technology providing an integrated memory controller and high-speed interconnect per independent processing core.

Performance and Features

Maximum multitasking performance Intel® Microarchitecture (Nehalem) offers the latest in processor innovation, including:

- Dynamic scalability, managed cores, threads, cache, interfaces, and power for energy-efficient performance on demand.
- Design and performance scalability for servers, workstations, notebooks and desktops with support for 2-8+ cores and up to 16+ threads with Intel® Hyper-Threading Technology (Intel® HT Technology), and scalable cache sizes, system interconnects, and integrated memory controllers.
- Intel® Turbo Boost Technology delivers additional performance automatically when needed by taking advantage of the processor's power and thermal headroom. This enables increased performance of both multi-threaded and single-threaded workloads.
- Intel Hyper-Threading Technology brings high-performance applications into mainstream computing with 1-16+ threads optimized for a new generation multi-core processor architecture.
- Scalable shared memory of Intel® QuickPath technology features memory distributed to each processor with integrated memory controllers and high-speed point-to-point interconnects to unleash the performance of future versions of next-generation Intel® multi-core processors.
- Multi-level shared cache improves performance and efficiency by reducing latency to frequently used data.

Turbo Boost Technology

This technology now built into Xeon 5500 processors will increase the speed of your processor on demand (from OS) if the CPU is operating below power / thermal specifications:

- Benefit of Turbo Boost (how much CPU speed up) depends on number of active cores
- Likelihood of Turbo Boost operation increases when less cores are active
- Likelihood of Turbo Boost operation increases when dynamic power mgt is enabled

Technical Specifications - Hard Drives

HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations	300 GB (15K)	Capacity	300 GB		
		Height	1 in; 2.5 cm		
		Width		Media Diameter	3.5 in; 8.9 cm
				Physical Size	4 in; 10.2 cm
		Interface	SAS		
		Synchronous Transfer Rate (Maximum)	3.0 Gb/s		
		Buffer	16 MB		
		Seek Time (typical reads, includes controller overhead, including settling)		Single Track	0.2 ms
				Average	3.5 ms
				Full Stroke	6.7 ms
		Rotational Speed	15,000 rpm		
		Logical Blocks	585,937,500 - 512 byte blocks		
		Operating Temperature	50° to 95° F (10° to 35° C)		
	146 GB (15K)	Capacity	146 GB		
		Height	1 in; 2.5 cm		
		Width		Media Diameter	3.5 in; 8.9 cm
				Physical Size	4 in; 10.2 cm
		Interface	SAS		
		Synchronous Transfer Rate (Maximum)	3.0 Gb/s		
		Buffer	16 MB		
		Seek Time (typical reads, includes controller overhead, including settling)		Single Track	0.2 ms
				Average	3.5 ms
				Full Stroke	6.7 ms
		Rotational Speed	15,000 rpm		
		Logical Blocks	86,749,488 - 512 byte blocks		
		Operating Temperature	50° to 95° F (10° to 35° C)		
	450 GB (15K)	Capacity	450 GB		
		Height	1 in; 2.5 cm		
		Width		Media Diameter	3.5 in; 8.9 cm
				Physical Size	4 in; 10.2 cm
		Interface	SAS		
		Synchronous Transfer Rate (Maximum)	3.0 Gb/s		
		Buffer	16 MB		

Technical Specifications - Hard Drives

Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.2 ms
	Average	3.6 ms
	Full Stroke	6.6 ms
Rotational Speed	15,000 rpm	
Logical Blocks	879, 097, 968 - 512 byte blocks	
Operating Temperature	50° to 95° F (10° to 35° C)	

SATA (Serial ATA) Hard Drives for HP Workstations 160,041,885,696 bytes (10K)

Capacity	160,041,885,696 bytes	
Height	1 in; 2.5 cm	
Width	Media Diameter	3.5 in; 8.9 cm
	Physical Size	4 in; 10.2 cm
Interface	Serial ATA (1.5 Gb/s), Native Command Queuing enabled	
Synchronous Transfer Rate (Maximum)	Up to 150 MB/s	
Buffer	16 Mbytes	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.3 ms
	Average	4.6 ms
	Full Stroke	10.2 ms
Rotational Speed	10,000 rpm	
Logical Blocks	312,581,808	
Operating Temperature	41 to 131 F (5 to 55 C)	

1,000,204,886,016 bytes (7,200)

Capacity	1,000,204,886,016 bytes	
Height	1 in; 2.5 cm	
Width	Media Diameter	3.5 in; 8.9 cm
	Physical Size	4 in; 10.2 cm
Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
Synchronous Transfer Rate (Maximum)	Up to 300 MB/s	
Buffer	32 MB	
Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2 ms
	Average	11 ms
	Full Stroke	21 ms
Rotational Speed	7,200 rpm	
Logical Blocks	1,953,525,168	
Operating Temperature	41 to 131 F (5 to 55 C)	

500,107,862,016

Capacity	500,107,862,016 bytes
-----------------	-----------------------



Technical Specifications - Hard Drives

bytes
(7,200)

Height	1 in; 2.5 cm
Width	Media Diameter 3.5 in; 8.9 cm
	Physical Size 4 in; 10.2 cm
Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled
Synchronous Transfer Rate (Maximum)	300 MB/s
Buffer	16 MB
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 2 ms
	Average 11 ms
	Full Stroke 21 ms
Rotational Speed	7,200 rpm
Logical Blocks	976,773,168
Operating Temperature	41 to 131 F (5 to 55 C)

250,059,350,016
bytes
(7,200)

Capacity	250,059,350,016 bytes
Height	1 in; 2.5 cm
Width	Media Diameter 3.5 in; 8.9 cm
	Physical Size 4 in; 10.2 cm
Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled
Synchronous Transfer Rate (Maximum)	300 MB/s
Buffer	16 MB
Seek Time (typical reads, includes controller overhead, including settling)	Single Track 2 ms
	Average 11 ms
	Full Stroke 21 ms
Rotational Speed	7,200 rpm
Logical Blocks	488,397,168
Operating Temperature	41 to 131 F (5 to 55 C)

160,041,885,696
bytes
(7,200)

Capacity	160,041,885,696 bytes
Height	1 in; 2.5 cm
Width	Media Diameter 3.5 in; 8.9 cm
	Physical Size 4 in; 10.2 cm
Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled
Synchronous Transfer Rate (Maximum)	300 MB/s
Buffer	8 MB

Technical Specifications - Hard Drives

	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2 ms
		Average	11 ms
		Full Stroke	21 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	312,581,808	
	Operating Temperature	41 to 131 F (5 to 55 C)	
300,069,052,416 bytes (10K)	Capacity	300,069,052,416 bytes	
	Height	0.6 in; 1.53 cm	
	Width	Media Diameter	2.5 in; 6.36 cm
		Physical Size	4 in; 10.17 cm
	Interface	Serial ATA (3.0Gb/s), Native Command Queuing enabled	
	Synchronous Transfer Rate (Maximum)	Up to 300 MB/s	
	Buffer	16 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	0.7 ms (maximum)
		Average	4.4 ms
		Full Stroke	9.5 ms
	Rotational Speed	10,000 rpm	
	Logical Blocks	586,072,368	
	Operating Temperature	41° to 131° F (5° to 55° C)	
320,072,933,376 bytes (7,200)	Capacity	320,072,933,376 bytes	
	Height	0.98 in; 2.5 cm	
	Width	Media Diameter	3.5 in; 8.9 cm
		Physical Size	4.0 in; 10.17 cm
	Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
	Synchronous Transfer Rate (Maximum)	300 MB/s	
	Buffer	8 MB	
	Seek Time (typical reads, includes controller overhead, including settling)	Single Track	2
		Average	12
		Full Stroke	21
	Rotational Speed	7,200 rpm	
	Logical Blocks	625,142,448	
	Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications - Hard Drive Controllers

Integrated SAS controller With RAID 0, 1/1E	PCI Bus	PCI-Express x4 lanes	
	PCI Modes	Bus Master DMA	
	RAID Levels	RAID 0, 1, 1E and 10E	
	PCI Data Burst Transfer Rate	250 MB/s per lane half duplex	
		500 MB/s per lane full duplex	
		1000 MB/s 4-lane half duplex	
	SAS Bandwidth	Half Duplex	Single lane – 300 MB/s
			Wide Port (2 lanes) – 600 MB/s
		Wide Port (4 lanes) – 1200 MB/s	
		Full Duplex	Single SAS Lane – 600 MB/s
	Wide Port (2 lanes) – 1200 MB/s		
	Wide Port (4 lanes) – 2400 MB/s		
	PCI Card Type	N/A	
	PCI Voltage	N/A	
	PCI Power	N/A	
	Bracket	N/A	
	Certification Level	PCI-Express 1.0a	
IO Bus	Eight 3Gb/s SAS/SATA ports		
SAS Processor	LSISAS1068E		
Internal Connectors	Four- SATA x1 connectors		
External Connectors	None		
Maximum Number of SCSI Devices	122		
LED Indicators	On-board activity and fault LEDs		
Integrated Mirroring	Integrated Mirroring option available		

LSI MegaRAID® SAS 8888ELP Host Bus Adapter (HBA)	PCI Bus	PCI-Express x8 lanes
	PCI Modes	Bus Master DMA
	RAID Levels	RAID 0, 1, and 5
		RAID spans 10 and 50
	PCI Data Burst Transfer Rate	Up to 3Gb/s per port
		Full Duplex
	PCI Voltage	+3.3V Add-in Card
	PCI Power	7.5 Watts
	Certification Level	PCI-Express 1.0a
	IO Bus	Eight 3Gb/s SAS/SATA ports
	Internal Connectors	Two SAS SFF8087 x4
	External Connectors	Two SAS SFF8088 x4
	Maximum Number of SCSI DeviceS	32

Technical Specifications - Hard Drive Controllers

LED Indicators

Connector LEDs indicate whether the internal or external connector is active for ports 0-3 and 4-7

Technical Specifications - Graphics

ATI FirePro V3700 256MB Graphics Card	Form Factor	4.40 inches (H) × 6.70 inches (L) (11.18 cm (H) × 17.02 cm (L))
	Graphics Controller	ATI FirePro V3700 Graphics Board
	Bus Type	PCI Express x16, Generation 2.0
	Memory	256 MB GDDR3 SDRAM unified graphics memory
	Connectors	2 Dual Link DVI-I Two DVI-I to VGA adapters included
	Maximum Resolution	Two dual-link DVI-I outputs drive two digital displays at resolutions up to 2560 x 1600 @ 60Hz or two analog displays at resolutions up to 2048 x 1536 @ 85Hz
	Shading architecture	Full Shader Model 4.0 <ul style="list-style-type: none">● 40 Stream Processing Units● Dynamic load balancing and resource allocation for vertex, geometry, and pixel shaders● Common instruction set and texture unit access supported for all types of shaders● Dedicated branch execution units and texture address processors
	Supported graphics APIs	OpenGL 2.1 DirectX 10.1
	Available graphics drivers	Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html Linux drivers may be obtained from: http://ati.amd.com/support/driver.html
	Power consumption	32 Watts

NVIDIA Quadro FX 380 256MB Graphics Card	Form Factor	4.376 inches (H) × 6.60 inches (L)
	Graphics Controller	NVIDIA Quadro FX 380 Graphics Board
	Bus Type	PCI Express x16, Generation 2.0
	Memory	256 MB GDDR3 SDRAM unified graphics memory
	Connectors	2 Dual Link DVI-I Two DVI-I to VGA adapters included
	Maximum Resolution	Two dual-link DVI-I outputs drive two digital displays at resolutions up to 2560 x 1600 @ 60Hz or two analog displays at resolutions up to 2048 x 1536 @ 85Hz
	RAMDAC	Dual Internal 400 MHz DAC
	Shading architecture	Full Shader Model 4.0 (OpenGL 2.1/DirectX 10 class) <ul style="list-style-type: none">● Long fragment programs (unlimited instructions)● Long vertex programs (unlimited instructions)● Looping and subroutines (up to 256 loops per vertex program)● Dynamic flow control

Technical Specifications - Graphics

	<ul style="list-style-type: none">● Conditional execution
Supported graphics APIs	OpenGL 3.0 Direct X 10.0
Available graphics drivers	Genuine Windows Vista Business(64-bit and 32-bit), Microsoft Windows XP Professional(64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 & 5 Desktop/Workstation HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html Novell SUSE Linux Enterprise drivers may be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
High-level Shader Languages	<ul style="list-style-type: none">● Optimized compiler for Cg and Microsoft HLSL● OpenGL 2.1 and DirectX 10 support● Open source compiler
CUDA™ Parallel Processor Cores	16
Power consumption	33.91 Watts

NVIDIA Quadro FX 580 512MB Graphics Card	Form Factor	4.376 inches (H) × 6.60 inches (L)
	Graphics Controller	NVIDIA Quadro FX 580 Graphics Board
	Bus Type	PCI Express x16, Generation 2.0
	Memory	512MB GDDR3 SDRAM unified graphics memory
	Connectors	2 DisplayPort, 1 Dual-Link DVI-I. One DisplayPort to DVI and one DVI to VGA adapter included ('DisplayPort to VGA' and 'DisplayPort to Dual Link DVI' adapters available as an accessory)
	Maximum Resolution	<ul style="list-style-type: none">● Two DisplayPort outputs drive two digital displays up to 2560 x 1600● One dual-link DVI-I output drives one digital display at resolutions up to 2560 x 1600 @ 60Hz or one analog display at resolutions up to 2048 x 1536 @ 85Hz
	RAMDAC	Single Internal 400 MHz DAC
	Shading architecture	Full Shader Model 4.0 (OpenGL 2.1/DirectX 10 class) <ul style="list-style-type: none">● Long fragment programs (unlimited instructions)● Long vertex programs (unlimited instructions)● Looping and subroutines (up to 256 loops per vertex program)● Dynamic flow control● Conditional execution
	Supported graphics APIs	OpenGL 3.0 Direct X 10.0
	Available graphics drivers	Genuine Windows Vista Business(64-bit and 32-bit), Microsoft Windows XP Professional(64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 & 5 Desktop/Workstation HP qualified drivers may be preloaded or available from the HP support Web site:

Technical Specifications - Graphics

High-level Shader Languages	<ul style="list-style-type: none">● Optimized compiler for Cg and Microsoft HLSL● OpenGL 2.1 and DirectX 10 support● Open source compiler
CUDA™ Parallel Processor Cores	32
Power consumption	40 Watts

<http://welcome.hp.com/country/us/en/support.html>

Novell SUSE Linux Enterprise drivers may be obtained from:
<ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

NVIDIA Quadro FX 1800 768MB Graphics Card	Form Factor	4.376 inches (H) x 7.8 inches (L)
	Graphics Controller	NVIDIA Quadro FX 1800 Graphics Board
	Bus Type	PCI Express x16, Generation 2.0
	Memory	768MB GDDR3 SDRAM unified graphics memory
	Connectors	2 DisplayPort, 1 Dual-Link DVI-I. One DisplayPort to DVI-D and one DVI to VGA adapter included
		('DisplayPort to VGA' and 'DisplayPort to Dual Link DVI' adapters available as an accessory)
	Maximum Resolution	<ul style="list-style-type: none">● Two DisplayPort outputs drive two digital displays up to 2560 x 1600● One dual-link DVI-I output drives one digital display at resolutions up to 2560 x 1600 @ 60Hz or one analog display at resolutions up to 2048 x 1536 @ 85Hz
	RAMDAC	Single Internal 400 MHz DAC
	Shading Architecture	Full Shader Model 4.0 (OpenGL 2.1/DirectX 10 class) <ul style="list-style-type: none">● Long fragment programs (unlimited instructions)● Long vertex programs (unlimited instructions)● Looping and subroutines (up to 256 loops per vertex program)● Dynamic flow control● Conditional execution
	Supported Graphics APIs	OpenGL 3.0 Direct X 10.0
	Available Graphics Drivers	Genuine Windows Vista Business(64-bit and 32-bit), Microsoft Windows XP Professional(64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 & 5 Desktop/Workstation
		HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
		Novell SUSE Linux Enterprise drivers may be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
	High-level Shader Languages	<ul style="list-style-type: none">● Optimized compiler for Cg and Microsoft HLSL● OpenGL 2.1 and DirectX 10 support● Open source compiler

Technical Specifications - Graphics

CUDA™ Parallel Processor Cores	64.
Power consumption	59 Watts

ATI FirePro V5700 512MB Graphics Card

Form Factor	4.40 inches (H) × 6.70 inches (L) (11.18 cm (H) × 17.02 cm (L))
Graphics Controller	ATI FirePro V5700 Graphics Board
Bus Type	PCI Express x16, Generation 2.0
Memory	512 MB GDDR3 SDRAM unified graphics memory
Connectors	2 DisplayPort, 1 Dual-Link DVI-I. One DisplayPort to DVI and one DVI to VGA adapter included ('DisplayPort to VGA' and 'DisplayPort to Dual Link DVI' adapters available as an accessory)
Maximum Resolution	<ul style="list-style-type: none">• Two DisplayPort outputs drive two digital displays up to 2560 x 1600• One dual-link DVI-I output drives one digital display at resolutions up to 2560 x 1600 @ 60Hz or one analog display at resolutions up to 2048 x 1536 @ 85Hz
Shading architecture	Full Shader Model 4.0 <ul style="list-style-type: none">• 320 Stream Processing Units• Dynamic load balancing and resource allocation for vertex, geometry, and pixel shaders• Common instruction set and texture unit access supported for all types of shaders• Dedicated branch execution units and texture address processors
Supported graphics APIs	OpenGL 2.1 DirectX 10.1
Available graphics drivers	Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html Linux drivers may be obtained from: http://ati.amd.com/support/driver.html
Power consumption	56 Watts

Technical Specifications - Graphics

NVIDIA Quadro FX 3800 Form Factor 1.0GB Graphics Card	4.376 inches (H) x 9.0 inches (L) Single slot card
Graphics Controller	NVIDIA Quadro FX 3800 Graphics Board
Bus Type	PCI Express x16, Generation 2.0
Memory	1 GB GDDR3 SDRAM unified graphics memory
Connectors	2 DisplayPort, 1 Dual-Link DVI-I. One DisplayPort to DVI-D and one DVI to VGA adapter included (‘DisplayPort to VGA’ and ‘DisplayPort to Dual Link DVI’ adapters available as an accessory)
Maximum Resolution	<ul style="list-style-type: none">• Two DisplayPort outputs drive two digital displays up to 2560 x 1600• One dual-link DVI-I output drives one digital display at resolutions up to 2560 x 1600 @ 60Hz or one analog display at resolutions up to 2048 x 1536 @ 85Hz
RAMDAC	Single Internal 400 MHz DAC
Shading architecture	Full Shader Model 4.0 (OpenGL 2.1/DirectX 10 class) <ul style="list-style-type: none">• Long fragment programs (unlimited instructions)• Long vertex programs (unlimited instructions)• Looping and subroutines (up to 256 loops per vertex program)• Dynamic flow control• Conditional execution
Supported graphics APIs	OpenGL 3.0 Direct X 10.0
Available graphics drivers	Genuine Windows Vista Business(64-bit and 32-bit), Microsoft Windows XP Professional(64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 & 5 Desktop/Workstation HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html Novell SUSE Linux Enterprise drivers may be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
High-level Shader Languages	<ul style="list-style-type: none">• Optimized compiler for Cg and Microsoft HLSL• OpenGL 2.1 and DirectX 10 support• Open source compiler
CUDA™ Parallel Processor Cores	192
Power consumption	107.9 Watts

Technical Specifications - Graphics

NVIDIA Quadro FX 4800 Form Factor 1.5GB PCIe Graphics Card	4.36" (H) x 10.5" (L) Dual slot card
Graphics Controller	NVIDIA Quadro FX 4800 graphics board
Bus Type	PCI Express x16, Generation 2.0
Memory	1.5 GB GDDR3 SDRAM unified graphics memory
Connectors	2 DisplayPort, 1 Dual-Link DVI-I, 1 3-pin Mini DIN stereo output, Two DisplayPort to DVI-D adapters included ('DisplayPort to VGA' and 'DisplayPort to Dual Link DVI' adapters available as an accessory)
Maximum Resolution	<ul style="list-style-type: none">• 2 DisplayPort connectors support ultra-high-resolution panels (up to 2560 x 1600)• Dual-link DVI-I output drives one digital display at resolutions up to 2560 x 1600 @ 60Hz• Internal 400 MHz DACs-One analog display up to 2048 x 1536 @ 85Hz
Shading Architecture	<ul style="list-style-type: none">• Full Shader Model 4.0 (OpenGL 2.1/DirectX 10 class)• Long fragment programs (unlimited instructions)• Long vertex programs (unlimited instructions)• Looping and subroutines (up to 256 loops per vertex program)• Dynamic flow control• Conditional execution
Supported Graphics APIs	OpenGL 3.0 Direct X 10.0
Available Graphics Drivers	Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 & 5 Desktop/Workstation HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html Novell SUSE Linux Enterprise drivers may be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
High-Resolution AntiAliasing	<ul style="list-style-type: none">• Rotated Grid Full-Scene Antialiasing (RG FSAA)• 32xFSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920 x 1200• 64x FSAA SLI Mode
High-level Shader Languages	<ul style="list-style-type: none">• Optimized compiler for Cg and Microsoft HLSL• OpenGL 2.1 and DirectX 10 support• Open source compiler
CUDA™ Parallel Processor Cores	192
Power consumption	146 Watts

Technical Specifications - Graphics

NVIDIA Quadro CX	Form Factor	4.36" (H) x 10.5" (L) Dual slot card
	Graphics Controller	NVIDIA Quadro CX 1.5GB Graphics Card
	Bus Type	PCI Express x16, Generation 2.0
	Memory	1.5 GB GDDR3 SDRAM unified graphics memory
	Connectors	2 DisplayPort, 1 Dual-Link DVI-I, 1 3-pin Mini DIN stereo output. Two DisplayPort to DVI-D adapters included (‘DisplayPort to VGA’ and ‘DisplayPort to Dual Link DVI’ adapters available as an accessory)
	Maximum Resolution	<ul style="list-style-type: none">• 2 DisplayPort connectors support ultra-high-resolution panels (up to 2560 x 1600)• Dual-link DVI-I output drives one digital display at resolutions up to 2560 x 1600 @ 60Hz• Internal 400 MHz DACs-One analog display up to 2048 x 1536 @ 85Hz
	RAMDAC	400MHz
	Shading Architecture	<ul style="list-style-type: none">• Full Shader Model 4.0 (OpenGL 2.1/DirectX 10 class)• Long fragment programs (unlimited instructions)• Long vertex programs (unlimited instructions)• Looping and subroutines (up to 256 loops per vertex program)• Dynamic flow control• Conditional execution
	Supported Graphics APIs	OpenGL 3.0 Direct X 10.0
	Available Graphics Drivers	Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
	High-Resolution AntiAliasing	<ul style="list-style-type: none">• Rotated Grid Full-Scene Antialiasing (RG FSAA)• 32xFSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920 x 1200• 64x FSAA SLI Mode
	High-level Shader Languages	<ul style="list-style-type: none">• Optimized compiler for Cg and Microsoft HLSL• OpenGL 2.1 and DirectX 10 support• Open source compiler
	CUDA™ Parallel Processor Cores	192
	Power consumption	146 Watts

Technical Specifications - Graphics

NVIDIA Quadro FX 5800 4GB Graphics Card	Form Factor	4.36" (H) x 10.5" (L), Dual Slot
	Graphics Controller	NVIDIA Quadro FX 5800 Graphics Board
	Bus Type	PCI Express x16, Generation 2.0
	Memory	4GB GDDR3 SDRAM unified graphics memory
	Connectors	2 Dual-Link DVI-I, 1 DisplayPort, 1 3-pin Mini DIN stereo output Two DVI to VGA adapters included
		('DisplayPort to VGA' and 'DisplayPort to Dual Link DVI' adapters available as an accessory)
	Maximum Resolution	<ul style="list-style-type: none">• Two dual-link DVI-I outputs drive two digital displays at resolutions up to 2560 x 1600 @ 60Hz• One DisplayPort output drives an ultra-high-resolution panel (up to 2560 x 1600)• Internal 400 MHz DACs-Two analog displays up to 2048 x 1536 @ 85Hz
	Shading Architecture	<ul style="list-style-type: none">• Full Shader Model 4.0 (OpenGL 2.1/DirectX 10 class)• Long fragment programs (unlimited instructions)• Long vertex programs (unlimited instructions)• Looping and subroutines (up to 256 loops per vertex program)• Dynamic flow control• Conditional execution
	Supported Graphics APIs	OpenGL 3.0 Direct X 10.0
	Available Graphics Drivers	Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) WS4 & 5 Desktop/Workstation
		HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html
		Novell SUSE Linux Enterprise drivers may be obtained from: ftp://download.nvidia.com/novell or http://www.nvidia.com
	High-Resolution AntiAliasing	<ul style="list-style-type: none">• Rotated Grid Full-Scene Antialiasing (RG FSAA)• 32x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920x1200
	High-level Shader Languages	<ul style="list-style-type: none">• Optimized compiler for Cg and Microsoft HLSL• OpenGL 2.1 and DirectX 10 support• Open source compiler
	CUDA™ Parallel Processor Cores	240
	Power consumption	225 Watts

Technical Specifications - Graphics

ATI FirePro V7750 1.0GB Form Factor Graphics Card	4.40 inches (H) × 13.0 inches (L) (11.18 cm (H) × 33.02 cm (L))
Graphics Controller	ATI FirePro V7750 Graphics Board
Bus Type	PCI Express x16, Generation 2.0
Memory	1024 MB GDDR3 SDRAM unified graphics memory
Connectors	2 DisplayPort, 1 Dual-Link DVI-I. One DisplayPort to DVI and one DVI to VGA adapter included ('DisplayPort to VGA' and 'DisplayPort to Dual Link DVI' adapters available as an accessory)
Maximum Resolution	<ul style="list-style-type: none">• Two DisplayPort outputs drive two digital displays up to 2560 x 1600• One dual-link DVI-I output drives one digital display at resolutions up to 2560 x 1600 @ 60Hz or one analog display at resolutions up to 2048 x 1536 @ 85Hz
Shading architecture	Full Shader Model 4.0 <ul style="list-style-type: none">• 320 Stream Processing Units• Dynamic load balancing and resource allocation for vertex, geometry, and pixel shaders• Common instruction set and texture unit access supported for all types of shaders• Dedicated branch execution units and texture address processors
Supported graphics APIs	OpenGL 2.1 DirectX 10.1
Available graphics drivers	Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/en/support.html Linux drivers may be obtained from: http://ati.amd.com/support/driver.html
Power consumption	76 Watts

Technical Specifications - Multimedia and Audio Devices

Integrated Intel/Realtek HD ALC262 Audio	Type	Integrated
	High Definition Codec	Yes
	FM Synthesis Support	Yes
	OPL3 FM Synthesis Support	Yes
	Sound Blaster Compatibility	Yes
	Meets Premium performance for Windows Logo Program 3.0	Yes
	Audio Jacks	Front panel microphone in and headphone out - fixed usage. Rear panel line in and line out jacks - jacks are retaskable One Line-In* (12-K ohm Input Impedance)* NOTE: External Speakers need to be powered externally.
	Sampling	3 stereo ADCs support 16/20-bit PCM format with 44.1K/48K/96kHz sample rate 2 stereo DAC supports 16/20/24-bit PCM format with 44.1K/48K/96K/192kHz sample rate
	Wavetable Syntheses (software)	Yes – GM and FM Midi Support, Direct Music and Down Loadable Soundset (4 Meg DLS Level 1 and 2 Support)
	3D Positional Sound	No
	Digital Audio	Yes
	Analog Audio	Yes
	DVD Audio	Yes
	Number of Channels on Line-Out	Stereo (Left & Right channels)
	Internal Audio Speaker Power Rating	1.5 W
	Internal Speaker	Yes
	Hardware Equalizer for Internal Speaker	No
	External Speaker Jack (Line-Out)	Yes

Technical Specifications - Multimedia and Audio Devices

SoundBlaster (Creative Labs) X-Fi Titanium PCIe Audio Card	24-bit Analog-to-Digital conversion of analog inputs	96kHz sample rate
	24-bit Digital-to-Analog conversion of digital sources	96kHz to analog 7:1 speaker output
	24-bit Digital-to-Analog conversion of stereo digital sources	8, 11.025, 16, 22.05, 24, 32, 44.1, 48 and 96kHz
	16-bit to 24-bit recording sampling rates	16-bit/44.1kHz, 16-bit/48kHz, 24-bit/44.1kHz, 24-bit/48kHz and 24-bit/96kHz with direct monitoring
	Enhanced SoundFont support	Up to 24-bit resolution
	Signal-to-Noise Ratio (20kHz Low-pass filter, A-Weighted)	109dB
	Total Harmonic Distortion + Noise at 1kHz (20kHz Low-pass filter)	.004%
	Frequency Response (-3dB, 24-bit/96kHz input)	10Hz to 46kHz
	Frequency Response (-3dB, 24-bit/192kHz input)	10Hz to 46kHz
	Speaker and Headphone connections	Stereo to 7.1 (Line Out via three 3.5mm mini jacks)
	Flexijack	Line In/ Microphone In/Optical Out via shared 3.5mm mini jack
	Front Panel Header	Intel HD Audio Compatible (2x5 pin)
	Operating System	Microsoft Windows Vista Business 64 Microsoft Windows Vista Business 32 Microsoft® Windows® XP Professional SP2 Microsoft Windows XP Professional x64 Edition
Minimum System Requirements	System RAM 512MB Operating System Windows Vista 32-bit and 64-bit version or Windows XP 32-bit or 64-bit version	

Technical Specifications - Optical and Removable Storage

NOTE: Actual speeds may vary. Does not permit copying of commercially available DVD movies or other copyright protected materials. Intended for creation and storage of your original material and other lawful uses. Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

HP DVD-ROM Drive	Description	5.25-inch, half-height, tray-load	
	Mounting Orientation	Either horizontal or vertical	
	Interface Type	SATA/ATAPI	
	Dimensions (WxHxD)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
	Disc Capacity	DVD-ROM Single layer: Up to 4.7 GB Double layer: Up to 8.5 GB	
	Access Times	DVD-ROM Single Layer	< 140 ms (typical)
		CD-ROM Mode 1	< 125 ms (typical)
		Full Stroke DVD	< 250 ms (seek)
		Full Stroke CD	< 210 ms (seek)
	Power	Source	SATA DC power receptacle
		DC Power Requirements	5 VDC \pm 5%-100 mV ripple p-p 12 VDC \pm 5%-200 mV ripple p-p
			DC Current
	Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
		Relative Humidity	10% to 90%
Maximum Wet Bulb Temperature		86° F (30° C)	
Operating Systems Supported		Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS3, WS4, 5 Desktop/Workstation Novell SLES 9 & SLE 10 No driver is required for this device. Native support is provided by the operating system.	

* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

Technical Specifications - Optical and Removable Storage

HP DVD+/-RW Drive	Description	5.25-inch, half-height, tray-load		
	Mounting Orientation	Either horizontal or vertical		
	Interface Type	SATA/ATAPI		
	Dimensions (WxHxD)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)		
	Disc Formats	DVD-RAM DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW		
	Disc Capacity	DVD-ROM	8.5 GB DL or 4.7 GB standard	
		Full Stroke DVD	< 250 ms (seek)	
		Full Stroke CD	< 210 ms (seek)	
	Maximum Data Transfer Rates	CD ROM Read	CD-ROM, CD-R Up to 40X CD-RW Up to 32X	
		DVD ROM Read	DVD-RAM	Up to 12X
			DVD+RW	Up to 8X
			DVD-RW	Up to 8X
			DVD+R DL	Up to 8X
			DVD-R DL	Up to 8X
			DVD-ROM	Up to 16X
			DVD-ROM DL	Up to 8X
			DVD+R	Up to 16X
			DVD-R	Up to 16X
	Power	Source	SATA DC power receptacle	
		DC Power Requirements	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p	
		DC Current	5 VDC -1000 mA typical, 1600 mA maximum 12 VDC -600 mA typical, 1400 mA maximum	
	Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)	
		Relative Humidity	10% to 90%	
	Maximum Wet Bulb Temperature	86° F (30° C)		
	Operating Systems Supported	Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS3, WS4, 5 Desktop/Workstation Novell SLES 9 & SLE 10 No driver is required for this device. Native		

Technical Specifications - Optical and Removable Storage

support is provided by the operating system.

* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>. For Windows Vista system requirements, visit: <http://www.windowsvista.com/systemrequirements>.

* LightScribe functionality is not natively supported by Linux distributions. Customers may download LightScribe Linux drivers from: <http://www.lightscribe.com/downloadSection/linux/index.aspx>

Kit Contents

HP SATA SuperMulti LightScribe DVD Writer drive, LightScribe software, Roxio Easy Media Creator software, Intervideo WinDVD Software, installation guide, and DVD+R media.

HP Slot Load DVD+/-RW Drive	Description	Slim-Line, Slot-load		
	Mounting Orientation	Either horizontal or vertical		
	Interface Type	SATA		
	Dimensions (WxHxD)	5 x .5 x 5 in (12.7 x 1.2 x 12.9 cm) 0		
	Disc Formats	DVD-RAM DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW		
	Disc Capacity	DVD-ROM	5/9/10/18 G DVD-Single / Dual (PTP, OTP) (Read Only) 4.7G DVD±R/RW (Read & Write) DVD±R Dual (Read & Write) 80mm DVD DVD-RAM (Read & Write)	
		CD-ROM	650 MB CD-ROM (Read Only) 80mm CD 800/700/650/ CD-Recordable (Read & Write) 700/650MB CD-Rewritable (Read & Write) 700/650MB High Speed CD-Rewritable (Read & Write) 700/650MB Ultra & Ultra+ Speed CD-Rewritable (Read & Write)	
		Full Stroke DVD	< 270 ms (seek)	
		Full Stroke CD	< 250 ms (seek)	
	Maximum Data Transfer Rates	CD ROM Read	CD-ROM, CD-R and CD-RW Up to 24X	
	DVD ROM Read	DVD-RAM Up to 5X DVD Single layer Up to 8X DVD Dual Layer up to 6X		



Technical Specifications - Optical and Removable Storage

Power	Source	SATA DC power receptacle
	DC Power Requirements	5 VDC \pm 5%-100 mV ripple p-p
	DC Current	5 VDC 40 mA typical, 800 mA maximum
Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)
	Relative Humidity	10% to 90%
	Operating Systems Supported	Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS3, WS4, 5 Desktop/Workstation Novell SLES 9 & SLE 10 No driver is required for this device. Native support is provided by the operating system.
	Kit Contents	Factory integrated only. Not available as a kit.

HP Blu-Ray Writer

Description	5.25-inch, half-height, tray-load	
Mounting Orientation	Either horizontal or vertical	
Interface Type	SATA	
Dimensions (WxHxD)	5.9 x 1.7 x 8.0 in (15.0 x 4.4 x 20.3 cm)	
Disc Formats	BD-ROM BD-R BD-RE DVD-RAM DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW	
Disc Capacity	DVD-ROM	8.5 GB DL or 4.7 GB standard
	Blu-ray	50 GB DL or 25 GB standard
	Full Stroke DVD	< 250 ms (seek)
	Full Stroke CD	< 210 ms (seek)
	Blu-ray	Blu-ray
	Startup Time (Time to drive ready from tray loading)	BD-ROM (SL/DL) 25S / 28S BD-R (SL/DL) 25S / 28S BD-RE (SL/DL) 25S / 28S DVD-ROM (SL/DL) 18S / 18S DVD-R (SL/DL) 25S / 25S DVD-RW 25S DVD+R (SL/DL) 25S / 25S DVD+RW 25S



Technical Specifications - Optical and Removable Storage

		DVD-RAM	45S
		CD-ROM	45S
Maximum Data Transfer Rates	CD ROM Read	CD-ROM	Up to 40X
		CD-R	Up to 40X
		CD-RW	Up to 40X
	DVD ROM Read	DVD-RAM	Up to 5X
		DVD+RW	Up to 10X
		DVD-RW	Up to 10X
		DVD+R DL	Up to 8X
		DVD-R DL	Up to 8X
		DVD-ROM	Up to 16X
		DVD-ROM DL	Up to 8X
		DVD+R	Up to 12X
		DVD-R	Up to 12X
		Blu-Ray	BD-ROM
	BD-ROM DL		Up to 4.8X
	BD-R		Up to 6X
	BD-R DL		Up to 4.8X
BD-R	Up to 6X		
		BD-RE SL/DL	Up to 4.8X
Power	Source	SATA DC power receptacle	
	DC Power Requirements	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 10%-100 mV ripple p-p	
	DC Current	5 VDC -900 mA typical, 1200 mA maximum 12 VDC -1000 mA typical, 1600 mA maximum	
Operating Environmental (all conditions non-condensing)	Temperature	41° to 122° F (5° to 50° C)	
	Relative Humidity	15% to 80%	
	Maximum Wet Bulb Temperature	86° F (30° C)	
	Operating Systems Supported	Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS3, WS4, 5 Desktop/Workstation Novell SLES 9 & SLE 10	
	Kit Contents	No driver is required for this device. Native support is provided by the operating system. HP Blue Laser RW Drive, LightScribe software, Roxio Easy Media Creator software, Intervideo WinDVD Software, installation guide.	

Technical Specifications - Optical and Removable Storage

Disclaimer	As Blu-Ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-Ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.
-------------------	---

HP 22-in-1 Media Card Reader	Description	The Media Card Reader device uses the same physical form factor and mounting as a Floppy Disk Drive. The device connects to a 2x5 two-channel USB header on the motherboard of the system. There is no USB controller card provided. Please see the Disc Formats section below for a list of flash memory card formats that are supported.
	Mounting Orientation	The Media Card Reader can be mounted in a dedicated Floppy Drive bay (if the chassis provides one) or in an appropriate Optical Bay adapter. It will operate in any orientation.
	Interface Type	USB 2.0 (one channel dedicated to the separate USB port; one channel dedicated to the flash memory card slots)
	Dimensions (WxHxD)	4.9 x 4.0 x 1.0 in (124.5 x 101.6 x 25.4 mm)
	Disc Formats	xD-Picture Micro SD Micro SDHC SD SDHC Mini SD Mini SDHC MultiMediaCard (MMC) Reduced Size MultiMediaCard (RS MMC) MultiMedia Card 4.2 (MMC Plus, including MMC Plus HC) Reduced Size MultiMedia Card 4.2 (MMC Mobile, including MMC Mobile HC) CompactFlash Card Type I CompactFlash Card Type II MicroDrive Memory Stick (MS) MagicGate Memory Stick (MG) MagicGate Memory Stick Duo Memory Stick Select Memory Stick Duo (MS Duo) Memory Stick PRO (MS PRO) Memory Stick PRO Duo (MS PRO Duo) Memory Stick PRO-HG Duo Two additional formats are usable with adapters (not supplied): MMC Micro Memory Stick Micro (M2)

Technical Specifications - Optical and Removable Storage

HP DX115 Removable Drive Enclosure	Interface Type	Compatible with SAS or SATA controllers
	Dimensions (WxHxL)	5.81 x 1.62 x 8.08 in (147.6 x 41.1 x 205 mm)
	Weight	Frame and Carrier: 3.8 lbs (1.73 kg) Carrier: 1 lbs (0.45 kg)

Technical Specifications - Controller Cards

HP IEEE 1394b FireWire PCIe Card	Data Transfer Rate	Supports up to 800 Mbps
	Devices Supported	IEEE-1394 compliant devices
	Bus Type	PCIe card full height PCIe slots
	Ports	Two IEEE-1394b bilingual 9-Pin Connector (Rear)
	Internal Connectors	One 10-Pin header Custom Connector
	System Requirements	Microsoft Windows XP Professional, Windows XP Home, Windows Vista. Not supported on Linux. Pentium® III or higher processor 128-MB RAM 1-GB Hard Drive CD-ROM drive Built in sound system Available PCI slot
	Temperature – Operating	50° to 131° F (10° to 55° C)
	Temperature – Storage	-22° to 140° F (-30° to 60° C)
	Relative Humidity – Operating	20% to 80%
	Compliances	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
	Operating Systems Supported	Microsoft Windows XP and Windows Vista

Technical Specifications - Networking and Communications

NOTE: "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

Integrated Broadcom 5764 PCIe LOM Controller	Connector	RJ45
	Data Rates Supported	10/100/1000BT
	Bus Architecture	PCIe X1
	Alerting	ASF 2.0

Broadcom (5761) NetXtreme Gigabit Ethernet Plus NIC	Connector	RJ-45
	Controller	Broadcom 5761 PCI-Express LAN Controller
	Memory	8 MB NVRAM serial Flash
	Data Rates Supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB, 802.3u, and 802.3x
	Bus Architecture	PCI-Express
	Data Path Width	Single Channel PCI-Express
	Data Transfer Mode	Bus Master DMA
	Hardware Certifications	FCC class B, Canada and US NRTL Mark, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia, UL listed (E212044), European Union Notice (CE 0682)
	Power Requirement	1.8W @ 3.3V
	Boot ROM Support	Yes
	Network Transfer Mode	Full-duplex Half-duplex (not available for the 1000BASE-T transceiver)
	Network Transfer Rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	Operating Temperature	32° to 131°F (0° to 55° C)
	Operating Humidity	131° F (55° C) with 5% to 95% non-condensing humidity
	Dimensions	2.75 in x 4.13 in (7 cm x 10.5 cm), low profile compatible
	Operating System Driver Support	Windows Vista 32-bit SP1, Windows Vista x64 SP1, Windows XP 32 bit professional, Windows XP x64 .
	Management Capabilities	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Broadcom mgmt utility, ASF2.0, DASH 1.0 and DASH 1.1 profiles
	Kit Contents	Broadcom NetXtreme Gigabit Ethernet Plus NIC, Broadcom NetXtreme Gigabit Ethernet Plus NIC USB Cable Assembly, CD, drivers, quick install guide, product warranty statement

Technical Specifications - Networking and Communications

HP NC360T PCI Express Dual Port Gigabit NIC	Connector	Two RJ-45
	Controller	Intel 82571EB
	Memory	Integrated 96KB
	Data Rates Supported	10/100/1000 Mbps
	Compliance	802.3, 802.3u, 802.3x, 802.3ab, 802.3ad, 802.1p, 802.1Q
	Bus Architecture	PCI-E 1.0a
	Data Path Width	Four lane (x4) PCI Express compatible with x4, x8, and x16 PCI Express slots
	Data Transfer Mode	Bus-master DMA
	Hardware Certifications	FCC Class B, VCCI Class B, BSMI Class A, CISPR 22 Class B, EN 55022 Class B, EN55024-1, ICES-003 Class B, MIC Class B, ACA Class B, UL, Canada UL, EN60950
	Power Requirement	1280 mA @ 3.3V typical
	Boot ROM Support	Yes
	Network Transfer Rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	Operating Temperature	32° to 131°F (0° to 55° C)
	Operating Humidity	0% to 95% non-condensing
	Dimensions	5.1 x 2.7 in (12.95 x 6.8 cm)
	Operating System Driver Support	Windows Vista Business 64*, Windows Vista Business 32*, Windows XP Professional, Windows XP Professional x64 Edition. Red Hat Enterprise Linux(RHEL) WS4, 5 Desktop/Workstation Novell SLES 9 & SLE 10
		<p>* Certain Windows Vista product features require advanced or additional hardware. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: http://www.windowsvista.com/upgradeadvisor. For Windows Vista system requirements, visit: http://www.windowsvista.com/systemrequirements.</p>
	Management Capabilities	WOL , PXE 2.1
	Kit Contents	HP NC360T PCI Express Dual Port Gigabit NIC, low profile bracket, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

Technical Specifications - Networking and Communications

Intel Gigabit CT Desktop NIC	Connector	RJ-45
	Controller	Intel WG82574L Gigabit Ethernet Controller
	Memory	Integrated Dual 48K configurable transmit receive FIFO Buffers
	Data Rates Supported	10/100/1000 Mbps
	Compliance	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus Architecture	PCI-E 1.0a
	Data Path Width	X1, 250 MB/s, Bi-directional interface
	Data Transfer Mode	Bus-master DMA
	Hardware Certifications	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	Power Requirement	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
	Boot ROM Support	Yes
	Network Transfer Rate	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	Operating Temperature	32° to 131°F (0° to 55° C)
	Operating Humidity	85% at 131° F (55° C)
	Dimensions	4.75 x 2.25 x 0.8 in (12.1 x 5.7 x 2.0 cm)
	Operating System Driver Support	Windows Vista Business 64, Windows Vista Business 32, Windows XP Professional, Windows XP x64. Red Hat Enterprise Linux 4, Red Hat Enterprise Linux 5.
	Management Capabilities	WOL , PXE, DMI, WFM 2.0
	Kit Contents	Intel Gigabit CT Desktop NIC, low profile bracket, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

© Copyright 2009 Hewlett-Packard Development Company, L.P.
The information contained herein is subject to change without notice.

All rights reserved. Microsoft, Windows, Windows Vista, and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, the Intel logo, Pentium, and Pentium Inside are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. Linux is a registered trademark of Linus Torvalds in the United States and other countries.

Warranty - year(s) Protected by HP Services, including a 3 years parts, 3 years labor, and 3 years onsite service (3/3/3) standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.