



GE Interlogix

NetworX™ NX-8-CF

Integrated Intrusion/Fire System



UL864 Listed Commercial Fire Kit

NetworX Platform

NetworX Performance

NetworX Power of One

Integrated Intrusion/Fire System NetworX™ NX-8-CF


The Power of One

NetworX, the platform you know for programming ease and flexibility, offers a UL 864 listed commercial fire solution that makes expanding your business simple! The NX-8-CF is a UL listed 12V integrated burg/fire solutions for commercial applications. With the NX-8-CF, you can expand into commercial fire without the cost and frustration of learning a new platform.

The NetworX NX-8-CF provides 48 zones of protection for fire and intrusion. In addition, the NX-8-CF supports an array of accessories and modules, including cellular backup and door access control. It is ideal for applications where integrated systems provide the most comprehensive and cost effective solution.



NetworX NX-8-CF Flexibility

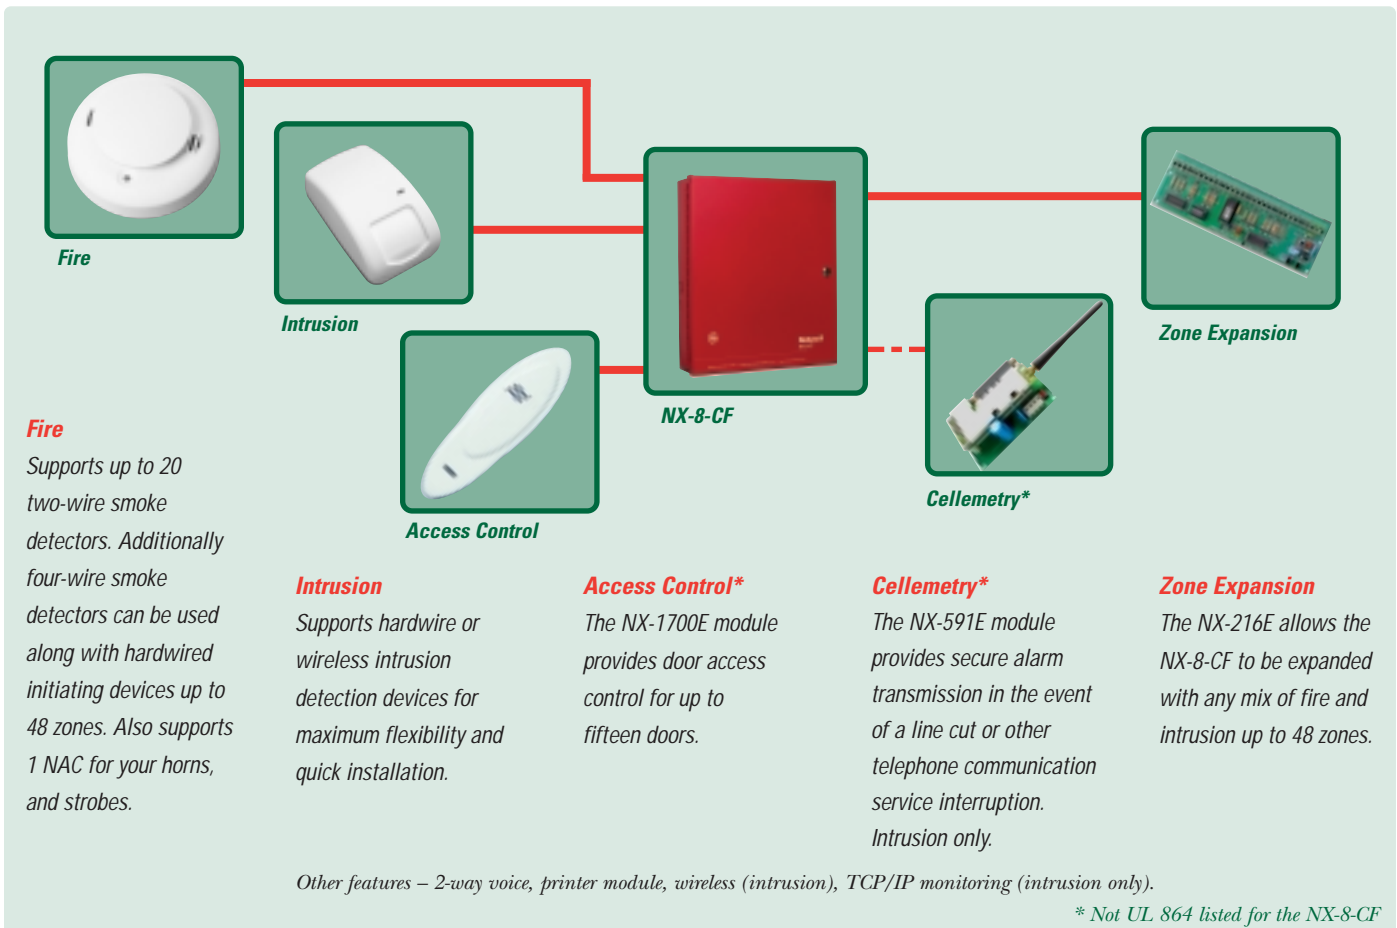

Commercial Solutions

Proven Platform

The NX-8-CF, from GE Interlogix, is a flexible integrated intrusion/fire system with eight partitions and up to 48 zones. Since the NX-8-CF is based on the NetworX platform, you already know how to program and install the panel easily. The panel comes standard with eight hardwire zone inputs and four programmable outputs that can be set up to activate external devices during an alarm event. And since it's based on the proven NetworX platform, installation of the NX-8-CF is fast and easy. The NX-8-CF's dedicated programmable notification appliance circuit outputs a temporal code and is individually silenceable. To meet the UL 864 requirement for commercial fire systems, the NX-8-CF has a NX-870E module that provides dual phone line supervision.



New Opportunities

With the NX-8-CF, you can expand into commercial fire applications with ease –

- **Convenience Stores**
- **Medical and Professional Offices**
- **Strip Malls**
- **Multi-Family Dwellings**
- **Day Care Centers**
- **Sprinkler Supervision**

Complete Solutions

GE Interlogix security and life safety products are designed and tested to work together and provide the most comprehensive solution for security professionals.

<p>Initiating Devices</p> <p>Indicating Devices</p> <p>Door Holders</p>	<p><i>Fire</i></p> <p>ESL</p> <p>ESL</p> <p><i>Product Line</i></p>	<p>Photoelectric 2 and 4-wire smoke detectors w/ field replaceable optical chambers, heat detectors and pull stations</p> <p>Various manufacturers horns, strobes, and sirens listed as compatible</p> <p>12V recessed, surface, flush, and floor mount options</p> <p><i>Application Notes</i></p>
<p>PIR Motion Sensors</p> <p>Dual Technology Motion Sensors</p> <p>Glassbreak Sensors</p> <p>Wireless</p>	<p><i>Intrusion Detection</i></p> <p>AP Series</p> <p>PrecisionLine™</p> <p>ShatterPro™ Solutions</p> <p>NetworX</p>	<p>Complete line of mirror optic PIRs</p> <p>PIR and radar technology combine to give you precise coverage and range control</p> <p>Patented acoustic glass break sensors</p> <p>Motion sensors and door/window contacts</p>

Residential and Commercial UL Burglary ratings

- UL 609 Commercial
- UL 1023 Residential Burglary
- UL 1610 Grade B & C Central Station Burglar Alarm
- UL 1637 Home Health Care Signaling

NX-8-CF Fire Panel has UL 864 rating for commercial fire.

- Type L
- Type RS
- Type CS

UL Listings

Operating Power	16.5V DC 50VA transformer
Auxiliary Power	
w/ 50VA transformer	12V DC 1 Amp
w/ NX-320 power supply	12V DC 2 Amps
	+ control panel power
Loop Resistance	
Standard loop	300 Ohms Max.
2-wire smokes	30 Ohms Max.
Loop Response	Selectable 50mS or 500mS
Operating temperature	32 to 120° F
NX-148E-CF LCD keypad	
Current draw	110 mA max.
w/o sounder	75mA
Dimensions	6.4 W x 5.3 H x 1.0" D
Control Panel Dimensions	15.5 W x 18.5 H x 4.5" D
Shipping Weight	9lbs.

Specifications

NX-8-CF UL 864 Approved Kit:

NX-8-CF	Control panel plus NX-870E in red commercial fire/burg enclosure
NX-148E-CF	2 alphanumeric LCD red keypads
NX-870E	Dual phone line fire supervision module
Transformer	16.5V, 50VA

Components may be purchased separately.

NetworX Technical Support: 800-727-2339

To get more information, or to get the NetworX Components brochure go to www.GE-Interlogix.com



GE Interlogix

www.GE-Interlogix.com

12345 SW Leveton Drive
Tualatin, OR 97062
Phone: 503-692-4052
USA & Canada: 800-547-2556
Technical Service: 800-648-7424
Faxback: 800-483-2495

2266 Second Street North
North St. Paul, MN 55109
Phone: 651-777-2690
USA & Canada: 800-777-5484
Technical Service: 800-777-2624