


Universal Ultra-Thin Flat Wall Mount For 32" to 50" Flat Panel Screens

NEW!

The world's thinnest mount, at only 0.4 inches thin, brings the screen closer to the wall than any other product in the industry. This near-invisible mount is ideal for ultra-thin flat panels and supports the weight of standard screens. Its all-steel, universal design is the ultimate solution in delivering space-saving, ultra-sleeks look that bring the screen closer to the wall than any other mount in the world.



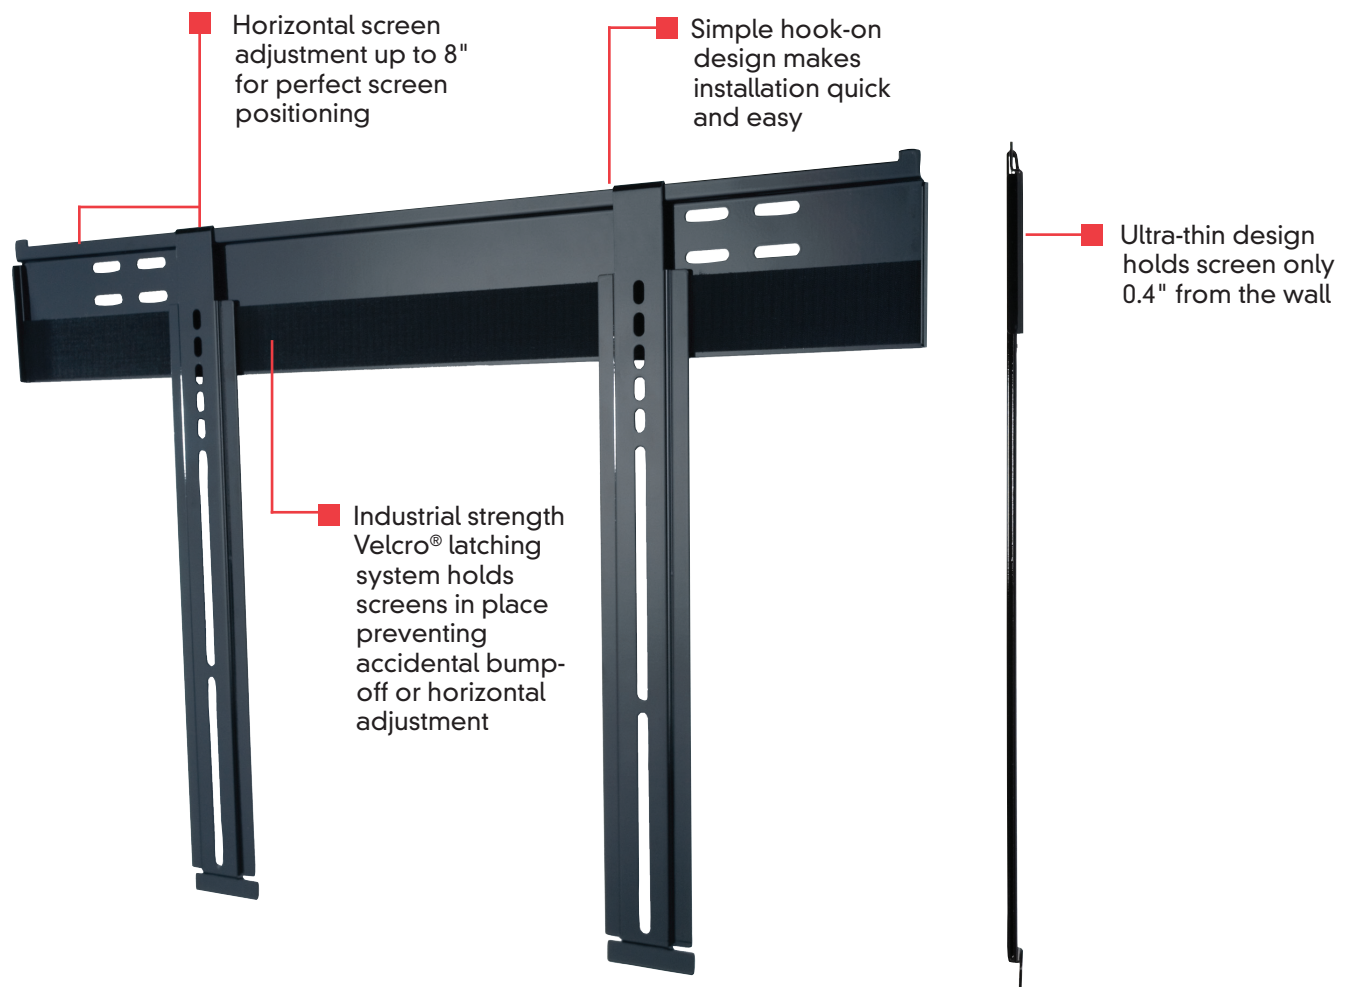

SlimLine®

WORLD'S THINNEST FLAT PANEL MOUNTING SOLUTIONS

Universal Ultra-Thin Flat Wall Mount

For 32" to 50" Flat Panel Screens*

Model Numbers

SUF650P

Product Specifications

FEATURES

- Ultra-thin design holds screen only 0.4" from the wall for a near-invisible application
- Universal mount compatible with ultra-thin LCD screens with mounting patterns up to 29.23" W x 17.67" H
- Universal brackets easily hook onto wall plate for an easy installation
- Industrial-strength Velcro® latching system secures screen adapters to wall plate in a single step, making installation fast and secure
- Horizontal screen adjustment of up to 8" (depending on screen model) for perfect screen placement
- Mounts to wood studs, concrete, cinder block or metal studs (metal stud accessory required)
- Comes with Peerless' Sorted-for-You™ fastener pack with all necessary screen attachment hardware

DIMENSIONS (W x H x D)

32.19" x 21.80" x 0.4" (81.8 x 55.4 x 1.1 cm)

LOAD CAPACITY

150 lb (68 kg)

PRODUCT WEIGHT

5.5 lb (2.5 kg)

FINISH

Scratch-resistant fused epoxy

AVAILABLE COLORS

Gloss black

ACCESSORIES

In-wall accessories box (IBA1)
Metal stud fasteners (ACC415)

PATENT

Patent pending

Package Specifications

PACKAGE CONTENTS

Wall plate, screen adapters, mounting and screen attachment hardware

UNITS IN PACKAGE

1

PACKAGE SIZE (W x H x D)

37.06" x 2.37" x 6.31" (94.1 x 6 x 16 cm)

PACKAGE SHIP WEIGHT

7.6 lb (3.44 kg)

PACKAGE UPC CODE

735029258360

WARRANTY

Limited 5-year

* Screen Compatibility Requirements

- The depth of this mount (0.4") may not provide sufficient space for proper ventilation on some screens. Refer to the screen manufacturer's ventilation requirements for mounting your screen before installation.
- The screen must have a flat mounting surface, or the mounting holes need to be on the furthest back surface of the screen.
- Input/output connection must be properly oriented to accommodate mounting 0.4" from the wall. In-wall accessory (IBA1) may provide additional clearance needed for plugs, depending on their location on the back of the screen.



Industrial strength Velcro® latching system holds screen in place against the wall plate preventing accidental bump-off or horizontal adjustment



LIT-0298

Peerless Industries, Inc.
3215 W. North Avenue,
Melrose Park, IL 60160

(800) 865-2112
(708) 865-8870

Fax: (708) 865-2941

www.peerlessmounts.com