

Liebert® GXT4™ UPS 5 - 10 kVA

Intelligent, Reliable UPS Protection

Liebert® GXT4™ UPS meets the need for higher power capacities in small spaces.

This true on-line double conversion UPS system is available in larger capacity models of 5 kVA - 10 kVA, featuring integrated maintenance bypass as well as optional extended battery runtime.

The **Liebert GXT4 UPS** is designed for use in either rack or tower configurations. It maintains a compact footprint in all ratings, with 5000 - 6000 VA models with a height of 5 U, and 10000 VA with a height of 6 U, as well as a short depth of <600 mm.

Flexibility:

- Rotatable multi-language LCD display panel
- Compact 5Us or 6Us height and short depth (<600 mm)
- Automatic frequency sensing
- Frequency conversion capability
- Rack & tower mounting flexibility
- User replaceable hot-swappable internal batteries
- Extended backup time with additional battery cabinets
- Liebert IntelliSlot® communication port available
- Includes Windows®-based configuration program
- Built-in USB communication ports for use with Liebert MultiLink™ automated shutdown software
- Built-in closure signals
- Emergency power-off (EPO)

High Availability:

- Internal automatic and manual bypass
- Self-diagnostics
- Input power-factor correction
- Advance early warning of UPS systems status
- 10 kVA parallel/redundant up to 2+1
- Periodic battery testing
- Intelligent battery management

Total Cost of Ownership:

- High output power factor
- ECO mode for increased efficiency
- ENERGY STAR® qualified models
- Wider input voltage minimizes battery use
- Battery cutoff voltage to prevent from over discharge of batteries and to prolong battery life

Communications for Power Monitoring, Control and Preventive Maintenance:

Liebert GXT4 offers a variety of communication options, providing flexible monitoring, control capabilities and preventive maintenance. These include:

- Optional SNMP/Webcard for UPS monitoring and control
- Optional Modbus and Relay cards
- Liebert MultiLink automated system shutdown software
- Liebert Nform™ monitoring system
- LIFE™ compatibility for UPS preventive maintenance and remote diagnostic service

Ideally Suited for Mission-Critical Applications:

- LAN and WAN servers
- Network equipment
- IP telephony deployments
- Office telecommunication systems
- Test and diagnostic equipment
- Finance applications




Liebert® GXT4™ 5 - 10 kVA

Liebert® GXT4™ UPS 5 - 10 kVA


Intelligent, Reliable UPS Protection

Technical Specifications

UPS Part Number	GXT4-5000RT230E	GXT4-6000RT230E	GXT4-10KRT230E
Power Ratings (VA/W)	5000 VA / 4000 W	6000 VA / 4800 W	10000 VA / 9000 W
Input AC Parameters			
Voltage Range (VAC)	176 - 280		
Frequency Range (Hz)	40~70; Auto sensing		
Input Socket	Hardwired input on PD2-CE6HDWRMBS standard power distribution box		Hardwired input on PD2-CE10HDWRMBS standard power distributions box
Output Sockets	6 x IEC320-C13 + 2 x IEC320-C19 + hardwired on PD2-CE6HDWRMBS standard power distribution		4 x IEC320-C13 + 4 x IEC320-C19 + hardwired on PD2-CE10HDWRMBS standard power distribution
Voltage (V)	230 factory default		
Waveform	Pure Sinewave		
Battery Parameters			
Type	Valve-regulated, non-spillable, lead-acid		
Quantity x Voltage x Rating	20 x 12 V x 5 Ahr		20 x 12 V x 9 Ahr
Recharge time	3 hours to 90% capacity after full discharge with 100% load		
Environmental			
Operating	0° C - to +40° C (+32°F to +104°F) (no derating)		
Relative Humidity	0% RH to 95% RH, non-condensing		
Operating Altitude	Up to 1000m (3281ft) at 25°C (77°F) without derating		
Audible Noise	<50 dBA, at 1 meter (3.2 ft) from the front or sides		
Agency			
Safety	IEC/EN/AS 62040-1: 2008; GS Mark		
EMI/EMC/C-Tick EMC	IEC/EN/AS 62040-2 2nd Ed (C2)		
Transportation	ISTA Procedure 1A		
Compliance	CE, RoHS		
Dimensions (W x D x H / mm)			
Unit / Shipping	430 x 574 x 217 / 516 x 745 x 530		430 x 581 x 261 / 530 x 745 x 563
Weight (kg)			
Unit / Shipping	60 / 71	60 / 71	70 / 92
Compatible external battery cabinet			
	GXT4-240VBATTE		
Type	Valve-regulated, non-spillable, lead-acid		
Quantity x Voltage x Rating	1 x 20 x 12 V x 9 Ahr		
Environmental			
Operating / Storage Temperature	0° C - to +40° C (+32°F to +104°F) / 15° C - to +50° C (5°F to +122°F)		
Relative Humidity	0% RH to 95% RH, non-condensing		
Maximum Operating Altitude	Up to 1000 m (3281 ft) at 25°C (77°F) without derating		
Agency			
Safety / Emissions	IEC/EN/AS 62040-1: 2008		
Transportation	ISTA Procedure 1A		
Dimensions (W x D x H / mm)			
Unit / Shipping	430 x 581 x 173 / 530 x 745 x 475		
Weight (kg)			
Unit / Shipping	65 / 76		

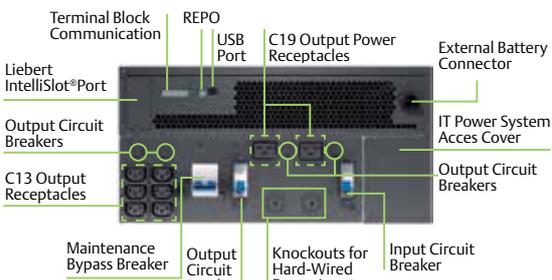

Liebert® GXT4™ 5000/6000 VA

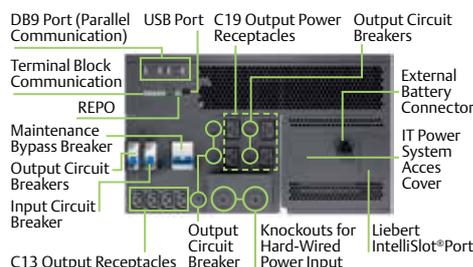

Liebert® GXT4™ 10000 VA



Front view Power Distribution (PD2-CE10HDWRMBS)



Liebert® IntelliSlot® Communication Card

EmersonNetworkPower.eu

Locations

Emerson Network Power Global Headquarters

1050 Dearborn Drive
Columbus, OH 43229, USA
Tel: +1 614 8880246

Emerson Network Power AC Power Europe, Middle East & Africa

Via Fornace, 30
40023 Castel Guelfo (BO) Italy
Tel: +39 0542 632 111
Fax: +39 0542 632 120
ACpower.Networkpower.Emea@Emerson.com

Emerson Network Power United Kingdom

George Curl Way
Southampton
SO18 2RY, UK
Tel: +44 (0)23 8061 0311
Fax: +44 (0)23 8061 0852

Globe Park
Fourth Avenue
Marlow Bucks
SL7 1YG
Tel: +44 1628 403200
Fax: +44 1628 403203
UK.Enquiries@Emerson.com



Tech Support

Always On! Our Commitment to your daily Business, provided by our World Wide multi language Tech Support.

Toll-free 0080011554499
Toll +39 02 98250222

liebert.upstech@emerson.com

While every precaution has been taken to ensure accuracy and completeness herein, Emerson assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications subject to change without notice.

Follow us on Social Media:



Emerson. Consider it Solved, Liebert, GXT4, Multilink, Nform, and Emerson Network Power are trademarks of Emerson Electric Co. or one of its affiliated companies. All the other marks are the property of their respective owners.
©2015 Emerson Electric Co.
MKA4LOUKGTX45 Rev.1-03/2015