

MX882UST Digital Projector




Features

- Inner reflection design of ultra short throw projector
- 0.3 Throw ratio
- Corner fit, Surface fit, 2D keystone image correction.
- Dual HDMI port. Support MHL.
- LAN control, LAN display
- FW upgradable via LAN, HDMI power on
- Wall mount bundle

Box Contents

- Remote Control w/ Battery RCS011
- Power Cord (by region) 2.9M
- User Manual CD *1
- Quick Start Guide *1
- Warranty Card (by region) *1
- VGA(D-sub 15pin) Cable *1
- Wall mount kit (installation guide) *1

Dimension

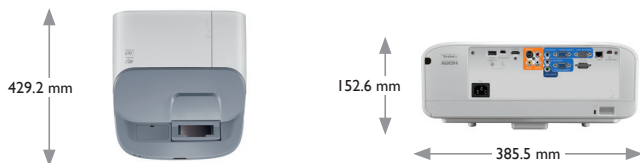


Optional Accessories

- Spare Lamp Kit 5J.JDM05.001
- Wall Mount WM04G4
- 3D Glasses DGD24



Because it matters

Input and Output Terminals

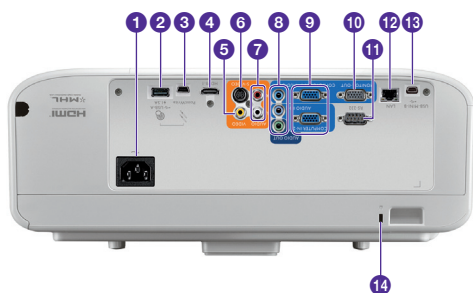

- 1 AC power jack
- 2 USB Type A port (Power for Touch kit)
- 3 PointWrite port (PointWrite kit is required)
- 4 HDMI-input port
- 5 Video input jack
- 6 S-Video input jack
- 7 Audio (L/R) input jacks
- 8 Audio output jack
- 9 RGB (PC)/Component Video (YPbPr/YCbCr) signal input jacks
- 10 RGB signal output jack
- 11 RS232 control port
- 12 RJ45 LAN input jack
- 13 USB Mini-B port
- 14 Kensington anti-theft lock slot

Product Specifications

Projection System	DLP	
Native Resolution	XGA(1024*768)	
Brightness	3200AL	
Contrast Ratio	10,000:1	
Display Color	1.07 Billion Colors	
Lens	F2.5,f=5.1mm	
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)	
Throw Ratio	0.3	
Image Size (Diagonal)	72"-120"	
Zoom Ratio	Fix	
Lamp Type	240W	
Lamp Mode (Normal/Eco/SmartEco/LampSave)*	2500/4000/6000 hours	
Keystone Adjustment	2D,Vertical +/- 30 degrees, Horizontal +/-25 degree	
Projection Offset	115%(±5%)	
Resolution Support	VGA(640 x 480) to UXGA(1600 x 1200)	
Horizontal Frequency	15~102KHz	
Vertical Scan Rate	23~120Hz	
Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
	Video Compatibility	NTSC, PAL, SECAM
Interface	Computer in (D-sub 15pin)	x 2(Shared with component)
	Monitor out (D-sub 15pin)	x 1
	Composite Video in (RCA)	x 1
	S-Video in (Mini DIN 4pin)	x 1
	HDMI/MHL	x 2(HDMI 2 with MHL)
	Audio in (Mini Jack)	x 1
	Audio out (Mini Jack)	x 1
	Audio L/R	x 1
	Speaker	10W x 2
	USB (Type mini B)	x 2(FW download/PointWrite)
	USB(Type A)	x 2 (USB display/USB reader/5V/2A power supply)
	RJ45	x 1 (LAN Control /LAN Display/FW download)
	RS232 (DB-9pin)	x 1
	IR Receiver	x1 (Front)
Dimensions	Dimensions(W x H x D)	385*152*429 mm
	Weight	8.0KG(w/o wall mount)
Power	Power Supply	AC100 to 240 V, 50 to 60 Hz
	Power Consumption	typical 410W, Network standby <6W, Standby <0.5W
Audible Noise	37/33 dBA (Normal/Economic mode)	
On-Screen Display Languages	Arabic/Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hindi/ Hungarian/ Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (28 Languages)	
Picture Modes	Dynamic/Presentation/sRGB/Cinema/(3D)/User 1/User 2	

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

Logistics information

Product Code	9HJDM77.13E
EAN Code	471 8755 05772 4
Dimensions Single Carton (cm)	590*500*533
Carton Weight (kg)	6,2
Pallet Size Block (cm)	1200*1000*1719



BenQ Europe B.V.
Meerenakkerweg 1-17
5652 AR Eindhoven
The Netherlands
Tel: +31 88 8889200
Fax: +31 88 8889299

© 2015 BenQ Corp. Specification may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third parties respectively. Doc.: PRJ HB BR EN 0301



Because it matters