

SUBMITTAL DATA - WALL-MOUNTED

MWMC018S4-2P

MULTI-ZONE MINI-SPLIT HEAT PUMP

Job:	Engineer:
Location:	Architect:
Schedule No.:	Date:
System Designation:	For: □Reference □Approval □Review □Construction

FEATURES

- Pre Heat Function
- Multi-Refrigerant Outlet
- Auto Restart
- Three Speed Fan
- Flare Connections
- Refrigerant R-410A
- LED Readout Panel
- · Wireless Remote Controller included

Product Warranty

All covered components - Twelve year limited warranty. Product registration required

Product registration required.								
SPECIFICATIONS								
PERFORMANCE								
Cooling Capacity ¹ (Btu/h)		18,000						
Heating Capacity ¹ (Btu/h)		18,000						
Airflow (CFM)	High	524						
	Medium	476						
	Low	306						
External Static Pressure (in. w.g.)								
Sound Pressure (dBA)	High	46.5						
	Medium	43.0						
	Low	32.5						
ELECTRICAL DATA								
Power Supply (V/Hz/Φ)		208-230/60/1						
		208-230/60/1 0.13						
Power Supply (V/Hz/Φ)								
Power Supply (V/Hz/Φ) Rated load amps (RLA)		0.13						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W)	Height	0.13						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS	Height Width	0.13 30						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS	•	0.13 30 12-1/2						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS	Width	0.13 30 12-1/2 40						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in)	Width	0.13 30 12-1/2 40 9-1/2						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in)	Width Depth	0.13 30 12-1/2 40 9-1/2 1/4						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in) Gas Pipe Connection (in)	Width Depth	0.13 30 12-1/2 40 9-1/2 1/4 1/2						
Power Supply (V/Hz/Φ) Rated load amps (RLA) Power Output (W) DIMENSIONS Unit Dimensions (in) Liquid Pipe Connection (in) Gas Pipe Connection (in) Condensate drain connection	Width Depth	0.13 30 12-1/2 40 9-1/2 1/4 1/2						



OPTIONAL ACCESSORIES Non-Programmable Controller (M0STAT61Q-1) Non-Programmable Controller (M0STAT120L-1) Programmable Controller (M0STAT120N-1)

NOTES

1. Cooling and Heating capacity data is rated at the following conditions:

Cooling: 80°FDB / 67°FWB Indoor, 95°FDB Outdoor Heating: 70°FDB Indoor, 47°FDB / 43°FWB Outdoor










SUBMITTAL DATA - WALL-MOUNTED MWMC018S4-2P

MULTI-ZONE MINI-SPLIT HEAT PUMP


DIMENSIONAL DRAWINGS - INCHES (MM)





FRONT VIEW

SIDE VIEW

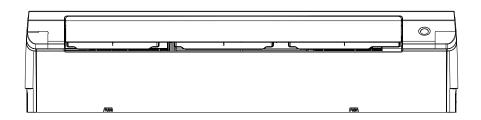

BOTTOM VIEW

Size	Α		В		С	
	in.	mm	in.	mm	in.	mm
MWMC009, 012	33-3/8	848	11-3/4	298	9	229
MWMC018	40	1016	12-1/2	318	9-1/2	241
MWMC024, 030	46-7/8	1191	14-5/8	371	11	279