



Overview

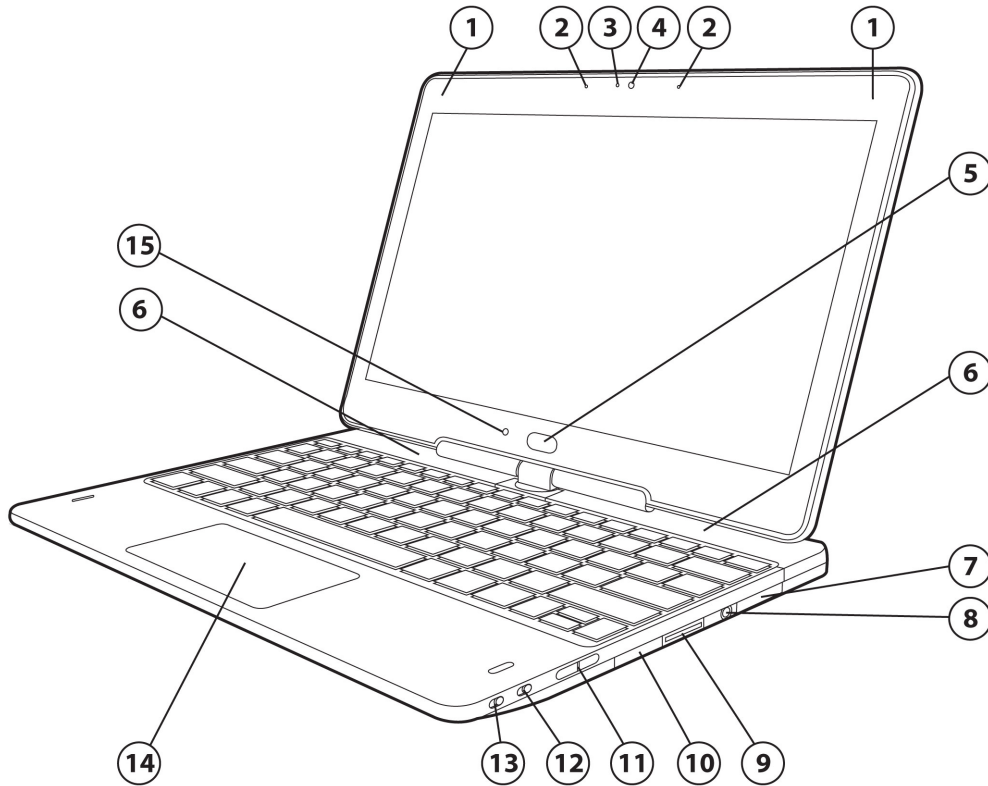

Front, Right


- | | |
|---------------------------|---------------------------|
| 1. WLAN antennas | 9. MicroSD slot |
| 2. Dual-microphone array | 10. Speaker |
| 3. Webcam LED | 11. Volume up/down button |
| 4. 720p HD Webcam | 12. Rotation lock button |
| 5. Home button | 13. Power button |
| 6. WWAN antennas | 14. Clickpad image sensor |
| 7. Side docking connector | 15. Ambient light sensor |
| 8. Audio jack | |

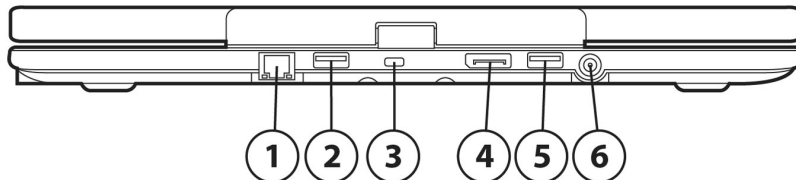

Rear


Overview

- | | |
|--------------------------|----------------------|
| 1. RJ-45 (Ethernet) jack | 4. DisplayPort v1.1a |
| 2. USB 3.0 port | 5. USB 3.0 port |
| 3. Security lock slot | 6. Power connector |

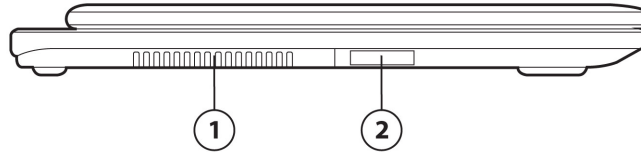

Left

1. Vent
2. Speaker

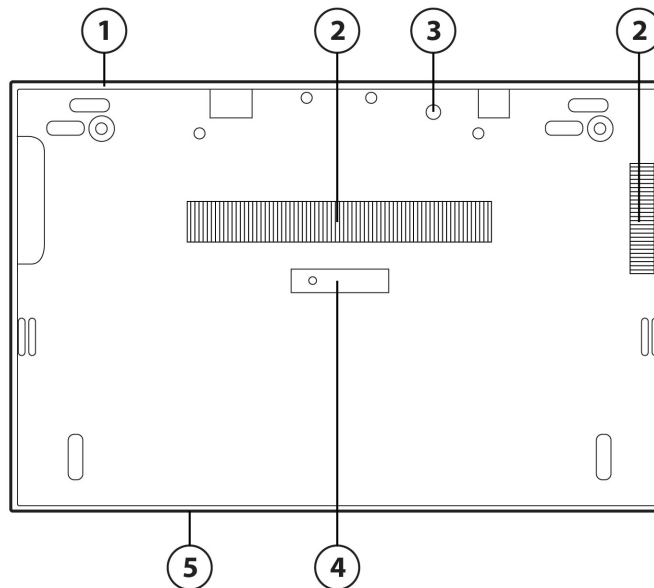

Bottom

- | | |
|---|------------------------------------|
| 1. Service cover | 4. Battery bay cover release latch |
| 2. Vents | 5. Battery bay |
| 3. Near Field Communication (NFC) antenna | |

Overview

At A Glance

- Windows 8 versions, Windows 7 versions or FreeDOS
- 11.6-inch diagonal LED-backlit HD UWVA display (1366 x 768) with capacitive multi-touch screen
- Industrial, business rugged HP DuraCase construction features a full magnesium alloy chassis, wear-resistant HP DuraFinish, and stainless steel hinges
- The HP Elitebook Revolve meets military standards 810G testing* for drop, vibration, functional shock, dust, altitude, and high and low temperature.
- Full-sized backlit, spill-resistant keyboard with bottom-case drain
- Clickpad image sensor
- Choice of 3rd Generation Intel® Core™ i7, i5 Core with Turbo Boost Technology or 3rd Generation Intel® Core™ i3 Core
- Intel vPro technology (optional support on models with i7 and i5 processors) enables you to remotely monitor, diagnose, and repair PCs over the network, even if a system's OS is inoperable or it is powered off
- Choice of up to 256 GB mSATA Solid State Drive
- Flexible wireless connectivity options:
 - Integrated WWAN modules with GPS support
 - Integrated Intel 802.11 a/b/g/n (2x2) wireless LAN module with Bluetooth
 - Integrated Intel 802.11 a/b/g/n (2x2) wireless LAN module
- 6-cell (44 WHr) polymer battery
- Integrated Intel HD Graphics
- Integrated 720p HD Webcam
- DTS Studio Sound with integrated stereo speakers and dual microphone array
- Security features including HP Client Security, Common Criteria Certified Discrete TPM 1.2 Embedded Security Chip, and Security lock slot
- Separate launch buttons for easy access to the following features: Windows, power, rotation lock, volume up and down
- DisplayPort for high resolution support
- Optional HP Docking Station
- Sensors include Gyroscope, Accelerometer, Compass, Ambient Light Sensor, Near Field Communication (NFC)
- MicroSD slot, Micro-SIM

* Testing was not intended to demonstrate fitness for Department of Defense contracts requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

Features

PRODUCT NAME

HP EliteBook Revolve 810 Tablet

OPERATING SYSTEM

Preinstalled

Windows 8 Pro 64*
Windows 8 64*
Windows 7 Professional 64 (available through downgrade rights from Windows 8 Pro)**
Windows 7 Professional 64***
Windows 7 Home Premium 64***
FreeDOS 2.0

Supported

Windows 8 32*
Windows 8 Pro 32*
Windows 8 ML 32*
Windows 8 Enterprise 32*
Windows 8 Enterprise 64*
Windows 7 Professional 32***
Windows 7 Enterprise 32***
Windows 7 Enterprise 64***
Windows 7 Ultimate 32***
Windows 7 Ultimate 64***
Windows 7 Home Premium 32***
Windows 7 Home Basic 32***
Windows 7 Home Basic 64***

* Not all features are available in all editions of Windows 8. Systems may require upgraded and/or separately purchased hardware, drivers and/or software to take full advantage of Windows 8 functionality. See <http://www.microsoft.com/>

** This system is preinstalled with Windows® 7 Pro software and also comes with a license and media for Windows 8 Pro software. You may only use one version of the Windows software at a time. Switching between versions will require you to uninstall one version and install the other version. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data

*** Systems may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See <http://www.microsoft.com/windows/windows-7/> for details.

Features

PROCESSOR*

3rd Generation Intel® Core™ i7-3687U (2.1 GHz, 4 MB L3 cache, 2 cores)*

Up to 3.30 GHz with Intel Turbo Boost Technology**

3rd Generation Intel® Core™ i5-3437U (1.9 GHz, 3 MB L3 cache, 2 cores)*

Up to 2.90 GHz with Intel Turbo Boost Technology**

3rd Generation Intel® Core™ i3-3227U (1.9 GHz, 3 MB L3 cache, 2 cores)*

* Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing on Intel® architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processors will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. Intel's numbering is not a measurement of higher performance.

** Intel® Turbo Boost technology requires a PC with a processor with Intel Turbo Boost capability. Intel Turbo Boost performance varies depending on hardware, software and overall system configuration. See www.intel.com/technology/turboboost for more information.

CHIPSET

Mobile Intel® QM77 Express (vPro support on i7 and i5 processors)

INTEL CORE I5 WITH VPRO/CORE I7 WITH VPRO TECHNOLOGY CAPABLE

Intel Core i5 with vPro and Core i7 with vPro technology is a selectable feature that is available on units configured with select processors, an Intel Centrino® Advanced-N or Ultimate-N WLAN module and a preinstalled Windows operating system. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel Active Management Technology 8.0 (iAMT) offers built-in manageability and proactive security for networked notebook PCs, even when they are powered off* or when the operating system is inoperable. It can help identify threats before they reach the network, isolate infected systems, and update PCs regardless of their power state.

*Requires a Windows operating system, network hardware and software, connection with a power source, and a direct (non-VPN) corporate network connection which is either cable or wireless LAN.

NOTE: Some functionality of this technology, such as Intel® Active management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel vPro technology is dependent on 3rd party software providers. Microsoft Windows required. For hard drives, GB = 1 billion bytes. Actual formatted capacity is less. Up to 30 GB for Windows 8 is reserved for system recovery software.

GRAPHICS

Integrated:

Intel HD Graphics

Features

DISPLAY

Internal

11.6-inch diagonal LED-backlit HD* UWVA display (1366 x 768)

- Ultra- Wide-viewing angle
- Capacitive multitouch screen with digitizer
- Tough, durable Corning Gorilla Glass 2

External

Up to 32-bit per pixel color depth

DisplayPort

Supports resolutions up to 2560 x 1600, 30-bit color depth at 60 Hz, and full HD (1920 x 1080) monitors, 24-bit color depth at 120 Hz

* HD content required to view HD images.

NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

STORAGE AND DRIVES

Solid State Drive

Up to 256 GB mSATA

NOTE: Solid State Drives (SSD), GB = 1 billion bytes. Actual formatted capacity is less. Up to 30 GB for Windows 8 is reserved for system recovery software.

MEMORY

Standard

DDR3 PC3-12800 SDRAM (1600 MHz)

One SODIMM slot supporting dual-channel memory plus 4 GB soldered down
4 GB and 8 GB SODIMMs

Maximum

Upgradeable to 12288 MB with optional 8192 MB SODIMM in slot 1 and 4096 MB soldered down
Dual-channel

Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

NOTE: Maximum memory capacities assume Windows 64-bit operating systems. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed.

Features

NETWORKING/COMMUNICATIONS

Wireless

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Broadband Wireless (WWAN) requires a Windows operating system and is available in select countries as a standard, factory configurable feature only. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

Broadband Wireless (WWAN)

HP un2430 EV-DO/HSPA Mobile Broadband Module with GPS support^{1, 2}

HP hs2350 HSPA+ Mobile Broadband Module with GPS support^{1, 2}

Wireless LAN (WLAN)

Intel Centrino Advanced N 6205, (2x2) a/b/g/n^{1, 3}

Intel 802.11 a/b/g/n (2x2) +Bluetooth Combo^{1, 3}

NOTES:

1. Wireless access point and Internet service required. Availability of public wireless access points limited.
2. GPS access requires an unobstructed path to multiple satellites. Performance may be affected if/when used inside of buildings, bridges or heavily congested metropolitan areas. Requires separately purchased GPS navigation software available from multiple GPS applications.
3. Wireless use requires separately purchased service contract. Check with your local vendor for coverage area and availability in your area. Connection and speeds will vary due to location, environment, network conditions, and other factors. 4G compatibility with HSPA+.

Communications

Integrated Intel 82579LM Gigabit* Network Connection (vPro configurations)

* The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

AUDIO/MULTIMEDIA

Audio

DTS Studio Sound

Integrated stereo speakers

Integrated microphone (dual-microphone array)

Buttons for volume up and down

Headphone/microphone combo jack

Webcam

Integrated 720p HD webcam

- HD format (widescreen)
- Supports videoconferencing and still image capture
- High quality fixed focus lens
- Video capture at various resolutions up to 1280x720 resolution (720p) and up to 30fps
- M-JPEG compression supports higher frame rates for video capture and videoconferencing
- Improved low light sensitivity
- Improved dynamic range

Features

KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard and a drain system that funnels fluid through a hole in the bottom of the notebook. This minimizes the risk of damage to sensitive components underneath. The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. U.S. and International key layouts are available. Other features include an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19 mm x 19 mm key pitch (center-to-center spacing), 2.0 mm stroke, and comfort-dished keycaps.

Pointing Devices

Clickpad image sensor

Optional HP Executive Tablet Pen*

*The HP Executive Tablet Pen does not support the hover feature, which may be required for some Microsoft Windows 8 apps. Please refer to www.hp.com/go/hpexecutivetabletpen for more information.

Buttons and Function Keys

Function keys are:

F1 - Ambient Light Sensor

F2 - Battery Gauge

F3 - Sleep

F4 - Display Switching

F5 - Speaker Mute

F6 - Volume Down

F7 - Volume Up

F8 - mic mute

F9 - Brightness Down

F10 - Brightness Up

F11 - Backlit

F12 - WiFi toggle

SENSORS

Accelerometer

Compass

Ambient Light Sensor

Near Field Communication (NFC)

SOFTWARE AND SECURITY

Preinstalled Software with Windows Operating System

HP ePrint*

PDF Complete Corporate Edition

Evernote

Adobe® Flash Player

Cyberlink Media Suite

- Cyberlink PowerDVD

Features

- Cyberlink Media Suite (Windows App) (Windows 8 only)
- Cyberlink Media Suite (Desktop App)
- Cyberlink YouCam (Windows App) (Windows 8 only)
- Cyberlink YouCam BE (Desktop App)
- Cyberlink Photo Director
- Cyberlink Power Director

Skype ready*

Skitch (Windows 8 only)

HP PageLift

Intel WiDi (with select configurations)

Buy Office.

* Requires an Internet connection to HP web-enabled printer and HP ePrint account registration (for a list of eligible printers, supported documents and image types and other HP ePrint details, see www.hp.com/go/eprintcenter). Requires optional broadband module. Broadband use requires separately purchased service contract. Check with service provider for coverage and availability in your area. Separately purchased data plans or usage fees may apply. Print times and connection speeds may vary.

** Internet access required.

Security

Standard

Common Criteria EAL4+ Augmented Certified Discrete TPM 1.2 Embedded Security Chip

Security lock slot

HP BIOS (BIOS Protection)

Secure Erase¹

Computrace Persistence²

DriveLock and Automatic DriveLock

Preboot Security

Master Boot Record recovery (Windows 7 only)

HP Client Security Software³:

- Drive Encryption
- Credential Manager
- Password Manager
- Absolute Data Protect (Windows 8 only)³
- Face Recognition³
- One Step Logon
- SpareKey⁴

Device Access Manager with Just In Time Authentication

Embedded Security (Windows 7 only)

Privacy Manager (Windows 7 only)

Microsoft Security Essentials (Windows 7 only)⁵

DigitalPass (Windows 7 only)

Central Management capable⁶

Optional

HP Combo Lock

¹ For the methods outlined in the National Institute of Standards and Technology Special Publication 800-88.

² Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription. Subscriptions can be purchased for terms ranging for multiple years. Service is limited, check with Absolute for availability outside the U.S

Features

³ Requires Microsoft Windows.

⁴ Requires initial user setup.

⁵ Opt-in and Internet connection required for updates

⁶ In order to deploy and receive updated policies, the client needs to be connected to the network server and requires separately purchased DigitalPersona Pro software. System access may not prevent users from logging into the system on the first attempt if policy updates haven't yet been received and applied.

For more information on HP security solutions refer to: <http://www.hp.com/go/security>.

Management

LANDesk Management Suite (optional)^{1, 2}

LANDesk Security Suite(optional)^{1, 2}

HP System Software Manager (available at no charge as a download from the web)

HP Softpaq Download Manager (available at no charge as a download from the web)

¹ Sold separately or as an optional feature.

² Location based functionality planned to be available in May 2013 and requires active LANDesk maintenance service or purchase of updated LANDesk license with location based settings when available.

POWER

Power Supply

External HP 45W Slim Smart AC Adapter

Power cord included is 5.91-foot (1.8 meter).

Primary Battery

HP 6-cell Battery (44 WHr)

Battery Life

HP 6-cell Primary Battery Up to 8 hours and 30 minutes (with Windows 7)*
Up to 8 hours and 15 minutes (with Windows 8)**

System Standby Time

Up to 137 hours

Power Conservation

Supports enhanced Intel SpeedStep technology (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)

Intel Display Power Saving technology

Hibernation

Standby

ACPI compliance

* Battery life will vary depending on various factors including product model, configuration, loaded applications, features, use, wireless functionality, and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See www.bapco.com for additional details.

** Testing conducted by HP consisting of full battery discharge while running a series of productivity scripts against the following applications (which may or may not be included with your particular product): Adobe® AcrobatReader 7.0, Adobe® Illustrator® CS2, Adobe® Photoshop® CS2, Apple® Quicktime 7.1, Intervideo® WinDVD® 8, Macromedia® Flash 8, Microsoft® Office® 2003 Pro, Microsoft® Project 2003, and Winzip® 10.0. Prior to testing, the system was fully charged, display brightness was set at 60 nits,

Features

wireless was turned off, and auto dim, suspend, hibernate and all other non-essential operation programs, utilities, and services to operation and battery testing were disabled. Battery life will vary depending on the product model, configuration, loaded applications, features, use, wireless functionality and power management settings. The maximum capacity of the battery will naturally decrease with time and usage.

ENVIRONMENTAL

- US Energy Star[®]
- IT ECO declaration
- EPEAT Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country US Federal Energy Management Program (FEMP)

WEIGHTS & DIMENSIONS

Weight

Starting at 3.08 lb (1.40 kg) (weight will vary by configuration)

Dimensions (w x d x h)

8.34 x 11.22 x 0.80 in (at front) / 212 x 285 x 22.2 mm (at front)

NOTE: Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 6-cell battery, lightest SSD, and 1 SODIMM.

PORTS/SLOTS

Ports

DisplayPort – One (v1.1a)
Stereo headphone/microphone combo jack – One
Power Connector – One
Side Docking Connector – One
RJ-45 (Ethernet) – One
USB 3.0 – One
USB 3.0 Charging – One

Digital Media Slots

Micro-SIM; Micro SD Media Reader Slot - supports SD, SDHC, SDXC

SERVICE AND SUPPORT

Limited, 90-day warranty, depending on country); 1 and 3 year limited warranty options available. 3-year limited warranty on battery. Optional HP Care Pack Services are extended service contracts which go beyond your standard warranties. For more details visit: <http://www.hp.com/go/cpc>

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details.
<http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>

Technical Specifications

SYSTEM UNIT

Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	110/220 V
	Average Operating Power	10.2 W
	Max Operating Power	< 45 W
Temperature	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	40 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Planned Industry Standard Certifications	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Select models*
	EPEAT	Gold**
	ICES	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	KC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	CIT	Yes
	GOST	Yes
	Saudi Arabian Compliance (ICCP)	Yes
	SABS	Yes
UKRSERTCOMPUTER	Yes	

Technical Specifications

* Configurations of the HP EliteBook Revolve that are ENERGY STAR qualified are identified as HP EliteBook Revolve ENERGY STAR on HP websites and on www.energystar.gov.

** EPEAT registration varies by country. See www.epeat.net for registration status by country. EPEAT status listed above applies to U.S.

For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

DISPLAYS

11.6-inch LED HD (1366 x 768)	Active Area	9.88 x 5.67 in (25.61 x 14.40 cm)	
	Dimensions (W x H)	11.53 x 6.49 in (29.3 x 16.5 cm)	
	Diagonal Size	11.6 in (29.46 cm)	
	Contrast Ratio	300:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	400 nit (typical)	
	Pixel Resolution	Format	1366 x 768
		Configuration	RGB Stripe
	Backlight	LED	
	Viewing Angle	40/40/15/30 (Left/Right/Down/Up) (typical)	

STORAGE AND DRIVES

Internal Storage

128 GB mSATA Solid State Drive	Drive Weight	75 Grams	
	Capacity	128 GB	
	Height	0.276 in (7 mm)	
	Width	2.76 in (70 mm)	
	Interface	SATA Gen 2	
	Performance	Maximum Sequential Read	Maximum Sequential Write
		250 MB/s	140 MB/s
	Logical Blocks	250,069,680	
	Operating Temperature	32° to 158°F (0° to 70°C) [case temp]	
	Features	ATA Security; ATA-7; SATA 2.6; DIPM; TRIM	

Technical Specifications

256 GB mSATA Solid State Drive	Drive Weight	Up to 10 Grams		
	Capacity	128 GB		
	Height	Up to 0.191 in (Up to 4.85 mm)		
	Width	1.18 in (29.85 mm)		
	Interface	SATA 3 (6 Gb/s)		
	Performance	Maximum Sequential Read	Up to 490 MB/s	Maximum Sequential Write Up to 250 MB/s
		Logical Blocks	500,118,192	
	Operating Temperature	32° to 158°F (0° to 70°C) [case temp]		
	Features	ATA Security; ATA-8, SATA 3.0; DIPM; TRIM		

NETWORKING/COMMUNICATIONS

Intel® 82579LM Gigabit Network Connection	Ethernet Features	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 8023. Clauses 40) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable) IEEE 802.3az EEE(Energy Efficient Ethernet) Jumbo Frame 9K Auto MDI/MDIX Crossover cable detection
	Power Management	ACPI compliant - multiple power modes Energy Detect Low Power Mode(Green Ethernet)
	Performance Features	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload(ARP & NS) Large send offload and Giant send offload Receiving Side Scaling MACSec Offload (802.3ae) Intel vPro iSCSI Boot
	Manageability	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status

Technical Specifications

HP un2430 EV-DO/HSPA Mobile Broadband Module

Interface	PCI Express 1.1 x1 to fully support ASPM L0s/L1 and CLKREQ. NOTE: Intel 82579 PCIe interface is not PCIe compliant. It operates at half of PCIe specification V1.1 (2.5GT/S) speed.
NIC Device Driver Name	Intel 82579LM/82579V Ethernet Network Connection
Technology/Operating Bands	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), AWS (UTRA FDD Band IV), 900MHz(UTRA FDD Band VIII), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
Wireless Protocol Standards	GSM/GPRS/EDGE: Class A, Multi-slot class 10 operation, coding schemes CS1 - CS4 and MSC1 - MSC9. UMTS/WCDMA: Release 99 and Release 6 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-856, IS-2000
Wireless Parametric Standards	Meets or exceeds TIA/EIA IS-98-D
Maximum Data Rates	UMTS (HSPA) - 14.4 Mbps (Download), 5.76Mbps (Upload) CDMA (EVDO Release A) - 3.1 Mbps (Download), 1.8Mbps (Upload)
GPS	Standalone GPS enabled gpsOneXTRATM™
GPS Bands	L1 - 1575.42 MHz
Maximum Output Power	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+0.7/-2.3) CDMA: 24dBm (+0.7/-2)
Maximum Power Consumption	2750mA (peak); 1100mA (average)
Power Consumption, Idle Not Connected	20 mA
Power Management	USB selective suspend Integrated notebook wireless button
Antenna Type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
Form Factor	PCI-Express MiniCard, USB 2.0 interface
Weight	11.5 g
Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
Voltage, Operating	3.3v +/- 10%
Temperature, Operating (from TIA/EIA/IS-98-D)	-22° to 158° F (-30° to 70° C) (full RF performance) -22° to 167° F (-30° to 75° C) (reduced RF performance)
Temperature, Non-operating, 96 hours (from MIL-STD 202 Method 108)	-40° to 185° F (-40° to 85° C)
Humidity, Non-operating	95% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)

Technical Specifications

	Configuration Utilities	HP Connection Manager
	LED Activity	LED Off - Radio Off; Solid LED On - Radio On
HP hs2350 HSPA+ Mobile Broadband Module	Technology/Operating Bands	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 900MHz(UTRA FDD Band VIII), 850 MHz (UTRA FDD Band V)
	Wireless Protocol Standards	GSM/GPRS/EDGE: Class B, Multi-slot class 10 operation, coding schemes CS1 - CS4 and MSC1 - MSC9. UMTS/WCDMA: Release 99 and Release 7 Advanced Receiver Type 3i
	Wireless Parametric Standards	Complies with 3GPP specifications
	Maximum Data Rates	UMTS (HSPA) - 21 Mbps (Download), 5.76Mbps (Upload)
	GPS	Standalone, A-GPS (Internet- and Network assisted)
	GPS Bands	1575.42 MHz (± 1.023 MHz)
	Maximum Output Power	GSM/EDGE GSM850 & GSM900 bands GPRS: +33 dBm ± 2 dBm (class 4) EGPRS: +27 dBm ± 3 dBm (class E2) DCS1800 & PCS1900 bands GPRS: +30 dBm ± 2 dBm (class 1) EGPRS: +26 dBm +4 / -3 dBm (class E2)
	Maximum Power Consumption	UMTS UTRA FDD Bands +24 dBm +4 / -3 dBm (class 3) 2000mA (peak); 600mA (average)
	Power Consumption, Sleep Mode	5 mA
	Power Management	USB selective suspend Integrated notebook wireless button
	Antenna Type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
	Form Factor	PCI-Express MiniCard, USB 2.0 interface
	Weight	< 12 g
	Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
	Voltage, Operating	3.3v +/- 9%
	Temperature, Operating	14° to 149° F (-10° to 65° C) (full RF performance) 14° to 167° F (-10° to 75° C) (reduced RF performance)

Technical Specifications

Temperature, Non-operating, 96 hours (from MIL-STD 202 Method 108)	-22° to 185° F (-30° to 85° C)
Humidity, Non-operating	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
Configuration Utilities	HP Connection Manager
LED Activity	LED Off - Radio Off; Solid LED On - Radio On
Intel Centrino Advanced-N Wireless LAN Standards 6205 (2x2)	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n
Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows 7, Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
Frequency Band	2.4 GHz and 5GHz
Antenna Structure	2 transmit; 2 receive (2x2)
Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security¹	Authentication: WPA and WPA2, 802.1x (EAP_TLS, TTLS, PEAP, LEAP, EAP-FAST) Authentication Protocols: PAP, CHAP, TLS, GTC, MS-CHAP, MS-CHAPv2 Encryption: 64 and 128-bit WEP, AES-CCMP, CKIP, TKIP Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between 2.4GHz band Access Points
Output Power (for CCK and OFDM) ²	17 dBm max

Technical Specifications

Power Consumption	Transmit: 2.3 Watts (max, with two spatial streams) Receive: 1 Watt (max with two spatial streams) Idle mode ³ : 35 mW (average) Radio off: 20 mW (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity⁴	54 Mbps: -76 dBm, 6 Mbps: -92 dBm
Antenna Connections	2 U.FL type connectors, 50 ohm nominal impedance
Form Factor	PCI-Express Half-MiniCard
Weight	0.0075 lb (3.4 g)
Dimensions	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)
Operating Voltage	3.3V +/- 9%
Temperature	Operating 32° to 176° F (0° to 80° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 90% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON
<ol style="list-style-type: none">1. Check latest software/driver release for updates on supported security features.2. Maximum output power may vary by country according to local regulations.3. In Power Save Polling mode and on battery power.4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.	
Intel 802.11a/b/g/n (2x2) Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n
Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
Frequency Band	2.4 GHz and 5GHz
Antenna Structure	2 transmit; 2 receive (2x2)
Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM

Technical Specifications

Security¹	Authentication: WPA and WPA2, 802.1x (EAP_TLS, TTLS, PEAP, LEAP, EAP-FAST)
	Authentication Protocols: PAP, CHAP, TLS, GTC, MS-CHAP, MS-CHAPv2
	Encryption: 64 and 128-bit WEP, AES-CCMP, CKIP, TKIP
	Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between 2.4GHz band Access Points
Output Power (for CCK and OFDM) ²	17 dBm max
Power Consumption	Transmit: 2.3 Watts (max, with two spatial streams) Receive: 1 Watt (max with two spatial streams) Idle mode ³ : 35 mW (average) Radio off: 20 mW (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity⁴	54 Mbps: -76 dBm, 6 Mbps: -92 dBm
Antenna Connections	2 U.FL type connectors, 50 ohm nominal impedance
Form Factor	PCI-Express Half-MiniCard
Weight	0.0075 lb (3.4 g)
Dimensions	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)
Operating Voltage	3.3V +/- 9%
Temperature	Operating 32° to 176° F (0° to 80° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 90% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode and on battery power.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

Technical Specifications

AUDIO/MULTIMEDIA

Audio	DTS Studio Sound (Windows OS only)	
Hardware	Implementation	IDT 92HD91 High Definition CODEC
	Function Key Volume Controls	Volume up, volume down, and mute
	Mute Buttons	Playback and Record mute buttons with LED indicator
	Full Duplex	Yes
	Microphone In	Stereo
	Headphone/Line Out	Stereo
	Integrated Microphone	Yes, dual digital microphone array when equipped with optional webcam
Audio Output Quality	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz - 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit
Integrated Stereo Speakers	Power Rating	1 Watt
	Impedance	8 Ohms

POWER

Technical Specifications

HP 45W Slim Smart AC Adapter	Dimensions (H x W x D)	9.60 x 4.95 x 2.24 cm		
	Input	90 to 265 VAC		
		Input Efficiency	87% min at 115 VAC	
		Input frequency range	47 to 63 Hz	
	Output	Input AC current	1.4 A at 90 VAC and maximum load	
		Output power	45W	
		DC output	19.5V	
		Hold-up time	5 msec at 115 VAC input	
		Output current limit	<8A, Over voltage protection- 29V max automatic shutdown	
	Connector	3 pin/grounded, mates with interchangeable cords		
	Environmental Design	Operating temperature	32° to 95° F (0° to 35° C)	
		Non-operating (storage) temperature	-4° to 121° F (-20° to 85° C)	
		Altitude	0 to 16,405 ft (0 to 5,000 m)	
Humidity		0% to 95%		
EMI and Safety Certifications	Storage Humidity	0% to 95%		
	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; Reliability - failure rate of less than 0.1% annually within the first three years of operation.			
HP 6-cell (44 WHr) Polymer Primary battery	Dimensions (H x W x L)	1.11 x 28.1 x 10.3 cm		
	Weight (max)	3.10g		
	Cells/Type	6-cell Polymer		
	Energy	Voltage	11.1V	
		Amp-hour capacity	4.0Ah	
		Watt-hour capacity	44Wh	
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)	
		Operating (Discharging)	14° to 122° F (-10° to 50° C)	
		Non-operating	-4° to 122° F (-20° to 50° C)	
	Battery Re-Charge Time	System in OFF or Standby Mode	2.5 hours	
		System ON	3-5 hours	
Fuel Gauge LED	No			
Optional Travel Battery Available	No			

ENVIRONMENTAL

Technical Specifications

Environmental Data

Eco-Label Certifications This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star®
- IT ECO declaration
- EPEAT Gold where HP registers commercial desktop products. See <http://www.epeat.net> for registration status in your country US Federal Energy Management Program (FEMP)

System Configuration The configuration used for the Energy Consumption and Declared Noise Emissions data is based on a "Typically Configured Notebook"

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	8.844 W	9.132 W	8.616 W
Sleep (Energy Star low power mode)	0.780 W	0.900 W	0.780 W
Off	0.396 W	0.480 W	0.396 W

Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	30 BTU/hr	31 BTU/hr	29 BTU/hr
Sleep	3 BTU/hr	3 BTU/hr	3 BTU/hr
Off	1 BTU/hr	2 BTU/hr	1 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.2	25
Fixed Disk (random writes)	3.1	25

System fan is usually off except when charging the battery

Batteries This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:

CR2032 (coin cell), Li-ion
6-cell high capacity Polymer battery

Additional information

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.

Technical Specifications

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 80% post consumer recycled plastic (by wt.)

This product is greater than 90.2% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - PAPER/Corrugated 340 g
 - OTHER/OTHER 1450 g
- Internal:
 - PLASTIC/Polyethylene low density 25 g
 - PLASTIC/EPE-Expanded Polyethylene 80 g
 - PLASTIC/PET 500 g
- The PAPER/Corrugated packaging material is made from 30% recycled content.
- The OTHER/OTHER packaging material is made from 30% recycled content.
- The PLASTIC/Polyethylene low density packaging material is made from 30% recycled content
- The PLASTIC/EPE-Expanded Polyethylene packaging material is made from 30% recycled content
- The PLASTIC/PET packaging material is made from 30% recycled content

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

Technical Specifications

MATERIAL USAGE

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment

(http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBT0)
- Nickel finishes that release greater than 0.5 µgrams/cm²/week, measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users.

END-OF-LIFE MANAGEMENT AND RECYCLING

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

HEWLETT-PACKARD CORPORATE ENVIRONMENTAL INFORMATION

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

Technical Specifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Options and Accessories (sold separately and availability may vary by country)

Type	Description	Part #
Memory	HP 2GB DDR3 1600 PC3-12800 SODIMM	H2P63AA#xxx
	HP 4GB DDR3 1600 PC3-12800 SODIMM	H2P64AA#xxx
	HP 8GB DDR3 1600 PC3-12800 SODIMM	H2P65AA#xxx
Cases	HP Essential Top Load Case (up to 15.6")	H2W17AA#xxx
	HP Essential Backpack (up to 15.6")	H1D24AA
	HP Essential Messenger Case (up to 17.3")	H1D25AA
	HP Deluxe 4 wheel Roller Case (up to 17.3")	XW576AA
	HP Business Nylon Backpack (up to 17.3")	BP849AA
	HP Business Nylon Case(up to 15.6")	BP848AA
	HP BP848 TAA Business Nylon Top Load (up to 15.6")	LU934AA#ABA
	HP Professional Series Designer Tote (up to 15.6")	AT889AA
	HP Professional Series Carrying Case (up to 15.6")	H4J90AA
	HP Professional Slim Top Load Case (up to 17.3")	H4J91AA
	HP Professional Series Carrying Case TSA (up to 15.6")	H4J92AA
	HP Professional Series Backpack (up to 15.6")	H4J93AA
	HP Professional Leather Case (up to 17.3")	H4J94AA
HP Business Slim Top Load (up to 14.1" x .75" thick)	H2T13AA	
Docking	HP Adjustable Dual Monitor Stand	AW664AA#xxx
	HP Adjustable Display Stand	AW663AA#xxx
	HP Display and Notebook Stand	AW662AA#xxx
	HP LCD Monitor Stand	QM196AA
	HP Dual Hinge Notebook Stand	AW661AA#xxx
	HP USB 2.0 Port Replicator	H1L07AA#xxx
	HP USB 3.0 Port Replicator	H1L08AA#xxx
	HP UltraSlim Docking Station	B9C87AA#xxx
Input/Output - Mice	HP USB Optical Travel mouse	RH304AA
	HP Wireless Mobile Mouse	H2L63AA
	HP USB Essential Keyboard/Mouse	H2S75AA
	HP 3-button USB Laser Mouse	H4B81AA
	HP X4000b Bluetooth Mouse	H3T50AA#xxx
Input/Output - Keyboard	HP Stylish Wireless KB/Mouse	H4B79AA
	HP Stylish USB KB/Mouse	H4B80AA
	HP Wireless Mini Keyboard	A3X55AA#xxx
	HP Slim BT Keyboard US	H4Q44AA#ABA

Options and Accessories (sold separately and availability may vary by country)

Input/Output - Other	HP USB Ethernet Adapter	XZ613AA#ABA
	USB Graphics Adapter	NL571AT
	USB Graphics Adapter (DBU PL)	NL571AA
	HP Executive Tablet Pen	H4E45AA
	NOTE: The HP Executive Tablet Pen does not support the hover feature, which may be required for some Microsoft Windows 8 apps. Please refer to www.hp.com/go/hpexecutivetabletpen for more information.	
Adapters	90W Slim Combo Adapter (coming soon Q2 2013)	H4A41AA#xxx
	90W w/USB Universal Adapter	H4A43AA#ABA
	90W Smart AC/Auto/Air Combo Adapter	AJ652AA#xxx
	90W Smart Auto/Truck Adapter	ED493AA
	HP Smart 65W Travel AC Adapter	AU155AA#xxx
	HP 65W Slim Adapter	AX727AA#xxx
	65W Smart AC Adapter	ED494AA#xxx
	90W Smart AC Adapter	ED495AA#xxx
	90W Slim Adapter	BT796AA#xxx
Storage - External Storage	HP Mobile USB DVDRW Non-LS	A2U57AA
Storage - SSD	HP 256GB SED Solid State Drive	H2C38AA
Platform Battery	HP OD06XL Battery	TBD
Health and Education	20 Notebook Managed Charging Cart	QL489AA#xxx
	20 Notebook Charging Cart	QL488AA#xxx
	30 Notebook Managed Charging Cart	QL490AA#xxx
	30 Notebook Charging Cart	H4F31AA#ABA
	HP Presentation Station Projector Shelf	QN034AA
	HP Presentation Station 1000	QL815AA
	HP Pocket Whiteboard (3 year warranty)	A0X37AA#xxx
Security	HP Docking Station Cable Lock	AU656AA#xxx
	HP UltraSlim Keyed Cable Lock	H4D73AA
	HP Master Keyed Docking Station Cable Lock (25 unit minimum)	AY474AA#xxx

Options and Accessories (sold separately and availability may vary by country)

Copyright © 2013 Hewlett-Packard Development Company, L.P.

2013 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Adobe® is a trademark of Adobe Systems Incorporated. Bluetooth is a trademark of its proprietor and used by Hewlett-Packard Company under license. Intel, Celeron, Core and vPro are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the U.S. and other countries. All other trademarks are the property of their respective owners. To learn more, visit www.hp.com.