




LED FLOODLIGHT

15W, 3000K

KNUCKLE MOUNT

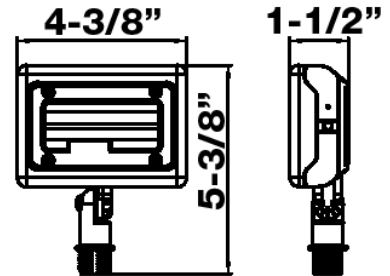

Features:

Die-Cast Aluminum Housing

Aluminum Heat Sink, Customized Fin Design
for Optimal Heat Dissipation

Heat Resistant Directed Optics



4KV Surge Protection

IP65 Outdoor Rated

Seoul 3030 LED's

| Part# | Housing Color | Wattage | Lumens | CCT | Voltage | CRI | Light Pattern | Lumens/Watt | DLC PRODUCT ID# |
|--------|---------------|---------|--------|------|---------|-----|---------------|-------------|-----------------|
| 71553A | White | 15 | 1592 | 3000 | 120-277 | 80 | 7H7V | 110 | PLCKUT3VRUTB |

PHOTOMETRY

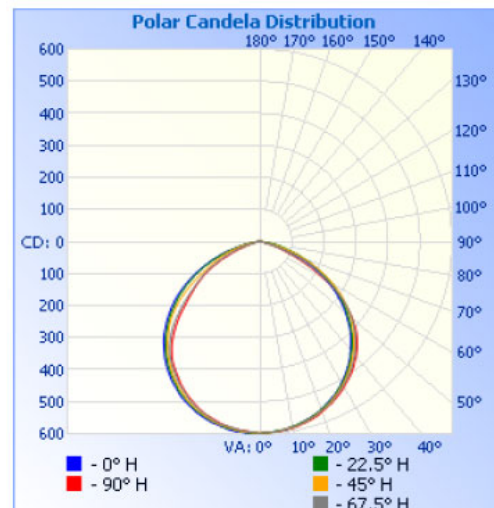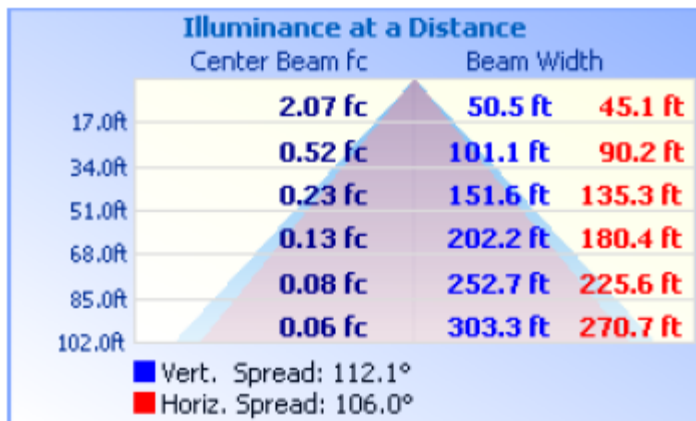



LED FLOODLIGHT

15W, 3000K

KUCKLE MOUNT

Technical Specifications:

Electrical:

Input Voltage: 120 thru 277

Current: .122A @ 120V

Frequency: 50/60Hz

Power Factor: ≥ 0.9

THD: $> 18\%$

Product Parameters:

15 Watts

Lumens: 1592

Efficacy: 110 Lumens Per Watt

50,000+ LED Life Span

CCT: 3000K (Warm White)

Chromaticity Measurements:

Beam Angle: 110°

BUG Rating: B1 U0 G0

CRI: > 80

R9: 22

DUV: -.00192

Chromaticity (x,y): $x=0.4343$; $y=0.3984$

Chromaticity (u,v): $u=0.2513$; $v=0.5187$

Component Specifications:

LED: Seoul SMD3030

Driver: 100-277V 50-60HZ

Driver Output Volts: 36V

Driver Output Amps: 320mA

Dimming: N/A

Operating Temperature:

Minimum Starting -40°F - 122°F

Construction:

Housing: Die Cast Aluminum

Powder Coated White

IP Rating: IP65

Lens Material: Polycarbonate

Mounting: Knuckle Mount Included

Listings: UL Listed

Carton Qty: 1

Weight: 1.87 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).