


### Overview



1. 2 External 5.25" Bays (shown with optional slot-load optical drive)
2. Power Button
3. HDD Activity LED
4. Front I/O: 1 USB 2.0, 2 USB 3.0, 1 Headphone, 1 Microphone, 1 1394a

### Overview

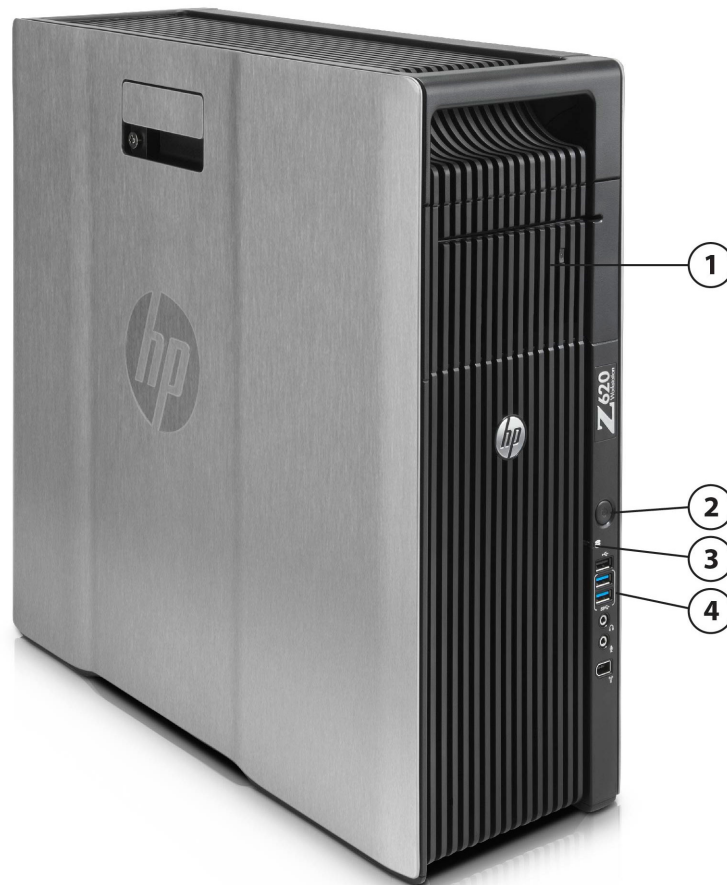

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>5. 2 External 5.25" Bays</li> <li>6. 3 Internal 3.5" Bays</li> <li>7. 12 DIMM Slots for DDR3 ECC Memory</li> <li>8. 800W, 90% Efficient Power Supply</li> <li>9. Rear I/O: Rear Power Button &amp; LED, PS/2 Ports, 1 1394a, 4 USB 2.0, 2 USB 3.0, 2 RJ-45 to Integrated GbE, 1 Audio Line In, 1 Audio Line Out, 1 Microphone</li> <li>10. Intel Xeon Processors E5-1600 family or E5-2600 family</li> </ul> | <ul style="list-style-type: none"> <li>11. 2<sup>nd</sup> CPU &amp; Memory Module</li> <li>12. 2 PCIe x16 Gen3 Slots</li> <li>13. 1 PCIe x8 Gen3, 1 PCIe x8(x4) Gen2, 1 PCIe x4(x1) Gen2, 1 PCI Slot</li> <li>14. 6 Internal USB 2.0 Ports</li> <li>15. 10 SATA Ports</li> </ul> |
|---|--|

<b>Form Factor</b>	Minitower
<b>Operating Systems</b>	Preinstalled: <ul style="list-style-type: none"> <li>• Windows 7 Ultimate 64-bit*</li> <li>• Windows 7 Professional 64-bit*</li> </ul>

### Overview

- Windows 7 Professional 32-bit\*
- Windows 8 Pro 64-bit
- Windows 8 Simplified Chinese Edition 64-bit
- Windows 8 Pro Downgrade to Windows 7 Professional 32-bit
- Windows 8 Pro Downgrade to Windows 7 Professional 64-bit
- HP Installer Kit for Linux (includes drivers for 64-bit OS versions of RHEL 5 & 6 and SUSE Linux Enterprise Desktop 11)
- Red Hat Enterprise Linux Desktop (Preinstall NOT available; 1 year paper license only)

#### Supported:

- Genuine Windows® 7 Enterprise 32/64
- SUSE Linux Enterprise Desktop 11
- Windows® XP Professional 32/64 (on select configurations)\*

Notes: \*See the "Windows XP Support Matrix for Z Workstations" at: [http://www.hp.com/support/workstation\\_manuals](http://www.hp.com/support/workstation_manuals)

Notes: For detailed OS/hardware support information for Linux, see: [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)

### Available Processors

Name	Cores	Clock Speed (GHz)	Cache (MB)	Memory Speed (MHz)	QPI Speed (GT/s)	Hyper-Threading	Featuring Intel® vPro™ Technology	Intel® Turbo Boost Technology <sup>1</sup>	TDP (W)
Intel® Xeon® E5-2690 processor	8	2.9	20	1600	8.0	Y	Y	4, 9	135
Intel Xeon E5-2680 processor	8	2.7	20	1600	8.0	Y	Y	4, 8	130
Intel Xeon E5-2670 processor	8	2.6	20	1600	8.0	Y	Y	4, 7	115
Intel Xeon E5-2667 processor	6	2.9	15	1600	8.0	Y	Y	3, 6	130
Intel Xeon E5-2665 processor	8	2.4	20	1600	8.0	Y	Y	4, 7	115
Intel Xeon E5-2660 processor	8	2.2	20	1600	8.0	Y	Y	5, 8	95
Intel Xeon E5-2650 processor	8	2.0	20	1600	8.0	Y	Y	4, 8	95
Intel Xeon E5-2643 processor	4	3.3	10	1600	8.0	Y	Y	1, 2	130
Intel Xeon E5-2640 processor	6	2.5	15	1333	7.2	Y	Y	3, 5	95
Intel Xeon E5-2630 processor	6	2.3	15	1333	7.2	Y	Y	3, 5	95
Intel Xeon E5-2620 processor	6	2.0	15	1333	7.2	Y	Y	3, 5	95
Intel Xeon E5-2609 processor	4	2.4	10	1066	6.4	N	Y	N/A	80

### Overview

Intel Xeon E5-2603 processor	4	1.8	10	1066	6.4	N	Y	N/A	80
Intel Xeon E5-2697 v2 processor	12	2.7	30	1866	8.0	Y	Y	3, 8	130
Intel Xeon E5-2695 v2 processor	12	2.4	30	1866	8.0	Y	Y	4, 8	115
Intel Xeon E5-2690 v2 processor	10	3.0	25	1866	8.0	Y	Y	3, 6	130
Intel Xeon E5-2680 v2 processor	10	2.8	25	1866	8.0	Y	Y	3, 8	115
Intel Xeon E5-2670 v2 processor	10	2.5	25	1866	8.0	Y	Y	4, 8	115
Intel Xeon E5-2667 v2 processor	8	3.3	25	1866	8.0	Y	Y	3, 7	130
Intel Xeon E5-2660 v2 processor	10	2.2	25	1866	8.0	Y	Y	4, 8	95
Intel Xeon E5-2650 v2 processor	8	2.6	20	1866	8.0	Y	Y	4, 8	95
Intel Xeon E5-2643 v2 processor	6	3.5	25	1866	8.0	Y	Y	1, 3	130
Intel Xeon E5-2640 v2 processor	8	2.0	20	1600	7.2	Y	Y	3, 5	95
Intel Xeon E5-2637 v2 processor	4	3.5	15	1866	8.0	Y	Y	1, 3	130
Intel Xeon E5-2630 v2 processor	6	2.6	15	1600	7.2	Y	Y	3, 5	80
Intel Xeon E5-2620 v2 processor	6	2.1	15	1600	7.2	Y	Y	3, 5	80
Intel Xeon E5-2609 v2 processor	4	2.5	10	1333	6.4	N	Y	N/A	80

### Overview

Intel Xeon E5-2603 v2 processor	4	1.8	10	1333	6.4	N	Y	N/A	80
Intel® Xeon® E5-1660 processor	6	3.3	15	1600	-	Y	Y	3, 6	130
Intel Xeon E5-1650 processor	6	3.2	12	1600	-	Y	Y	3, 6	130
Intel Xeon E5-1620 processor	4	3.6	10	1600	-	Y	Y	2, 3	130
Intel Xeon E5-1607 processor	4	3.0	10	1066	-	N	Y	N/A	130
Intel Xeon E5-1603 processor	4	2.8	10	1066	-	N	Y	N/A	130
Intel Xeon E5-1680 v2 processor	8	3.0	25	1866	-	Y	Y	6, 10	130
Intel Xeon E5-1660 v2 processor	6	3.7	15	1866	-	Y	Y	2, 3	130
Intel Xeon E5-1650 v2 processor	6	3.5	12	1866	-	Y	Y	1, 4	130
Intel Xeon E5-1620 v2 processor	4	3.7	10	1866	-	Y	Y	0, 2	130
Intel Xeon E5-1607 v2 processor	4	3.0	10	1600	-	N	Y	N/A	130

<sup>1</sup>The specifications shown in this column represent the following: (all core maximum turbo steps, one core maximum turbo steps). Turbo boost stepping occurs in 100MHz increments. Processors that do not have turbo functionality are denoted as N/A.

**NOTE:** Z620 systems configured with E5-1600 series processors may not add a 2nd processor. To support two processors, E5-2600 series processor must be chosen.

### Available Processor Disclaimers

When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See: [http://www.intel.com/products/processor\\_number/](http://www.intel.com/products/processor_number/) for details

Multi-Core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software for full benefits; check with software provider to determine suitability; Not all customers or software applications will necessarily benefit from use of these technologies.

64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processor will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See: <http://www.intel.com/info/em64t> for more

### Overview

<b>Additional Details</b>	<p>information.</p> <ul style="list-style-type: none"> <li>● Intel® Sandy Bridge Architecture</li> <li>● Intel® C602 Chipset</li> <li>● Intel® Xeon® processor E5-2600 product family</li> <li>● Intel® Xeon® processor E5-2600 v2 product family</li> <li>● Intel® Xeon® processor E5-1600 product family</li> <li>● Intel® Xeon® processor E5-1600 v2 product family (Sandy Bridge, Socket R)</li> <li>● Up to 8.0GT/s QPI support with two QPI links between processors</li> <li>● 4-channel per processor 1066/1333/1600/1866 MHz DDR3 memory* subsystem</li> <li>● Up to 192 GB Memory capacity with 12 DIMM slots and 16 GB DIMMs (with two processors installed)</li> <li>● PCI Express I/O and dual PCIe x16 Gen3 graphics support</li> <li>● Dual Integrated Intel Gigabit LAN on Motherboard (LOM)</li> <li>● 2 channels of Serial ATA (SATA) 6.0 Gb/s and 8 channels of SATA 3.0 Gb/s natively supported internally</li> <li>● SATA RAID 0, 1, 5, and 10 support standard on motherboard</li> <li>● SAS RAID 0, 1, and 10 supported using the LSI 9212-4i 6Gb/s controller</li> <li>● SATA optical drives</li> <li>● High Definition integrated audio with internal speaker</li> <li>● 800W 90% efficient power supply</li> <li>● ENERGY STAR® qualification and energy-saving features available on selected configurations (Not supported by Linux)</li> <li>● Protected by HP Services, including a 3 years parts, 3 years labor, and 3 years onsite service (3/3/3) standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.</li> </ul> <p>*Each processor supports up to 4 channels of DDR3 memory. To realize full performance at least 1 DIMM must be inserted into each channel. To get full 8 channel support, 2 processors MUST be installed.</p>
<b>Form Factor</b>	4U Rackable Minitower
<b>Color</b>	Brushed aluminum & black
<b>I/O Expansion Slots</b>	<p>Slot 1 (top):          PCI Express Gen2 x4(1)*          Full-height, Half-length          (not available when 2nd CPU/Memory Module is installed)</p> <p>Slot 2:          PCI Express Gen3 x16          Full-height, Full-length (with extender)</p> <p>Slot 3:          PCI Express Gen2 x8(4)* with open-ended connector**          Full-height, Full-length (with extender)</p> <p>Slot 4:          PCI Express Gen3 x8 with open-ended connector**          Full-height, Full-length (with extender)</p> <p>Slot 5:          PCI Express Gen3 x16          Full-height, Full-length (with extender)</p> <p>Slot 6:</p>

### Overview

	<p>PCI 32bit/33MHz Full-height, Full-length (with extender)</p> <p>* x&lt;number&gt; = number of lanes or size of the physical/mechanical connector. (number) = number of lanes supported electrically. Typically communicated as x# mechanical, x(#)electrical. ** open-ended connector allow a greater bandwidth (e.g. x16) card to be installed physically into a lower bandwidth connector/slot.</p>				
<b>Mass Storage Bays</b> (see Storage section for more details)	Total bays = 5				
<b>Internal Bays</b>	3 internal 3.5" bays (with acoustic dampening rail assemblies pre-installed)				
<b>External Bays</b>	2 external 5.25" bays (4th HDD occupies one external bay)				
<b>Front I/O</b>	2 USB 3.0, 1 USB 2.0, 1 Headphone, 1 Microphone, 1 IEEE 1394a				
<b>Rear I/O</b>	2 USB 3.0, 4 USB 2.0, 2 RJ-45 integrated Gigabit LAN, 2 PS/2, 1 Audio Line-In, 1 Audio Line-Out, 1 Microphone Serial supported with optional connector on PCI bracket cabled to system board connector				
<b>Internal USB</b>	6 USB 2.0				
<b>Chassis Dimensions</b> (H x W x D)	44.45 x 17.15 x 46.48 cm (17.5 x 6.75 x 18.3 in) Rack utilization: 4U				
<b>System Weight</b>	Actual weight depends upon configuration Minimum config: 15.5 kg (34.2 lb) Typical config: 17.9 kg (39.4 lb) Maximum config: 22.6 kg (49.9 lb)				
<b>Temperature</b>	<table border="1"> <tr> <td>Operating:</td> <td>5° to 35° C (40° to 95° F)</td> </tr> <tr> <td>Non-operating</td> <td>-40° to 60° C (-40° to 140° F)</td> </tr> </table>	Operating:	5° to 35° C (40° to 95° F)	Non-operating	-40° to 60° C (-40° to 140° F)
Operating:	5° to 35° C (40° to 95° F)				
Non-operating	-40° to 60° C (-40° to 140° F)				
<b>Humidity</b>	<table border="1"> <tr> <td>Operating:</td> <td>8% to 85% relative humidity, non-condensing</td> </tr> <tr> <td>Non-operating</td> <td>8% to 90% relative humidity, non-condensing</td> </tr> </table>	Operating:	8% to 85% relative humidity, non-condensing	Non-operating	8% to 90% relative humidity, non-condensing
Operating:	8% to 85% relative humidity, non-condensing				
Non-operating	8% to 90% relative humidity, non-condensing				
<b>Maximum Altitude</b> (non-pressurized)	<table border="1"> <tr> <td>Operating:</td> <td>3,048m (10,000ft)</td> </tr> <tr> <td>Non-operating</td> <td>9,144m (30,000ft)</td> </tr> </table>	Operating:	3,048m (10,000ft)	Non-operating	9,144m (30,000ft)
Operating:	3,048m (10,000ft)				
Non-operating	9,144m (30,000ft)				
<b>Power Supply</b>	Tool-free 800W 90% Efficient wide-ranging, active Power Factor Correction The Power Supply Efficiency Report for this product may be found at this link: TBD				
<b>Interfaces Supported</b>	10-channel SATA Interface (2 @ 6.0 Gb/s and 8 @ 3.0 Gb/s). 6 channels are eSATA configurable (2 @ 6 Gb/s, 4 @ 3 Gb/s) for use with eSATA CTO/AMO Kit. SAS interface supported USB 3.0, USB 2.0, IEEE 1394a interface				
<b>Hard Drive Controllers Supported</b>	SATA and SAS controllers				
<b>Backup Devices</b>	For a complete listing of compatible DAT tape drives, LTO tape drives and RDX Removable Disk Backup System offerings, please visit <a href="http://www.hp.com/go/connect">http://www.hp.com/go/connect</a>				
<b>Workstation ISV Certifications</b>	See the latest list of certifications at <a href="http://www.hp.com/united-states/campaigns/workstations/partnerships.html">http://www.hp.com/united-states/campaigns/workstations/partnerships.html</a>				

### Supported Components

#### Processors

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>Intel Xeon E5-2600 Series - CTO</b>				
Intel® Xeon® Processor E5-2603 4C 1.80GHz	Y	N		
Intel® Xeon® Processor E5-2609 4C 2.40GHz	Y	N		
Intel® Xeon® Processor E5-2620 6C 2.00GHz	Y	N		
Intel® Xeon® Processor E5-2630 6C 2.30GHz	Y	N		
Intel® Xeon® Processor E5-2640 6C 2.50GHz	Y	N		
Intel® Xeon® Processor E5-2643 4C 3.30GHz	Y	N		
Intel® Xeon® Processor E5-2650 8C 2.00GHz	Y	N		
Intel® Xeon® Processor E5-2660 8C 2.20GHz	Y	N		
Intel® Xeon® Processor E5-2665 8C 2.40GHz	Y	N		
Intel® Xeon® Processor E5-2667 6C 2.90GHz	Y	N		
Intel® Xeon® Processor E5-2670 8C 2.60GHz	Y	N		
Intel® Xeon® Processor E5-2680 8C 2.70GHz	Y	N		
Intel® Xeon® Processor E5-2690 8C 2.90GHz	Y	N		
<b>Intel Xeon E5-1600 Series</b>				
Intel® Xeon® Processor E5-1660 6C 3.30GHz	Y	N		
Intel® Xeon® Processor E5-1650 6C 3.20GHz	Y	N		
Intel® Xeon® Processor E5-1620 4C 3.60GHz	Y	N		
Intel® Xeon® Processor E5-1607 4C 3.00GHz	Y	N		
Intel® Xeon® Processor E5-1603 4C 2.80GHz	Y	N		
<b>Intel Xeon E5-2600 Series - Z620 AMO</b>				
Z620 Xeon E5-2603 4C 1.80 10MB 1066 CPU2	N	Y	A6S72AA	
Z620 Xeon E5-2609 4C 2.40 10MB 1066 CPU2	N	Y	A6S73AA	
Z620 Xeon E5-2620 6C 2.00 15MB 1333 CPU2	N	Y	A6S74AA	
Z620 Xeon E5-2630 6C 2.30 15MB 1333 CPU2	N	Y	A6S75AA	
Z620 Xeon E5-2640 6C 2.50 15MB 1333 CPU2	N	Y	A6S76AA	
Z620 Xeon E5-2643 4C 3.30 10MB 1600 CPU2	N	Y	A6S77AA	
Z620 Xeon E5-2650 8C 2.00 20MB 1600 CPU2	N	Y	A6S78AA	
Z620 Xeon E5-2660 8C 2.20 20MB 1600 CPU2	N	Y	A6S79AA	
Z620 Xeon E5-2665 8C 2.40 20MB 1600 CPU2	N	Y	A6S80AA	
Z620 Xeon E5-2667 6C 2.90 15MB 1600 CPU2	N	Y	A6S81AA	
Z620 Xeon E5-2670 8C 2.60 20MB 1600 CPU2	N	Y	A6S82AA	
Z620 Xeon E5-2680 8C 2.70 20MB 1600 CPU2	N	Y	A6S83AA	
Z620 Xeon E5-2690 8C 2.90 20MB 1600 CPU2	N	Y	A6S84AA	
<b>Intel Xeon E5-2600 v2 Series - CTO</b>				
Intel® Xeon® Processor E5-2667 v2 8C 3.30GHz	Y	N		
Intel® Xeon® Processor E5-2650 v2 8C 2.60GHz	Y	N		



### Supported Components

Intel® Xeon® Processor E5-2643 v2 6C 3.50GHz	Y	N
Intel® Xeon® Processor E5-2695 v2 12C 2.40GHz	Y	N
Intel® Xeon® Processor E5-2690 v2 10C 3.00GHz	Y	N
Intel® Xeon® Processor E5-2637 v2 4C 3.50GHz	Y	N
Intel® Xeon® Processor E5-2620 v2 6C 2.10GHz	Y	N
Intel® Xeon® Processor E5-2603 v2 4C 1.80GHz	Y	N
Intel® Xeon® Processor E5-2660 v2 10C 2.20GHz	Y	N
Intel® Xeon® Processor E5-2630 v2 6C 2.60GHz	Y	N
Intel® Xeon® Processor E5-2609 v2 4C 2.50GHz	Y	N
Intel® Xeon® Processor E5-2640 v2 8C 2.00GHz	Y	N
Intel® Xeon® Processor E5-2670 v2 10C 2.50GHz	Y	N
Intel® Xeon® Processor E5-2697 v2 12C 2.70GHz	Y	N
Intel® Xeon® Processor E5-2680 v2 10C 2.80GHz	Y	N

#### Intel Xeon E5-1600 v2 Series

Intel® Xeon® Processor E5-1607 v2 4C 3.00GHz	Y	N
Intel® Xeon® Processor E5-1620 v2 4C 3.70GHz	Y	N
Intel® Xeon® Processor E5-1680 v2 8C 3.00GHz	Y	N
Intel® Xeon® Processor E5-1660 v2 6C 3.70GHz	Y	N
Intel® Xeon® Processor E5-1650 v2 6C 3.50GHz	Y	N

#### Intel Xeon E5-2600 v2 Series - Z620 AMO

Z620 Xeon E5-2640 v2 8C 2.00 20MB 1600 CPU2	N	Y	E3E09AA
Z620 Xeon E5-2667 v2 8C 3.30 25MB 1866 CPU2	N	Y	E3E13AA
Z620 Xeon E5-2630 v2 6C 2.60 15MB 1600 CPU2	N	Y	E3E07AA
Z620 Xeon E5-2650 v2 8C 2.60 20MB 1866 CPU2	N	Y	E3E11AA
Z620 Xeon E5-2620 v2 6C 2.10 15MB 1600 CPU2	N	Y	E3E06AA
Z620 Xeon E5-2603 v2 4C 1.80 10MB 1333 CPU2	N	Y	E3E04AA
Z620 Xeon E5-2690 v2 10C 3.00 25MB 1866 CPU2	N	Y	E3E16AA
Z620 Xeon E5-2637 v2 4C 3.50 15MB 1866 CPU2	N	Y	E3E08AA
Z620 Xeon E5-2697 v2 12C 2.70 30MB 1866 CPU2	N	Y	E3E18AA
Z620 Xeon E5-2609 v2 4C 2.50 10MB 1333 CPU2	N	Y	E3E05AA
Z620 Xeon E5-2670 v2 10C 2.50 25MB 1866 CPU2	N	Y	E3E14AA
Z620 Xeon E5-2660 v2 10C 2.20 25MB 1866 CPU2	N	Y	E3E12AA
Z620 Xeon E5-2695 v2 12C 2.40 30MB 1866 CPU2	N	Y	E3E17AA
Z620 Xeon E5-2643 v2 6C 3.50 25MB 1866 CPU2	N	Y	E3E10AA
Z620 Xeon E5-2680 v2 10C 2.80 25MB 1866 CPU2	N	Y	E3E15AA

**NOTE 1:** When ordering two processors, the second processor must be the same as the first. Intel processor numbers are not a measurement of higher performance. Processor numbers differentiate features within each processor family, not across different processor families. See: [http://www.intel.com/products/processor\\_number/](http://www.intel.com/products/processor_number/) for details.

Multi-Core technologies are designed to improve performance of multithreaded software products and hardware-aware multitasking operating systems and may require appropriate operating system software

### Supported Components

for full benefits; check with software provider to determine suitability; Not all customers or software applications will necessarily benefit from use of these technologies.

64-bit computing on Intel® 64 architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processor will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See: <http://www.intel.com/info/em64t> for more information.

Intel's numbering is not a measurement of higher performance.

Z620 processor AMO kits include:

- 2nd CPU/Memory Module (riser)
- processor
- heat sink

#### SAS Hard Drives

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations</b>				
HP 300GB SAS 10K SFF HDD	Y	Y	A2Z20AA	
HP 600GB SAS 10K SFF HDD	Y	Y	A2Z21AA	
HP 900GB SAS 10K SFF HDD	Y	Y	E2P03AA	
300GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	LU967AA	
450GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	LU968AA	
600GB SAS 15K rpm 6Gb/s 3.5" HDD	Y	Y	VM647AA	
HP 900GB SAS 10K SFF HDD	Y	Y	E2P03AA	
HP 1.2TB SAS 10K SFF HDD	Y	Y	E2P04AA	

#### Sub-Section Description/Notes

**NOTE:** SAS Controller add-in card required

#### SATA Hard Drives

##### SATA (Serial ATA) Hard Drives for HP Workstations

250GB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	LQ034AA	
500GB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	LQ036AA	
500GB SATA 7.2K SED SFF HDD	Y	Y	D8N29AA	
1TB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	LQ037AA	
2.0TB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	QB576AA	
3.0TB SATA 7200 rpm 6Gb/s 3.5" HDD	Y	Y	QF298AA	
250GB SATA 10K rpm SFF HDD	Y	Y	B8X18AA	
500GB SATA 10K rpm SFF HDD	Y	Y	B8X19AA	
1TB SATA 10K rpm SFF HDD	Y	Y	B8X20AA	

#### SATA Solid State Drives

##### HP Solid State Drives (SSDs) for Workstations

HP 128GB SATA 6Gb/s SSD	Y	Y	A3D25AA	
HP 256GB SATA 6Gb/s SSD	Y	Y	A3D26AA	
HP 256GB SATA 6Gb/s SED SSD	Y	Y	D8N28AA	

### Supported Components

HP 512GB SATA 6Gb/s SSD	Y	N	D8F30AA
Seagate 600 Pro 240GB SATA SSD	Y	Y	E9Q51AA
Seagate 600 Pro 480GB SATA SSD	Y	Y	E9Q52AA

For hard drives, 1 GB = 1 billion bytes; TB = 1 trillion bytes. Actual formatted capacity is less. Up to 12 GB of hard drive (or system disk) is reserved for the system recovery software (XP and XP Pro). Up to 3 GB of system disk is reserved for system recovery software (Vista).

Up to 4 drives are allowed. The 4th drive will occupy one of the external 5.25" bays.

### Hard Drive Controllers

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
<b>Integrated SATA 6.0 Gb/s Controller</b>				
Integrated SATA 6.0 Gb/s Controller	Y	N		Two ports
<b>Integrated SATA 3.0 Gb/s Controller</b>				
Integrated SATA 3.0 Gb/s Controller	Y	N		Eight ports
<b>Factory integrated RAID on motherboard for SATA drives</b>				
RAID 0 Configuration - Striped Array	Y	N		See note 1
RAID 1 Configuration - Mirrored Array	Y	N		See note 1
RAID 10 Configuration - Striped/Mirrored Array	Y	N		See note 1
RAID 0 Data Configuration -- Boot/OS Drive + 2 Drive Striped Array	Y	N		See note 1
<b>LSI 9212 4-Port SAS 6Gb/s RAID Card</b>				
LSI 9212 4-Port SAS 6Gb/s RAID Card	Y	Y	XP310AA	
<b>LSI 9217-4i4e 8-port SAS 6Gb/s RAID Card</b>				
LSI 9217-4i4e 8-port SAS 6Gb/s RAID Card	Y	Y	E0X20AA	
<b>LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card and iBBU08 Battery Backup Unit</b>				
LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card	N	Y	WE465AA	
Optional: LSI iBBU08 Battery Backup Unit for LSI 9260-8i	N	Y	LA783AA	

RAID arrays greater than 2 TB are fully supported.

**NOTE 1:** Requires 2 identical hard drives (speeds, capacity, interface). RAID 1 does not support a 3rd HDD.

**NOTE:** Specific user-configured hardware SAS RAID configurations are supported on this system with Linux. For details, please visit: [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)

SATA hardware RAID is supported on Linux systems that have support for the Intel RSTe technology. The Linux kernel, with built-in software RAID, provides excellent functionality and performance. It is a good alternative to hardware-based RAID. Please visit [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix) for RAID capabilities with Linux.

**NOTE:** Specific user-configured hardware SAS RAID configurations are supported on this Linux system. IS: Striping of 2 or more HDDs into a single logical volume

IM: Mirroring of 2 HDDs into a single logical volume

### Supported Components

IME: Mirroring of 3 or more HDDs into a single logical volume  
 For details, please visit: [http://www.hp.com/support/linux\\_hardware\\_matrix](http://www.hp.com/support/linux_hardware_matrix)

#### Graphics

	Factory		Option Kit	Support Notes	Supported	
	Configured	Option Kit	Part Number		# of cards	Mixed?
<b>Professional 2D</b>						
NVIDIA NVS 300 512MB Graphics	Y	Y	XP612AA		4	No
NVIDIA NVS 310 512MB Graphics	Y	Y	A7U59AA		4	Yes
NVIDIA NVS 315 1GB Graphics	Y	Y	E1U66AA		4	No
NVIDIA NVS 510 2GB Graphics	Y	Y	C2J98AA	Note 1	2	Yes

#### Graphics Cable Adapters

	Factory		Option Kit	Support Notes	Supported	
	Configured	Option Kit	Part Number		# of cards	Mixed?
HP DisplayPort To DVI-D Adapter (4-Pack)	Y	N			1	
HP DisplayPort To VGA Adapter 2nd	Y	N			1	
HP DisplayPort To DVI-D Adapter (6-Pack)	Y	N			1	
HP DisplayPort To DVI-D Adapter (2-Pack)	Y	N			1	
HP DisplayPort to Dual Link DVI Adapter	Y	Y	NR078AA		1	
HP DisplayPort To VGA Adapter	Y	Y	AS615AA		1	
HP DisplayPort To DVI-D Adapter	Y	Y	FH973AA		1	

#### Entry 3D

NVIDIA Quadro 410 512MB Graphics	Y	Y	A7U60AA		2	No
NVIDIA Quadro K600 1GB Graphics	Y	Y	C2J92AA		2	No
AMD FirePro V3900 1GB Graphics	Y	Y	A6R69AA		2	No

#### Mid-range 3D

NVIDIA Quadro K2000 2GB Graphics	Y	Y	C2J93AA		2	No
----------------------------------	---	---	---------	--	---	----

#### High End 3D

NVIDIA Quadro K4000 3GB Graphics	Y	Y	C2J94AA		2	No
NVIDIA Quadro K5000 4GB Graphics	Y	Y	C2J95AA		2	No
AMD FirePro W7000 4GB Graphics	Y	Y	C2K00AA		2	No
NVIDIA Quadro 6000 6GB Graphics	Y	Y	WS097AA		1	No

**NOTE 1:** If 1st card is NVS 510, 2nd card must be NVS 510 or NVS 310.

### Supported Components

#### High Performance GPU Computing

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
NVIDIA Tesla C2075 Compute Processor	Y	Y	QB035AA	See note 1
NVIDIA Tesla K20c Compute Processor	Y	Y	C2J97AA	See note 2

**NOTE 1:** Tesla C2075 does not have an operational graphics output and is only supported in combination with NVIDIA Quadro 410 1st graphics.

**NOTE2:** Tesla K20 is supported in combination with NVIDIA Quadro K600/K2000/K4000 1st graphics. Not supported with Win7 32-bit OS.

#### Memory

#### CTO

#### Option Kit Part Number

#### Support Notes

##### DDR3-1600 ECC Unbuffered DIMMs - CTO

2GB DDR3-1600 ECC Unbuffered RAM

4GB DDR3-1600 ECC Unbuffered RAM

##### DDR3-1600 ECC Registered DIMMs - CTO

4GB DDR3-1600 ECC Registered RAM

8GB DDR3-1600 ECC Registered RAM

16GB DDR3-1600 ECC Registered RAM

##### DDR3-1866 ECC Unbuffered DIMMs - CTO

2GB DDR3-1866 ECC Unbuffered RAM

4GB DDR3-1866 ECC Unbuffered RAM

##### DDR3-1866 ECC Registered DIMMs - CTO

4GB DDR3-1866 ECC Registered RAM

8GB DDR3-1866 ECC Registered RAM

16GB DDR3-1866 ECC Registered RAM

#### Sub-Section Description/Notes

The Z620 has a four-channel memory architecture. Four channels are associated with each processor. For optimal performance, populate a DIMM in each channel.

With single-processor configurations, 8 DIMM slots are available. Four additional DIMM slots are available with the 2nd CPU & Memory Module.

#### AMO

##### DDR3-1600 ECC Registered DIMMs - AMO

4GB DDR3-1600 ECC Registered RAM

A2Z49AA

8GB DDR3-1600 ECC Registered RAM

A2Z51AA

16GB DDR3-1600 ECC Registered RAM

A2Z52AA

##### DDR3-1600 ECC Unbuffered DIMMs - AMO

HP 2GB (1x2GB) DDR3-1600 ECC RAM

A2Z47AA

HP 4GB (1x4GB) DDR3-1600 ECC RAM

A2Z48AA

##### DDR3-1866 ECC Unbuffered DIMMs - AMO

HP 2GB (1x2GB) DDR3-1866 ECC RAM

E2Q90AA

### Supported Components

HP 4GB (1x4GB) DDR3-1866 ECC RAM	E2Q91AA
<b>DDR3-1866 ECC Registered DIMMs - AMO</b>	
HP 4GB (1x4GB) DDR3-1866 ECC Reg RAM	E2Q92AA
HP 8GB (1x8GB) DDR3-1866 ECC Reg RAM	E2Q94AA
HP 16GB (1x16GB) DDR3-1866 ECC Reg RAM	E2Q95AA

**NOTE:** Although all of these memory selections incorporate 1600MHz memory modules, the speed at which they operate is dependent upon the processor.

### Multimedia and Audio Devices

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Creative Recon3D PCIe Audio Card	Y	Y	BOU68AA	
Integrated Intel/Realtek HD ALC262 Audio	Y	N		
HP Thin USB Powered Speakers	Y	Y	KK912AA	

### Optical and Removable Storage

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP 16X DVD-ROM SATA Drive (non-Lightscribe version)	Y	Y	AR629AA	See note 1
HP 16X DVD+/-RW SuperMulti SATA Drive (non-Lightscribe)	Y	Y	QS208AA	
HP Slot Load DVD+/-RW Drive	Y	N		
HP Blu-ray Writer	Y	Y	AR482AA	See note 2
<b>HP DX115 Removable Drive Enclosure</b>				
HP DX115 Carrier with 160GB SATA HDD	N	Y	FZ577AA	
HP DX115 Removable HDD Frame/Carrier	N	Y	FZ576AA	
HP DX115 Removable HDD Carrier	N	Y	NB792AA	

Actual speeds may vary. Does not permit copying of commercially available DVD movies or other copyright protected materials. Intended for creation and storage of your original material and other lawful uses. Double Layer discs can store more data than single layer discs. However, double-layer discs burned with this drive may not be compatible with many existing single-layer DVD drives and players.

As Blu-ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.

**NOTE 1:** Not supported as a 2nd Optical Drive.

**NOTE 2:** Cannot be ordered in combination with another Blu-ray Writer.

### Supported Components

#### Controller Cards

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP IEEE 1394b FireWire PCIe Card	Y	Y	NK653AA	
HP Thunderbolt-2 PCIe 1-port I/O Card*	Y	Y	F3F43AA	Available early 2014

\* Connect in a flash with 4X USB 3.0 bandwidth on an optional high-performance Thunderbolt™ 2.0 port.

Thunderbolt is new technology. Thunderbolt cable and Thunderbolt device (sold separately) must be compatible with Windows. To determine whether your device is Thunderbolt Certified for Windows, see <https://thunderbolttechnology.net/products>.

Thunderbolt™ 2.0 is planned to be available via an optional add-in card in early 2014.

#### Networking and Communications

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Integrated Intel 82579LM PCIe GbE Controller	Y	N		See note 2
Broadcom NetXtreme Gigabit Ethernet Plus NIC (PCIe)	Y	Y	FS215AA	See notes 1 and 2
Intel Gigabit CT Desktop NIC	N	Y	FH969AA	See note 2
HP X520 10GbE Dual Port Adapter	Y	Y	C3N52AA	See note 2
HP 10GbE SFP+ SR Transceiver	Y	Y	C3N53AA	See note 2
HP 361T PCIe Dual Port Gigabit NIC	N	Y	C3N37AA	See note 2
Intel Ethernet I210-T1 PCIe NIC	Y	Y	E0X95AA	See note 2

**NOTE 1:** This is a PCI Express card based on the Broadcom 5761 chip. This card does not support DASH 1.1 manageability on this platform.

**NOTE 2:** "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/sec. For high speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

#### Racking and Physical Security

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
Security Cable with Kensington Lock	N	Y	PC766A	
HP (CMT) Solenoid Lock	N	Y	DE618A	
HP Solenoid Hood Lock & Hood Sensor	Y	N		
HP Z6/Z8 Adjustable Sliding Rail Rack Kit	N	Y	NN124AA	

### Supported Components

#### Input Devices

	<b>Factory Configured</b>	<b>Option Kit</b>	<b>Option Kit Part Number</b>	<b>Support Notes</b>
HP PS/2 Standard Keyboard	Y	Y	DT527A	
HP USB Standard Keyboard	Y	Y	DT528A	
HP PS/2 Optical Scroll Mouse	Y	Y	EY703AA	
HP USB 2-Button Optical Scroll Mouse	Y	Y	DC172B	
HP USB Optical 3-Button Mouse	Y	Y	DY651A	
HP USB Smart Card Keyboard	Y	Y	ED707AA	
HP 2.4GHz Wireless Keyboard & Mouse	N	Y	NB896AA	
HP USB Optical 3-Button 2.9M OEM Mouse	N	Y	ET424AA	
HP SpaceExplorer 3D USB Controller	N	Y	RY429AA	
HP SpacePilot 3D USB Intelligent Controller	N	Y	EF390AA	
HP PS/2 Keyboard	Y	Y	QY774AA	
HP PS/2 Mouse	Y	Y	QY775AA	
HP USB Keyboard	Y	Y	QY776AA	
HP USB Optical Mouse	Y	Y	QY777AA	
HP USB 1000dpi Laser Mouse	Y	Y	QY778AA	

Product numbers QY774AA-QY778AA represent the new 2012 products with the updated product design. The previous models will be phased out over time.

#### Other Hardware

	<b>Factory Configured</b>	<b>Option Kit</b>	<b>Option Kit Part Number</b>	<b>Support Notes</b>
HP Workstation Mouse Pad	Y	N		Japan only.
HP Power Cord Kit	N	Y	DM293A	
HP eSATA PCI Cable Kit	N	Y	GM110AA	
HP Serial Port Adapter	N	Y	PA716A	
HP Internal USB Port Kit	N	Y	EM165AA	
HP Optical Bay HDD Mounting Bracket	Y	Y	NQ099AA	For 3.5" HDDs
HP Energy Star Enabled Configuration	Y	N		



### Supported Components

#### Software

	Factory Configured	Option Kit	Option Kit Part Number	Support Notes
HP Performance Advisor	Y	Y		See note 1
HP Remote Graphics Software (RGS) 6.0	Y	N		See note 2
HP ProtectTools Security	Y	N		See note 3
HP Power Assistant	Y	N		Win7 only
PDF Complete - Trial Edition	Y	N		
Cyberlink Media Suite & PowerDVD	Y	N		Media playback and authoring software
MS Office Home & Business 2013	Y	N		See note 3

**NOTE 1:** Available as a free download here: [www.hp.com/go/performanceadvisor](http://www.hp.com/go/performanceadvisor)

**NOTE 2:** Supports both 32 and 64 bit versions of Windows 7 Professional and Enterprise, Windows XP Professional and Enterprise, and RHEL V6

**NOTE 3:** Must select as a Configure to Order option. Delivered as a "Drop in the Box" CD. Not Supported with Windows 7 Ultimate. Not Supported with Linux.

#### Operating Systems

#### Support Notes

Genuine Windows® 7 Ultimate 64-bit See note 1

Genuine Windows® 7 Professional 64-bit See note 1

Genuine Windows® 7 Professional 32-bit See note 1

HP Linux Installer Kit

Red Hat Enterprise Linux (RHEL) Workstation - Paper License (1yr) See note 2

Windows 8 Pro 64-bit

Windows 8 Simplified Chinese Edition 64-bit

Windows 8 Pro Downgrade to Windows 7 Professional 32-bit

Windows 8 Pro Downgrade to Windows 7 Professional 64-bit

**NOTE 1:** See <http://www.microsoft.com/windows/windows-7/> for support details.

**NOTE 2:** This second OS must be ordered with the HP Linux Intaller Kit as the first OS.

### System Technical Specifications

<b>System Board</b>	
<b>System Board Form Factor</b>	Main System Board: 24 x 31 cm 9.6 x 12.2 inches 2nd CPU/Memory Board (optional): 14.9 x 29.2 cm 5.85 x 11.50 inches
<b>Processor Socket</b>	LGA2011 1st CPU on system board 2nd CPU on optional 2nd CPU/Memory Module
<b>CPU Bus Speed</b>	QPI: Up to 8.0GT/second, depending on processor
<b>Chipset</b>	Intel C602 Chipset
<b>Super I/O Controller</b>	Nuvoton NPCD379H (SIO-12)
<b>Memory Expansion Slots</b>	8 on system board(CPU0) + 4 on optional 2nd CPU/Memory Module (CPU1)
<b>Memory Type Supported</b>	DDR3, UDIMM (Unbuffered), ECC: 2GB and 4GB DDR3, RDIMM (Registered), ECC: 4GB, 8GB, and 16GB
<b>Memory Modes</b>	NUMA (Non-Uniform Memory Architecture), Memory Node Interleave
<b>Memory Speed Supported</b>	1066, 1333, & 1600MHz

### System Technical Specifications

		Single Processor							
		CPU0 Front Slots				CPU0 Rear Slots			
Capacity (GB)	Type	DIMM 1	DIMM 2	DIMM 3	DIMM 4	DIMM 5	DIMM 6	DIMM 7	DIMM 8
2	UDIMM	2GB							
4	UDIMM	2GB							2GB
6	UDIMM	2GB		2GB					2GB
8	UDIMM	2GB		2GB			2GB		2GB
12	UDIMM	2GB	2GB	2GB			2GB	2GB	2GB
16	UDIMM	2GB	2GB	2GB	2GB	2GB	2GB	2GB	2GB
16	UDIMM	4GB		4GB			4GB		4GB
16	RDIMM	4GB		4GB			4GB		4GB
24	UDIMM	4GB	2GB	4GB	2GB	2GB	4GB	2GB	4GB
32	UDIMM	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB
32	RDIMM	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB
32	RDIMM	8GB		8GB			8GB		8GB
48	RDIMM	8GB	4GB	8GB	4GB	4GB	8GB	4GB	8GB
64	RDIMM	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB
<i>Slot Load Order</i>		1	5	3	7	8	4	6	2

### System Technical Specifications

		Dual Processor											
		CPU0 Front Slots				CPU0 Rear Slots				CPU1 Front Slots		CPU1 Rear Slots	
Capacity (GB)	Type	DIMM 1	DIMM 2	DIMM 3	DIMM 4	DIMM 5	DIMM 6	DIMM 7	DIMM 8	DIMM 1	DIMM 2	DIMM 3	DIMM 4
4	UDIMM	2GB								2GB			
8	UDIMM	2GB							2GB	2GB			2GB
12	UDIMM	2GB		2GB					2GB	2GB	2GB		2GB
16	UDIMM	2GB		2GB			2GB		2GB	2GB	2GB	2GB	2GB
20	UDIMM	2GB	2GB	2GB			2GB	2GB	2GB	2GB	2GB	2GB	2GB
24	UDIMM	2GB	2GB	2GB	2GB	2GB	2GB	2GB	2GB	2GB	2GB	2GB	2GB
32	UDIMM	4GB		4GB			4GB		4GB	4GB	4GB	4GB	4GB
32	RDIMM	4GB		4GB			4GB		4GB	4GB	4GB	4GB	4GB
48	UDIMM	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB	4GB
48	RDIMM	8GB		4GB			4GB		8GB	8GB	4GB	4GB	8GB
64	RDIMM	8GB		8GB			8GB		8GB	8GB	8GB	8GB	8GB
80	RDIMM	8GB	4GB	8GB	4GB	4GB	8GB	4GB	8GB	8GB	8GB	8GB	8GB
96	RDIMM	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB	8GB
Slot Load Order		1	9	5	11	12	7	10	3	2	6	8	4

**NOTE:** CPU0 is located on the main system board. CPU1 (optional) is located on an add-in riser card.

<b>Maximum Memory</b>	Supports up to 192GB with two processors and (12) 16 GB DIMMs
<b>Memory Configuration (Supported)</b>	<ul style="list-style-type: none"> <li>Not all memory configurations possible are represented above.</li> <li>Only ECC DIMMs are supported.</li> <li>Do not install memory modules into memory slots if corresponding processor is not installed.</li> <li>Dual processor configurations with memory modules installed for only one processor is not supported.</li> <li>UDIMM (Unbuffered) and RDIMM (Registered) memory cannot be mixed. All memory installed in the system must be either UDIMM or RDIMM.</li> </ul>
<b>PCI Express Connectors</b>	<p>Slot 1 (top): PCI Express Gen2 x4(1)* Full-height, Half-length (not available when 2nd CPU/Memory Module is installed)</p> <p>Slot 2: PCI Express Gen3 x16 Full-height, Full-length (with extender)</p> <p>Slot 3: PCI Express Gen2 x8(4)* with open-ended connector**</p>

### System Technical Specifications

	<p>Full-height, Full-length (with extender)</p> <p>Slot 4: PCI Express Gen3 x8 with open-ended connector** Full-height, Full-length (with extender)</p> <p>Slot 5: PCI Express Gen3 x16 Full-height, Full-length (with extender)</p> <p>* x&lt;number&gt; = number of lanes or size of the physical/mechanical connector. (number) = number of lanes supported electrically. Typically communicated as x# mechanical, x(#)electrical. ** open-ended connector allow a greater bandwidth (e.g. x16) card to be installed physically into a lower bandwidth connector/slot.</p>	
<b>PCI Connectors (5.0V)</b>	<p>Slot 6: PCI 32bit/33MHz Full-height, Full-length (with extender)</p>	
<b>Supported Drive Interfaces</b>	<b>SATA</b>	Integrated 10-channel SATA interface (2@6Gb/s, 8@3Gb/s). Supports RAID 0, 1, 5, 10 and NCQ. Factory integrated RAID is Microsoft Windows only.
	<b>Serial Attached SCSI</b>	Requires Optional PCIe card
<b>Integrated RAID</b>	<ul style="list-style-type: none"> <li>● Integrated SATA RAID</li> <li>● RAID 0, RAID 1*, RAID 5, RAID 10</li> <li>● Supports one RAID array with 2-4 drives</li> <li>● RAID 0 configuration - striped array (supported and configure to order)</li> <li>● RAID 1 configuration - mirrored array (supported and configure to order)</li> <li>● RAID 5 parity striping (supported but not configure to order)</li> <li>● RAID 10 striped and mirrored array</li> </ul> <p>*HW RAID functionality not supported by Linux. Use SW RAID functionality provided in the Red Hat Operating system instead.</p>	
<b>Integrated Graphics</b>	No	
<b>Network Controller</b>	<ul style="list-style-type: none"> <li>● Integrated Intel 82579 and 82574 Controllers.</li> <li>● Memory Integrated 48KB receive buffer and 8KB transmit buffer</li> <li>● Data rates supported 10/100/1000 Mb/s</li> <li>● Compliance IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control</li> <li>● Bus architecture PCIe 1.0a</li> <li>● Data path width X1</li> <li>● Data path speed 2.5Gbit per sec per direction transfer rate</li> <li>● Data transfer mode Bus-master DMA</li> <li>● Power requirement 1.0 watts @ +3.3V AUX supply</li> <li>● Boot ROM support Yes</li> <li>● Network transfer rate 10BASE-T (half-duplex) 10 Mb/s</li> <li>● 10BASE-T (full-duplex) 20 Mb/s</li> <li>● 100BASE-TX (half-duplex) 100 Mb/s</li> <li>● 100BASE-TX (full-duplex) 200 Mb/s</li> <li>● 1000BASE-T (full-duplex) 2000 Mb/s</li> <li>● Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP Professional 32 and 64</li> </ul>	

### System Technical Specifications

	<ul style="list-style-type: none"> <li>Management capabilities AMT/vPro Technology</li> </ul>	
<b>SATA Connectors</b>	10 ports/connectors (6 ports may be cabled to optional eSATA cable kits [2 ports per cable kit])	
<b>IEEE 1394a or 1394b</b>	1394a is integrated 1394b is optional with PCIe card Cable from Front IO can be plugged into PCIe Card. Not supported in Linux	
<b>IEEE 1394 Connector(s)</b>	<b>Front</b>	1 - 1394a
	<b>Rear</b>	1 - 1394a
	<b>Internal</b>	No
<b>USB Connector(s)</b>	<b>Front</b>	1 - USB 2.0 2 - USB 3.0
	<b>Rear</b>	4 - USB 2.0 2 - USB 3.0
	<b>Internal</b>	6 - USB 2.0 (3x 2x5 headers)  Provides connection for optional HP Internal USB Port Kits and Media Card Reader
<b>HD Integrated Audio</b>	Realtek ALC262	
<b>Flash ROM</b>	Yes	
<b>CPU Fan Header</b>	One for each CPU socket	
<b>Chassis Fan Header</b>	Rear System Chassis Fan Header Front System Chassis Fan Header	
<b>CMOS Battery Holder – Lithium</b>	Yes	
<b>Integrated Trusted Platform Module</b>	TPM 1.2, Infineon	
<b>Power Supply Headers</b>	Yes	
<b>Power Switch, Power LED &amp; Hard Drive LED Header</b>	Yes (includes speaker and intrusion sensor signals)	
<b>Clear Password Jumper</b>	Yes	
<b>Serial Port</b>	Optional	
<b>Parallel Port</b>	No	
<b>Keyboard/Mouse</b>	PS/2	

### System Technical Specifications

<b>Z620 Required Power Supply Info</b>	
<b>Power Supply</b>	800W 90% Efficient, Custom PSU (Wide Ranging, Active PFC)
<b>Operating Voltage Range</b>	90–269 VAC
<b>Rated Voltage Range</b>	100–240 V      118 V
<b>Rated Line Frequency</b>	50–60 Hz      400 Hz
<b>Operating Line Frequency Range</b>	47–66 Hz      393–407 Hz
<b>Rated Input Current</b>	9.7 A @ 100–240 V      9.7 A @ 400 V
<b>Heat Dissipation (Configuration and software dependent)</b>	Typical = 1972 btu/hr (497 kcal/hr) Maximum = 3139 btu/hr (791 kcal/hr)
<b>Power Supply Fan</b>	92x25 mm variable speed
<b>ENERGY STAR Qualified (Configuration dependent)</b>	Yes
<b>80 PLUS® Compliant</b>	Yes, 90% Efficient  The Z620 800W power supply efficiency report can be found at this link: <a href="#">S10-800P1A</a>
<b>FEMP Standby Power Compliant @115V (&lt;2W in S5 - Power Off)</b>	Yes
<b>EuP Compliant @ 230V (&lt;0.5 W in S5 - Power Off)</b>	Yes
<b>CECP Compliant @ 220V (&lt;4W in S3 - Suspend to RAM)</b>	Yes; Configuration dependent
<b>Power Consumption in sleep mode (as defined by ENERGY STAR) - Suspend to RAM (S3) (Instantly Available PC)</b>	<15W
<b>Built-in Self Test LED</b>	Yes
<b>Surge Tolerant Full Ranging Power Supply (withstands power surges up to 2000V)</b>	Yes
<b>Access Panel Solenoid Lock Header</b> Yes	
<b>Access Panel Intrusion Sensor Header</b> Yes Integrated in Front User Interface (Power Switch, Power LED, HDD LED, Speaker) Cable	
<b>Multibay Header</b> No	
<b>Integrated Gigabit Ethernet</b> Integrated Intel 82579 and 82574 Controllers	
<b>Wake on LAN</b> Yes	
<b>ASF 1.0/2.0</b> (Alert Standard Format) No	
<b>TPM</b> Integrated TPM 1.2; Infineon	
<b>Password Clear Header</b> Yes	
<b>AUX IN</b> (audio) No	
<b>Clear CMOS Button</b> Yes	
<b>Memory Fan Header</b> CPU0 Memory Fan Header; CPU1 Memory Fan Header	

### System Technical Specifications

#### System Configuration

<b>Example Configuration #1 (ENERGY STAR QUALIFIED)</b>	Processor Info	1x Intel Xeon E5-2650 (Eight-Core)					
	Memory Info	4x 2GB DDR3 1600 (UDIMM)					
	Graphics Info	1x NVIDIA Quadro 600					
	Disks/Optical/Floppy	1x 250GB SATA 7200/1x 16X DVD-ROM SATA					
	Power Supply	800W 90% Custom PSU					
	Other	1x NVIDIA Tesla C2075					
<b>Energy Consumption</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	111 W		110 W		111 W	
	Windows Busy Typ (S0)	287 W		276 W		286 W	
	Windows Busy Max (S0)	396 W		390 W		398 W	
	Sleep (S3)	4.25 W	4.10 W	4.43 W	4.31 W	4.25 W	4.11 W
	Off (S5)	1.81 W	1.62 W	2.07 W	1.89 W	1.79 W	1.61 W
	Zero Power Mode (ErP)	0.25 W		0.45 W		0.23 W	
<b>Heat Dissipation**</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	379 btu/hr		375 btu/hr		379 btu/hr	
	Windows Busy Typ (S0)	979 btu/hr		942 btu/hr		976 btu/hr	
	Windows Busy Max (S0)	1351 btu/hr		1331 btu/hr		1358 btu/hr	
	Sleep (S3)	14.5 btu/hr	14.0 btu/hr	15.1 btu/hr	14.7 btu/hr	14.5 btu/hr	14.0 btu/hr
	Off (S5)	6.18 btu/hr	5.53 btu/hr	7.06 btu/hr	6.45 btu/hr	6.11 btu/hr	5.49 btu/hr
	Zero Power Mode (ErP)	0.85 btu/hr		1.54 btu/hr		0.78 btu/hr	

<b>Example Configuration #2 (ENERGY STAR QUALIFIED)</b>	Processor Info	1x Intel Xeon E5-2643 (Four-Core)					
	Memory Info	4x 4GB DDR3 1600 (UDIMM)					
	Graphics Info	1x NVIDIA NVS 300					
	Disks/Optical/Floppy	2x 500GB SATA 7200/1x 16X DVD-ROM SATA					
	Power Supply	800W 90% Custom PSU					
	Other	-					
<b>Energy Consumption</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	66.8 W		66.3 W		66.9 W	
	Windows Busy Typ (S0)	170 W		169 W		171 W	
	Windows Busy Max (S0)	193 W		190 W		193 W	
	Sleep (S3)	4.43 W	4.31 W	4.62 W	4.51 W	4.43 W	4.33 W
	Off (S5)	1.81 W	1.38 W	2.07 W	1.64 W	1.78 W	1.36 W
	Zero Power Mode (ErP)	0.24 W		0.45 W		0.23 W	
<b>Heat Dissipation**</b>		115 VAC		230 VAC		100 VAC	
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
	Windows Idle (S0)	228 btu/hr		226 btu/hr		228 btu/hr	
	Windows Busy Typ (S0)	580 btu/hr		577 btu/hr		583 btu/hr	
	Windows Busy Max (S0)	659 btu/hr		648 btu/hr		659 btu/hr	
	Sleep (S3)	15.1 btu/hr	14.7 btu/hr	15.8 btu/hr	15.4 btu/hr	15.1 btu/hr	14.8 btu/hr
	Off (S5)	6.18 btu/hr	4.71 btu/hr	7.06 btu/hr	5.60 btu/hr	6.07 btu/hr	4.64 btu/hr



### System Technical Specifications

	Zero Power Mode (ErP)	0.82 btu/hr	1.54 btu/hr	0.78 btu/hr
--	-----------------------	-------------	-------------	-------------

<b>Example Configuration #3 (ENERGY STAR QUALIFIED)</b>	Processor Info	2x Intel Xeon E5-2690 (Eight-Core)						
	Memory Info	8x 8GB DDR3 1600 (RDIMM)						
	Graphics Info	1x NVIDIA Quadro 2000						
	Disks/Optical/Floppy	2x 250GB SATA 7200/1x 16X DVD+-RW SuperMulti SATA						
	Power Supply	800W 90% Custom PSU						
	Other	-						
	<b>Energy Consumption</b>		115 VAC		230 VAC		100 VAC	
			LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)		121 W		120 W		122 W		
Windows Busy Typ (S0)		506 W		494 W		518 W		
Windows Busy Max (S0)		541 W		531 W		544 W		
Sleep (S3)		7.75 W	7.57 W	7.84 W	7.67 W	7.82 W	7.62 W	
Off (S5)		1.97 W	1.57 W	2.18 W	1.82 W	1.96 W	1.55 W	
Zero Power Mode (ErP)		0.24 W		0.44 W		0.23 W		
<b>Heat Dissipation**</b>		115 VAC		230 VAC		100 VAC		
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	
	Windows Idle (S0)	413 btu/hr		409 btu/hr		416 btu/hr		
	Windows Busy Typ (S0)	1727 btu/hr		1686 btu/hr		1767 btu/hr		
	Windows Busy Max (S0)	1846 btu/hr		1812 btu/hr		1856 btu/hr		
	Sleep (S3)	26.4 btu/hr	25.8 btu/hr	26.8 btu/hr	26.2 btu/hr	26.7 btu/hr	26.0 btu/hr	
	Off (S5)	6.72 btu/hr	5.36 btu/hr	7.44 btu/hr	6.21 btu/hr	6.69 btu/hr	5.29 btu/hr	
	Zero Power Mode (ErP)	0.82 btu/hr		1.50 btu/hr		0.78 btu/hr		

<b>Example Configuration #4</b>	Processor Info	2x Intel Xeon E5-2620 (Six-Core)						
	Memory Info	12x 4GB DDR3 1600 (UDIMM)						
	Graphics Info	2x NVIDIA Quadro 5000						
	Disks/Optical/Floppy	4x 600GB SAS 15K/1x 16X DVD+-RW SuperMulti SATA						
	Power Supply	800W 90% Custom PSU						
	Other	LSI 9212 SAS Card						
	<b>Energy Consumption</b>		115 VAC		230 VAC		100 VAC	
			LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled
Windows Idle (S0)		216 W		213 W		217 W		
Windows Busy Typ (S0)		525 W		485 W		512 W		
Windows Busy Max (S0)		644 W		631 W		647 W		
Sleep (S3)		9.27 W	8.81 W	9.36 W	8.91 W	9.31 W	8.89 W	
Off (S5)		1.85 W	1.43 W	2.12 W	1.68 W	1.83 W	1.41 W	
Zero Power Mode (ErP)		0.25 W		0.45 W		0.23 W		
<b>Heat Dissipation**</b>		115 VAC		230 VAC		100 VAC		
		LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	LAN Enabled	LAN Disabled	
	Windows Idle (S0)	737 btu/hr		727 btu/hr		740 btu/hr		
	Windows Busy Typ (S0)	1791 btu/hr		1655 btu/hr		1747 btu/hr		
	Windows Busy Max (S0)	2197 btu/hr		2153 btu/hr		2208 btu/hr		
	Sleep (S3)	31.6 btu/hr	30.1 btu/hr	31.9 btu/hr	30.4 btu/hr	31.8 btu/hr	30.3 btu/hr	
	Off (S5)	6.31 btu/hr	4.88 btu/hr	7.23 btu/hr	5.73 btu/hr	6.24 btu/hr	4.81 btu/hr	

### System Technical Specifications

	Zero Power Mode (ErP)	0.85 btu/hr	1.54 btu/hr	0.78 btu/hr
--	-----------------------	-------------	-------------	-------------

#### Declared Noise Emissions (Entry-level and High-end configurations)

<b>System Configuration (Entry level)</b>	<b>Processor Info</b>	Single Intel Xeon E5-2640 2.50 GHz
	<b>Memory Info</b>	4 - 2 GB DDR3 1333 MHz UDIMM
	<b>Graphics Info</b>	NVIDIA Q400
	<b>Disks/Optical/Floppy</b>	Single 1 TB 7200 RPM SATA DVD ROM

<b>Declared Noise Emissions</b> (in accordance with ISO 7779 and ISO 9296)		<b>Sound Power (LWAd, bels)</b>	<b>Deskside Sound Pressure (LpAm, decibels)</b>
	<b>Idle</b>	3.3	16
	<b>Hard drive Operating</b> (random reads)	3.9	22
	<b>DVD-ROM Operating</b> (sequential reads)	5.1	39

<b>System Configuration (High-end)</b>	<b>Processor Info</b>	Dual Xeon E5-2690 2.90 GHz
	<b>Memory Info</b>	12 - 4GB DDR3 1600 MHz UDIMM
	<b>Graphics Info</b>	NVIDIA Q4000
	<b>Disks/Optical/Floppy</b>	Dual 600 GB 15K RPM SAS 3.5" DVD ROM

<b>Declared Noise Emissions</b> (in accordance with ISO 7779 and ISO 9296)		<b>Sound Power (LWAd, bels)</b>	<b>Deskside Sound Pressure (LpAm, decibels)</b>
	<b>Idle</b>	4.4	29
	<b>Hard drive Operating</b> (random reads)	4.8	32
	<b>DVD-ROM Operating</b> (sequential reads)	5.1	36

### System Technical Specifications

<b>Environmental Requirements</b>	<b>Temperature</b>	Operating: 5°C to 35°C (40°F to 95°F) Non-operating: -40°C to 60°C (-40°F to 140°F)
	<b>Humidity</b>	Operating: 8% to 85% RH, non-condensing Non-operating: 8% to 90% RH, non-condensing
	<b>Maximum Altitude</b>	Operating: 3,048 m (10,000 ft) Non-operating: 9,144 m (30,000 ft)
	<b>Dynamic (new)</b>	Shock Operating: ½-sine: 40 g, 2-3ms (~62 cm/sec) Non-operating: ½-sine: 160 cm/s, 2-3ms (~105 g) square: 20 g, 422 cm/s <b>NOTE:</b> Values represent individual shock events and do not indicate repetitive shock events.  Vibration Operating random: 0.5 g (rms), 5-300 Hz, up to 0.0025 g <sup>2</sup> /Hz Non-operating random: 2.0 g (rms), 5-500 Hz, up to 0.0150 g <sup>2</sup> /Hz <b>NOTE:</b> Values do not indicate continuous vibration.
	<b>Cooling</b>	Above 1524m (5,000 ft) altitude, maximum operating temperature is de-rated by 1°C (1.8°F) per 305m (1,000 ft) elevation increase

### Physical Security and Serviceability

<b>Access Panel</b>	Tool-less Includes system board and memory information
<b>Optical Drive</b>	Tool-less, no carrier or rails required
<b>Hard Drives</b>	Tool-less  Integrated blind-mate drive carriers  Optional 5.25" external bay carriers
<b>Expansion Cards</b>	Tool-less
<b>Processor Socket</b>	1st socket on main system board. 2nd socket on optional 2nd CPU/Memory Module.
<b>Green User Touch Points</b>	Yes, on primary serviceable components
<b>Color-coordinated Cables and Connectors</b>	Yes
<b>Memory</b>	Tool-less
<b>System Board</b>	Tool-less 2nd CPU/Memory Module: Tool-less
<b>Dual Color Power and HD LED on Front of Computer</b>	Yes
<b>Configuration Record SW</b>	Yes
<b>Over-Temp Warning on Screen</b>	Yes, at POST screen on reboot.
<b>Restore CD/DVD Set</b>	Yes, restores the computer to its original factory shipping image - Can be obtained via HP Support.

### System Technical Specifications

<b>Dual Function Front Power Switch</b>	Yes, also acts as a reset switch when held for 4 seconds.
<b>Padlock Support</b>	No
<b>Cable Lock Support</b>	Yes, Kensington Cable Lock (optional): Prevents entire system theft only. 3mm x 7mm slot at rear of system
<b>Universal Chassis Clamp Lock Support</b>	No
<b>Solenoid Lock and Hood Sensor</b>	Access Panel Solenoid Lock: Yes (optional). Activated remotely to prevent system entry. Access Panel Intrusion Sensor: Yes (optional).
<b>Rear Port Control Cover</b>	No
<b>Removable Media Write/Boot Control</b>	Yes, user can prevent the workstation from writing to or booting from removable media.
<b>Power-On Password</b>	Yes, prevents an unauthorized person from booting up the computer.
<b>Setup Password</b>	Yes, prevents an unauthorized person from changing the system configuration.
<b>3.3V Aux Power LED on System PCA</b>	No
<b>NIC LEDs (integrated) (Green &amp; Amber)</b>	Yes
<b>CPUs and Heatsinks</b>	CPU heatsink removal requires a T-15 Torx or flat blade screwdriver. CPU removal is tool-less.
<b>Power Supply Diagnostic LED</b>	Yes
<b>Front Power Button</b>	Yes
<b>Rear Power Button</b>	Yes
<b>Front Power LED</b>	Yes, blue (normal), red (fault)
<b>Front Hard Drive Activity LED</b>	Yes, green
<b>Front ODD Activity LED</b>	Yes
<b>Internal Speaker</b>	Yes
<b>System/Emergency ROM Flash Recovery</b>	Recovers corrupted system BIOS
<b>Cooling Solutions</b>	Air cooled forced convection
<b>Power Supply Fans</b>	1 - 92mm
<b>CPU Heatsink Fan</b>	1st CPU: 1 - 92mm Optional 2nd CPU: 1 - 92mm
<b>Memory Heatsink Fan</b>	System Board Memory: rear bank: 1 - 60mm, front bank: 1 - 40mm Optional 2nd CPU/Memory Module: rear bank: 1 - 80mm.
<b>HP Vision Diagnostics Offline Edition</b>	<p>HP Vision Diagnostics Offline Edition</p> <p>The diagnostics utility enables you to perform testing and to view critical computer hardware and software configuration information from various sources. This utility enables you to:</p> <ul style="list-style-type: none"> <li>• Run diagnostics</li> <li>• View the hardware configuration of the system</li> </ul>

### System Technical Specifications

	<p>Key features and benefits</p> <p>HP Vision Diagnostics simplifies the process of effectively identifying, diagnosing, and isolating the hardware issues. In addition to robust management tools, service tools can be invaluable in quickly resolving system problems. To streamline the service process and resolve problems quickly, it is necessary to have the right information available at the time that a service call is placed. The primary information requirement, which is also the one that provides the greatest Vision into potential system issues, is the configuration of the system. Vision diagnostics helps provide higher system availability. Typical uses of the Vision Diagnostics are:</p> <ul style="list-style-type: none"> <li>• Testing and diagnosing apparent hardware failures</li> <li>• Documenting system configurations for upgrade planning, standardization, inventory tracking, disaster recovery, and maintenance</li> <li>• Sending configuration information to another location for more in-depth analysis</li> </ul>
<b>Access Panel Key Lock</b>	Yes, prevents removal of the access panel and all internal components including devices installed in the external 5.25" bays.
<b>ACPI-Ready Hardware</b>	Advanced Configuration and Power Management Interface (ACPI). <ul style="list-style-type: none"> <li>• Allows the system to wake from a low power mode</li> <li>• Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system</li> </ul>
<b>Trusted Platform Module Chip with optional ProtectTools Software</b>	Yes, Infineon SLB9635TT1.2
<b>Integrated Chassis Handles</b>	Yes
<b>Power Supply</b>	Tool-less. Includes integrated handle.
<b>PCI Card Retention</b>	Yes, tool-less Rear (all) Middle (full-height cards) Front (full-length cards with extender)
<b>Flash ROM</b>	SPI ROM
<b>Diagnostic Power Switch LED on board</b>	Yes
<b>Clear Password Jumper</b>	Yes
<b>Clear CMOS Button</b>	Yes
<b>CMOS Battery Holder</b>	Yes
<b>DIMM Connectors</b>	Yes
<b>HP ProtectTools Security Manager</b>	Yes - Not supported on Linux

<b>BIOS</b>	
<b>BIOS 32-bit Services</b>	Standard BIOS 32-Bit Service Directory Proposal v0.4
<b>PCI 3.0 Support</b>	Full BIOS support for PCI Express through industry standard interfaces
<b>ATAPI</b>	ATAPI Removable Media Device BIOS Specification Version 1.0

### System Technical Specifications

<b>BBS</b>	BIOS Boot Specification v1.01
<b>WMI Support</b>	WMI is Microsoft's implementation of Web-Based Enterprise Management (WBEM) for Windows. WMI is fully compliant with the Distributed Management Task Force (DMTF) Common Information Model (CIM) and WBEM specifications.
<b>BIOS Boot Spec 1.01+</b>	Provides more control over how and from what devices the workstation will boot
<b>BIOS Power On</b>	Users can define a specific date and time for the system to power on
<b>ROM Based Computer Setup Utility (F10)</b>	Review and customize system configuration settings controlled by the BIOS
<b>System/Emergency ROM Flash Recovery with Video</b>	Recovers system BIOS in corrupted Flash ROM
<b>Replicated Setup</b>	Saves BIOS settings to diskette or USB flash device in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering Computer Configuration Utility (F10 Setup).
<b>SMBIOS</b>	System Management BIOS 2.7 for system management information
<b>Boot Control</b>	Disables the ability to boot from removable media on supported devices
<b>Memory Change Alert</b>	Alerts management console if memory is removed or changed
<b>Thermal Alert</b>	Monitors the temperature state within the chassis. Three modes: <ul style="list-style-type: none"> <li>● NORMAL - normal temperature ranges.</li> <li>● ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown.</li> <li>● SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs.</li> </ul>
<b>Remote ROM Flash</b>	Provides secure, fail-safe ROM image management from a central network console
<b>ACPI (Advanced Configuration and Power Management Interface)</b>	Allows the system to enter and resume from low power modes (sleep states). Enables an operating system to control system power consumption based on the dynamic workload. Makes it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system. Supports ACPI 2.0 for full compatibility with 64-bit operating systems.
<b>Ownership Tag</b>	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen
<b>Remote Wakeup/Remote Shutdown</b>	System administrators can power on, restart, and power off a client computer from a remote location
<b>Instantly Available PC (Suspend to RAM - ACPI sleep state S3)</b>	Allows for very low power consumption with quick resume time
<b>Remote System Installation via F12 (PXE 2.1) (Remote Boot from Server)</b>	Allows a new or existing system to boot over the network and download software, including the operating system
<b>ROM revision levels</b>	Reports the system BIOS revision level in Computer Configuration Utility (F10 Setup). Version is available through an industry standard interface (SMBIOS) so that management SW applications can use and report this information.
<b>System board revision level</b>	Allows management SW to read revision level of the system board Revision level is digitally encoded into the HW and cannot be modified

### System Technical Specifications

<b>Start-up Diagnostics (Power-on Self-Test)</b>	Assesses system health at boot time with selectable levels of testing
<b>Auto Setup when new hardware installed</b>	System automatically detects the addition of new hardware
<b>Keyboard-less Operation</b>	The system can be booted without a keyboard
<b>Localized ROM Setup</b>	Common BIOS image supports System Configuration Utility (F10 Setup) menus in 12 languages with local keyboard mappings
<b>Asset Tag</b>	Allows the user or MIS to set a unique tag string in non-volatile memor
<b>Per-slot Control</b>	Allows I/O slot parameters (option ROM enable/disable, bus latency) to be configured individually
<b>Adaptive Cooling</b>	Fan control parameters are set according to detected hardware configuration for optimal acoustics
<b>Pre-boot Diagnostics</b>	Early (pre-video) critical errors are reported via beeps and blinks on the power LED
<b>Industry Standard Specification Support</b>	
<b>UEFI Specification Revision</b>	2.3.1
<b>Industry Standard</b>	Revision Supported by the BIOS
<b>ACPI</b>	Advanced Configuration and Power Management Interface, Version 2.0
<b>ATA (IDE)</b>	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
<b>CD Boot</b>	"El Torito" Bootable CD-ROM Format Specification Version 1.0
<b>EDD</b>	<ul style="list-style-type: none"> <li>Enhanced Disk Drive Specification Version 1.1</li> <li>BIOS Enhanced Disk Drive Specification Version 3.0</li> </ul>
<b>EHCI</b>	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
<b>PCI</b>	<ul style="list-style-type: none"> <li>PCI Local Bus Specification, Revision 2.3</li> <li>PCI Power Management Specification, Revision 1.1</li> <li>PCI Firmware Specification, Revision 3.0, Draft 0.7</li> </ul>
<b>PCI Express</b>	PCI Express Base Specification, Revision 2.0 PCI Express Base Specification, Revision 3.0
<b>PMM</b>	POST Memory Manager Specification, Version 1.01
<b>SATA</b>	<ul style="list-style-type: none"> <li>Serial ATA Specification, Revision 1.0a</li> <li>Serial ATA 3 Gb/s: Serial ATA Specification, Revision 2.5</li> <li>Serial ATA 6 Gb/s: Serial ATA Specification, Revision 3.0</li> </ul>
<b>SPD</b>	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2
<b>TPM</b>	Trusted Computing Group TPM Specification Version 1.2
<b>UHCI</b>	Universal Host Controller Interface Design Guide, Revision 1.1
<b>USB</b>	Universal Serial Bus Revision 1.1 Specification  Universal Serial Bus Revision 2.0 Specification  Universal Serial Bus Revision 3.0 Specification
<b>SMBIOS</b>	System Management BIOS Reference Specification, Version 2.7

### Social and Environmental Responsibility

### System Technical Specifications

<b>Eco-Label Certifications &amp; Declarations</b>	<p>This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:</p> <ul style="list-style-type: none"> <li>● ENERGY STAR® (energy-saving features available on selected configurations-Windows only)</li> <li>● US Federal Energy Management Program (FEMP)</li> <li>● China Energy Conservation Program</li> <li>● IT ECO declaration</li> </ul>
<b>Batteries</b>	<p>The battery in this product complies with EU Directive 2006/66/EC          Battery size: CR2032 (coin cell)          Battery type: Lithium Metal</p> <p>The battery in this product does not contain:</p> <ul style="list-style-type: none"> <li>● Mercury greater than 5ppm by weight</li> <li>● Cadmium greater than 10ppm by weight</li> <li>● Lead greater than 40ppm by weight</li> </ul>
<b>Restricted Material Usage</b>	<p>This product meets the material restrictions specified in HP's General Specification for the Environment. <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf">http://www.hp.com/hpinfo/globalcitizenship/environment/pdf/gse.pdf</a>          Hewlett-Packard is committed to compliance with all applicable environmental laws and regulations, including the European Union Restriction of Hazardous Substances (RoHS) Directive. HP's goal is to exceed compliance obligations by meeting the requirements of the RoHS Directive on a worldwide basis.</p>
<b>Low Halogen Statement</b>	<p>This product is low halogen except for power cords, cables and peripherals, as well as the following customer-configurable internal components: 3 ½" SAS HDDs, LSI 9260-8i SAS 6Gb/s ROC RAID Card, Creative Recon3D PCIe Audio Card, Liquid Cooling Solution and Broadcom 5761 Gigabit PCIe NIC are not Low Halogen. Service parts obtained after purchase may not be Low Halogen.</p>
<b>End-of-Life Management and Recycling</b>	<p>Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <a href="http://www.hp.com/recycle">http://www.hp.com/recycle</a> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner. This product is greater than 90% recyclable by weight when properly disposed of at end of life.</p>
<b>Hewlett-Packard Corporate Environmental Information</b>	<p>For more information about HP's commitment to the environment:</p> <p>Global Citizenship Report: <a href="http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html">http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html</a></p> <p>Eco-label certifications: <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html">http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html</a></p> <p>ISO 14001 certificates: <a href="http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html">http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html</a></p>
<b>Additional Information</b>	<ul style="list-style-type: none"> <li>● This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.</li> <li>● Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.</li> <li>● This product is &gt;90% recycle-able when properly disposed of at end of life.</li> <li>● EPEAT Gold - ENERGY STAR qualified configurations of this product are in compliance with the IEEE 1680 (EPEAT) standard at the Gold level where HP registers workstation products. See <a href="http://ww2.epeat.net/CompanyDetail.aspx?CompanyID=24">http://ww2.epeat.net/CompanyDetail.aspx?CompanyID=24</a> for registration status in your country.</li> </ul>
<b>Packaging</b>	<p>HP Workstation product packaging meets the HP General Specification for the Environment at <a href="http://www.hp.com/hpinfo/globalcitizenship/society/gen_specifications.html">http://www.hp.com/hpinfo/globalcitizenship/society/gen_specifications.html</a></p> <ul style="list-style-type: none"> <li>● Does not contain restricted substances listed in HP Standard 011-1 General Specification for the Environment</li> <li>● Does not contain ozone-depleting substances (ODS)</li> </ul>



### System Technical Specifications

	<ul style="list-style-type: none"> <li>• Does not contain heavy metals (lead, mercury, cadmium or hexavalent chromium) in excess of 100 ppm sum total for all heavy metals listed</li> <li>• Maximizes the use of post-consumer recycled content materials in packaging materials</li> <li>• All packaging material is recyclable</li> <li>• All packaging material is designed for ease of disassembly</li> <li>• Reduced size and weight of packages to improve transportation fuel efficiency</li> <li>• Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards formatting</li> </ul>
<b>Packaging Materials</b>	
<b>Internal</b>	Cushions and plastic bags made of low density polyethylene (LDPE).
<b>External</b>	Outer carton, accessories carton, and insert made of corrugated paper board.

### Manageability

<b>Industry Standard Specifications</b>	<p>This product meets the following industry standard specifications for manageability functionality:</p> <ul style="list-style-type: none"> <li>• DASH 1.1 required functionalities via Intel LAN on motherboard</li> </ul>
<b>Intel Active Management Technology (AMT)</b>	<p>Intel Active Management Technology (AMT) 7.0</p> <p>An advanced set of remote management features and functionality providing IT administrators the latest and most effective tools to remotely discover, heal, and protect networked client systems regardless of the system's health or power state. AMT 7.0 includes the following advanced management functions:</p> <ul style="list-style-type: none"> <li>• Power Management (on, off, reset)</li> <li>• Hardware Inventory (includes BIOS and firmware revisions)</li> <li>• Hardware Alerting</li> <li>• Agent Presence</li> <li>• System Defense Filters</li> <li>• SOL/IDER</li> <li>• Cisco NAC/SDN Support</li> <li>• ME Wake-on-LAN</li> <li>• DASH 1.1 compliance</li> <li>• IPv6 Support</li> <li>• Fast Call for Help - a client inside or outside the firewall may initiate a call for help via BIOS screen, periodic connections, or alert triggered connection</li> <li>• Remote Scheduled Maintenance - pre-schedule when the system connects to the IT or service provider console for maintenance.</li> <li>• Remote Alerts - automatically alert IT or service provider if issues arise</li> <li>• Access Monitor - Provides oversight into Intel® AMT actions to support security requirements</li> <li>• PC Alarm Clock</li> <li>• Microsoft NAP Support</li> <li>• Host Base set-up and configuration</li> <li>• Management Engine (ME) firmware roll back</li> </ul>
<b>Intel® vPro™ Technology</b>	<p>The HP Z620 Workstation supports Intel vPro technology when configured as outlined below:</p> <ul style="list-style-type: none"> <li>• Intel Xeon processor E5-1600 product family or E5-2600 product family featuring Intel vPro Technology</li> <li>• Intel C602 chipset</li> <li>• Intel 82579LM GbE LAN</li> </ul>
<b>Remote Manageability Software Solutions</b>	<p>The HP Z620 Workstation is supported on the following remote manageability software consoles:</p> <ul style="list-style-type: none"> <li>• LANDesk Management Suite (HP recommended solution)</li> </ul>

### System Technical Specifications

	<ul style="list-style-type: none"> <li>• Microsoft System Center Configuration Manager</li> <li>• HP Client Automation Enterprise</li> </ul> <p>For questions or support for manageability needs, please visit <a href="http://www.hp.com/go/easydeploy">http://www.hp.com/go/easydeploy</a></p>
<b>System Software Manager</b>	<p>For questions or support for SSM, please visit: <a href="http://www.hp.com/go/ssm">http://www.hp.com/go/ssm</a></p>
<b>Service, Support, and Warranty</b>	<p>On-site Warranty and Service (<b>Note 1</b>): Three-years, limited warranty and service offering delivers on-site, next business-day (<b>Note 2</b>) service for parts and labor and includes free telephone support (<b>Note 3</b>) 8am - 5pm. Global coverage (<b>Note 2</b>) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.</p> <p><b>NOTE 1:</b> Terms and conditions may vary by country. Certain restrictions and exclusions apply.</p> <p><b>NOTE 2:</b> On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.</p> <p><b>NOTE 3:</b> Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24x7 support service may not be available in some countries. HP Care Pack Services extend service contracts beyond the standard warranties. Service starts from date of hardware purchase. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <a href="http://www.hp.com/go/lookuptool">http://www.hp.com/go/lookuptool</a>. Additional HP Care Pack Services information by product is available at: <a href="http://www.hp.com/hps/carepack">http://www.hp.com/hps/carepack</a>. Service levels and response times for HP Care Packs may vary depending on your geographic location.</p>
<b>Product Change Notification</b>	<ul style="list-style-type: none"> <li>• Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile.</li> <li>• PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition.</li> <li>• Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support.</li> </ul>

### Stable & Consistent Offerings

As part of its commitment to hardware, software, and solution innovation, HP is proud to introduce this breakthrough platform configuration stability to HP Workstation customers. HP Stable & Consistent Offerings are built on the foundation of a carefully chosen set of hardware and software designed and tested to work with all HP Z Workstation platforms through their end of life. These components and their corresponding HP Workstation platform compatibility are outlined in this section.

HP Stable & Consistent Offerings are available worldwide to all HP Workstation customers-no special programs, no additional cost-no kidding. Simply select your hardware and software components when you customize your HP Workstation and be assured that you'll be able to buy that same configuration throughout the lifecycle of the product.

<b>Processors</b>	<b>Product #</b>	<b>Offering</b>
	A2A06AV	Intel Xeon E5-2620 2 15M 1333 6C 1 CPU
	A2A19AV	Intel Xeon E5-2620 2 15M 1333 6C 2 CPU
	A2A09AV	Intel Xeon E5-2643 3.3 10M 1600 4C 1 CPU
	A2A22AV	Intel Xeon E5-2643 3.3 10M 1600 4C 2 CPU

---

<b>Hard Drives</b>	<b>Product #</b>	<b>Offering</b>
	QG001AV	500GB 7200 RPM SATA 1st HDD
	QG011AV	500GB 7200 RPM SATA 2nd HDD
	QG021AV	500GB 7200 RPM SATA 3rd HDD
	QG031AV	500GB 7200 RPM SATA 4th HDD
	QG002AV	1TB 7200 RPM SATA 1st HDD
	QG012AV	1TB 7200 RPM SATA 2nd HDD
	QG022AV	1TB 7200 RPM SATA 3rd HDD
	QG032AV	1TB 7200 RPM SATA 4th HDD

---

<b>Graphics</b>	<b>Product #</b>	<b>Offering</b>
	A7U49AV	NVIDIA NVS 310 512MB GFX
	A7U50AV	NVIDIA NVS 310 512MB 2nd GFX
	A7U51AV	NVIDIA NVS 310 512MB 3rd GFX
	A7U52AV	NVIDIA NVS 310 512MB 4th GFX

---

<b>Memory</b>	<b>Product #</b>	<b>Offering</b>
		Any configuration with 2GB DDR3-1600 ECC Unbuffered DIMMs
		Any configuration with 4GB DDR3-1600 ECC Unbuffered DIMMs
		Any configuration with 4GB DDR3-1600 ECC Registered DIMMs
		Any configuration with 8GB DDR3-1600 ECC Registered DIMMs

---

<b>Optical and Removable Storage</b>	<b>Product #</b>	<b>Offering</b>
	QG049AV	16X SuperMulti DVDRW SATA 1st ODD
	QG053AV	16x SuperMulti DVDRW SATA 2nd ODD

### Stable & Consistent Offerings

---

<b>Input Devices</b>	<b>Product #</b>	<b>Offering</b>
	A8Z53AV	HP USB Keyboard (available June 2012)
	A8Z55AV	HP USB Optical Mouse (available June 2012)

---

<b>Operating Systems</b>	<b>Product #</b>	<b>Offering</b>
	LJ454AV	Windows 7 Professional 64-bit OS

### Technical Specifications - Processors

<b>Processors</b>	Intel® Xeon® Processor E5-2603 4C 1.80GHz
	Intel® Xeon® Processor E5-2609 4C 2.40GHz
	Intel® Xeon® Processor E5-2620 6C 2.00GHz
	Intel® Xeon® Processor E5-2630 6C 2.30GHz
	Intel® Xeon® Processor E5-2640 6C 2.50GHz
	Intel® Xeon® Processor E5-2643 4C 3.30GHz
	Intel® Xeon® Processor E5-2650 8C 2.00GHz
	Intel® Xeon® Processor E5-2660 8C 2.20GHz
	Intel® Xeon® Processor E5-2665 8C 2.40GHz
	Intel® Xeon® Processor E5-2667 6C 2.90GHz
	Intel® Xeon® Processor E5-2670 8C 2.60GHz
	Intel® Xeon® Processor E5-2680 8C 2.70GHz
	Intel® Xeon® Processor E5-2690 8C 2.90GHz

### Introduction

The Intel® Xeon® processor E5-1600/E5-2600/E5-4600 product families are the next generation of 64-bit, multi-core enterprise processors built on 32-nanometer process technology. Throughout this document, the Intel® Xeon® processor E5-1600/E5-2600/E5-4600 product families may be referred to as simply the processor. Where information differs between the EP and EP 4S SKUs, this document uses specific Intel® Xeon® processor E5-1600 product family, Intel® Xeon® processor E5-2600 product family, and Intel® Xeon® processor E5-4600 product family notation. Based on the low-power/high performance 2nd Generation Intel® Core™ Processor Family microarchitecture, the processor is designed for a two chip platform consisting of a processor and a Platform Controller Hub (PCH) enabling higher performance, easier validation, and improved x-y footprint. The Intel® Xeon® processor E5-1600 product family and the Intel® Xeon® processor E5-2600 product family are designed for Efficient Performance server, workstation and HPC platforms. The Intel® Xeon® processor E5-4600 product family processor supports scalable server and HPC platforms of two or more processors, including "glueless" 4-way platforms. Note: some processor features are not available on all platforms.

These processors feature per socket, two Intel® QuickPath Interconnect point-to-point links capable of up to 8.0 GT/s, up to 40 lanes of PCI Express\* 3.0 links capable of 8.0 GT/s, and 4 lanes of DMI2/PCI Express\* 2.0 interface with a peak transfer rate of 5.0 GT/s. The processor supports up to 46 bits of physical address space and 48-bit of virtual address space.

Included in this family of processors is an integrated memory controller (IMC) and integrated I/O (IIO) (such as PCI Express\* and DMI2) on a single silicon die. This single die solution is known as a monolithic processor.

### Performance and Features

- Up to 8 execution cores
- Each core supports two threads (Intel® Hyper-Threading Technology), up to 16 threads per socket
- 46-bit physical addressing and 48-bit virtual addressing
- 1 GB large page support for server applications
- A 32-KB instruction and 32-KB data first-level cache (L1) for each core
- A 256-KB shared instruction/data mid-level (L2) cache for each core
- Up to 20 MB last level cache (LLC): up

### Technical Specifications - Processors

Intel® Xeon® Processor E5-1660 6C 3.30GHz  
Intel® Xeon® Processor E5-1650 6C 3.20GHz  
Intel® Xeon® Processor E5-1620 4C 3.60GHz  
Intel® Xeon® Processor E5-1607 4C 3.00GHz  
Intel® Xeon® Processor E5-1603 4C 2.80GHz

#### Processor Note

For detailed processor specifications, please refer to the Overview section at the beginning of this document.

Z620 Xeon E5-2603 4C 1.80 10MB 1066 CPU2	A6S72AA
Z620 Xeon E5-2609 4C 2.40 10MB 1066 CPU2	A6S73AA
Z620 Xeon E5-2620 6C 2.00 15MB 1333 CPU2	A6S74AA
Z620 Xeon E5-2630 6C 2.30 15MB 1333 CPU2	A6S75AA
Z620 Xeon E5-2640 6C 2.50 15MB 1333 CPU2	A6S76AA
Z620 Xeon E5-2643 4C 3.30 10MB 1600 CPU2	A6S77AA
Z620 Xeon E5-2650 8C 2.00 20MB 1600 CPU2	A6S78AA
Z620 Xeon E5-2660 8C 2.20 20MB 1600 CPU2	A6S79AA
Z620 Xeon E5-2665 8C 2.40 20MB 1600 CPU2	A6S80AA
Z620 Xeon E5-2667 6C 2.90 15MB 1600 CPU2	A6S81AA
Z620 Xeon E5-2670 8C 2.60 20MB 1600 CPU2	A6S82AA
Z620 Xeon E5-2680 8C 2.70 20MB 1600 CPU2	A6S83AA
Z620 Xeon E5-2690 8C 2.90 20MB 1600 CPU2	A6S84AA

### Introduction

The After Market Option kits for the Z620 processors include the "2nd CPU & Memory Module", the Intel Xeon processor, and the heatsink. Additional system memory must be ordered separately.

Intel® Xeon® Processor E5-2603 v2 4C 1.80GHz  
Intel® Xeon® Processor E5-2609 v2 4C 2.50GHz  
Intel® Xeon® Processor E5-2620 v2 6C 2.10GHz  
Intel® Xeon® Processor E5-2630 v2 6C 2.60GHz  
Intel® Xeon® Processor E5-2637 v2 4C 3.50GHz  
Intel® Xeon® Processor E5-2640 v2 8C 2.00GHz  
Intel® Xeon® Processor E5-2643 v2 6C 3.50GHz  
Intel® Xeon® Processor E5-2650 v2 8C 2.60GHz  
Intel® Xeon® Processor E5-2660 v2 10C 2.20GHz  
Intel® Xeon® Processor E5-2667 v2 8C 3.30GHz  
Intel® Xeon® Processor E5-2670 v2 10C 2.50GHz  
Intel® Xeon® Processor E5-2680 v2 10C 2.80GHz  
Intel® Xeon® Processor E5-2690 v2 10C 3.00GHz  
Intel® Xeon® Processor E5-2695 v2 12C 2.40GHz  
Intel® Xeon® Processor E5-2697 v2 12C 2.70GHz

### Technical Specifications - Processors

Intel® Xeon® Processor E5-1607 v2 4C 3.00GHz  
Intel® Xeon® Processor E5-1620 v2 4C 3.70GHz  
Intel® Xeon® Processor E5-1650 v2 6C 3.50GHz  
Intel® Xeon® Processor E5-1660 v2 6C 3.70GHz  
Intel® Xeon® Processor E5-1680 v2 8C 3.00GHz

Z620 Xeon E5-2603 v2 4C 1.80 10MB 1333 CPU2	E3E04AA
Z620 Xeon E5-2609 v2 4C 2.50 10MB 1333 CPU2	E3E05AA
Z620 Xeon E5-2620 v2 6C 2.10 15MB 1600 CPU2	E3E06AA
Z620 Xeon E5-2630 v2 6C 2.60 15MB 1600 CPU2	E3E07AA
Z620 Xeon E5-2637 v2 4C 3.50 15MB 1866 CPU2	E3E08AA
Z620 Xeon E5-2640 v2 8C 2.00 20MB 1600 CPU2	E3E09AA
Z620 Xeon E5-2643 v2 6C 3.50 25MB 1866 CPU2	E3E10AA
Z620 Xeon E5-2650 v2 8C 2.60 20MB 1866 CPU2	E3E11AA
Z620 Xeon E5-2660 v2 10C 2.20 25MB 1866 CPU2	E3E12AA
Z620 Xeon E5-2667 v2 8C 3.30 25MB 1866 CPU2	E3E13AA
Z620 Xeon E5-2670 v2 10C 2.50 25MB 1866 CPU2	E3E14AA
Z620 Xeon E5-2680 v2 10C 2.80 25MB 1866 CPU2	E3E15AA
Z620 Xeon E5-2690 v2 10C 3.00 25MB 1866 CPU2	E3E16AA
Z620 Xeon E5-2695 v2 12C 2.40 30MB 1866 CPU2	E3E17AA
Z620 Xeon E5-2697 v2 12C 2.70 30MB 1866 CPU2	E3E18AA

### Technical Specifications - Hard Drives

<b>HP SAS (Serial Attached SCSI) Hard Drives for HP Workstations</b>	<b>600GB SAS 15K rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	600GB
		<b>Height</b>	1 in; 2.54 cm
		<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
			<b>Physical Size</b> 4 in; 10.17 cm
		<b>Interface</b>	SAS
		<b>Synchronous Transfer Rate (Maximum)</b>	6.0 Gb/s
		<b>Buffer</b>	16 MB
		<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b> 0.2 ms
			<b>Average</b> 3.4 ms
			<b>Full Stroke</b> 6.6 ms
		<b>Rotational Speed</b>	15,000 rpm
		<b>Logical Blocks</b>	1,172,123,568 - 512 byte blocks
		<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)

	<b>450GB SAS 15K rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	450GB
		<b>Height</b>	1 in; 2.54 cm
		<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
			<b>Physical Size</b> 4 in; 10.17 cm
		<b>Interface</b>	SAS
		<b>Synchronous Transfer Rate (Maximum)</b>	6Gb/s
		<b>Buffer</b>	16MB
		<b>Seek Time (typical reads, includes controller overhead, including settling)</b>	<b>Single Track</b> 0.2 ms
			<b>Average</b> 3.4 ms
			<b>Full Stroke</b> 6.6 ms
		<b>Rotational Speed</b>	15,000 rpm
		<b>Operating Temperature</b>	50° to 95° F (10° to 35° C)

	<b>300GB SAS 15K rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>	300GB
		<b>Height</b>	1 in; 2.54 cm
		<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
			<b>Physical Size</b> 4 in; 10.17 cm
		<b>Interface</b>	SAS
		<b>Synchronous Transfer Rate (Maximum)</b>	6Gb/s
		<b>Buffer</b>	16MB



### Technical Specifications - Hard Drives

	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.2 ms
		<b>Average</b>	3.4 ms
		<b>Full Stroke</b>	6.6 ms
	<b>Rotational Speed</b>		15,000 rpm
	<b>Operating Temperature</b>		50° to 95° F (10° to 35° C)
<b>HP 300GB SAS 10K SFF HDD</b>	<b>Capacity</b>		300GB
	<b>Height</b>		0.6 in; 1.53 cm
	<b>Width</b>	<b>Media Diameter</b>	2.5 in; 6.36 cm
		<b>Physical Size</b>	2.75 in; 6.99 cm
	<b>Interface</b>		SAS 6Gb/s
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 600MB/s
	<b>Buffer</b>		64MB
	<b>Cache</b>		multi-segmentable cache buffer
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.4 ms (max)
		<b>Average</b>	3.6 ms
		<b>Full Stroke</b>	7.3 ms
	<b>Rotational Speed</b>		10,000 rpm
	<b>Logical Blocks</b>		585,937,500
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>HP 600GB SAS 10K SFF HDD</b>	<b>Capacity</b>		600GB
	<b>Height</b>		0.6 in; 1.53 cm
	<b>Width</b>	<b>Media Diameter</b>	2.5 in; 6.36 cm
		<b>Physical Size</b>	2.75 in; 6.99 cm
	<b>Interface</b>		SAS 6Gb/s
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 600MB/s
	<b>Buffer</b>		64MB
	<b>Cache</b>		multi-segmentable cache buffer
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.4 ms (max)
		<b>Average</b>	3.6 ms
		<b>Full Stroke</b>	7.3 ms
	<b>Rotational Speed</b>		10,000 rpm
	<b>Logical Blocks</b>		1,172,123,568
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)

### Technical Specifications - Hard Drives

#### HP 900GB SAS 10K SFF HDD

<b>Capacity</b>	900GB
<b>Height</b>	0.6 in; 1.53 cm
<b>Width</b>	
	<b>Media Diameter</b> 2.5 in; 6.36 cm
	<b>Physical Size</b> 2.75 in; 6.99 cm
<b>Interface</b>	SAS 6Gb/s
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s
<b>Buffer</b>	64MB
<b>Cache</b>	multi-segmentable cache buffer
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b> 0.2ms (max)
	<b>Average</b> 3.5ms
	<b>Full Stroke</b> 7.0ms
<b>Rotational Speed</b>	10,000 rpm
<b>Logical Blocks</b>	1,758,174,767
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

#### HP 1.2TB SAS 10K SFF HDD

<b>Capacity</b>	1.2TB
<b>Height</b>	0.6 in; 1.53 cm
<b>Width</b>	
	<b>Media Diameter</b> 2.5 in; 6.36 cm
	<b>Physical Size</b> 2.75 in; 6.99 cm
<b>Interface</b>	SAS 6Gb/s
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s
<b>Buffer</b>	64MB
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b> 0.18ms (max)
	<b>Average</b> 3.5ms
	<b>Full Stroke</b> 7.17ms
<b>Rotational Speed</b>	10,000 rpm
<b>Logical Blocks</b>	2,344,225,968
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

#### SATA (Serial ATA) Hard Drives for HP Workstations

#### 250GB SATA 10K rpm SFF HDD

<b>Capacity</b>	250GB
<b>Height</b>	0.6 in; 1.53 cm
<b>Width</b>	
	<b>Media Diameter</b> 2.5 in; 6.36 cm
	<b>Physical Size</b> 2.75 in; 6.99 cm
<b>Interface</b>	Serial ATA (6Gb/s)
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s
<b>Buffer</b>	64MB

### Technical Specifications - Hard Drives

	<b>Cache</b>	Adaptive	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1.2ms (typical)
		<b>Average</b>	3.6ms
		<b>Full Stroke</b>	9.0ms (typical)
	<b>Rotational Speed</b>	10K rpm	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>500GB SATA 10K rpm SFF HDD</b>	<b>Capacity</b>	500GB	
	<b>Height</b>	0.6 in; 1.53 cm	
	<b>Width</b>	<b>Media Diameter</b>	2.5 in; 6.36 cm
		<b>Physical Size</b>	2.75 in; 6.99 cm
	<b>Interface</b>	Serial ATA (6Gb/s)	
	<b>Synchronous Transfer Rate</b> (Maximum)	Up to 600MB/s	
	<b>Buffer</b>	64MB	
	<b>Cache</b>	Adaptive	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1.2ms (typical)
		<b>Average</b>	3.6ms
		<b>Full Stroke</b>	9.0ms (typical)
	<b>Rotational Speed</b>	10K rpm	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>1TB SATA 10K rpm SFF HDD</b>	<b>Capacity</b>	1TB	
	<b>Height</b>	0.6 in; 1.53 cm	
	<b>Width</b>	<b>Media Diameter</b>	2.5 in; 6.36 cm
		<b>Physical Size</b>	2.75 in; 6.99 cm
	<b>Interface</b>	Serial ATA (6Gb/s)	
	<b>Synchronous Transfer Rate</b> (Maximum)	Up to 600 MB/s	
	<b>Buffer</b>	64MB	
	<b>Cache</b>	Adaptive	
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1.2ms (typical)
		<b>Average</b>	3.6ms
		<b>Full Stroke</b>	9.0ms (typical)
	<b>Rotational Speed</b>	10K rpm	
	<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)	
<b>250GB SATA 7200 rpm</b>	<b>Capacity</b>	250 GB	

### Technical Specifications - Hard Drives

#### 6Gb/s 3.5" HDD

<b>Height</b>	1 in; 2.54 cm
<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
	<b>Physical Size</b> 4 in; 10.17 cm
<b>Interface</b>	Serial ATA (6.0Gb/s), NCQ enabled
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s
<b>Buffer</b>	8 MB
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b> 2 ms
	<b>Average</b> 11 ms
	<b>Full-Stroke</b> 21 ms
<b>Rotational Speed</b>	7,200 rpm
<b>Logical Blocks</b>	488,397,168
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

#### 500GB SATA 7200 rpm 6Gb/s 3.5" HDD

<b>Capacity</b>	500GB
<b>Height</b>	0.6 in; 1.53 cm
<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
	<b>Physical Size</b> 4 in; 10.17 cm
<b>Interface</b>	Serial ATA (6.0Gb/s), NCQ enabled
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s
<b>Buffer</b>	16MB
<b>Cache</b>	Segmentable
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b> 2 ms
	<b>Average</b> 11 ms
	<b>Full-Stroke</b> 21 ms
<b>Rotational Speed</b>	7,200 rpm
<b>Logical Blocks</b>	976,773,168
<b>Operating Temperature</b>	41° to 131° F (5° to 55° C)

#### 1TB SATA 7200 rpm 6Gb/s 3.5" HDD

<b>Capacity</b>	1 Terabyte (1000 GB)
<b>Height</b>	1 in; 2.54 cm
<b>Width</b>	<b>Media Diameter</b> 3.5 in; 8.9 cm
	<b>Physical Size</b> 4 in; 10.17 cm
<b>Interface</b>	Serial ATA (6.0Gb/s), NCQ enabled
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600 MB/s
<b>Cache</b>	32 MB

### Technical Specifications - Hard Drives

	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2 ms
		<b>Average</b>	11 ms
		<b>Full-Stroke</b>	21 ms
	<b>Rotational Speed</b>		7,200 rpm
	<b>Logical Blocks</b>		1,953,525,168
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>2.0TB SATA 7200 rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>		2TB
	<b>Height</b>		1 in; 2.54 cm
	<b>Width</b>	<b>Media Diameter</b>	3.5 in; 8.9 cm
		<b>Physical Size</b>	4 in; 10.17 cm
	<b>Interface</b>		Serial ATA (6.0 Gb/s), NCQ Enabled
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 600 MB/s
	<b>Cache</b>		64MB
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	2 ms
		<b>Average</b>	11 ms
		<b>Full-Stroke</b>	21 ms
	<b>Rotational Speed</b>		7,200 rpm
	<b>Logical Blocks</b>		3,907,029,168
	<b>Operating Temperature</b>		41° to 131° F (5° to 55° C)
<b>3.0TB SATA 7200 rpm 6Gb/s 3.5" HDD</b>	<b>Capacity</b>		3.0TB
	<b>Height</b>		1 in; 2.54 cm
	<b>Width</b>	<b>Media Diameter</b>	3.5 in; 8.9 cm
		<b>Physical Size</b>	4 in; 10.17 cm
	<b>Interface</b>		Serial ATA (6.0Gb/s), NCQ enabled
	<b>Synchronous Transfer Rate</b> (Maximum)		Up to 6.0 Gb/s
	<b>Buffer</b>		64MB
	<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	0.6 ms
		<b>Average</b>	11 ms
		<b>Full-Stroke</b>	Not specified
	<b>Rotational Speed</b>		7200 rpm
	<b>Operating Temperature</b>		41° to 140° F (5° to 60° C)
<b>500GB SATA 7.2K SED SFF HDD</b>	<b>Capacity</b>		500GB
	<b>Height</b>		0.275 in; 0.7 cm

### Technical Specifications - Hard Drives

<b>Width</b>	<b>Media Diameter</b>	2.5 in; 6.36 cm
	<b>Physical Size</b>	2.75 in; 6.99 cm
<b>Interface</b>	Serial ATA (6Gb/s)	
<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s	
<b>Buffer</b>	32MB	
<b>Seek Time</b> (typical reads, includes controller overhead, including settling)	<b>Single Track</b>	1 ms
	<b>Average</b>	4.2 ms
	<b>Full-Stroke</b>	25 ms (typical)
<b>Rotational Speed</b>	7,200 rpm	
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C)	

#### HP Solid State Drives (SSDs) for Workstations

<b>HP 128GB SATA 6Gb/s SSD</b>	<b>Capacity</b>	128GB
	<b>Height</b>	0.28 in; 0.7 cm
	<b>Width</b>	<b>Physical Size</b> 2.5 in; 6.36 cm
	<b>Interface</b>	SATA 6Gb/s
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 500MB/s (Sequential Read)
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
<b>HP 256GB SATA 6Gb/s SSD</b>	<b>Capacity</b>	256GB
	<b>Height</b>	0.28 in; 0.7 cm
	<b>Interface</b>	SATA 6Gb/s
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 500MB/s (Sequential Read)
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)
<b>HP 256GB SATA 6Gb/s SED SSD</b>	<b>Capacity</b>	256GB
	<b>Height</b>	0.28 in; 0.7 cm
	<b>Width</b>	<b>Physical Size</b> 2.5 in; 6.36 cm
	<b>Interface</b>	6Gb/s SATA
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 500MB/s (Sequential Read)
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)

### Technical Specifications - Hard Drives

<b>HP 512GB SATA 6Gb/s SSD</b>	<b>Capacity</b>	512GB	
	<b>Height</b>	0.28 in; 0.7 cm	
	<b>Width</b>	<b>Physical Size</b>	2.5 in; 6.36 cm
	<b>Interface</b>	6Gb/s SATA	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 500MB/s (Sequential Read)	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	
	<b>Seagate 600 Pro 240GB SATA SSD</b>	<b>Capacity</b>	240GB
<b>Height</b>		0.28 in; 0.7 cm	
<b>Width</b>		<b>Physical Size</b>	2.76 in; 7.01 cm
<b>Interface</b>		SATA 6Gb/s	
<b>Synchronous Transfer Rate (Maximum)</b>		Up to 600MB/s	
<b>Operating Temperature</b>		32° to 158° F (0° to 70° C)	
<b>Seagate 600 Pro 480GB SATA SSD</b>		<b>Capacity</b>	480GB
	<b>Height</b>	0.28 in; 0.7 cm	
	<b>Width</b>	<b>Physical Size</b>	2.76 in; 7.01 cm
	<b>Interface</b>	SATA 6Gb/s	
	<b>Synchronous Transfer Rate (Maximum)</b>	Up to 600MB/s	
	<b>Operating Temperature</b>	32° to 158° F (0° to 70° C)	

### Technical Specifications - Hard Drive Controllers

<b>LSI 9212 4-Port SAS 6Gb/s RAID Card</b>	<b>PCI Bus</b>	8-lane, 5GT/s PCI Express 2.0
	<b>PCI Modes</b>	Bus Master DMA
	<b>RAID Levels</b>	RAID 0, 1, 1E and 10
	<b>PCI Data Burst Transfer Rate</b>	Half Duplex, x4 PCIe 2000 MB/s Full Duplex, x8 PCIe 4000 MB/s
	<b>SAS Bandwidth</b>	<b>Half Duplex</b> Single lane - 600 MB/s Wide Port (2 lanes) - 1200 MB/s Wide Port (4 lanes) - 2400 MB/s
		<b>Full Duplex</b> Single SAS Lane - 1200 MB/s Wide Port (2 lanes) - 2400 MB/s Wide Port (4 lanes) - 4800 MB/s
	<b>PCI Card Type</b>	3.3V Add-in card
	<b>PCI Voltage</b>	12 V ± 10%
	<b>PCI Power</b>	<13.5 Watts
	<b>Bracket</b>	Full height and Low-profile
	<b>Certification Level</b>	PCI-Express 2.0
	<b>IO Bus</b>	1x4 6Gb/s SAS ports
	<b>SAS Processor</b>	LSISAS2004
<b>Internal Connectors</b>	Four x1 SATA	
<b>External Connectors</b>	None	
<b>Maximum Number of SCSI Devices</b>	256	
<b>LED Indicators</b>	Internal Activity/Fault per x4 port - Heartbeat	

<b>LSI MegaRAID® 9260-8i SAS 6Gb/s ROC RAID Card and iBBU08 Battery Backup Unit</b>	<b>PCI Bus</b>	PCI-Express (Gen2) V2.0 x8 lanes
	<b>PCI Modes</b>	Bus Master DMA
	<b>RAID Levels</b>	RAID 0, 1, 5, and 6 RAID spans 10, 50 and 60
	<b>PCI Data Burst Transfer Rate</b>	Up to 4GB/s
	<b>PCI Card Type</b>	Low profile, single PCIe slot design with full height bracket.
		The optional iBBU08 Battery Backup unit mounts on the controller card and the assembly remains within a single PCIe slot width.
	<b>PCI Voltage</b>	+3.3V Add-in Card
	<b>PCI Power</b>	12.5 Watts
	<b>Certification Level</b>	PCI-Express 2.0
	<b>IO Bus</b>	Eight 3 Gb/s and 6Gb/s compatible SAS/SATA ports
	<b>Internal Connectors</b>	Two SAS SFF8087 x4
	<b>External Connectors</b>	None



### Technical Specifications - Hard Drive Controllers

**Maximum Number of SCSI** 32.

**Devices**

**NOTE:** HP Workstations do not support this many internal drives.

**LED Indicators**

Connector LEDs indicate whether the internal connector is active for ports 0-3 and 4-7

### Technical Specifications - Graphics

<b>NVIDIA NVS 300 512MB Graphics</b>	<b>Form Factor</b>	2.7 inches (H) x 5.7 inches (L), Half-Height
	<b>Graphics Controller</b>	NVIDIA NVS 300 Graphics Board
	<b>Bus Type</b>	PCI Express x16, Generation 2.0
	<b>Memory</b>	512 MB GDDR3 SDRAM unified graphics memory
	<b>Connectors</b>	DMS-59 Includes DMS-59 to Dual DVI-I adapter DMS-59 to Dual DisplayPort adapter and DMS-59 to Dual VGA adapter available as an option DMS-59 to Dual DisplayPort adapter required for HP ZR30w Display
	<b>Maximum Resolution</b>	DVI: two digital displays up to 1920 x 1200 DisplayPort: two digital displays up to 2560 x 1600 VGA: two analog displays up to 1920 x 1080
	<b>Image Quality Features</b>	
	<b>Display Output</b>	This card support up to two displays: <ul style="list-style-type: none"><li>• Drives DVI enabled digital displays at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking</li><li>• Drives DisplayPort enabled digital displays at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking (through optional DMS-59 to DisplayPort adapter)</li><li>• Drives VGA enabled analog displays at resolutions up to 1920 x 1080 (through optional DMS-59 to VGA adapter)</li></ul>
	<b>Supported Graphics APIs</b>	OpenGL 3.3 DirectX 10.1
	<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 5 Desktop/Workstation Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>  Novell SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
	<b>Power Consumption</b>	<18 Watts

---

<b>NVIDIA NVS 310 512MB Graphics</b>	<b>Form Factor</b>	Low Profile: 2.713 inches in height x 6.150 inches in length Weight: ~142 grams
	<b>Graphics Controller</b>	NVIDIA NVS 310 GPU: GF119-825
	<b>Bus Type</b>	PCI Express x16, 2.0 compliant

### Technical Specifications - Graphics

<b>Memory</b>	Size: 512MB DDR3 Clock: 875Mhz Memory Bandwidth: 14GB/s
<b>Connectors</b>	2 x DisplayPort
<b>Maximum Resolution</b>	Up to 2560 x 1600 (digital display) per display.
<b>Image Quality Features</b>	The following video formats are supported: <ul style="list-style-type: none"><li>- MPEG2</li><li>- MPEG4 Part 2 Advanced Simple Profile</li><li>- H.264 SVC codec support</li><li>- Support for 3D Blu Ray</li><li>- VC1</li><li>- DivX version 3.11 and later</li><li>- MVC</li></ul> <p>A full range of video resolutions are supported including 1080p, 1080i, 720p, 480p and 480i. The NVS 310 GPU provides hardware acceleration for the computationally intensive parts of video processing, as well as provides improved video playback speeds via faster decode and transcode.</p>
<b>Display Output</b>	Up to 2 displays in the following configurations:  DisplayPort output: <ul style="list-style-type: none"><li>● Drives two DisplayPort enabled digital display at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking, when connected natively using the 2 DisplayPort connectors on the NVS 310 graphics card</li><li>● Supports 2 monitors up to resolution of 1920 x 1200 at 60 Hz with reduced blanking using DisplayPort 1.2 multi stream topology technology.</li></ul> DVI-D output: <ul style="list-style-type: none"><li>● Drives two digital display at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors</li><li>● Drives two digital display at resolutions up to 2560 x 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors</li></ul> HDMI output: <ul style="list-style-type: none"><li>● NVS 310 is capable of driving two high definition (HD) panels up to resolutions of 1920 x 1080P at 60 Hz using DisplayPort to HDMI cable adaptors</li></ul> VGA display output: <ul style="list-style-type: none"><li>● Drives two analog display at resolutions up to 1920 x 1200 at 60 Hz using DisplayPort to VGA cable adaptors</li></ul>
<b>Shading Architecture</b>	Shader Model 5.0
<b>Supported Graphics APIs</b>	DX11, OpenGL 4.1
<b>Available Graphics Drivers</b>	Windows 8 Genuine Windows 7 Professional (64-bit and 32-bit)

### Technical Specifications - Graphics

Microsoft Windows XP Professional (64-bit and 32-bit)  
Red Hat Enterprise Linux(RHEL)  
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site:  
<http://welcome.hp.com/country/us/en/support.html>

SUSE Linux Enterprise drivers may also be obtained from:  
<ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

#### Power Consumption

19.5 Watts

#### Note

1. The thermal solution used on this card is an active fan heatsink.
2. Factory configured NVS 310 graphics card have no cable adapters included. Adapters must be ordered separately.
3. Option kit NVS 310 includes 2 DP to DVI-D cable adapters.

#### NVIDIA NVS 315 1GB Graphics (for HP Workstations)

#### Form Factor

Low Profile:  
2.713 inches in height × 5.7 inches in length  
Weight: ~142 grams

#### Graphics Controller

NVIDIA NVS 315 (using GF119-825 GPU)  
Number of Cores: 48 CUDA cores  
Max. Power: 19.3W  
Cooling Solution: Active fan heatsink

#### Bus Type

PCI Express x16, 2.0 compliant

#### Memory

Size: 1GB DDR3  
Clock: 875Mhz  
Memory Bandwidth: 14GB/s

#### Connectors

DMS-59 output  
Cables included:  
- For CTO: DMS-59 to DVI cable  
- For AMO: DMS-59 to DVI cable and DMS-59 to VGA cable

#### Maximum Resolution

Maximum number of displays supported: 2

Maximum Resolution Support:  
- DMS-59 to VGA: 2048 x 1536 @ 85Hz  
- DMS-59 to DVI: 1980 x 1200 @ 60Hz  
- DMS-59 to DP: 2560 x 1600 @ 60Hz

#### Image Quality Features

See Display Output section.

The following video formats are supported:  
- MPEG2  
- MPEG4 Part 2 Advanced Simple Profile  
- H.264 SVC codec support  
- Support for 3D Blu Ray  
- VC1  
- DivX version 3.11 or later

A full range of video resolutions are supported including 1080p, 1080i, 720p,

### Technical Specifications - Graphics

#### Display Output

480p and 480i. The NVS 315 GPU provides hardware acceleration for the computationally intensive parts of video processing, as well as provides improved video playback speeds via faster decode and transcode.

Up to 2 displays using one of the following DMS-59 cables:

DMS-59 to DVI  
DMS-59 to VGA  
DMS-59 to DP

DisplayPort output:

- Drives two DisplayPort enabled digital displays at resolutions up to 2560 × 1600 at 60 Hz with reduced blanking, when connected via the DMS-59 to DP adaptor.

DVI-D output:

- Drives two digital display at resolutions up to 1920 × 1200 at 60 Hz with reduced blanking using DMS-59 to DVI-D single-link cable adaptor

VGA display output:

- Drives two analog display at resolutions up to 2048 × 1536 at 85 Hz using DMS-59 to VGA cable adaptor.

#### Shading Architecture

Shader Model 5.0

#### Supported Graphics APIs

DX11, OpenGL 4.3

#### Available Graphics Drivers

Windows 8  
Microsoft Windows 7 Professional (64-bit and 32-bit)  
Microsoft Windows XP Professional (64-bit and 32-bit)  
Red Hat Enterprise Linux(RHEL)  
SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

SUSE Linux Enterprise drivers may also be obtained from:

<ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

#### Notes

1. The thermal solution used on this card is an active fan heatsink.
2. Factory configured graphics card includes DMS-59 to DVI cable.
3. Option kit graphics card includes DMS-59 to DVI and DMS-59 to VGA cables (one each).

#### NVIDIA NVS 510 2GB Graphics

#### Form Factor Graphics Controller

Low Profile, 2.713 inches × 6.3 inches, single slot

NVS 510 GPU  
Core Clock: 797 Mhz  
Memory Clock: 891 Mhz  
CUDA Cores: 192

#### Bus Type

PCI Express x16, Generation 2.0

#### Memory

2GB DDR3

### Technical Specifications - Graphics

<b>Connectors</b>	Four mini-DisplayPort. Four mini-DisplayPort to DisplayPort adapters included. (DisplayPort to DVI-D, DisplayPort to VGA, DisplayPort to HDMI, and DisplayPort to Dual-Link DVI adapters available as separate accessories)
<b>Maximum Resolution</b>	Mini-DisplayPort connectors support ultra-high-resolution panels (up to 3840 x 2160 @ 60Hz)  <b>NOTE:</b> This card supports up to four displays. For Windows XP, only 2 active displays are supported.
<b>Image Quality Features</b>	10-bit internal display processing, including hardware support for 10-bit scan-out
<b>Display Output</b>	DisplayPort with Multi-Stream Technology (MST) and High Bit Rate 2 (HBR2) support.  Digital Display Support  1. DisplayPort Output - Drives four DisplayPort enabled digital display at resolutions up to 3840 x 2160 at 60 Hz with reduced blanking, when connected natively using the 4 DisplayPort connectors on the NVS 510 graphics card. - DisplayPort Multi-Stream Topology (MST) Technology: Supports various combinations of display resolutions and number of displays when using DisplayPort multi stream topology technology - up to a maximum of 4 monitors at a resolution of 1920 x 1200 at 60 Hz with reduced blanking.  2. DVI-D Output - Drives four digital displays at resolutions up to 1920 x 1200 at 60 Hz with reduced blanking using DisplayPort to DVI-D single-link cable adaptors. - Drives four digital displays at resolutions up to 2560x 1600 at 60 Hz with reduced blanking using DisplayPort to DVI-D dual-link cable adaptors.  3. HDMI Output - The NVS 510 graphics board is capable of driving four high definition (HD) panels up to resolutions of 1920 x 1080P at 60 Hz using DisplayPort to HDMI cable adaptors.  Analog Display Support  1. VGA display output - Drives four analog displays at resolutions up to 1920 x 1200 at 60 Hz using DisplayPort to VGA cable adaptors.
<b>Supported Graphics APIs</b>	Full Microsoft DirectX 11, Shader Model 5.0 support Full OpenGL 4.3 support
<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>

### Technical Specifications - Graphics

<b>Power Consumption</b>	33.4 Watts
<b>Note</b>	Heatsink cooler design is active.

<b>Graphics Cable Adapters</b>	<b>Note</b>	<p>Graphics Cable Adapter option choice is available starting Feb 1 2013 for the following graphics cards: NVS 310, Quadro 410, Qaudro K5000, FirePro V3900, FirePro W7000</p> <p>New Graphics Cards introduced after Feb 1 2013 will be eligible for choosing Graphics Cable Adapters, unless otherwise specified.</p> <p>No cable choice for NVS 300, NVS 510.</p> <p>Maximum number of cables allowed is 8.</p>
--------------------------------	-------------	--

#### NVIDIA Quadro 410 512MB Graphics

<b>Form Factor</b>	Low Profile: 2.713 inches × 5.7 inches, single slot
<b>Graphics Controller</b>	NVIDIA Quadro 410 GPU: GK107
<b>Bus Type</b>	PCI Express x16, 3.0 compliant
<b>Memory</b>	Size: 512MB DDR3 Clock: 900MHz Memory Bandwidth: 14GB/s
<b>Connectors</b>	One dual-link DVI-I connector One DisplayPort connector
<b>Maximum Resolution</b>	VGA (through DVI to VGA cable): <ul style="list-style-type: none"> <li>• 2048 × 1536 × 32 bpp at 85 Hz</li> </ul> Dual-link DVI <ul style="list-style-type: none"> <li>• 2560 × 1600 × 32 bpp at 60 Hz (reduced blanking)</li> </ul> Single-link DVI <ul style="list-style-type: none"> <li>• 1920 × 1200 × 32 bpp at 60 Hz (reduced blanking)</li> </ul> DisplayPort 1.2 <ul style="list-style-type: none"> <li>• 3840 × 2160 × 36 bpp at 60 Hz</li> </ul>
<b>RAMDAC</b>	400 MHz integrated RAMDAC
<b>Display Output</b>	Maximum number of displays supported: 2
<b>Shading Architecture</b>	Shader Model 5.0
<b>Supported Graphics APIs</b>	DX11, OpenGL 4.2
<b>Available Graphics Drivers</b>	Windows 8 Genuine Windows 7 Professional (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux(RHEL)

### Technical Specifications - Graphics

SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

HP qualified drivers may be preloaded or the latest HP qualified drivers are available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

SUSE Linux Enterprise drivers may also be obtained from:

<ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

#### Notes

1. Factory configured Quadro 410 does not include any video adapters. Adapters must be ordered separately.

2. Option kit Quadro 410 includes one DP to DVI-D adapter

---

<b>NVIDIA Quadro K600 1GB Graphics</b>	<b>Form Factor</b>	2.731" H x 6.3" L Single Slot, Low Profile Full Height Profile bracket installed Low Profile bracket included
	<b>Graphics Controller</b>	NVIDIA Quadro K600 Graphics Card Kepler GK107 GPU 192 CUDA cores Max Power: 41 Watts
	<b>Bus Type</b>	PCI Express 2.0 x16
	<b>Memory</b>	1 GB GDDR3, 891 Mhz 128-bit memory I/O path 29 GB/s memory bandwidth
	<b>Connectors</b>	1 DL-DVI(I) output, 1 DisplayPort output CTO: No video cable adapter included AMO: One DP-to-DVI adapter included with card
	<b>Maximum Resolution</b>	Additional DVI-to-VGA, DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as accessories DisplayPort: - up to 3840 x 2160 x 30 bpp @ 60Hz - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST)
	<b>Image Quality Features</b>	DL-DVI(I) output: - up to 2560 x 1600 x 32 bpp @ 60Hz 10-bit internal display processing pipeline 10-bit scan-out support
	<b>Display Output</b>	VGA: - requires use of DVI-to-VGA and/or DP-to-VGA video cable adapters - 400 Mhz integrated RAMDAC - Max resolution: 2048 x 1536 x 32 bpp @ 85 Hz  DL-DVI(I): - Max resolution: 2560 x 1600 x 32 bpp @ 60 Hz  SL-DVI(I): - Max resolution: 1920 x 1200 x 32 bpp @ 60 Hz



### Technical Specifications - Graphics

	<p>DisplayPort:</p> <ul style="list-style-type: none"> <li>- Supports HBR2 and MST</li> <li>- Max resolution: 3840 x 2160 x 30 bpp @ 60 Hz (only one monitor can be connected to the Quadro K600 DisplayPort connector at this resolution)</li> <li>- Max number of daisy-chained monitors: 2</li> </ul>
<b>Shading Architecture</b>	Full Microsoft DirectX 11 Shader Model 5.0
<b>Supported Graphics APIs</b>	<p>OpenGL 4.3</p> <p>DirectX 11</p> <p>API support includes:</p> <p>CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran</p>
<b>Available Graphics Drivers</b>	<p>Windows 8 Pro 64-bit</p> <p>Windows 8 (China) 64-bit</p> <p>Genuine Windows 7 Professional (64-bit and 32-bit)</p> <p>Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit)</p> <p>Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation</p> <p>SUSE Linux Enterprise Desktop 11 (64-bit)</p> <p>HP qualified drivers may be preloaded or available from the HP support Web site:</p> <p><a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a></p> <p>SUSE Linux Enterprise drivers may also be obtained from:</p> <p><a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a></p>
<b>Notes</b>	<ol style="list-style-type: none"> <li>1. Quadro K600 offered as CTO does not include a video cable adapter. Video cable adapters must be ordered separately.</li> <li>2. Quadro K600 offered as AMO includes one DP-to-DVI video cable adapter. Additional cables must be ordered separately.</li> <li>3. Quadro K600 is Windows 8 Compliant.</li> <li>4. A total maximum of 2 active monitors are supported across all display output types.</li> </ol>

<b>AMD FirePro V3900 1GB Graphics</b>	<b>Form Factor</b>	Full height, half length (full-height bracket included)
	<b>Graphics Controller</b>	AMD FirePro™ V3900 professional graphics
	<b>Bus Type</b>	PCI Express® x16, Generation 2.1
	<b>Memory</b>	1GB DDR3 memory
	<b>Connectors</b>	1 DL DVI, 1 DP output One DP to DVI adapter included
	<b>Maximum Resolution</b>	2560x1600 per display (5120x1600 max. horizontal resolution)
	<b>Display Output</b>	1 DisplayPort® 1.2 1 Dual-link DVI
	<b>Supported Graphics APIs</b>	OpenCL™ 1.1, DirectX® 11 and OpenGL 4.2
	<b>Available Graphics Drivers</b>	<p>Genuine Windows® 7 Professional (64-bit and 32-bit)</p> <p>Genuine Windows Vista® Business (64-bit and 32-bit)</p> <p>Microsoft® Windows XP® Professional (64-bit and 32-bit)</p> <p>Red Hat Enterprise Linux(RHEL)</p> <p>SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)</p>

### Technical Specifications - Graphics

HP qualified drivers may be preloaded or available from the HP support Web site: <http://welcome.hp.com/country/us/en/support.html>

**Power Consumption**

<50W

**Note**

AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See [www.amd.com/firepro](http://www.amd.com/firepro) for details.

---

**NVIDIA Quadro K2000 2GB Form Factor Graphics**

4.38" H x 7.97" L  
Single Slot, Full Height

**Graphics Controller**

NVIDIA Quadro K2000 Graphics Card  
Kepler GK107 GPU  
384 CUDA cores  
Max Power: 51.1 Watts

**Bus Type**

PCI Express 2.0 x16

**Memory**

2 GB GDDR5, 2000 Mhz  
128-bit memory I/O path  
64 GB/s memory bandwidth

**Connectors**

1 DL-DVI(I) output, 2 DisplayPort outputs  
CTO: No video cable adapter included  
AMO: One DP-to-DVI adapter included with card

**Maximum Resolution**

Additional DVI-to-VGA, DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as accessories  
DisplayPort:  
- up to 3840 x 2160 x 30 bpp @ 60Hz  
- supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST)

**Image Quality Features**

DL-DVI(I) output:  
- up to 2560 x 1600 x 32 bpp @ 60Hz  
• 10-bit internal display processing pipeline  
• 10-bit scan-out support

**Display Output**

VGA:  
- requires use of DVI-to-VGA and/or DP-to-VGA video cable adapters  
- 400 Mhz integrated RAMDAC  
- Max resolution: 2048 x 1536 x 32 bpp @ 85 Hz  
DL-DVI(I):  
- Max resolution: 2560 x 1600 x 32 bpp @ 60 Hz  
SL-DVI(I):  
- Max resolution: 1920 x 1200 x 32 bpp @ 60 Hz

DisplayPort:

### Technical Specifications - Graphics

- Supports HBR2 and MST
- Max resolution: 3840 x 2160 x 30 bpp @ 60 Hz (only one monitor can be connected to a Quadro K2000 DisplayPort connector at this resolution)
- Max number of DisplayPort daisy-chained monitors or hub connected monitors from a single Quadro K2000 DisplayPort connector: 4 with maximum resolution of 1920 x 1200

Maximum number of monitors across all available Quadro K2000 outputs is 4.

**Shading Architecture**

Full Microsoft DirectX 11 Shader Model 5

**Supported Graphics APIs**

OpenGL 4.3

DirectX 11

API support includes:

CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran

**Available Graphics Drivers**

Windows 8 Pro 64-bit

Windows 8 (China) 64-bit

Genuine Windows 7 Professional (64-bit and 32-bit)

Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit)

Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation

SUSE Linux Enterprise Desktop 11 (64-bit)

HP qualified drivers may be preloaded or available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

SUSE Linux Enterprise drivers may also be obtained from:

<ftp://download.nvidia.com/novell> or <http://www.nvidia.com>

**Notes**

1. Quadro K2000 offered as CTO does not include a video cable adapter. Video cable adapters must be ordered separately.
2. Quadro K2000 offered as AMO includes one DP-to-DVI video cable adapter. Additional cables must be ordered separately.

---

**NVIDIA Quadro K4000 3GB Form Factor Graphics**

4.376" H x 9.5" L  
Single Slot, Full Height

**Graphics Controller**

NVIDIA Quadro K4000 Graphics Card

Kepler GK106 GPU

768 CUDA cores

Max Power: 80 Watts

**Bus Type**

PCI Express 2.0 x16

**Memory**

3 GB GDDR5, 2800 Mhz

192-bit memory I/O path

134 GB/s memory bandwidth

**Connectors**

1 DL-DVI(I) output, 2 DisplayPort outputs

CTO: No video cable adapter included

AMO: One DP-to-DVI adapter included with card

Additional DVI-to-VGA, DisplayPort-to-VGA or DisplayPort-to-DVI adapters are available as accessories

### Technical Specifications - Graphics

<b>Maximum Resolution</b>	DisplayPort: - up to 3840 x 2160 x 30 bpp @ 60Hz - supports High Bit Rate 2 (HBR2) and Multi-Stream Transport (MST)
<b>Image Quality Features</b>	DL-DVI(I) output: - up to 2560 x 1600 x 32 bpp @ 60Hz <ul style="list-style-type: none"><li>• 10-bit internal display processing pipeline</li><li>• 10-bit scan-out support</li></ul>
<b>Display Output</b>	VGA: - requires use of DVI-to-VGA and/or DP-to-VGA video cable adapters - 400 Mhz integrated RAMDAC - Max resolution: 2048 x 1536 x 32 bpp @ 85 Hz  DL-DVI(I): - Max resolution: 2560 x 1600 x 32 bpp @ 60 Hz  SL-DVI(I): - Max resolution: 1920 x 1200 x 32 bpp @ 60 Hz  DisplayPort: - Supports HBR2 and MST - Max resolution: 3840 x 2160 x 30 bpp @ 60 Hz (only one monitor can be connected to a Quadro K4000 DisplayPort connector at this resolution) - Max number of DisplayPort daisy-chained monitors or hub connected monitors from a single Quadro K4000 DisplayPort connector: 4 with maximum resolution of 1920 x 1200  HDMI: - Requires use of DP-to-HDMI cable - Max Resolution: 1920 x 1080 x 32 bpp @ 60Hz  Maximum number of monitors across all available Quadro K4000 outputs is 4.
<b>Shading Architecture</b>	Full Microsoft DirectX 11 Shader Model 5.0
<b>Supported Graphics APIs</b>	OpenGL 4.3 DirectX 11 API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
<b>Available Graphics Drivers</b>	Windows 8 Pro 64-bit Windows 8 (China) 64-bit Genuine Windows 7 Professional (64-bit and 32-bit)  Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit) Red Hat Enterprise Linux(RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>  SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>

### Technical Specifications - Graphics

#### Notes

1. Quadro K4000 offered as CTO does not include a video cable adapter. Video cable adapters must be ordered separately.
2. Quadro K4000 offered as AMO includes one DP-to-DVI video cable adapter. Additional cables must be ordered separately.
3. Quadro K4000 is Windows 8 Compliant.
4. A total maximum of 4 active monitors are supported across all display output types. To get 4 monitors, at least one monitor must be daisy chained on a DisplayPort output.
5. A DisplayPort hub device may be used to connect multiple DisplayPort monitors to a single Quadro K4000 DisplayPort output.

#### NVIDIA Quadro K5000 4GB Form Factor Graphics

<b>Form Factor</b>	4.376" H x 10.5" L Dual Slot
<b>Graphics Controller</b>	NVIDIA Quadro K5000 Graphics Card based on the GK104 GPU
<b>Bus Type</b>	PCI Express 2.0 x16
<b>Memory</b>	4GB GDDR5 173GB/s memory bandwidth
<b>Connectors</b>	DVI-I (1), DVI-D (1), DP (2), Optional 3D Stereo bracket with 3-pin mini-DIN connector. No adapter included with card.
<b>Image Quality Features</b>	DVI to VGA, DisplayPort to VGA, DisplayPort to DVI, and DisplayPort to Dual-Link DVI adapters available as accessories <ul style="list-style-type: none"><li>● DisplayPort with Multi-Stream Technology (MST) and High Bit Rate 2 (HBR2), HDMI 1.4, and HDCP support</li><li>● NVIDIA 3D Vision™ technology</li></ul>
<b>Display Output</b>	400 MHz integrated RAMDAC <ul style="list-style-type: none"><li>● Maximum resolution over VGA (through DVI to VGA cable): 2048 × 1536 × 32 bpp at 85 Hz</li></ul> Dual-link internal TMDS (DVI 1.0) <ul style="list-style-type: none"><li>● Maximum resolution over digital port (single GPU and SLI mode): 2560 × 1600 × 32 bpp at 60 Hz (reduced blanking)</li></ul> Single-link internal TMDS (DVI 1.0) <ul style="list-style-type: none"><li>● Maximum resolution over digital port (single GPU and SLI mode): 1920 × 1200 × 32 bpp at 60 Hz (reduced blanking)</li></ul> DisplayPort with MST and HBR2. <ul style="list-style-type: none"><li>● Maximum resolution: 3840 × 2160 × 36 bpp at 60Hz</li></ul> HDMI <ul style="list-style-type: none"><li>● Maximum resolution: 1920 × 1080 × 32 bpp at 60Hz</li></ul>

### Technical Specifications - Graphics

<b>Supported Graphics APIs</b>	OpenGL 4.2 DirectX 11 Shader model 5.0 Support API support for NVIDIA's CUDA™ C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, Fortran
<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)
<b>Power Consumption</b>	122 Watts
<b>Note</b>	HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>

### AMD FirePro W7000 4GB Graphics

<b>Form Factor</b>	Full height, full length, single slot
<b>Graphics Controller</b>	AMD FirePro™ W7000 Professional Graphics Max Power: <150 Watts
<b>Bus Type</b>	PCI Express™ x16, Generation 3.0
<b>Memory</b>	4GB GDDR5, 153.6 GB/s bandwidth, ECC support
<b>Connectors</b>	4 x DisplayPort with HBR2 and MST support.
<b>Maximum Resolution</b>	DisplayPort: 4096x2160 @24bpp 60Hz Dual Link DVI: 2560x1600 (requires DP to DL-DVI adapter) Single Link DVI: 1920x1200 (requires DP to DVI adapter) VGA: 1920x1200 (requires DP to VGA adapter)
<b>Image Quality Features</b>	Advanced support for 8-bit, 10-bit, and 16-bit per RGB color component
<b>Display Output</b>	Max number of monitors supported using DisplayPort: 6  Monitor chaining from a single DisplayPort options(subject to a max of 6 total monitors across all outputs, requires use of DisplayPort Monitors supporting MST or the use of DisplayPort hubs): <ul style="list-style-type: none"> <li>● 1 4096x2169 display</li> <li>● 2 2560x1600 displays</li> <li>● 4 1920x1200 displays</li> </ul>
<b>Shading Architecture</b>	Shader Model 5.0
<b>Supported Graphics APIs</b>	OpenGL® 4.2 with OpenGL Shading Language OpenCL 1.1 Microsoft® DirectX® 11.1
<b>Available Graphics Drivers</b>	Windows 8 Windows 7 Professional (64-bit and 32-bit) Windows 8 (64bit and 32-bit) Red Hat Enterprise Linux(RHEL) SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)

### Technical Specifications - Graphics

HP qualified drivers may be preloaded or available from the HP support Web site:

<http://welcome.hp.com/country/us/en/support.html>

**Note**

1. AMD Eyefinity technology can support multiple displays using a single enabled AMD FirePro™ professional graphics card; the number of supported displays varies by card model. Microsoft® Windows® 7, Windows Vista®, or Linux® is required in order to support more than 2 displays. Depending on the card model, native DisplayPort™ connectors and/or certified DisplayPort™ active or passive adapters to convert your monitor's native input to your card's DisplayPort™ or Mini-DisplayPort™ connector(s) may be required. See [www.amd.com/firepro](http://www.amd.com/firepro) for details.

2. Factory configured FirePro W7000 graphics card does not include any video adapter cables. Adapters must be ordered separately.

3. Option Kit FirePro W7000 graphics card does not include any video cable adapters. Adapters must be ordered separately.

<b>NVIDIA Quadro 6000 6GB Graphics</b>	<b>Form Factor</b>	4.376" H x 9.75" L Dual Slot
	<b>Graphics Controller</b>	NVIDIA Quadro 6000 Graphics Card
	<b>Bus Type</b>	PCI Express 2.0 x16
	<b>Memory</b>	6 GB GDDR5 384-bit ECC Memory
	<b>Connectors</b>	1 DVI-I output, 2 DisplayPort outputs, 1 Stereo(3-pin mini DIN); One DP to DVI adapter included with card
	<b>Maximum Resolution</b>	DVI to VGA, DisplayPort to VGA and DisplayPort to dual link DVI adapters available as accessories Dual DisplayPort (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz) Dual-link DVI-I output (up to 2560 x 1600 @ 60Hz and 1920x1200 @ 120Hz)
	<b>Image Quality Features</b>	<ul style="list-style-type: none"> <li>● 30-bit color</li> <li>● Up to 16K x16K texture and render processing</li> <li>● Transparent multisampling and super sampling</li> <li>● 16x angle independent anisotropic filtering</li> <li>● 128-bit floating point performance</li> <li>● 32-bit per-component floating point texture filtering and blending</li> <li>● 64x full scene antialiasing (FSAA) / 128x FSAA in SLI Mode</li> <li>● Support for any combination of two connected displays</li> <li>● DisplayPort 1.1a, HDMI 1.3a, and HDCP support</li> <li>● NVIDIA 3D Vision™ technology, 3D DLP, Interleaved, and other 3D stereo format support</li> <li>● Full OpenGL quad buffered stereo support</li> <li>● Underscan/overscan compensation and hardware scaling</li> <li>● NVIDIA nView® multi-display technology</li> </ul>
	<b>Shading Architecture</b>	Shader Model 5.0

### Technical Specifications - Graphics

<b>Supported Graphics APIs</b>	OpenGL 4.0 DirectX 11 CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
<b>Available Graphics Drivers</b>	Genuine Windows 7 Professional (64-bit and 32-bit) Genuine Windows Vista Business (64-bit and 32-bit) Microsoft Windows XP Professional (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 5 Desktop/Workstation (64-bit and 32-bit) Red Hat Enterprise Linux (RHEL) 6 Desktop/Workstation SUSE Linux Enterprise Desktop 11 (64-bit and 32-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>  Novell SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
<b>Power Consumption</b>	<250 Watts



### Technical Specifications - High Performance GPU Computing

#### NVIDIA Tesla C2075 Compute Processor

<b>Form Factor</b>	4.376 inches by 9.75 inches Dual Slot
<b>System Interface</b>	PCI Express Gen2 ×16
<b>Video Outputs</b>	One Dual Link DVI-I  (Entry graphics level of performance)
<b>Memory</b>	6GB GDDR5
<b>Peak Memory Bandwidth</b>	+170 GB/s
<b>Supported APIs</b>	CUDA API support includes: CUDA C, CUDA C++, DirectCompute 5.0, OpenCL, Java, Python, and Fortran
<b>Supported Operating Systems</b>	Genuine Windows 7 Professional (64-bit) Genuine Windows Vista Business (64-bit) Microsoft Windows XP Professional (64-bit) Red Hat Enterprise Linux (RHEL) 5, 6 Desktop/Workstation (64-bit) SUSE Linux Enterprise Desktop 11 (64-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>  Novell SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
<b>Processor Cores</b>	448 CUDA cores
<b>Power Consumption</b>	~215 Watts

**NOTE 1:** A 1110W PSU is required for Tesla C2075 on the Z800

**NOTE 2:** A 600W PSU is required for Tesla C2075 on the Z400

**NOTE 3:** A 1125W PSU is required for Tesla C2075 on the Z820

#### NVIDIA Tesla K20c Compute Processor

<b>Form Factor</b>	4.376 inches by 10.5 inches Dual Slot
<b>System Interface</b>	PCI Express Gen2 ×16
<b>Video Outputs</b>	None.
<b>Memory</b>	5GB GDDR5, 320-bit memory path
<b>Peak Memory Bandwidth</b>	208 GB/s (with ECC off)
<b>Supported APIs</b>	CUDA and OpenACC API support includes: CUDA C, CUDA C++, Java, Python, and Fortran
<b>Supported Operating Systems</b>	Windows 8 (64-bit) Genuine Windows 7 Professional (64-bit) Red Hat Enterprise Linux (RHEL) 5, 6 Desktop/Workstation (64-bit) SUSE Linux Enterprise Desktop 11 (64-bit)  HP qualified drivers may be preloaded or available from the HP support Web site: <a href="http://welcome.hp.com/country/us/en/support.html">http://welcome.hp.com/country/us/en/support.html</a>

### Technical Specifications - High Performance GPU Computing

	Novell SUSE Linux Enterprise drivers may also be obtained from: <a href="ftp://download.nvidia.com/novell">ftp://download.nvidia.com/novell</a> or <a href="http://www.nvidia.com">http://www.nvidia.com</a>
<b>Processor Cores</b>	GK110 GPU, 706 MHz clock 2496 CUDA cores
<b>Power Consumption</b>	~225 Watts

**NOTE 1:** A 1125W PSU is required for any K20 configuration on the Z820

### Technical Specifications - Multimedia and Audio Devices

**HP Thin USB Powered  
Speakers**

**Frequency Response (-** F0 to 20kHz  
**3dB, 24-bit/96kHz input)**

**Dimensions** Speakers: 14.52 x 9.50 x 2.45 cm (5.72 x 3.74 x 0.96 in) per speaker

### Technical Specifications - Optical and Removable Storage

<b>HP DVD-ROM Drive</b>	<b>Description</b>	5.25-inch, half-height, tray-load	
	<b>Mounting Orientation</b>	Either horizontal or vertical	
	<b>Interface Type</b>	SATA/ATAPI	
	<b>Dimensions (WxHxD)</b>	15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)	
	<b>Disc Capacity</b>	<b>DVD-ROM</b> Single layer: Up to 4.7 GB Double layer: Up to 8.5 GB	
	<b>Access Times</b>	<b>DVD-ROM Single Layer</b>	< 140 ms (typical)
		<b>CD-ROM Mode 1</b>	< 125 ms (typical)
		<b>Full Stroke DVD</b>	< 250 ms (seek)
		<b>Full Stroke CD</b>	< 210 ms (seek)
	<b>Power</b>	<b>Source</b>	SATA DC power receptacle
		<b>DC Power Requirements</b>	5 VDC ± 5%-100 mV ripple p-p 12 VDC ± 5%-200 mV ripple p-p
		<b>DC Current</b>	5 VDC - <1000 mA typical, < 1600 mA maximum 12 VDC - < 600 mA typical, < 1400 mA maximum
	<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)
		<b>Relative Humidity</b>	10% to 90%
		<b>Maximum Wet Bulb Temperature</b>	86° F (30° C)
<b>Operating Systems Supported</b>		Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation, Removed reference to "Novell" because of acquisition and changed product reference to "SUSE Linux Enterprise Desktop 10 & 11", No driver is required for this device. Native support is provided by the operating system.	

<b>HP DVD+/-RW Drive</b>	<b>Description</b>	5.25-inch, half-height, tray-load
	<b>Mounting Orientation</b>	Either horizontal or vertical
	<b>Interface Type</b>	SATA/ATAPI
	<b>Dimensions (WxHxD)</b>	15.0 x 4.4 x 17.5 cm (5.9 x 1.7 x 8.0 in)
	<b>Disc Formats</b>	DVD-RAM
		DVD+R
DVD+RW		
DVD+R DL		
DVD-R DL		
	DVD-R	
	DVD-RW	

### Technical Specifications - Optical and Removable Storage

	CD-R		
	CD-RW		
<b>Disc Capacity</b>	<b>DVD-ROM</b>		8.5 GB DL or 4.7 GB standard
	<b>Full Stroke DVD</b>		< 240 ms (seek)
	<b>Full Stroke CD</b>		< 200 ms (seek)
<b>Maximum Data Transfer Rates</b>	<b>CD ROM Read</b>		CD-ROM, CD-R Up to 40X CD-RW Up to 32X
	<b>DVD ROM Read</b>	DVD-RAM	Up to 12X
		DVD+RW	Up to 8X
		DVD-RW	Up to 8X
		DVD+R DL	Up to 12X
		DVD-R DL	Up to 12X
		DVD-ROM	Up to 16X
		DVD-ROM DL	Up to 12X
		DVD+R	Up to 16X
		DVD-R	Up to 16X
<b>Power</b>	<b>Source</b>		SATA DC power receptacle
	<b>DC Power Requirements</b>		5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 5%-200 mV ripple p-p
	<b>DC Current</b>		5 VDC -<1000 mA typical, <1600 mA maximum 12 VDC -<1200 mA typical, <2000 mA maximum
<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>		41° to 122° F (5° to 50° C)
	<b>Relative Humidity</b>		10% to 90%
	<b>Maximum Wet Bulb Temperature</b>		86° F (30° C)
	<b>Operating Systems Supported</b>		Windows 8 32-bit and 64-bit, Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation SUSE Linux Enterprise Desktop 10 & 11
	<b>Kit Contents</b>		No driver is required for this device. Native support is provided by the operating system. HP SATA SuperMulti DVD Writer Drive, Roxio Easy Media Creator software, Intervideo WinDVD Software, installation guide, and DVD+R media.

### Technical Specifications - Optical and Removable Storage

<b>HP Slot Load DVD+/-RW Drive</b>	<b>Description</b>	Slim-Line, Slot-load	
	<b>Mounting Orientation</b>	Either horizontal or vertical	
	<b>Interface Type</b>	SATA	
	<b>Dimensions (WxHxD)</b>	12.7 x 1.2 x 12.9 cm (5 x 0.5 x 5 in)	
	<b>Disc Formats</b>	DVD-RAM DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW	
	<b>Disc Capacity</b>	<b>DVD-ROM</b>	5/9/10/18 G DVD-Single / Dual (PTP, OTP) (Read Only)
			4.7G DVD±R/RW (Read & Write)
			DVD±R Dual (Read & Write)
			80mm DVD
			DVD-RAM (Read & Write)
		<b>CD-ROM</b>	650 MB CD-ROM (Read Only)
			80mm CD
			800/700/650/ CD-Recordable (Read & Write)
			700/650MB CD-Rewritable (Read & Write)
		700/650MB High Speed CD-Rewritable (Read & Write)	
	700/650MB Ultra & Ultra+ Speed CD-Rewritable (Read & Write)		
	<b>Full Stroke DVD</b>	< 270 ms (seek)	
	<b>Full Stroke CD</b>	< 250 ms (seek)	
<b>Maximum Data Transfer Rates</b>	<b>CD ROM Read</b>	CD-ROM, CD-R and CD-RW Up to 24X	
	<b>DVD ROM Read</b>	DVD-RAM Up to 5X DVD Single layer Up to 8X DVD Dual Layer Up to 8X	
<b>Power</b>	<b>Source</b>	SATA DC power receptacle	
	<b>DC Power Requirements</b>	5 VDC ± 5%-100 mV ripple p-p	
	<b>DC Current</b>	5 VDC 40 mA typical, 800 mA maximum	
<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)	
	<b>Relative Humidity</b>	10% to 90%	
	<b>Operating Systems Supported</b>	Genuine Windows 7 Professional 32-bit and 64-bit. Red Hat Enterprise Linux(RHEL) WS4, 5, 6 Desktop/Workstation, SUSE Linux Enterprise Desktop 10 & 11. Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows XP Professional or Windows XP Home 32*.	
		No driver is required for this device. Native support is provided by the operating system.	
	<b>Kit Contents</b>	Factory integrated only. Not available as a kit.	

---

<b>HP Blu-Ray Writer</b>	<b>Description</b>	5.25-inch, half-height, tray-load
--------------------------	--------------------	-----------------------------------

### Technical Specifications - Optical and Removable Storage

<b>Mounting Orientation</b>	Either horizontal or vertical		
<b>Interface Type</b>	SATA		
<b>Dimensions (WxHxD)</b>	15.0 x 4.4 x 20.3 cm (5.9 x 1.7 x 8.0 in)		
<b>Disc Formats</b>	BD-ROM BD-R BD-RE DVD-RAM DVD+R DVD+RW DVD+R DL DVD-R DL DVD-R DVD-RW CD-R CD-RW		
<b>Disc Capacity</b>	<b>DVD-ROM</b>	8.5 GB DL or 4.7 GB standard	
	<b>Blu-ray</b>	50 GB DL or 25 GB standard	
	<b>Full Stroke DVD</b>	< 250 ms (seek)	
	<b>Full Stroke CD</b>	< 210 ms (seek)	
	<b>Blu-ray</b>	<275 ms (seek)	
	<b>Startup Time</b> (Time to drive ready from tray loading)	BD-ROM (SL/DL)	25S / 28S
		BD-R (SL/DL)	25S / 28S
		BD-RE (SL/DL)	25S / 28S
		DVD-ROM (SL/DL)	18S / 18S
		DVD-R (SL/DL)	25S / 25S
		DVD-RW	25S
		DVD+R (SL/DL)	25S / 25S
		DVD+RW	25S
		DVD-RAM	45S
		CD-ROM	45S
<b>Maximum Data Transfer Rates</b>	<b>CD ROM Read</b>	CD-ROM	Up to 40X
		CD-R	Up to 40X
		CD-RW	Up to 40X
	<b>DVD ROM Read</b>	DVD-RAM	Up to 5X
		DVD+RW	Up to 10X
		DVD-RW	Up to 10X
		DVD+R DL	Up to 8X
		DVD-R DL	Up to 8X
		DVD-ROM	Up to 16X
		DVD-ROM DL	Up to 8X
		DVD+R	Up to 12X
		DVD-R	Up to 12X
	<b>Blu-Ray</b>	BD-ROM	Up to 6X

### Technical Specifications - Optical and Removable Storage

		BD-ROM DL	Up to 4.8X
		BD-R	Up to 6X
		BD-R DL	Up to 4.8X
		BD-R	Up to 6X
		BD-RE SL/DL	Up to 4.8X
<b>Power</b>	<b>Source</b>	SATA DC power receptacle	
	<b>DC Power Requirements</b>	5 VDC $\pm$ 5%-100 mV ripple p-p 12 VDC $\pm$ 10%-100 mV ripple p-p	
	<b>DC Current</b>	5 VDC -900 mA typical, 1200 mA maximum 12 VDC -1000 mA typical, 1600 mA maximum	
<b>Operating Environmental</b> (all conditions non-condensing)	<b>Temperature</b>	41° to 122° F (5° to 50° C)	
	<b>Relative Humidity</b>	15% to 80%	
	<b>Maximum Wet Bulb Temperature</b>	86° F (30° C)	
	<b>Operating Systems Supported</b>	Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64*, Windows Vista Business 32*, Windows Vista Home Basic 32*, Windows 2000, Windows XP Professional or Windows XP Home 32*. Red Hat Enterprise Linux(RHEL) WS4**, 5, 6 Desktop/Workstation, SUSE Linux Enterprise Desktop 10 & 11	
		<p>* No driver is required for this device. Native support is provided by the operating system.</p> <p>** RHEL WS4 not supported on Z200/Z200SFF</p>	
	<b>Kit Contents</b>	HP Blue Laser RW Drive, Roxio Easy Media Creator software, Intervideo WinDVD Software, installation guide.	
<b>Disclaimer</b>	As Blu-Ray is a new format containing new technologies, certain disc, digital connection, compatibility and/or performance issues may arise, and do not constitute defects in the product. Flawless playback on all systems is not guaranteed. In order for some Blu-Ray titles to play, they may require a DVI or HDMI digital connection and your display may require HDCP support. HD-DVD movies cannot be played on this workstation.		

#### HP DX115 Removable Drive Enclosure

**Interface Type**  
**Dimensions** (WxHxL)  
**Weight**

Compatible with SAS or SATA controllers  
147.6 x 41.1 x 205 mm (5.81 x 1.62 x 8.08 in)  
Frame and Carrier: 1.73 kg (3.8 lbs)  
Carrier: 0.45 kg (1 lbs)



### Technical Specifications - Controller Cards

<b>HP IEEE 1394b FireWire PCIe Card</b>	<b>Data Transfer Rate</b>	Supports up to 800 Mbps
	<b>Devices Supported</b>	IEEE-1394 compliant devices
	<b>Bus Type</b>	PCIe card full height PCIe slots
	<b>Ports</b>	Two IEEE-1394b bilingual 9-Pin connectors (Rear)
	<b>Internal Connectors</b>	One 10-Pin Header connector
	<b>System Requirements</b>	Windows 7 Professional 32-bit and 64-bit, Microsoft® Windows® XP Professional, Windows XP Home, Windows Vista, SLED 11 and RHEL 6. Intel Pentium® G series or higher processor, 128-MB RAM, 1-GB Hard Drive, CD-ROM drive, built in sound system, Available PCIe slot.
	<b>Temperature – Operating</b>	50° to 131° F (10° to 55° C)
	<b>Temperature – Storage</b>	-22° to 140° F (-30° to 60° C)
	<b>Relative Humidity – Operating</b>	20% to 80%
	<b>Compliances</b>	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
	<b>Operating Systems Supported</b>	Windows 7 Professional 32-bit and 64-bit, Windows Vista® Business 32-bit and 64-bit, Windows® XP Professional, XP Professional 64-bit, RHEL 6 and SLED 11.
<b>HP Thunderbolt-2 PCIe 1-port I/O Card</b>	<b>Data Transfer Rate</b>	Supports up to 20 Gb/s (20,000 Mb/s)
	<b>Devices Supported</b>	Thunderbolt™ certified devices
	<b>Bus Type</b>	PCIe card, full or half height PCIe slots
	<b>Ports</b>	One Thunderbolt™ 2 external 20-Pin output connectors (Rear)
	<b>Internal Connectors</b>	One 5-Pin header connector
	<b>System Requirements</b>	Genuine Windows 7 Professional 64-bit, Genuine Windows 8.1 64-bit, Intel i5 series or higher processor, 128-MB RAM, 1-GB Hard Drive, available PCIe slot.
	<b>Temperature - Operating</b>	50° to 131° F (10° to 55° C)
	<b>Temperature - Storage</b>	-22° to 140° F (-30° to 60° C)
	<b>Relative Humidity - Operating</b>	20% to 80%
	<b>Compliances</b>	FCC Part 15B, cULus 60950, CE Mark EN55022B(1995)/EN55024-1998 STD, Taiwan BSMI CNS13438, Korea MIC
	<b>Operating Systems Supported</b>	Genuine Windows 7 Professional 64-bit, Genuine Windows 8.1 64-bit.
<b>Kit Contents</b>	HP Thunderbolt™ 2 PCIe 1-port I/O Card, full height and half height bracket, DisplayPort to DisplayPort cable, internal header cables(2), user documentation and warranty card.	
<b>Warranty</b>	The HP Thunderbolt™ 2 PCIe 1-port I/O Card has a one-year Limited Warranty or the remainder of the warranty of the HP supported product in which it is installed. Technical support is available seven days a week, 24 hours a day, by phone, as well as online support forums. Certain restrictions and exclusions apply.	

### Technical Specifications - Networking and Communications

<b>Integrated Intel 82579LM PCIe GbE Controller</b>	<b>Connector</b>	RJ-45
	<b>Controller</b>	Intel 82579LM GbE platform LAN connect networking controller
	<b>Memory</b>	24 KB FIFO packet buffer memory
	<b>Data Rates Supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	802.1P, 802.1Q, 802.2, 802.3, 802.3ab, 802.3az, 802.3u
	<b>Bus Architecture</b>	PCI Express and SMBus
	<b>Data Transfer Mode</b>	PCIe-based interface for active state operation (S0 state) and SMBus for host and management traffic (Sx low power state)
	<b>Power Requirement</b>	Requires 3.3V and 1.05V or just 3.3V with integrated regulators
	<b>Boot ROM Support</b>	Yes
	<b>Network Transfer Mode</b>	Full-duplex; Half-duplex (not supported for the 1000BASE-T transceiver)
	<b>Network Transfer Rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	<b>Management Capabilities</b>	WOL, auto MDI crossover, PXE, Multi-port teaming, RSS, Advanced cable diagnostic. AMT 7.0 support

---

<b>Broadcom (5761) NetXtreme Gigabit Ethernet Plus NIC</b>	<b>Connector</b>	RJ-45
	<b>Controller</b>	Broadcom 5761 PCI-Express LAN Controller
	<b>Memory</b>	8 MB NVRAM serial Flash
	<b>Data Rates Supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB, 802.3u, and 802.3x
	<b>Bus Architecture</b>	PCI-Express
	<b>Data Path Width</b>	Single Channel PCI-Express
	<b>Data Transfer Mode</b>	Bus Master DMA
	<b>Hardware Certifications</b>	FCC class B, Canada and US NRTL Mark, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia, UL listed (E212044), European Union Notice (CE 0682)
	<b>Power Requirement</b>	1.8W @ 3.3V
	<b>Boot ROM Support</b>	Yes
	<b>Network Transfer Mode</b>	Full-duplex Half-duplex (not available for the 1000BASE-T transceiver)
	<b>Network Transfer Rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
<b>Operating Temperature</b>	32° to 131°F (0° to 55° C)	

### Technical Specifications - Networking and Communications

<b>Operating Humidity</b>	131° F (55° C) with 5% to 95% non-condensing humidity
<b>Dimensions</b>	7 cm x 10.5 cm (2.75 in x 4.13 in), low profile compatible
<b>Operating System Driver Support</b>	Windows 7 Professional 32-bit and 64-bit, Windows Vista 32-bit SP1, Windows Vista x64 SP1, Windows XP 32 bit professional, Windows XP x64 Red Hat Enterprise Linux (RHEL) 5, 6; Novell SLED 10 & 11
<b>Management Capabilities</b>	ACPI, WOL and DMI 2.0, PXE 2.0, WfM 2.0, Broadcom mgmt utility, ASF2.0, DASH 1.0 and DASH 1.1 profiles
<b>Kit Contents</b>	Broadcom NetXtreme Gigabit Ethernet Plus NIC, Broadcom NetXtreme Gigabit Ethernet Plus NIC USB Cable Assembly, CD, drivers, quick install guide, product warranty statement

<b>Intel Gigabit CT Desktop NIC</b>	<b>Connector</b>	RJ-45
	<b>Controller</b>	Intel WG82574L Gigabit Ethernet Controller
	<b>Memory</b>	Integrated Dual 48K configurable transmit receive FIFO Buffers
	<b>Data Rates Supported</b>	10/100/1000 Mbps
	<b>Compliance</b>	IEEE 802.1P, 802.1Q, 802.2, 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	<b>Bus Architecture</b>	PCI-E 1.0a
	<b>Data Path Width</b>	X1, 250 MB/s, Bi-directional interface
	<b>Data Transfer Mode</b>	Bus-master DMA
	<b>Hardware Certifications</b>	FCC, B, CE, TUV- cTUVus Mark Canada and United States, TUV- GS Mark for European Union
	<b>Power Requirement</b>	Aux 3.3V, 3.0 Watts in 1000base-T and 2.0 Watts in 100Base-T
	<b>Boot ROM Support</b>	Yes
	<b>Network Transfer Rate</b>	10BASE-T (half-duplex) 10 Mbps 10BASE-T (full-duplex) 20 Mbps 100BASE-TX (half-duplex) 100 Mbps 100BASE-TX (full-duplex) 200 Mbps 1000BASE-T (full-duplex) 2000 Mbps
	<b>Operating Temperature</b>	32° to 131°F (0° to 55° C)
	<b>Operating Humidity</b>	85% at 131° F (55° C)
	<b>Dimensions</b>	12.1 x 5.7 x 2.0 cm (4.75 x 2.25 x 0.8 in)
	<b>Operating System Driver Support</b>	Windows 7 Professional 32-bit and 64-bit, Windows Vista Business 64, Windows Vista Business 32, Windows XP Professional, Windows XP x64. Red Hat Enterprise Linux 4 (RHEL4.8 or newer)*, Red Hat Enterprise Linux 5 (RHEL5.3 or newer), Red Hat Enterprise Linux 6, SUSE Linux Enterprise Desktop (SLED) 11
	<b>Management Capabilities</b>	RHEL 4 and 5, SLED 10, are not supported on the Z220 CMT/SFF WOL , PXE, DMI, WfM 2.0
	<b>Kit Contents</b>	Intel Gigabit CT Desktop NIC, low profile bracket, CD containing Intel PROset II NIC drivers, quick install guide, product warranty statement

### Technical Specifications - Networking and Communications

**HP X520 10GbE Dual Port Adapter** **Hardware Certifications** FCC B, UL, CE, VCCI, BSMI, CTICK, KCC

**HP 10GbE SFP+ SR Transceiver**

**Operating Temperature** 0°C to 45°C (32°F to 113°F)

**Operating Humidity** 0% to 85%, noncondensing

**Dimensions (H x W x D)** 0.47(h) x 0.54(w) x 2.19(d) inches (1.19 x 1.38 x 5.57 cm)

**HP 361T PCIe Dual Port Gigabit NIC**

**Connector** Two RJ-45

**Controller** Intel® Ethernet I350 Controller

**Data Rates Supported** 10/100/1000 Mbps, Half- and full-duplex

**Compliance** 802.3, 802.3u, 802.3x, 802.3ab, 802.3ad, 802.1p, 802.1Q, 802.3az, IEEE 1588 PCIe v2.0 standard  
RoHS (6 of 6)  
FCC (U.S. only) Class B  
DOC (Canada) Class B  
CE EN 55024, EN55022 Class B  
VCCI Class II  
UL 1950  
CSA 950  
EN 60950  
CE  
ACPI 1.1a  
Microsoft WHQL (Windows Hardware Quality Labs)

**Bus Architecture** PCI-E 1.0a

**Data Path Width** Four lane (x4) PCI Express compatible with x4, x8, and x16 PCI Express slots

**Power Requirement** 4.1W idle without EEE link partner  
3.2W idle with EEE link partner  
4.2W maximum

**Network Transfer Rate** 10BASE-T (half-duplex) 10 Mb/s  
10BASE-T (full-duplex) 20 Mb/s  
100BASE-TX (half-duplex) 100 Mb/s  
100BASE-TX (full-duplex) 200 Mb/s  
1000BASE-T (full-duplex) 2000 Mb/s

**Operating Temperature** 32° to 131°F (0° to 55° C)

**Operating Humidity** 10% to 95% non-condensing

**Dimensions (H x W x D)** 5.3 x 2.5 in (13.50 cm x 6.4 cm) (without brackets)

**Operating System Driver Support** Windows 7 Professional 32-bit and 64-bit.  
Red Hat Enterprise Linux(RHEL) WS4, 5, 6 Desktop/Workstation  
Novell SLED 10 & SLED 11

**Management Capabilities** WOL , PXE 2.1

### Technical Specifications - Networking and Communications

**Kit Contents**

HP 361T PCIe Dual Port Gigabit NIC PCA with a standard height bracket attached to it (the low profile bracket is included in the clamshell that the PCA ships in)  
Product Warranty statement and the Quick Install Card (QIC).

---

© 2013 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein. Intel, Xeon, and QuickPath are trademarks of Intel Corporation in the U.S. and other countries. Microsoft and Windows are U.S. registered trademarks of Microsoft Corporation.