

KabyLake /SkyLake

Desktop

M.2

2 x HDMI

10 x USB





## Features


- Intel® Core Skylake-s/KabyLake-s Series Processors
- 2 x SO-DIMM DDR3L Memory, Up to 32GB
- 1 x HDMI1.4b, 1 x HDMI2.0
- 1 x 2.5" SATA, 1 x M.2(2242/2280) for SSD
- 4 x USB3.0, 6 x USB2.0 1 x RS232
- 1 x RJ45, 1 x M.2(2230) for WiFi/BT

## Specifications RoHS CE FC CCC

Processor	CPU	Intel® LGA1151 Socket 6 <sup>th</sup> /7 <sup>th</sup> Gen. Processor
	Chipset	H110
	BIOS	AMI Source Code
Memory	Type	DDR3L
	Socket	2 x SO-DIMM
	Max Size	32GB
Graphics	GPU	Intel® HD Graphics 520/620
	Graphic Engine	Direct3D 2015, OpenGL 4.5, OpenCL 2.1
	HDMI2.0	1 x HDMI (Max. 3840 x 2160@60Hz)
	HDMI1.4b	1 x HDMI (Max. 3840 x 2160@30Hz)
Network	Controller	Intel® I219LM Gigabit Ethernet
	Interface	1 x RJ45
I/O	USB	4 x USB3.0, 6 x USB2.0
	Display Interface	2 x HDMI
	LAN	1 x RJ45
	Serial Port	1 x RS232
	Audio	1 x MIC-IN, 1 x AUDIO-OUT
	M.2 (2230)	1 x M.2 (2230) for WiFi/BT
	M.2 (2242/2280)	1 x M.2 (2242/2280) for SSD
	WatchDog Timer	0~255 Second Time Out Support
JAHC	Auto Power On	Power Activated Automatically Start
	RTC	Set Up Independently Every day, A Week as a Cycle
	SATA	1 x 2.5" SATA
Storage	M.2	1 x M.2 (2242/2280) for SSD
	Windows	Windows 7/8.1/10 (64-Bit)
Operation System	Linux	Supported
	Power Type	DC-IN
Power	Power Adapter	19V 4.74A
	Dimensions (W x D x H)	180mm x 177mm x 36mm (7.09" x 6.97" x 1.42")
Mechanical	Construction	Metal
	Mounting(Optional)	VESA Mounting Kit (JZ 300) Deaktop Kit (JC 189)
	Color	Black
	Operating Temperature	0°C ~ 45°C ( 32 F ~ 113 F ) at 0.7m/s Air Flow
Environment	Relative Humidity	95% @ 40°C (non-condensing)
	Certification	CE, FCC Class B, CCC

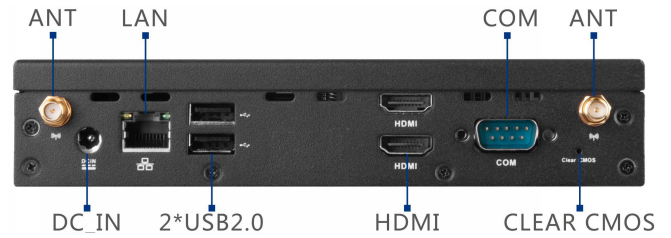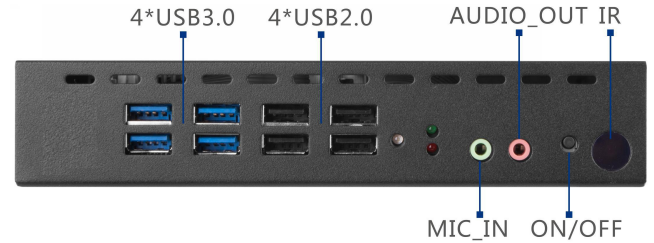

## Dimensions and Drawing

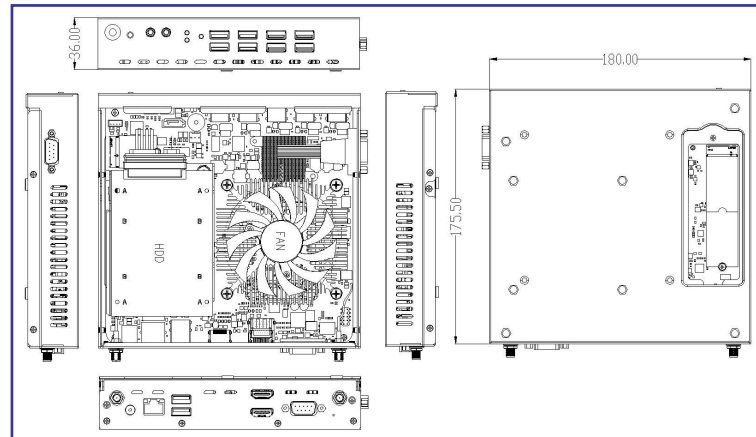

## Packing List

Part Number	Description	Amount	Mark
-	BQ67	1	180mm x 177mm x 36mm
-	Drive Disk	1	
-	WiFi Antenna	2	
-	AC Power Cable	1	
-	AC Power Adapter	1	

## Ordering Information

Part Number	Description
<b>BQ67-H110</b>	Intel® LGA1151 Socket 6 <sup>th</sup> /7 <sup>th</sup> Gen. Processor