



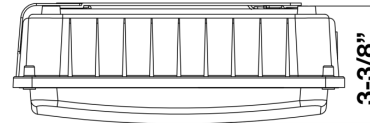

71609B - ULTRATHIN CANOPY

SURFACE MOUNT

70W 5000K 120-277V


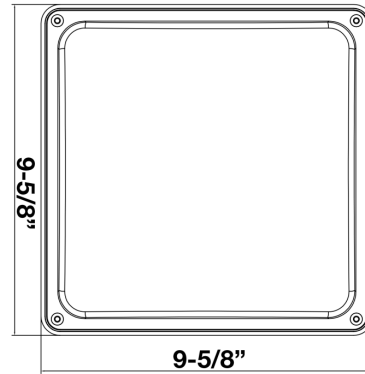


FEATURES:

- Thin Appearance
- Good Heat Dissipation
- Convenient Installation Pendant or Surface Mount
- Long Life high Efficiency LEDs
- 50,000+ Hour LED Life Expectancy
- Photocell (Not Included) can be installed on fixture
- IP65 Wet Location Rated
- cULus listed for Wet Locations
- DLC Listed
- 5 Year Warranty

Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Dimming	Lumens/Watt	DLC#
71609B	Bronze	70W	8020	5000K	120-277	0-10V	114	PLH1SCRFCK0U

PHOTOMETRY

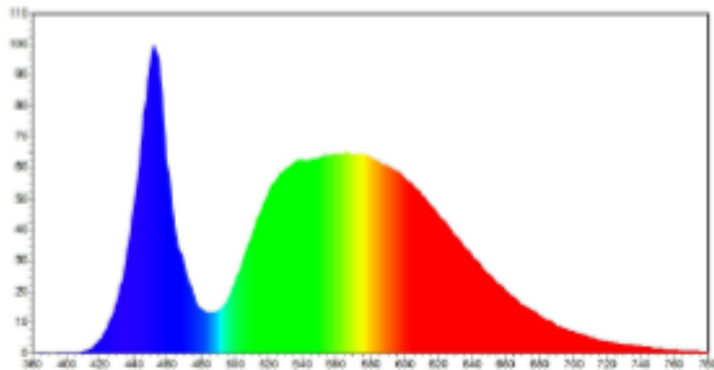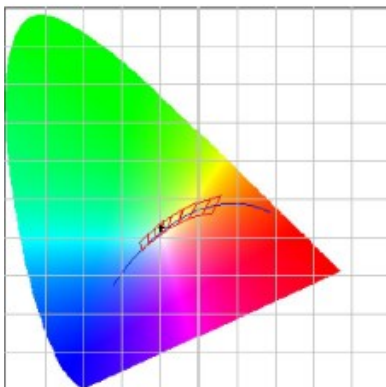



71609B - ULTRATHIN CANOPY

SURFACE MOUNT

70W 5000K 120-277V

Technical Specifications:

Electrical:

Input Voltage: 120 - 277

Current: .568A@120V; .284A@277V

Frequency: 60Hz

Power Factor: \geq .9

Product Parameters:

70 Watts

Efficacy: 114 lumens per watt

50,000+ LED Life Span

CCT: 5000k (Cool White)

Chromacity Measurements:

Beam Angle: 140°

CRI: \geq 70

R9: -21

DUV: 0.0059

Chromaticity (x,y): x=.3454; y= .3639

Chromaticity (u,v): u=.2069; v= .3270

Component Specifications:

LED: SSC3030

Driver: 120-277V 50-60HZ

Driver Output Volts: 120-277

Driver Output Amps: 205mA

Surge Protection: 10,000V

Dimming: 0-10V

Operating Temperature:

Minimum Starting -31° - 122° F

Construction:

Housing: Aluminum Housing

Powder Coat Bronze Finish

IP Rating: IP65 Wet Location Rated

Lens Material: Prismatic Polycarbonate Lens

Mounting: Ceiling Mount

(Drywall / Sheetrock)

Listings: ETL, cULus

DLC PRODUCT ID#: PLH1SCRFCK0U

Carton Qty: 1

Weight: 8 lb

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).