

BladeUPS

EATON



BladeUPS

Standalone or pre-assembled configurations

BladeUPS



Powering Business Worldwide



(888) 305-1555

www.p-s-s.com info@p-s-s.com



An Eaton Green Product

Introducing the BladeUPS uninterruptible power system

Designed specifically for high-density computing environments, the Eaton BladeUPS delivers 8 or 12 kW of efficient, reliable power in only 6U of standard rack space, including batteries. Expand capacity by combining 12 kW modules in a building block fashion to deliver 60 kW (N+1) from a single rack enclosure. This powerful configuration delivers higher power density than competitive, modular solutions, while dissipating only one-third of the heat.

The standard internal batteries provide needed ride-through power until an auxiliary power source takes over or systems are gracefully shut down. Extend runtime up to 55 minutes at full load* (or 120 minutes at half load) with extended battery modules (EBMs).

* 8 kW model ONLY available at 208V input.



Eaton BladeUPS

Features

- Protects mission-critical applications with innovative backup power technology designed specifically for high-density computing environments
- Supports the constant moves, adds and changes of today's dynamic data centers with a modular, scalable, and flexible backup power architecture
- Conserves valuable rack space with 8 or 12 kW of power in only 6U of rack height, including batteries
- Accommodates growth by enabling building-block upgrades from 12 to 60 kW in a single rack enclosure
- Reduces energy costs and cooling needs through best-in-class efficiency performance
- Delivers highest levels of reliability at the rack with patented Powerware Hot Sync paralleling technology and intelligent bypass design, field proven in thousands of large data centers globally
- Simplifies installation and service with true plug-and-power connections and hot-swappable batteries and electronics modules
- Increases battery life through ABM[®] technology, resulting in more uptime and fewer battery replacements

POWER PROTECTION FOR:

- Blade servers
- Small, medium and large data centers
- Network closets
- PBX and VoIP equipment
- Networking applications: IPTV, security
- Storage devices: RAID, SAN
- Database clusters



BladeUPS in a rack
(60 kW, N+1 redundant)



The BladeUPS is TAA Compliant.


Reduce energy costs with high efficiency

As utility rates continue to climb, energy efficiency becomes a sticking point with data center managers.

The BladeUPS delivers an outstanding, industry-leading 98 percent efficiency in normal operation. Even at <50 percent load, where efficiency is typically much lower, this UPS performs more efficiently than competitors' modular products at full load.

In addition to dramatic cost savings, high system efficiency extends battery runtimes and produces cooler operating conditions within the UPS, extending the life of components and increasing overall reliability and performance.

Even small increases in efficiency can quickly translate into thousands of dollars. The example below compares annual and five-year energy costs for the BladeUPS and a competitor's solution. It's easy to see that the BladeUPS pays for itself through energy and cooling savings alone.

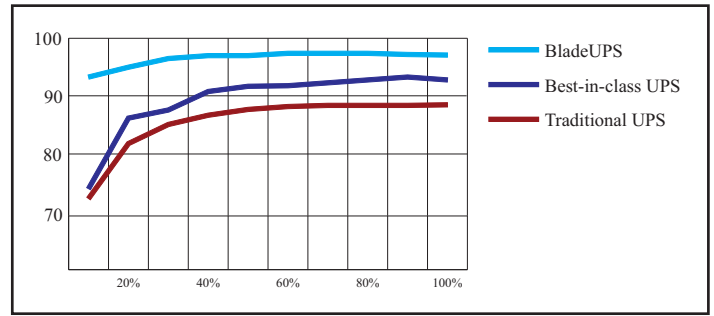

Even at very small loads, where you would expect efficiency to be lower, the BladeUPS is still more efficient than other UPS products at full load.

Efficiency comparison and savings

	BladeUPS	Traditional UPS
UPS efficiency rating	>98%	91.5%
Rack power consumption	60 kW	60 kW
Cost per kWh	\$0.10	\$0.10
Cost to operate per hour	\$6.18	\$6.56
Monthly power savings	\$273	
Heat dissipation (BTUs per hour)	6,300	19,000
*Monthly cooling savings	\$246	
Annual savings with the BladeUPS	\$6,238	
Five-year savings with the BladeUPS	\$31,190	

* Cooling savings based on industry calculation of cooling costs per kW of power costs.

Reduce cooling costs with lower heat dissipation

The high-efficiency BladeUPS reduces the power requirements for the data center. In the example shown, the BladeUPS reduces energy costs by an average of \$273 per month. In addition, the high efficiency of a BladeUPS reduces overall air conditioning needs by more than one third; multiply that with a reduction in cooling costs by one-third and utility bills are further decreased by an additional \$246 per month. The savings compound with the data center size and the number of UPS products. The low heat dissipation means this UPS can be located close to equipment racks without a concern for creating hot spots in the data center.



The BladeUPS remains cool even in a data center full of servers.

Meet current and changing requirements with modular architecture

The building block of the BladeUPS system is a 6U rackmount module that provides 12 kW of backup power protection. The system expands easily to provide maximum results. As your data center grows, the system's modularity plays a key role in optimizing your capital planning and deployment. Using the patented and field-proven Powerware Hot Sync paralleling technology, up to six BladeUPS modules can be paralleled for extra capacity or redundancy, providing 60 kW of redundant backup power protection in one 19-inch rack.

Patented load-sharing control intelligently distributes the workload among modules without requiring direct synchronization links among them. Any module can provide backup support for any other, with no interruption or downtime. For instance, in a redundant system you could perform full maintenance on any module without any interruption of conditioned power to the protected IT equipment.

YEAR 1: INITIAL INSTALL



12 kW

YEAR 3: EXPANSION

BladeUPS Parallel Bar for paralleling UPS modules

42U Eaton enclosure

Total rack space: 24U

12 kW BladeUPS occupies 6U of space



36 kW

Redundant N+1 configuration: Six 12 kW UPS modules share the load equally. If a UPS module is removed from service, the remaining modules seamlessly support the load without interruption.

Three 12 kW UPS modules = 36 kW of backup power

6U electrical wire-way

YEAR 5: FURTHER EXPANSION




60 kW, N+1

The BladeUPS is extraordinarily flexible—configured as a single module or multi-module system (up to six modules) in a standard 19-inch rack enclosure. The modular design enables you to deploy just the right amount of backup protection at the right price for your current needs and expand later whenever needed.


Easy setup with simple parallel configuration changes

The BladeUPS is easy to install, configure, and deploy—and easy to expand later, without help from Eaton. To link multiple BladeUPS modules into a parallel configuration, all you need is a BladeUPS Parallel Bar—a simple kit installed in the bottom of the rack and on the back rail. IT personnel can then simply plug additional modules into the parallel bus bar. The system is intelligent, so it automatically detects paralleled modules and fully configures itself for parallel operations.

Eaton also offers an assortment of plug-and-play power distribution accessories with various input and output connections to distribute power from the BladeUPS to rack power strips or directly to high-power servers. You can choose from distribution designs with or without monitoring capability, for redundant or non-redundant applications spanning from 0U to full rack height.

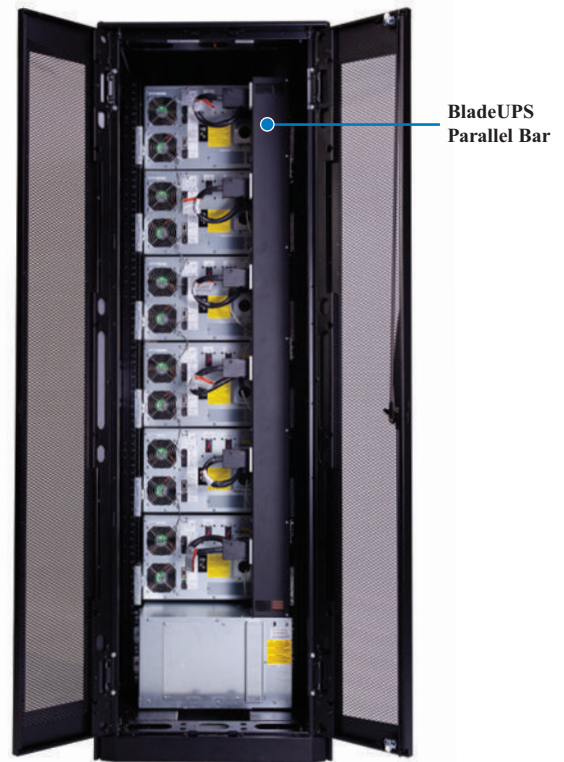

The BladeUPS Parallel Bar easily connects up to six modules in parallel.

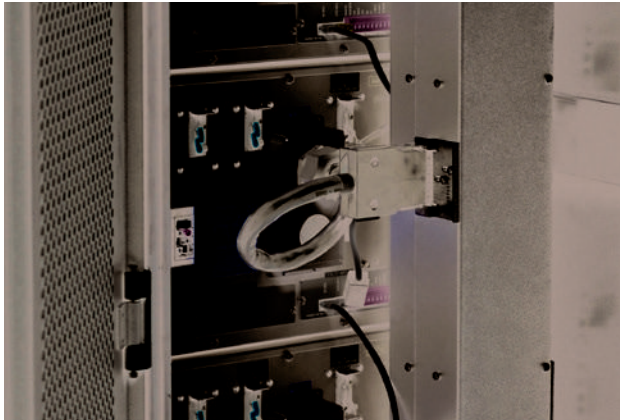


Adding modules is a simple plug-and-power procedure for IT personnel with safety-approved connectors.

Administrators can monitor and manage the BladeUPS using the unit's LCD panel or remote monitoring software. The UPS provides data for the entire multi-module system, as well as the individual module. In addition, a module working in a parallel configuration can be separated at any time and re-deployed as a standalone module to meet a data center's changing requirements.

The brightly backlit 2.6" LCD shows parameters of the system or a module.



Access parallel system information



Display output from multiple modules on one screen



Display full system output from any UPS



Review any UPS from any display




Display individual module output voltage






Display individual module output current

Save space with high power density UPS

The BladeUPS offers the smallest footprint of any UPS in its class, as well as double the power density of any other UPS on the market. This compact design leaves more space for IT equipment in the rack and data center.



BladeUPS
60 kW N+1 modular system with 6-minute battery and automatic maintenance bypass
Total square feet = 7.0

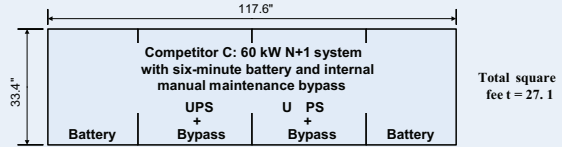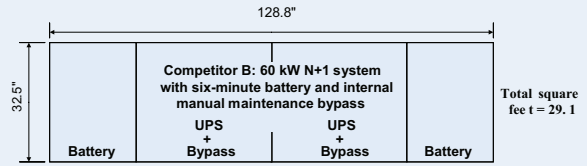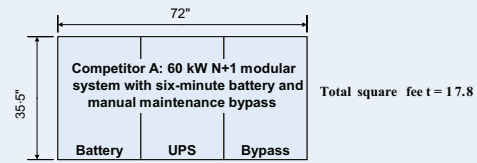

BladeUPS system footprint compared to competitors' footprints for 60 kW N+1 redundant application

Expedite deployment with flexible installation options

The BladeUPS can be deployed in a variety of system architectures to support the specific requirements of your computer room or data center, and to support the desired level of redundancy (Tier I through Tier IV, as defined by the Uptime Institute). Data center managers can tailor power protection to adapt to changing needs, often without the need for an electrician or service technician.


Hybrid power protection. Stronger redundancy of power protection for equipment racks containing critical IT equipment.

- For dual-corded loads with one source on a central UPS and the other on utility power, you can back up selected loads with a local BladeUPS, deployed in a distributed or zone fashion.
- For dual- or single-corded loads on a central UPS, you can back up selected loads with a local BladeUPS (distributed or zone) in series with the central UPS. This configuration provides maximum reliability close to critical loads, with minimal heat dissipation and maximum efficiency.

System architecture with the BladeUPS

Centralized power protection for small computer rooms. Start with one 12 kW module and expand to 60 kW with N+1 redundancy in a single 19-inch rack enclosure.

Zone power protection for mid-sized computer rooms. Deploy 60 kW (N+1) in a 19-inch rack to protect a row of IT equipment racks. Use 3U rack mount RPMs to distribute power to the IT equipment.

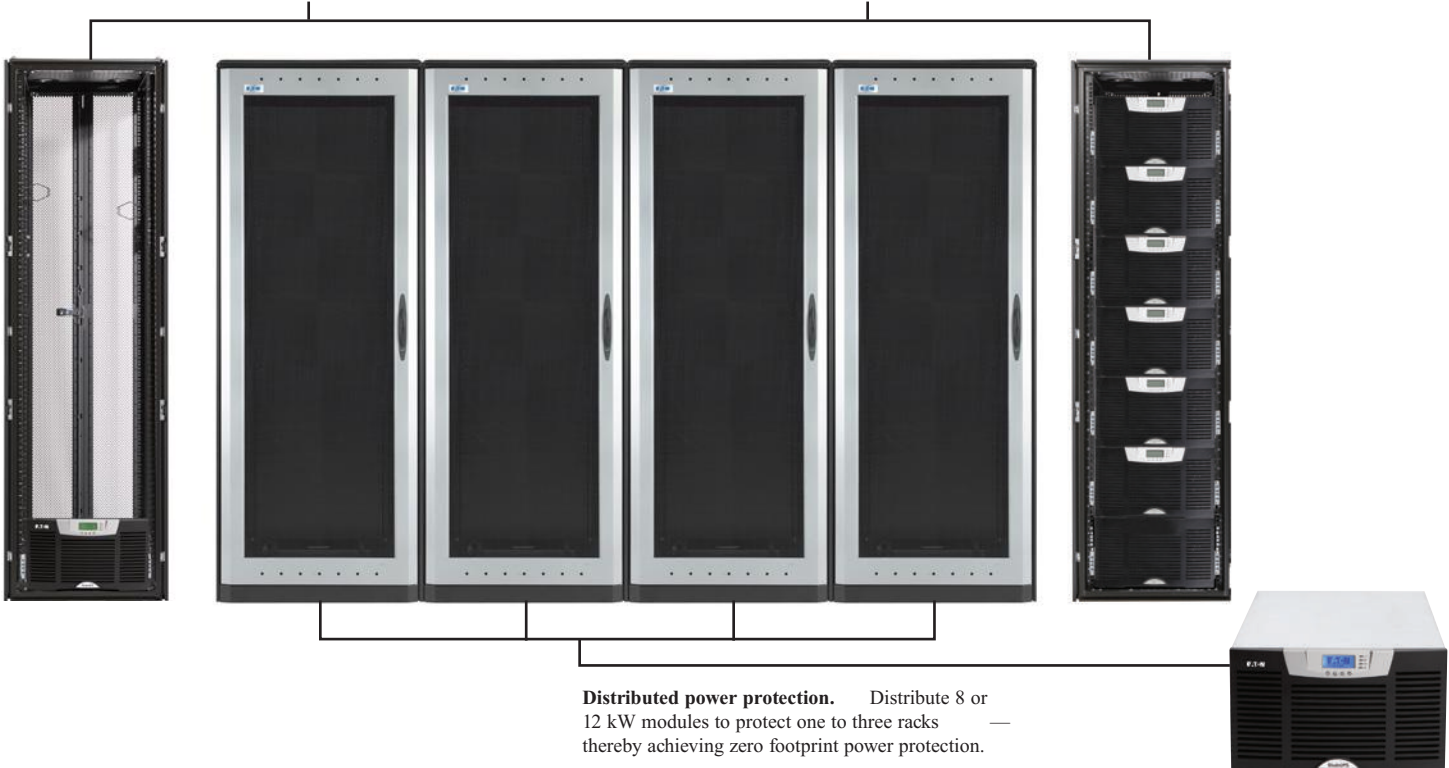

Distributed power protection. Distribute 8 or 12 kW modules to protect one to three racks — thereby achieving zero footprint power protection.

Eaton BladeUPS pre-assembled system

Take advantage of Eaton's turnkey solution with the BladeUPS pre-assembled system. Order depending on your power requirements, pre-assembled systems with one to six BladeUPS units installed, providing the right level of power protection today while looking ahead to future growth. The top-entry models are ideal for data center environments that don't have a raised floor and a flexible option is available to facilitate data center moves, additions or changes. Bottom entry models are also available.

Each pre-assembled system is factory installed, tested and placed in the new Eaton S-Series rack (42U). Eaton fully assembles the system, complete with communications cards and system wiring validation, prior to shipping, and it's delivered on a single, shock-absorbent pallet.

Please note that extended battery modules and other BladeUPS accessories for these systems must be ordered separately.

Cost savings

BladeUPS pre-assembled systems are more affordable than ordering the standard system components and onsite installation service separately; you'll save 7 percent on the overall cost of the product by purchasing the pre-assembled unit. Even more, since it's shipped on a single pallet, you can save up to 20 percent on shipping costs!

Easy installation

Each pre-assembled system comes with all the UPS modules and communication cards already installed. For BladeUPS systems with five and six modules, the internal batteries are shipped uninstalled for better weight distribution.

You simply unwrap the rack and easily roll it off of the pallet via a specially designed ramp that's packaged with the unit. Once the rack is set in place, all you have to do is bring electricity to the unit and initiate the startup.



BladeUPS pre-assembled system on shock-absorbent pallet with specially-designed ramp.

S-Series Rack

Eaton S-Series Racks are scalable and feature a fully welded steel frame. A wide range of horizontal and vertical cable management options enhance cabinet-to-cabinet and top-to-bottom cable routing. Split rear doors provide easier access and maneuverability in data center environments and a broad range of rack accessories, as well as power distribution, management and protection products, provide a proven platform you can depend on to support your critical IT operations. Interact with the S-Series Rack at Eaton.com/S-Series.



Fully welded frame allows unobstructed access along the sides, eliminating cumbersome pass-through holes.



Open base offers unsurpassed access of cables through the bottom of the enclosure.



Enclosed, integrated trough allows for overhead cable distribution.

Key technology features

- Factory pre-tested system accelerates installation and minimizes on-site testing requirements
- Save up to 20 percent in shipping costs
- Top and bottom entry models available
- Modularity and scalability allow the system to be easily moved
- Installed in new Eaton S-Series rack
- Quick and easy installation process

Shipping features

- Shock-absorbent pallet
- Specially-designed ramp included for easy on-site product placement
- Extra space on pallet for internal batteries to provide improved weight distribution for five- and six-module systems during shipping
- Shipped as one unit, resulting in lower cost and easier installation

BladeUPS pre-assembled system - bottom entry (12 kW to 60 kW N+1)

Part Number	Model
ZP21110XXXXX00012 kW, 208V	
ZP21111XXXXX00012 kW, 208V, with (1) Web/SNMP card	
ZP21115XXXXX00012 kW, 208V with (1) Power Xpert SNMP/ModBus card	
ZP212100XXXX00024 kW, 208V	
ZP212110XXXX00024 kW, 208V with (1) Web/SNMP card	
ZP212150XXXX00024 kW, 208V with (1) Power Xpert SNMP/ModBus card	
ZP2131000XXX000 36 kW, 208V	
ZP21311000XXX000 36 kW, 208V with (1) Web/SNMP card	
ZP21315000XXX000 36 kW, 208V with (1) Power Xpert SNMP/ModBus card	
ZP21410000XX000 48 kW, 208V	
ZP21411000XX000 48 kW, 208V with (1) Web/SNMP card	
ZP21415000XX000 48 kW, 208V with (1) Power Xpert SNMP/ModBus card	
ZP215100000X000 60 kW, 208V	
ZP215110000X000 60 kW, 208V with (1) Web/SNMP card	
ZP215150000X000 60 kW, 208V with (1) Power Xpert SNMP/ModBus card	
ZP2161000000000 60 kW N+1, 208V	
ZP2161100000000 60 kW N+1, 208V with (1) Web/SNMP card	
ZP2161500000000 60 kW N+1, 208V with (1) Power Xpert SNMP/ModBus card	

BladeUPS pre-assembled system - top entry (12 kW to 60 kW N+1)

ZP22110XXXXX00012 kW, 208V
ZP22111XXXXX00012 kW, 208V, with (1) Web/SNMP card
ZP22115XXXXX00012 kW, 208V, with (1) Power Xpert SNMP/ModBus card
ZP222100XXXX00024 kW, 208V
ZP222110XXXX00024 kW, 208V, with (1) Web/SNMP card
ZP222150XXXX00024 kW, 208V, with (1) Power Xpert SNMP/ModBus card
ZP2231000XXX000 36 kW, 208V
ZP22311000XXX000 36 kW, 208V, with (1) Web/SNMP card
ZP22315000XXX000 36 kW, 208V, with (1) Power Xpert SNMP/ModBus card
ZP22410000XX000 48 kW, 208V
ZP22411000XX000 48 kW, 208V, with (1) Web/SNMP card
ZP22415000XX000 48 kW, 208V, with (1) Power Xpert SNMP/ModBus card
ZP225100000X000 60 kW, 208V
ZP225110000X000 60 kW, 208V, with (1) Web/SNMP card
ZP225150000X000 60 kW, 208V, with (1) Power Xpert SNMP/ModBus card
ZP2261000000000 60 kW N+1, 208V
ZP2261100000000 60 kW N+1, 208V, with (1) Web/SNMP card
ZP2261500000000 60 kW N+1, 208V, with (1) Power Xpert SNMP/ModBus card

BladeUPS pre-assembled system - bottom entry (12 kW to 48 kW)

Part Number	Model
ZP23110XXXXX00012 kW, 208V	
ZP23111XXXXX00012 kW, 208V, with (1) Web/SNMP card	
ZP23115XXXXX00012 kW, 208V with (1) Power Xpert SNMP/ModBus card	
ZP232100XXXX00024 kW, 208V	
ZP232110XXXX00024 kW, 208V with (1) Web/SNMP card	
ZP232150XXXX00024 kW, 208V with (1) Power Xpert SNMP/ModBus card	
ZP2331000XXX000 36 kW, 208V	
ZP23311000XXX000 36 kW, 208V with (1) Web/SNMP card	
ZP23315000XXX000 36 kW, 208V with (1) Power Xpert SNMP/ModBus card	
ZP23410000XX000 48 kW, 208V	
ZP23411000XX000 48 kW, 208V with (1) Web/SNMP card	
ZP23415000XX000 48 kW, 208V with (1) Power Xpert SNMP/ModBus card	

BladeUPS pre-assembled system - top entry (12 kW to 48 kW)

ZP24110XXXXX00012 kW, 208V
ZP24111XXXXX00012 kW, 208V, with (1) Web/SNMP card
ZP24115XXXXX00012 kW, 208V, with (1) Power Xpert SNMP/ModBus card
ZP242100XXXX00024 kW, 208V
ZP242110XXXX00024 kW, 208V, with (1) Web/SNMP card
ZP242150XXXX00024 kW, 208V, with (1) Power Xpert SNMP/ModBus card
ZP2431000XXX000 36 kW, 208V
ZP24311000XXX000 36 kW, 208V, with (1) Web/SNMP card
ZP24315000XXX000 36 kW, 208V, with (1) Power Xpert SNMP/ModBus card
ZP24410000XX000 48 kW, 208V
ZP24411000XX000 48 kW, 208V, with (1) Web/SNMP card
ZP24415000XX000 48 kW, 208V, with (1) Power Xpert SNMP/ModBus card

BladeUPS standalone systems (or capacity additions to parallel systems)

ZC0811108100000 8 kW 208V w/30A 5W* in/5W out, PXGX-UPS
ZC1212200100000 12 kW 208V w/60A 5W* in/5W out
ZC1212208100000 12 kW 208V w/60A 5W in/5W out, PXGX-UPS
ZC1212600100000 12 kW 208V w/60A 5W in/4W out
ZC1212608100000 12 kW 208V w/60A 5W in/4W out, PXGX-UPS
ZC121P060100000 12 kW 208V for parallel configuration
ZC121P068100000 12 kW 208V for parallel config, PXGX-UPS
ZC1224408100000 12kW 400V w/30A 5W in/5W out, PXGX-UPS
ZC122P060100000 12kW 400V for parallel configuration
ZC122P068100000 12kW 400V for parallel config, PXGX-UPS

* W is wire count in plug assembly. IEC309-60 used for 208V 12 kW, NEMA L21-30 used for 208V 8 kW, IEC309-30 used for 400V 12 kW
 Preassembled systems have hardwire input and output.
 Additional configurations available, please contact your Eaton sales representative.

Dimensions

Unit Dimensions (H x W x D, in)	(H x W x D, mm)
81.0 x 24.0 x 42.0	2057.4 x 609.6 x 1066.8
Shipping Dimensions (H x W x D, in)	(H x W x D, mm)
86.5 x 32.0 x 77.0	2197.1 x 812.8 x 1955.8

Power management software

Eaton's BladeUPS configurable and pre-assembled systems seamlessly integrate into the major virtualization platforms offering up to 10 free power nodes and allowing you to view your entire data center on a single dashboard.

Intelligent Power Software Suite

With Intelligent Power Manager supervisory software, you get a global view across the network from any PC with an Internet browser. Exceptionally versatile, the software is compatible with power devices supporting a network interface, including other manufacturers' UPSs, environmental sensors, ePDUs, shutdown applications and more.

In the event of an extended power outage, Eaton's free NetWatch software works in conjunction with the ConnectUPS X-Slot Web/SNMP card to allow you to gracefully and sequentially shut down connected devices, including virtual machines. NetWatch is compatible with ESXi and vSphere from VMware.



Microsoft Partner Network

Power Xpert software

Using Power Xpert software, you can also monitor the status of multiple UPSs and ancillary devices to accurately diagnose past events and predict future conditions.




Power Xpert software seamlessly handles Eaton's communications equipment in a graphical manner without additional serial interfaces, protocols or customization.

FORSEER software

FORESEER software analyzes thousands of data points to proactively manage key equipment throughout an enterprise-wide infrastructure. This system interfaces with an extensive collection of devices from most major manufacturers of power and environmental equipment, as well as subsystems for fire detection and suppression, security, fuel handling and building controls.

Software and connectivity options provide a unified window into the state of IT and facilities systems. With this level of visibility, you can transform the power system into a powerful strategic asset.

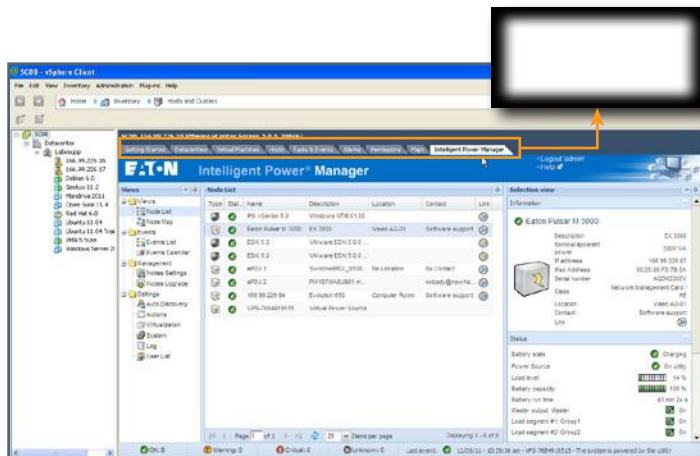

Intelligent Power Manager plugs into VMware's vCenter dashboard.



A configurable user interface displays critical data center information with FORESEER software.

Count on reliable performance and uptime

Recognizing the mission-critical nature of data center operations, the BladeUPS has been designed for premium reliability and continuous operation. The rackmount BladeUPS incorporates leading technologies that Eaton developed for its largest UPSs, such as:

Robust paralleling. With Eaton's patented Powerware Hot Sync technology, UPS modules work in peer-to-peer fashion when configured in a parallel system. Most other paralleling systems on the market use a single central main controller with a backup controller. If the main controller fails, the system must recognize this and transfer control to the backup control, or the entire system fails. With Eaton's patented approach, each UPS module operates independently, yet is completely synchronized with the others. There is no change in control, therefore no single point of failure.

Intelligent maintenance bypass switch. The internal switch inside the UPS chassis automatically activates bypass mode whenever a power module is removed. This feature ensures that power to protected loads is not accidentally interrupted by human error. (If the UPS is in a parallel environment with N+1 redundancy, removing an electronics module only causes that particular UPS module to go offline while the protected equipment is supported by other modules in the configuration).

Static bypass switch. All BladeUPS modules have their own static switch for normal operations and for internal bypass in case of a high overload condition, output load fault or internal failure.


Hot-swappable electronics and battery modules. Replacing batteries or electronics modules can be done in minutes without interrupting power to IT equipment. This hot-swap capability helps reduce mean time to repair (MTTR) and dramatically improves the availability of the protected IT equipment.



IT staff can easily replace battery modules.

Eaton's advanced battery management technique.

ABM technology significantly extends battery service life with a unique three-stage charging technique. The UPS automatically tests battery health and provides advance notification when preventive maintenance is needed, allowing ample time to hot-swap batteries without ever having to shut down connected equipment.

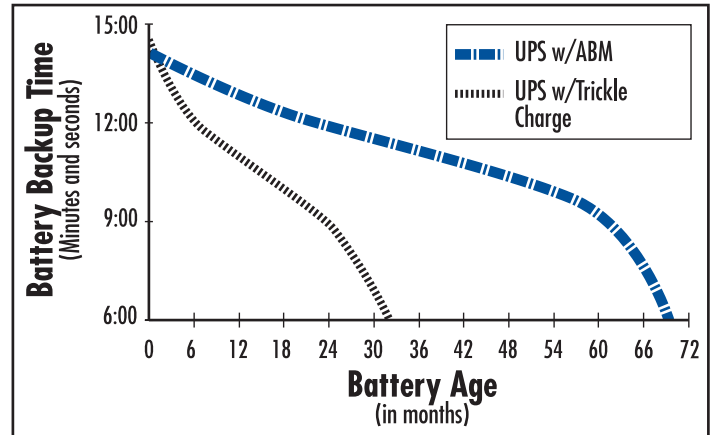

Eaton's ABM technology significantly increases battery service life.

Flexibly distribute power to racks

With Eaton's rack power module (RPM)

Partner the BladeUPS with an RPM to create a highly flexible, adaptable power delivery architecture at the rack level. The RPM delivers up to 36 kW (hardwired models) of power in an organized manner to loads of various voltages, power cords and layouts.

The 3U RPM can be deployed in the same rack with the UPS and IT equipment; there's no need for a dedicated infrastructure rack. The resulting architecture has fewer cables to manage, fewer distribution points to monitor and greater flexibility for IT personnel to make changes without an electrician.

Consider a Tier II data center with 42 racks at 5 kW per rack: the BladeUPS with RPM can meet power requirements with half the number of racks, 60 percent less rack space, 45 percent less cabling and 41 percent less square footage than other vendors' power distribution products that require dedicated racks. These advantages make the BladeUPS with RPM ideal for distributed protection in small to mid-sized data centers, or to add zone protection in large data centers that have centralized UPSs.



Eaton RPM

Simplify UPS installation and maintenance

The BladeUPS is easy to install, configure and deploy. All BladeUPS modules (UPS and battery) come with rackmount kits for easy installation in standard equipment racks. In-house IT staff can install and service this UPS themselves. Adding parallel units for future expansion is a simple, plug-and-play procedure.

The BladeUPS battery trays are user-replaceable so that one person, working alone, can replace the battery without disrupting data center operations or power to protected equipment.

Most IT teams are confident managing the BladeUPS without outside help because of its simplicity. However, Eaton is ready to provide support with its world-class service organization of customer service technicians who deliver 24x7 support including on-site corrective and preventive maintenance, battery solutions, service training, integration services and spare parts.

The BladeUPS is also compatible with Eaton’s eNotify Remote Monitoring system, which features 24x7 real-time monitoring of 100+ UPS and battery alarms, with Eaton’s staff of technical experts able to respond immediately and resolve many issues remotely. eNotify delivers monthly email reports that detail UPS performance and alarm history. Visit Eaton.com/enotify for more information.



IT staff can easily install electronics modules.

Flexible runtime options

Each BladeUPS can be configured with its own external battery backup. The BladeUPS design eliminates this single point of failure. Competitive, modular systems use a centralized battery bank with a shared connection point that presents a potential single point of failure.



BladeUPS extended battery module

BladeUPS typical battery runtime chart (in minutes)

Single Module		Internal Battery	+ 1 EBM	+ 2 EBMs	+ 3 EBMs	+ 4 EBMs
Load kW	Load %					
12	100%	4.7	9.5	17	27	34
11	92%	5.4	10.9	20	30	38
10	83%	6.2	13	22	33	42
9	75%	7.3	15	24	38	48
8*	67%	8.7	18	28	43	55
7	58%	10.7	23	32	50	64
6	50%	13.6	27	42	60	76
5	42%	18.5	33	51	73	94
4	33%	23	42	66	94	120
3	25%	30	56	89	128	165
2	17%	44	85	137	199	258

*Please use this 8 kW row for battery runtimes of 8 kW systems.

BladeUPS typical battery runtime chart (Parallel UPS, in minutes)

Number of UPS Models	Total Load kW	Internal Battery	+1 EBM per UPS		+2 EBMs per UPS		+3 EBMs per UPS		+4 EBMs per UPS		Configuration	Load %	kW per UPS Modules
			Min	EBMs	Min	EBMs	Min	EBMs	Min	EBMs			
6	60	6.2	13	6	22	12	33	18	42	24	N+1	83%	10
5	48	6.7	13	5	23	10	35	15	44	20	N+1	80%	9.6
4	36	7.3	15	4	24	8	38	12	48	16	N+1	75%	9
3	24	8.7	18	3	28	6	43	9	55	12	N+1	67%	8
2	12	14	27	2	42	4	60	6	76	8	N+1	50%	6

Technical specifications ¹

General characteristics

Power rating	8 or 12 kW per UPS module (8 kW only available at 208V)
Efficiency	Up to 98%
Heat dissipation	371 watts/1266 BTU/hr at 100% rated load (12 kW) 264 watts/903 BTU/hr at 100% rated load (8 kW)
Cooling	Fan cooled, temperature microprocessor monitored; front air entry, rear exhaust
Audible noise, normal operation	<60 dBA at 1 meter
Altitude before derating	1000 meters (3300 ft ASL)
Input characteristics	
Input voltage	208 Vac and 400 Vac models
Voltage range	208V model: 180 to 265 Vac 400V model: 311 to 500 Vac
Frequency range	50 or 60 Hz, ± 5 Hz
Input current distortion	<5% with IT loads (PFC power supplies)
Input power factor	>0.99 with IT loads (PFC power supplies)
Inrush current	Load dependent
Input requirements	Three-phase, four-wire + ground
Bypass source	Same as input (single feed)
Generator compatibility	Fast sync slew rate for generator synchronization, programmable return to AC source delay

Output characteristics

Rated output voltage	208V model: 180 to 225 Vac, Ph to Ph 400V model: 180 to 240 Vac, Ph to N
Output configuration	Three-phase, four-wire + ground
Output frequency (nominal)	50 or 60 Hz auto-detection on startup
Frequency regulation	0.1 Hz free running
Load power factor range	Lagging: 0.7 Leading: 0.9
Total output voltage distortion	<3% with IT loads (PFC power supplies) <5% non-linear or non-PFC power supplies

Battery characteristics

Battery type	VRLA - AGM
Battery runtime (internal)	50% loading 23 min (8 kW) 13 min (12 kW) 100% loading 9 min (8 kW) 4.7 min (12 kW)
Battery string voltage	240 Vdc
Battery test	Automatic battery test standard (remote scheduling capable); manual battery test from front display
Battery recharge profile	ABM three-stage charging technology
Battery cut-off voltage	Variable from 1.67 VPC at <5 min runtime to 1.75 VPC at >90 min runtime
Battery low condition	Announced with alarm
Extended battery capability	Yes, add up to four additional 3U battery enclosures 50% loading 120 min (8 kW) 76 min (12 kW) 100% loading 55 min (8 kW) 34 min (12 kW)

Physical characteristics

Dimensions H x W x D, in (mm)	EBM5.1 (6U) x 17.4 x 26.0 (267 x 442 x 660)
	EBM5.2 (3U) x 17.2 x 26 (132 x 437 x 660)

Note:

Total chassis weight without batteries or electronics: 100 lb (46 kg)
Total chassis weight with batteries or electronics: 307 lb (140 kg)

Total UPS weight without batteries	135 lb (61 kg)
Total UPS weight with batteries	307 lb (140 kg)
EBM shipping weight	170 lb (77 kg)

Communications and user interface

Software compatibility	UPS ships with Software Suite CD containing Intelligent Power Manager supervisory software and Intelligent Power Protector protection software
X-Slot Bays	Two available for the cards listed below
Optional X-Slot communication cards	Application: Web/SNMP: PowerXpert Gateway Series UPS card Web/SNMP: Connect UPS card (400V models ONLY) Modbus RTU: Modbus card Modbus TCP/IP: PowerXpert Gateway Series UPS card IBM eServer™ (i5™, iSeries™, or AS/400): Relay interface card N/O, N/C (dry contact): Industrial relay card Parallel: Powerware Hot Sync CAN Bridge card
Control panel LCD	Two lines by 20 characters Four menu-driven interface buttons Four status-at-a-glance LEDs
Multi-language	English standard; 20 languages available
Configuration changes	User capable, firmware auto configures
Dry contact inputs	Two, user-configurable
Dry contact outputs	One, user-configurable
Service	
Installation	User capable, optional factory service available located in the IT racks
Preventive maintenance	User capable, optional factory service available
Corrective maintenance	User capable, optional factory service available
Serviceability features	Hot-swappable batteries Hot-swappable electronics module Automated internal maintenance bypass Auto-configure firmware Flash firmware upgradeable

Certifications

Safety	208V model: UL1778, cUL 400V model: CE
EMI	208V model: FCC Part 15 Class A 400V model: EN 62040-2 Class A
Surge protection	ANSI C62.41, Cat B-3
Hazardous materials (RoHS)	EU Directive 2002/95/EC Category 3 (4 of 5)

Warranty

Standard	18 months from date of shipment
Warranty repair	Factory depot repair or replace

Service Support Agreements

Depot	PowerTrust Express
On-site 8x5	PowerTrust Value
On-site 24x7	PowerTrust eight-, six- or two-hour response

Options and accessories

Detachable input cord
Detachable input/output cord assembly
Detachable paralleling cord assembly
EBMs
3U output sub-distribution module
0U to 3U rack power strips
60 kW BladeUPS Parallel Bar, Top Entry, Bottom Entry & 4-high versions
Environmental Monitoring Probe (EMP) for temperature and humidity monitoring
X-Slot communication cards (see Communications and user interface section)
3U Maintenance Bypass Module
External Battery Interconnect for use with 400V models

1. Due to continuing product improvement programs, specifications are subject to change without notice.
2. eNotify Remote Monitoring and 24x7 technical support included.