Data sheet

# HP LaserJet Enterprise M605 Series<sup>\*</sup>



## A powerhouse printer loaded with manageability, energy savings, and mobile printing features.<sup>2</sup>

Accelerate business results with outstanding print quality. Tackle large jobs and equip workgroups for success wherever business leads.<sup>2</sup> Easily manage and expand this impressively fast, versatile printer—and help reduce environmental impact.



HP LaserJet Enterprise M605n



HP LaserJet Enterprise M605dn



HP LaserJet Enterprise M605x

#### Take productivity to the next level

- Equip users to fly through tasks with the intuitive 4.3-inch (10.9 cm) colour touchscreen and PIN printing.
- Meet high-volume demands with automatic two-sided printing and versatile paper trays—up to 3,600 sheets.<sup>3</sup>
- Improve efficiency. Add paper-handling accessories to presort jobs, print on different media, and more.<sup>4</sup>
- Print uninterrupted for longer periods of time with high-yield Original HP LaserJet cartridges.<sup>5</sup>

## Meet business needs in the office and beyond

- Enable wireless direct printing in the office—from mobile devices—without accessing the network.<sup>6</sup>
- Print with just a touch of your NFC-enabled mobile device to this printer—no network needed.<sup>7</sup>
  Extend your printing reach. Easily share printing resources on a network with Ethernet connectivity.

## Advanced capabilities, easy management

- Easily expand this printer as solutions advance and workgroup needs grow, with add-on, updatable features.
- Protect sensitive data—at rest or in transit—with a variety of embedded and optional security solutions.<sup>9</sup>
- Easily take command of your printing environment from one central location—with HP Web Jetadmin.  $^{\rm 10}$
- Quickly troubleshoot problems using cloud-based help services that are relevant and up to date.<sup>11</sup>


#### Less energy, more efficiency and savings

- Save energy—HP Auto-On/Auto-Off Technology turns your printer on when you need it and off when you don't.<sup>12</sup>
- Conserve resources—this printer has lower typical electricity consumption than any device in its class.<sup>8</sup>
- Help save time and money with lightweight HP EcoFFICIENT paper—engineered for clean, trouble-free printing.
- Help reduce your impact. Count on easy, free cartridge recycling through HP Planet Partners.<sup>1</sup>
- Protect your investment with HP Care Pack. Let our HP certified engineers resolve all your technical issues.<sup>13</sup>

<sup>1</sup>SKUs availability may vary by country. <sup>1</sup> Program availability varies. Original HP cartridge return and recycling is currently available in more than 49 countries, territories, and regions in Asia, Europe, and North and South America through the HP Planet Partners program. For more information, visit hp.com/recycle. <sup>2</sup> Local printing requires mobile device and printer be on the same network or have a direct wireless connection. Wireless performance is dependent on physical environment and distance from access point. Wireless operations are compatible with 2.4 GHz operations only. Remote printing requires an Internet connection to an HP web-connected printer. App or software and HP ePrint account registration may also be required. Wireless broadband use requires separately purchased service contrations for mobile devices. Check with service portroase of additional accessories. <sup>4</sup> Optional paper-handling accessories must be purchased separately. <sup>5</sup> The optional high-yield Original HP Laser let cartridge must be purchased separately. <sup>6</sup> Feature is available only on the HP Laser let Enterprise M605x. Mobile device must support NFC-enabled printing. See hp.com/go/mobileprinting PO or printer prior to printing. Depending on mobile device, an app or driver may also be required. Wireless performance is dependent on physical environment and distance from the access point in the MFP or printer. For details, see hp.com/go/mobileprinting. <sup>7</sup> Feature is available only on the HP Laser let Enterprise M605x. Mobile device must support NFC-enabled printing. For more information, see hp.com/go/mobileprinting also be required. Wireless performance is dependent on physical environment and distance from the access point in the MFP or printer. For details, see hp.com/go/mobileprinting. <sup>6</sup> Based on HP testing using the ENERGY STAR® programs Typical Electricity Consumption Troe information, see hp.com/go/mobileprinting. <sup>9</sup> Based on HP testing using the ENERGY STAR® programs Typical Electricity Consumption more information,

## **Product walkaround**

- 1 Intuitive 10.9 cm (4.3-inch) colour touchscreen **HP LaserJet Enterprise M605x shown** tilts up for easier viewing 2 600-sheet output bin 2 3 Top cover (access to the toner cartridge) 3 4 100-sheet multipurpose tray 1 500-sheet input tray 2 5 500-sheet input tray 3 6 (D)Hardware Integration Pocket (HIP) 7 Easy-access USB port 8 Convenient front on/off button 9 5 10 Output accessory cover 6 11 512 MB standard memory (upgradeable **Front view** to 1.5 GB) and a 1.2 GHz processor 12 Access port for optional Kensington-style lock 10 13 Local area network (LAN) Ethernet (RJ-45) network port шů 14 Hi-speed USB 2.0 printing port 11 12 15 Hi-speed USB 2.0 port for connecting external 13 USB devices 14 16 Power connection 15
- 17 Built-in automatic two-sided printing

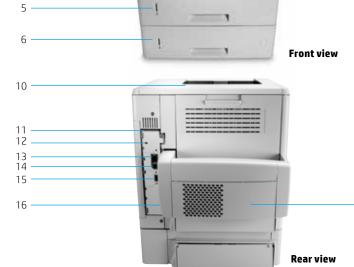

8

q

17

## Series at a glance

	0	0	
Model	M605n	M605dn	M605x
Product number	E6B69A	E6B70A	E6B71A
Print speed in ppm, A4 <sup>2</sup>	Up to 55	Up to 55	Up to 55
Control panel	4-line LCD with keypad	4-line LCD with keypad	10.9 cm (4.3-inch) colour touchscreen
100-sheet multipurpose tray and 500-sheet tray 2	✓	✓	✓
500-sheet tray 3	Optional	Optional	✓
Up to three 1 x 500-sheet input trays and one 1,500-sheet high-capacity input tray¹	Optional (up to a maximum of 6 trays total)	Optional (up to a maximum of 6 trays total)	Optional (up to a maximum of 6 trays total)
Touch-to-print³ and wireless direct⁴ mobile printing	Optional	Optional	4
HP High-Performance Secure Hard Disk	Optional	Optional	Optional
Automatic duplexer	Optional	✓	✓
Support for high-capacity toner cartridge	✓	$\checkmark$	$\checkmark$
ENERGY STAR <sup>®</sup> certified	Not available	✓	✓

<sup>1</sup> 3,600-sheet input capacity requires purchase of additional accessories, up to a maximum of 6 trays total for up to 3,600-sheet input capacity. To insure product stability, it is a requirement to purchase the HP LaserJet Printer Stand (F2G70A) when using M605 Printers with more than three HP LaserJet 500-sheet Input Tray Feeders (F2G68A), or with one HP LaserJet 1,500-sheet Input Tray (F2G73A) and more than one HP LaserJet 500-sheet Input Tray Feeder (F2G68A). <sup>2</sup> Printing speed measured using ISO/IEC 24734 and excludes first set of test documents. For more information, see <u>hp.com/go/printerclaims</u>. Exact speed varies depending on the system configuration, software application, driver, and document complexity. Print speeds are up to 55 ppm, A4 (58 ppm, letter) for the HP LaserJet Enterprise M605 series. <sup>3</sup> Touch-to-print capability is standard on the HP LaserJet Enterprise M605x only. Requires purchase of optional HP Jetfrect 3000w near field communications (NFC)/Wireless Accessory, available Fall 2015, for the HP LaserJet Enterprise M605x on the HP Las Mobile device must support NFC-enabled printing. For more information, see hp.com/go/mobileprinting.<sup>4</sup> Wireless direct printing is standard on the HP LaserJet Enterprise M605x only. Requires purchase of optional HP Jetdirect 3000w near field communications (NFC)/Wireless Accessory, available Fall 2015, for the HP LaserJet Enterprise M605n and M605dn. Mobile device needs to be connected directly to the Wi-Fi signal of a wrieless forect-capable multifunction printer (MFP) or printer prior to printing. Depending on mobile device, an app or driver may also be required. Wireless performance is dependent on physical environment and distance from the access point in the MFP or printer. For details, see <u>hp.com/go/businessmobileprinting</u>

## **HP Services**

Downtime can have serious consequences, so HP provides support beyond the standard warranty. You benefit from reduced risk, maximized uptime, predictable service delivery and no unbudgeted repair costs.

Choose from:

## **Optimized Care (optimum performance**

**and stability):** 4 hour Onsite Support, Maintenance Kit Replacement Service, Installation with Network Configuration Service

**Standard Care (high level of uptime):** Next Business Day Onsite Support, Maintenance Kit Replacement Service, Installation with Network Configuration Service

Basic Care (minimum recommended support): Next Business Day Onsite Support

**4 hr Onsite Support:** Onsite support within four hours after a service call received within the coverage window

**Next Business Day Onsite Support:** Onsite service the next business day after the service call is received

#### Maintenance Kit Replacement Service:

Onsite replacement of your printer's maintenance kit including parts, materials, and labor

#### Installation with Network Configuration

**Service:** Assembly, network configuration, and basic administrator familiarization

For more information about HP Care Pack, HP Contractual, or HP Managed Print Services, visit <u>hp.com/go/printservices</u>



Mac







## **Top Features**

Stay ahead of schedule with this swift and versatile printer—up to 58 pages per minute (ppm).<sup>2</sup> Easily meet high-volume demands and provide flexible options for multiple users and paper sizes.

Business is mobile, and so is your workforce. Keep them covered—at their desk, on the way to the office, or stepping off a plane for an important meeting—with easy printing from mobile devices.<sup>1</sup>

Streamline fleet management—while giving workgroups the tools to support larger business initiatives. Extend print capabilities as business evolves, enhance security, and customize new solutions seamlessly.

Shrink your energy use while helping your company save money. This HP Laser Jet Enterprise printer is designed for low energy consumption. Keep the printing process efficient and produce less waste.

Product				
E6B69A	HP LaserJet Enterprise M605n			
E6B70A	HP LaserJet Enterprise M605dn			
E6B71A	HP LaserJet Enterprise M605x			
Accessories				
F2G68A	HP LaserJet 500-Sheet Input Tray Feeder			
F2G69A	HP LaserJet Auto Duplexer Two Side Print			
F2G70A	HP LaserJet Printer Stand			
F2G71A	HP LaserJet 500-Sheet Stacker			
F2G72A	HP LaserJet 500-Sheet Stacker Stapler			
F2G73A	HP LaserJet 1,500-Sheet Input Tray			
F2G74A	HP LaserJet 75-Sheet Envelope Feeder			
F2G81A	HP LaserJet 500-Sheet 5-Bin Mailbox			
B5L28A	HP Two Internal USB Ports			
B5L29A	HP Secure High Performance Hard Disk Drive			
G6W84A	HP 1GB 90-Pin DDR3 Slim DIMM			
F5S62A	HP Trusted Platform Module			
F2G75A	HP LaserJet Custom Media Cassette Accessory			
Supplies & Mai	intenance Kits <sup>3</sup>			
CF281A	HP 81A Black Original LaserJet Toner Cartridge (~10,500 pages)			
CF281X	HP 81X High Yield Black Original LaserJet Toner Cartridge (~25,000 pages)			
F2G76A	HP Color LaserJet Printer 110V Maintenance Kit			
F2G77A	HP Color LaserJet Printer 220V Maintenance Kit			
HP Care Packs				
U8CR0E	HP 3-year Next Business Day + DMR LaserJet M605 Hardware Support			
U8CR1E	HP 3-year 4h 9x5 + DMR LaserJet M605 Hardware Support			
U8CR2E	HP 3-year 4h 13x5 + DMR LaserJet M605 Hardware Support			
U8CR5E	HP 4-year Next Business Day + DMR Laser Jet M605 Hardware Support			
U8CR6E	HP 5-year Next Business Day + DMR LaserJet M605 Hardware Support			
U8CS5E	HP 5-year 4h 13x5 + DMR LaserJet M605 Hardware Support			
U8CS9E	HP 5-year 4h 9x5 + DMR Laser Jet M605 Hardware Support			
U8CTOE	HP 4-year 4h 9x5 + DMR Laser Jet M605 Hardware Support			
U8CT1E	HP 4-year 4h 13x5 + DMR LaserJet M605 Hardware Support			
U8CT2E	HP 1-year Post Warranty 4h $9x5 + DMR$ LaserJet M605 Support			
U8CT3E	HP 1-year Post Warranty 4h 13x5 + DMR Laser Jet M605 Support			
U8CT5E	HP 1-year Post Warranty Next Business Day + DMR LaserJet M605 Support			
U8CT6E	HP 2-year Post Warranty Next Business Day + DMR Laser Jet M605 Hardware Suppor			
Protect your inv	vestment with HP Care Pack. Let HP certified engineers resolve your technical issues.			
	s on HP Care Pack, go to <u>hp.com/go/cpc</u>			
Paper				
Contact HP via	phone: Asia: 65 6253 8500			

## Solutions

HP Web Jetadmin: <u>hp.com/go</u>/wja

HP Universal Print Driver: hp.com/go/upd

HP Imaging and Printing Security Center: <u>hp.com/go/ipsc</u>

HP LaserJet Fonts, Barcodes, and IPDS Emulation available at <a href="https://www.hp.com/go/laserjetfonts">hp.com/go/laserjetfonts</a>

To learn more about available infrastructure, management, and workflow solutions, visit hp.com/go/gsc

<sup>1</sup> Local printing requires mobile device and printer be on the same network or have a direct wireless connection. Wireless performance is dependent on physical environment and distance from access point. Wireless operations are compatible with 2.4 GHz operations only. Remote printing requires an Internet connection to an HP web-connected printer. App or software and HP ePrint account registration may also be required. Wireless broadband use requires separately purchased service contract for mobile devices. Check with service provider for coverage and availability in your area. See <u>hp.com/go/mobileprinting</u> for more details. <sup>2</sup> Printing speed measured using ISO/IEC 24734 and excludes first set of test documents. For more information, see <u>hp.com/go/printerclaims</u>. Exact speed varies depending on the system configuration, software application, driver, and document complexity. <sup>3</sup> Declared yield value in accordance with ISO/IEC 19752 and continuous printing. Actual yields vary considerably based on images printed and other factors. For details see <u>hp.com/go/learnaboutsupplies</u>

## **HP LaserJet Enterprise M605 Series**

Functions	HP LaserJet Enterprise M605n (E6B69A)	HP LaserJet Enterprise M605dn (E6B70A) Print only	HP LaserJet Enterprise M605x (E6B71A)		
Print	Pinkony				
	Manual (Automatic optional)	Auto	matic		
Duplex print options	Manual (Automatic optional) Automatic Black (normal, A4): Up to 55 ppm; Black (normal, letter): Up to 58 ppm				
Print speed <sup>1</sup>					
First page out	Black (A4, ready): As fast as 7 sec; Colour (A4, ready): As fast as 7 sec				
Print technology Print resolution	Laser				
Print resolution technologies	Black (best): Up to 1200 x 1200 dpi Black (normal): HP ImageRE1 3600 (600 x 600 dpi)				
Print cartridges number	HP ImageREt 3600 (600 x 600 dpi), HP ProRes 1200 (1200 x 1200 dpi) 2 (black)				
Standard print languages			2 (u 1 7)		
Printer management	HP PCL 6, HP PCL 5e, HP Postscript Level 3 emulation, native PDF printing (v 1.7) Printer Administrator Resource Kit (Driver Configuration Utility, Driver Deployment Utility, Managed Printing Administrator); HP Web JetAdmin Software; HP Proxy Agent Software; HP Imaging an				
Printer management	Printer Administrator Resource Kit (briver conliguration officity, t	Printing Security Center; HP Utility (Mac)	o jetkulnih soltwale, ne eloxy Agent soltwale, ne imaging and		
Connectivity					
Standard connectivity	HP ePrint: Apple Airf	Print™; Ethernet; USB	HP ePrint: Apple AirPrint™: USB: Wireless direct printing:		
			Wireless (WiFi)		
Mobile print capability <sup>2</sup>	HP ePrint, Apple AirPrint™		HP ePrint, Apple AirPrint™, Touch-to-Print, Wireless Direct		
			Printing		
Network ready	Standard (built-in Gigabit Ethernet)				
Network capabilities	Via HP Jetdirect Ethernet embedded print server (standard) supp		Embedded NFC/HP Wireless Direct support		
	on Fast Ethernet and Gigabit Ethernet; IPsec (standard)				
Wireless capability	Optional, enabled with purchase	Yes, embedded NFC/HP Wireless Direct support			
Memory		ilot)			
Duty cycle <sup>3</sup>	Up to 225,000 pages; Recommended monthly page volume: <sup>4</sup> 5,000 to 16,000 pages				
Processor speed	1.2 GHz				
Paper handling			1		
Input <sup>8</sup>	100-sheet multipurpose tray 1, 500-sheet input tray 2;	100-sheet multipurpose tray 1, 500-sheet input tray 2,	100-sheet multipurpose tray 1, 500-sheet input tray 2, 500-shee		
	Optional: 500-sheet input tray, Custom media cassette	Automatic duplexer for two-sided printing; <b>Optional:</b> 500-sheet input tray, Custom media cassette (for tray 2 position only),	input tray 3, Automatic duplexer for two-sided printing; <b>Optional</b>		
	(for tray 2 position only), 1,500-sheet High-capacity input tray (add up to 4 additional trays for up to 3,600-sheet input	1,500-sheet High-capacity input tray (add up to 4 additional	500-sheet input tray, Custom media cassette (for tray 2 position only), 1,500-sheet High-capacity input tray (add up to 4 additiona		
	capacity), Automatic duplexer for two-sided printing,	trays for up to 3,600-sheet input capacity), Automatic duplexer	trays for up to 3,600-sheet input capacity), Automatic duplexer		
	75-sheet envelope feeder	for two-sided printing, 75-sheet envelope feeder	for two-sided printing, 75-sheet envelope feeder		
Output		t rear output bin; Optional: 500-sheet stacker, 500-sheet stapler-			
Media type		d, prepunched, recycled, rough, light), envelopes, labels, cardstock			
Media weight		00-sheet input tray, optional Custom media cassette, optiona			
		al Envelope feeder: 75 to 105 g/m²; Optional Duplexer: 60 to 1			
Media sizes custom	Multipurpose tray 1: 76 x 127 to 216 x 356 mm; Tray 2, (	ptional 500-sheet input tray: 148 x 210 to 216 x 356 mm; Opti	onal Custom media cassette: 102 x 148 to 170 x 282 mm		
Dimensions (W x D x H)	425 x 451 x 399 mm (16.7 x 17.8 x 15.7 in)	425 x 451 x 399 mm (16.7 x 21.1 x 15.7 in)	425 x 537 x 521 mm (16.7 x 21.1 x 20.5 in)		
Weight	22.6 kg (49.7 lb)	22.6 kg (57 lb)	32.5 kg (71.5 lb)		
What's in the box	HP LaserJet M605n Printer; Pre-installed HP Black LaserJet	HP LaserJet M605dn Printer; Pre-installed HP Black LaserJet	HP LaserJet M605x Printer; Pre-installed HP Black LaserJet		
	Toner Cartridge; Installation guide, Support flyer; Printer	Toner Cartridge; Pre-installed HP Duplexer; Installation guide,	Toner Cartridge; Pre-installed HP Duplexer; Installation guide,		
	documentation and software on CD-ROM; Power cord	Support flyer; Printer documentation and software on	Support flyer; Printer documentation and software on		
		CD-ROM; Power cord	CD-ROM; Power cord		
Warranty features		One-year return to bench <sup>7</sup>			
Systems					
Compatible operating systems		all 32-bit editions (XP Home, XP Pro, etc.), Windows Vista all (32-			
	7 all (32-bit, 64-bit) editions; Windows 8/8.1 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 10 all (32-bit, 64-bit) editions (excluding RT OS for Tabl				
	with Universal Print Driver (From HP.com): Windows XP (SP3) (32-bit, 64-bit) editions (XP Home, XP Pro, etc.), Windows Vista all (32-bit, 64-bit) editions (Home Basic, Premium, Professional, etc.), Windows 7 all (32-bit, 64-bit) editions, Windows 8/8.1 all (32-bit, 64-bit) editions (excluding RT OS for Tablets), Windows 7 all (32-bit, 64-bit) editions, (excluding RT OS for Tablets);				
	Mac OS (HP Print Drivers available from HP.com and Apple Store): OS X 10.7 Lion, OS X 10.8 Mountain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; Mobile OS (In-OS drivers): iOS, Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Linux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, 13.04,				
		13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX			
Minimum system requirements	PC: Windows XP (SP3) all 32-bit editions (XP Home, XP Pro, etc.), Windows Vista all 32-bit editions (Home Basic, Premium, Professional, etc.), Windows 7 all 32-bit additions; Windows				
	8/8.1 al 32-bit and 6-bit editions (excluding RT of getL), windows 10 al 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editions (excluding RT of getL), windows 10 ar 32-bit and 64-bit editi				
	(From HP.com): Windows XP (SP3) 32-bit and 64-bit editions (XP Home, XP Pro, etc.), Windows Vista all 32-bit and 64-bit editions (Home Basic, Premium, Professional, etc.), Windows 7 all 32-bit				
	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit editions (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers):				
	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition	ns (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers):		
	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li	ns (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14,	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10,		
	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX;	ns (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, CD-ROM or DVD drive, or Internet connection; Dedicated USB or ne	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard		
	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware require	ns (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, CD-ROM or DVD drive, or Internet connection; Dedicated USB or ne nents see <u>microsoft.com</u> ; <b>Mac</b> Mac OS X 10.7 Lion, OS X 10.8 Mou	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Vosemite; USB; 1 GB		
	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard of	ns (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, CD-ROM or DVD drive, or Internet connection; Dedicated USB or ne nents see <u>microsoft.com</u> ); <b>Mac</b> Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; <del>OS compatible</del> hardware (For OS hardware requirements	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB see <u>apple.com</u> )		
Fonts and typefaces	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux 0S (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard or 105 internal TrueType fonts scalable in HP PCL, 92 internal scal	ns (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, CD-ROM or DVD drive, or Internet connection; Dedicated USB or ne nents see microsoft.com; <b>Mact</b> Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, etwork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB see <u>apple.com</u> ) i); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal		
Fonts and typefaces	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux 0S (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard or 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so	ns (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, CD-ROM or DVD drive, or Internet connection; Dedicated USB or ne nents see microsoft.com; <b>Mac:</b> Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; <del>OS</del> compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP Laser Jet For	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, etwork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB see <u>apple.com</u> ) apple.com b); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPDS Emulation available at <u>hp.com/go/laserjetfonts</u>		
	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS : UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard of 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention),	ss (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, CD-ROM or DVD drive, or Internet connection; Dedicated USB or ne nents see microsoft.com); <b>Mac:</b> Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; <del>OS</del> compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-iri ions available via third-party flash memory cards; HP LaserJet For buttons (Information, Stop/Cancel, Return, Home, Folder, Clear),	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, etwork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB see <u>apple.com</u> ) i); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal		
Control panel	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num	Is (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, C)-ROW or DVD drive, or Internet connection. Dedicated USB or nements see microsoft.com); Mac: Mac OS X 10.7 Lion, OS X 10.8 Mou Jisk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP Laser Jet For Duttons (Information, Stop/Cancel, Return, Home, Folder, Clear), reric keypad	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB see <u>apple.com</u> ) (); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal tts and IPDS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button		
Control panel	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard of 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num Power supply type: Internal (Built-in) power supply, Power 5	ns (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, CD-ROM or DVD drive, or Internet connection; Dedicated USB or ne nents see microsoft.com); Mac Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP Laser Jet For buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), reric keypad	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Vosemite; USB; 1 GB see <u>apple.com</u> ) u; 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPDS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button u), 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC		
Control panel	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.0, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS :UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard or 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num <b>Power supply type:</b> Internal (Built-in) power supply; <b>Power s</b> (+/ - 10%), 50/60 Hz (+/ - 3 Hz) (Not dual voltage, product varie	ss (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, CD-ROM or DVD drive, or Internet connection; Dedicated USB or ne nents see microsoft.com); <b>Mac:</b> Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; <del>OS</del> compatibile hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP LaserJet For buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), neric keypad <b>supply required</b> : 110-volt input voltage: 100 to 127 VAC (+/- 10% by part number with # Option code identifier); <b>Power consumpti</b>	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB see apple.com) a); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPOS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button b, 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC <b>on:</b> <sup>2</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual		
Control panel Power	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.0, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard of 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num <b>Power supply type:</b> Internal (Built-in) power supply; <b>Power s</b> (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product vare) Off	si (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, C)-ROM or DVD drive, or Internet connection. Dedicated USB or nements see microsoft.com); Mac: Mac OS X 10.7 Lion, OS X 10.8 Mou Jisk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-irions available via third-party flash memory cards; HP Laser Jet For buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), neric keypad upply required: 110-volt input voltage: 100 to 127 VAC (+/- 10% by part number with # Option code identifier); Power consumpti 0, 0.7 watts (Auto-Off/Wake on LAN), <0.1 watts (Auto-Off/Manual	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB see apple.com) a); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPOS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button ), 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC om <sup>2</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On)		
Control panel Power	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard of 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num <b>Power supply type:</b> Internal (Built-in) power supply; <b>Power s</b> (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product varie Off <b>Windows OS:</b> HP Software Installer/Uninstaller, HP PCL 6 Print	Is (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, C)-ROM or DVD drive, or Internet connection; Dedicated USB or nenents see microsoft.com); Mac: Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP Laser Jet For buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), erric keypad supply required: 110-volt input voltage: 100 to 127 VAC (+/- 10% s by part number with # Option code identifier); Power consumpti ), 0.7 watts (Auto-Off/Wake on LAN), <0.1 watts (Auto-Off/Manual or Driver, HP Device Experience (DXP), HP Update, Product Registra	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB see <u>apple.com</u> ) i); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPDS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button on, 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC <b>on:</b> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On)		
Control panel Power Software included	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num Power supply type: Internal (Built-in) power supply; Power (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product varie Off Windows OS: HP Software Installer/Uninstaller, HP PCL 6 Printh manuals;Mac OS: Welcome Scree	ss (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, (C-ROM or DVD drive, or Internet connection; Dedicated USB or ne ments see microsoft.com); <b>Mac:</b> Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP Laser Jet For buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), teric keypad upply required: 110-volt input voltage: 100 to 127 VAC (+/- 10% s by part number with # Option code identifier); <b>Power consumpti</b> 0, 0.7 watts (Auto-Off/Wake on LAN), <0.1 watts (Auto-Off/Manual or Driver, HP Device Experience (DXP), HP Update, Product Registra n, (Directs users to <u>HP.com</u> or OS App Source for Laser Jet Software	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers); 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Vosemite; USB; 1 GB see <u>apple.com</u> ) 0; 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPDS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button ), 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC <b>on-</b> <sup>8</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On) tion Assist, HP Web Services Assist (HP Connected), Online user e), Setup Scan To Folder and Email		
Control panel Power Software included	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num Power supply type: Internal (Built-in) power supply; Power (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product varie Off Windows OS: HP Software Installer/Uninstaller, HP PCL 6 Printh manuals;Mac OS: Welcome Scree	ss (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Inux Mint (13, 14, CD-ROM or DVD drive, or Internet connection. Dedicated USB or ne ments see microsoft.com); <b>Mac:</b> Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP LaserJetFor buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), teric keypad <b>upply required</b> : 110-volt input voltage: 100 to 127 VAC (+/- 10% by part number with # Option code identifier); <b>Power consumpti</b> ), 0.7 watts (Auto-Off/Wake on LAN), <0.1 watts (Auto-Off/Manual er Driver, HP Device Experience (DXP), HP Update, Product Registra is <b>(ready)</b> : 4.2 <b>(</b> A); <b>Acoustic pressure emissions bystander (acthi</b>	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers); 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Vosemite; USB; 1 GB see <u>apple.com</u> ) 0; 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPDS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button ), 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC <b>on-</b> <sup>8</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On) tion Assist, HP Web Services Assist (HP Connected), Online user e), Setup Scan To Folder and Email		
Control panel Power Software included Acoustic	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.0, 14.04, 14.10), Debian (G.O.X, 7.X;) Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard of 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key nun Power supply type: Internal (Built-in) power supply. Power s (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product varie Off Windows OS: HP Software Installer/Uninstaller, HP PCL 6 Print manuals; Mac OS: Welcome Scree Acoustic power emissions: <sup>6</sup> 7.1 B(A); Acoustic power emission	ss (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, C)-ROM or DVD drive, or Internet connection. Dedicated USB or nements see microsoft.com); Mac: Mac OS X 10.7 Lion, OS X 10.8 Mou Jisk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-inoins available via third-party flash memory cards; HP LaserJet For buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), neric keypad 110-volt input voltage: 100 to 127 VAC (+/- 10% by part number with # Option code identifier); Power consumpti (), 0.7 watts (Auto-Off/Wake on LAN), <0.1 watts (Auto-Off/Manual er Driver, HP Device Experience (DXP), HP Update, Product Registra n, (Directs users to HP.com or OS App Source for LaserJet Softwarn (s (ready): 4.2 B(A); Acoustic pressure emissions bystander (active) (27 dB(A))	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB see apple.com) a); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPOS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button b, 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC Om <sup>2</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On) tion Assist, HP Web Services Assist (HP Connected), Online user e), Setup Scan To Folder and Email re, printing): 56 dB(A); Acoustic pressure emissions bystander		
Control panel Power Software included	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num Power supply type: Internal (Built-in) power supply; Powers (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product varie Off Windows OS: HP Software Installer/Uninstaller, HP PCL 6 Print Acoustic power emissions: <sup>6</sup> 7.1 B(A); Acoustic power emission Operating temperature range: 15 to 32° C (59 to 89.6° F); R	ss (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Inux Mint (13, 14, CD-ROM or DVD drive, or Internet connection. Dedicated USB or ne ments see microsoft.com); <b>Mac:</b> Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP LaserJetFor buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), teric keypad <b>upply required</b> : 110-volt input voltage: 100 to 127 VAC (+/- 10% by part number with # Option code identifier); <b>Power consumpti</b> ), 0.7 watts (Auto-Off/Wake on LAN), <0.1 watts (Auto-Off/Manual er Driver, HP Device Experience (DXP), HP Update, Product Registra is <b>(ready)</b> : 4.2 <b>(</b> A); <b>Acoustic pressure emissions bystander (acthi</b>	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers); 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10; twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Vosemite; USB; 1 GB see <u>apple.com</u> ) y. 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPDS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button ), 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC <b>on:</b> <sup>8</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On) tion Assist, HP Web Services Assist (HP Connected), Online user e), Setup Scan To Folder and Email re, printing): 56 dB(A); Acoustic pressure emissions bystander ); Non-operating humidity range: 10 to 90% RH; Operating		
Control panel Power Software included Acoustic	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.0, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS :UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard or 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num <b>Power supply type</b> : Internal (Built-in) power supply; <b>Power s</b> (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product varie manuals; <b>Mac OS</b> : Welcome Scree <b>Acoustic power emissions:</b> <sup>6</sup> 7.1 B(A); <b>Acoustic power emission</b> <b>Operating temperature range</b> : 15 to 32° C (59 to 89.6° F); <b>R</b> <b>humidity</b> :	ss (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, CD-ROM or DVD drive, or Internet connection; Dedicated USB or ne nents see microsoft.com); <b>Mac:</b> Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP LaserJet For buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), teric keypad upply required: 110-volt input voltage: 100 to 127 VAC (+/- 10% s by part number with # Option code identifier); <b>Power consumpti</b> 1, 0.7 watts (Auto-Off/Wake on LAN), <0.1 watts (Auto-Off/Manual or Driver, HP Device Experience (DXP), HP Update, Product Registra n, (Directs users to <u>HP.com</u> or OS App Source for LaserJet Softwarn is (ready): 4.2 B(A); Acoustic pressure emissions bystander (activ (ready): 27 dB(A) ecommended operating temperature: 15 to 32° C (59 to 89.6° F	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB see <u>apple.com</u> ) a); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPOS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button b), 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC on: <sup>6</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On) tion Assist, HP Web Services Assist (HP Connected), Online user e, Setup Scan To Folder and Email re, printing): 56 dB(A); Acoustic pressure emissions bystander Y; Non-operating humidity range: 10 to 90% RH; Operating 0 to 80% RH		
Control panel Power Software included Acoustic Environmental ranges	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num <b>Power supply type</b> : Internal (Built-in) power supply; <b>Power</b> (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product varie Off <b>Windows OS:</b> HP Software Installer/Uninstaller, HP PCL 6 Print <b>Windows OS:</b> HP Software Installer/Uninstaller, HP PCL 6 Forith <b>Windows OS:</b> HP Software Installer/Uninstaller, HP PCL 6 Forith <b>Windows OS:</b> HP Software Installer/Uninstaller, HP PCL 6 Print Bard (S); For Software 15 to 32° C (59 to 89.6° F); <b>R</b> <b>Mumidity ra</b> Identity management: Kerberos authentication, LDAP auth IPsec/firewall with Certificate, Pre-Shared Key, and Kerbero	ss (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, CD-ROM or DVD drive, or Internet connection; Dedicated USB or ne nents see microsoft.com); <b>Mac:</b> Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP LaserJet For buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), teric keypad upply required: 110-volt input voltage: 100 to 127 VAC (+/- 10% s by part number with # Option code identifier); <b>Power consumpti</b> 1, 0.7 watts (Auto-Off/Wake on LAN), <0.1 watts (Auto-Off/Manual or Driver, HP Device Experience (DXP), HP Update, Product Registra n, (Directs users to <u>HP.com</u> or OS App Source for LaserJet Softwarn is <b>(ready)</b> : 24.2 B(A); <b>Acoustic pressure emissions bystander (activ (ready)</b> : 27 dB(A) <b>ecommended operating temperature</b> : 15 to 32° C (59 to 89.6° F <b>nge</b> : 10 to 80% RH; <b>Recommended operating hundity range</b> : 1 entication, 1000 user PIN codes, optional HP and 3rd party adverted.	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers); 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10; twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Vosemite; USB; 1 GB see <u>apple.com</u> ) 1, Tinternal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPDS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button ), 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC <b>on:</b> <sup>8</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On) tion Assist, HP Web Services Assist (HP Connected), Online user e), Setup Scan To Folder and Email re, printing): 56 dB(A); Acoustic pressure emissions bystander ); Non-operating humidity range: 10 to 90% RH; Operating 0 to 80% RH red authentication solutions (e.g., badge readers); Network: 2.1 X authentication (EAP-PEAP, EAP-TLS), SINMPV3, HTTPS,		
Control panel Power Software included Acoustic Environmental ranges	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HFLIP); SUSE Li 13.04, 13.0, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS :UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard or 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num <b>Power supply type</b> : Internal (Built-in) power supply; <b>Power s</b> (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product varie manuals; <b>Mac OS</b> : Welcome Scree <b>Acoustic power emissions:</b> <sup>4</sup> 7.1 B(A); <b>Acoustic power emission</b> <b>Operating temperature range</b> : 15 to 32° C (59 to 89.6° F); <b>R</b> <b>humidity</b> management: Kerberos authentication, LDAP auth IPSec/firewall with Certificate, Pre-Shared Key, and Kerbero Certificates, Access Control List; Data: Storage Encryption, Em	ss (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, CD-ROM or DVD drive, or Internet connection; Dedicated USB or ne ments see microsoft.com); <b>Mac:</b> Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP LaserJet For buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), neric keypad "upply required: 110-volt input voltage: 100 to 127 VAC (+/- 10% by part number with # Option code identifier); <b>Power consumpti</b> ), 0.7 watts (Auto-Off/Wake on LAN), -0.1 watts (Auto-Off/Manual er Driver, HP Device Experience (DXP), HP Update, Product Registra n, (Directs users to <u>HP.com</u> or OS App Source for LaserJet Softwari s (ready): 4.2 B(A); <b>Acoustic pressure emissions bystander (activ (ready)</b> : 27 dB(A) <b>ecommended operating temperature</b> : 15 to 32° C (59 to 89.6° Finge: 10 to 80% RH; <b>Recommended operating humidity range:</b> 10 entication, Supports WJA-10 IPsec onfiguration Plug-in, 80 a suthentication, Supports WJA-10 IPsec configuration Plug-ins, 80 <b>examilies and the stared stare and the and 3rd party advance a suthentication, Supports WJA-10 IPsec configuration Plug-in, 80 <b>examilies and closes</b> FIPS 140 validated cryptographic librari</b>	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.11) twork connection or Wireless connection: 200 MB available har ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB see apple.com) a); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPDS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button om: 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On) tion Assist, HP Web Services Assist (HP Connected), Online user e), Setup Scan To Folder and Email re, printing): 56 dB(A); Acoustic pressure emissions bystander (S); Non-operating humidity range: 10 to 90% RH; Operating 0 to 80% RH erd authentication solutions (e.g., badge readers); Network: 2.1X authentication solutions (e.g., badge readers); Network: 2.1X authentication solutions (e.g., badge readers); Network: 2.1X authentication solutions (e.g., Lance State); Network: 3.1X authentication (EAP-PEAP, SL); S(HTTPS); Encrypted		
Control panel Power Software included Acoustic Environmental ranges	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.0, 14.04, 14.10), Debian (6.0.x, T.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard of 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num <b>Power supply type</b> : Internal (Built-in) power supply; <b>Power s</b> (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product varie Mindows OS: HP Software Installer/Uninstaller, HP PCL 6 Print manuals; Mac OS: Welcome Scree <b>Acoustic power emissions:</b> <sup>6</sup> 7.1 B(A); <b>Acoustic power emission</b> Identity management: Kerberos authentication, LDAP auth IPsec/firewall with Certificate, Pre-Shared Key, and Kerbero Certificates, Access Control List; Data: Storage Encryption, En Credentials; Device: Security lock slot, USB port disablement, NE	si (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, C)-ROM or DVD drive, or Internet connection. Dedicated USB or nenents see microsoft.com); Mac: Mac OS X 10.7 Lion, OS X 10.8 Mou Jisk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-irions available via third-party flash memory cards; HP LaserJetFor buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), neric keypad upply required: 110-volt input voltage: 100 to 127 VAC (+/- 10% by part number with # Option code identifier); Power consumpti ), 0.7 watts (Auto-Off/Wake on LAN), <0.1 watts (Auto-Off/Manual er Driver, HP Device Experience (DXP), HP Update, Product Registra n, (Directs users to HP.com or OS App Source for LaserJet Softwarn is (ready): 2.2 G/B(A) ecommended operating temperature: 15 a 32° C (59 to 89.6° F nega: 10 to 80% RH; Recommended operating humidity range: 1 entication, Supports WJA-10 IPsec configuration Plug-in, 80 r, ypted PDF & Email (uses FIPS 140 validated cryptographic librari ardware integration pocket for security solutions; Security manage	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB see apple.com) a); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal tis and IPDS Emulation available at <u>hc.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button b, 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC om <sup>2</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On) 50 on <sup>5</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On) tion Assist, HP Web Services Assist (HP Connected), Online user e), Setup Scan To Folder and Email re, printing): 56 dB(A); Acoustic pressure emissions bystander (); Non-operating humidity range: 10 to 90% RH; Operating 0 to 80% RH ed authentication solutions (e.g., badge readers); Network: 2.1X authentication (EAP-PEAP, EAP-TLS), SIMPAya, HTTPS, es from Microsoft), Secure Stars, SL/LTS, (HTTPS), Encrypted ment: Compatible with HP Imaging and Printing Security Center		
Control panel Power Software included Acoustic Environmental ranges Security management	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.10, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num Power supply type: Internal (Built-in) power supply; Powers (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product varie Off Windows OS: HP Software Installer/Uninstaller, HP PCL 6 Print Windows OS: HP Software Installer/Uninstaller, HP PCL 6 Print Mundity ra Identity management: Kerberos authentication, LDAP auth IPsec/firewall with Certificate, Arcess Control List; Data: Storage Encryption, Enc Credentias; Device: Security Lock slot, USB port disablement, hz IEC 60950-1:2005 + A1:2009 +A2:2013 (International); EN G	ss (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, (C)-ROM or DVD drive, or Internet connection; Dedicated USB or ne ments see microsoft.com); <b>Mac:</b> Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP Laser Jet For buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), teric keypad upply required: 110-volt input voltage: 100 to 127 VAC (+/- 10% s by part number with # Option code identifier); <b>Power consumpti</b> 1, 0.7 watts (Auto-Off/Wake on LAN), -0.1 watts (Auto-Off/Manual or Driver, HP Device Experience (DXP), HP Update, Product Registra n, (Directs users to <u>HP.com</u> or OS App Source for Laser Jet Softwarn is <b>(ready)</b> : 4.2 B(A); <b>Acoustic pressure emissions bystander (activ (ready)</b> : 27 dB(A) <b>ecommended operating temperature</b> : 15 to 32° C (59 to 89.6° F <b>nge</b> : 10 to 80% RH; <b>Recommended operating handidy range</b> : 1 entication, 1000 user PIN codes, optional HP and 3rd party advance s athentication, Supports WJA-10 layec configuration Pug-in, 80 crypted PDF & Email (uses FIPS 140 validated cryptographic librari ardware integration pocket for security solutions; Security manage 950-1:2006 + A1:2010 + A11:2009 + A12:2011 + A2:2013 (EU);	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers); 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Vosemite; USB; 1 GB see <u>apple.com</u> ) 1, Tinternal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPDS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button ), 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC <b>on:</b> <sup>8</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On) tion Assist, HP Web Services Assist (HP Connected), Online user e), Setup Scan To Folder and Email re, printing): 56 dB(A); Acoustic pressure emissions bystander ); Non-operating humidity range: 10 to 90% RH; Operating 0 to 80% RH sed authentication solutions (e.g., badge readers); Network: 2.1X authentication (EAP-PEAP; EAP-TLS), SNMPV3, HTTPS, es from Microsoft), Secure Erase, SSL/TLS (HTTPS), Encrypted ment: Compatible with HP Imaging and Printing Security Center IEC 60825-1; UL/cUL Listed (US/Canada); GS License (Europe);		
Control panel Power Software included Acoustic Environmental ranges Security management Safety approvals and requirements	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS (In-OS HPLIP): SUSE Li 13.04, 13.0, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS: UNIX; disk space; OS compatible hardware (For OS hardware requirer available hard or 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num <b>Power supply type</b> : Internal (Built-in) power supply; <b>Power s</b> (+/- 10%), S0/60 Hz (+/- 3 Hz) (Not dual voltage, product varie manuals, <b>Mac OS</b> : Welcome Scree <b>Acoustic power emissions:</b> <sup>6</sup> 7.1 B(A); <b>Acoustic power emission</b> Udentity management: Kerberos authentication, LDAP auth INPsec/firewall with Certificate, Pre-Shared Key, and Kerbero Certificates, Access Control List; Data: Storage Encryption, Em Credentials; Device: Security lock slot, USB port disablement, En ILE 60950-1:2005 + A1:2009 +A2:2013 (International); EN 66 EN 60825-1 (Class 1 Laser/LED Device); LowV	ss (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Inux Mint (13, 14, CD-ROM or DVD drive, or Internet connection. Dedicated USB or ne nents see microsoft.com); <b>Mac</b> : Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP LaserJetFor buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), heric keypad upply required: 110-volt input voltage: 100 to 127 VAC (+/-10% by part number with # Option code identifier); <b>Power consumpti</b> 1, 0.7 watts (Auto-Off/Wake on LAN), -0.1 watts (Auto-Off/Manual er Driver, HP Device Experience (DXP), HP Update, Product Registra n, Olirects users to <u>HP.com</u> or OS App Source for LaserJet Softwar is (ready): 4.2 B(A); <b>Acoustic pressure emissions bystander (activ (ready)</b> : 27 dB(A) <b>(commended operating temperature</b> : 15 to 32° C (59 to 89.6° F nge: 10 to 80% RH; <b>Recommended operating humidity range</b> : 1 est autont, 1000 user PIN codes, optional HP and 3rd party advang trypted PDF & Email (uses FIPS 140 validated cryptographic librari ardware integration pocket for security solutions; Security manage 5950-1:2006 + A1:2010 + A1:2009 + A1:22011 + A2:2013 (EU); oltage Directive 2006/95/EC with CE Marking (Europe); other safel	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Vosemite; USB; 1 GB see <u>apple.com</u> ) 1); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal ts and IPDS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button ), 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC <b>on:</b> <sup>9</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On) 15, Sotyo Chz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC <b>on:</b> <sup>9</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On) 2, Setup Scan To Folder and Email <b>re, printing):</b> 56 dB(A); <b>Acoustic pressure emissions bystander</b> 2); <b>Non-operating humidity range:</b> 10 to 90% RH; <b>Operating</b> 0 to 80% RH eed authentication (EAP, EAP-TLS), SNMPv3, HTTPS, es from Microsoft), Secure Erase, SSL/TLS (HTTPS), Encrypted ment: Compatible with HP Imaging and Printing Security Center IEC 60825-1; UL/CUL Listed (US/Canada); GS License (Europe); y approvals as required by individual countries		
Control panel Power Software included Acoustic Environmental ranges	and 64-bit editions, Windows 8/8.1 all 32-bit and 64-bit edition Android, Windows 8/8.1/10 RT; Linux OS Linu-OS HPLIPS; USGE Li 13.04, 13.0, 14.04, 14.10), Debian (6.0.x, 7.x); Other OS LUNX; disk space; OS compatible hardware (For OS hardware requirer available hard of 105 internal TrueType fonts scalable in HP PCL, 92 internal scal Windows Vista 8 Fonts (Calibri, Cambria); additional font so 4-line colour LCD display, 3 LED lights (Ready, Data, Attention), 10-key num <b>Power supply type</b> : Internal (Built-in) power supply, <b>Power s</b> (+/- 10%), 50/60 Hz (+/- 3 Hz) (Not dual voltage, product varie windows OS: HP Software Installer/Uninstaller, HP PCL 6 Print manuals; <b>Mac OS</b> : Welcome Scree <b>Acoustic power emissions:</b> <sup>4</sup> 7.1 B(A); <b>Acoustic power emission</b> <b>Operating temperature range</b> : 15 to 32° C (59 to 89.6° F); <b>R</b> <u>humidity</u> ra Identity management: Kerberos authentication, LDAP auth IPsec/firewall with Certificate, Pre-Shared Key, and Kerbero Certificates, Access Control List; Data: Storage Encryption, En Credentials; Device: Security lock slot, USB port disablement, hz IEC 60950-1:2005 + A1:2009 +A2:2013 (International); EN 60 EN 60825-1 (Class 1 Laser/LED Device); Low V IPV4/IPV6: Apple Bonjour Compatible (Mac OS 10.2.4 or high	ss (excluding RT OS for Tablets), Windows 10 all 32-bit and 64-bit nux (12.2, 12.3, 13.1), Fedora (17, 18, 19, 20), Linux Mint (13, 14, (C)-ROM or DVD drive, or Internet connection; Dedicated USB or ne ments see microsoft.com); <b>Mac:</b> Mac OS X 10.7 Lion, OS X 10.8 Mou disk space; OS compatible hardware (For OS hardware requirements lable fonts in HP postscript Level 3 emulation (Euro symbol built-ir ions available via third-party flash memory cards; HP Laser Jet For buttons (Information, Stop/Cancel, Return, Home, Folder, Clear), teric keypad upply required: 110-volt input voltage: 100 to 127 VAC (+/- 10% s by part number with # Option code identifier); <b>Power consumpti</b> 1, 0.7 watts (Auto-Off/Wake on LAN), -0.1 watts (Auto-Off/Manual or Driver, HP Device Experience (DXP), HP Update, Product Registra n, (Directs users to <u>HP.com</u> or OS App Source for Laser Jet Softwarn is <b>(ready)</b> : 4.2 B(A); <b>Acoustic pressure emissions bystander (activ (ready)</b> : 27 dB(A) <b>ecommended operating temperature</b> : 15 to 32° C (59 to 89.6° F <b>nge</b> : 10 to 80% RH; <b>Recommended operating handidy range</b> : 1 entication, 1000 user PIN codes, optional HP and 3rd party advance s athentication, Supports WJA-10 layec configuration Pug-in, 80 crypted PDF & Email (uses FIPS 140 validated cryptographic librari ardware integration pocket for security solutions; Security manage 950-1:2006 + A1:2010 + A11:2009 + A12:2011 + A2:2013 (EU);	editions (excluding RT OS for Tablets); Mobile OS (In-OS drivers): 15, 16, 17), Boss (3.0, 5.0), Ubuntu (10.04, 11.10, 12.04, 12.10, twork connection or Wireless connection; 200 MB available hard ntain Lion, OS X 10.9 Mavericks, OS X 10.10 Yosemite; USB; 1 GB see apple.com) a); 1 internal Unicode Fonts (Andale Mono WorldType); 2 Internal tis and IPDS Emulation available at <u>hp.com/go/laserjetfonts</u> 4.3-in touch screen, LCD (colour graphics); 1 Home button b, 50/60 Hz (+/- 3 Hz); 220-volt input voltage: 220 to 240 VAC om: <sup>8</sup> 840 watts (Printing), 3.7 watts (Sleep), <0.1 watts (Manual On) tion Assist, HP Web Services Assist (HP Connected), Online user e), Setup Scan To Folder and Email ere, printing): 56 dB(A); <b>Acoustic pressure emissions bystander</b> (); <b>Non-operating humidity range</b> : 10 to 90% RH; <b>Operating</b> 0 to 80% RH ered authentication solutions (e.g., badge readers); Network: 2.1X authentication slutions (e.g., badge readers); Network: 2.1X authentication flazer, Exe, SL/TLS (HTTPS), Encrypted ment: Compatible with HP Imaging and Printing Security Center IEC 60825-1; UL/CUL Listed (US/Canada); CS License (Europe); y approvals as required by individual countries scovery, IPR Secure-IPR; IPsec/Firewall; IPv6: DHCPv6, MLDv1,		

<sup>1</sup> Measured using ISO/IEC 24734, excludes first set of test documents. For more information see hp.com/go/printerclaims. Exact speed varies depending on the system configuration, software application, driver, and document complexity. <sup>2</sup> May require a firmware upgrade to be compatible, download at hp.com/go/support. <sup>3</sup> Duty cycle is defined as the maximum number of pages per month of imaged output. This value provides a comparison of product robustness in relation to other HP LaserJet or HP Color LaserJet devices, and enables appropriate deployment of printers and MFPs to satisfy the demands of connected individuals or groups. <sup>4</sup> HP recommends that the number of printed pages per month be within the stated range for optimum device performance, based on factors including supplies replacement intervals and device life over an extended warranty period. <sup>5</sup> Power requirements are based on the control/region where the printer is sold. Do not convert operating voltages. This will damage the printer and volt the product values are offered separately and with an additional cost. To insure product stability, it is a requirement to purchase the HP LaserJet Printer Stand (F2G70A) when using M605 Printer with more than three HP LaserJet 500-sheet Input Tray Feeders (CE998A), or with one HP LaserJet 1,500-sheet Input Tray Feeders (CE998A).

#### To learn more, visit hp.com

© Copyright 2015 Hewlett-Packard Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

ENERGY STAR and the ENERGY STAR logo are registered U.S. marks. Microsoft and Windows are registered trademarks of Microsoft Corporation. AirPrint and the AirPrint logo are trademarks of Apple Inc., registered in the U.S. and other countries. Linux is a U.S. registered trademark of Linus Torvalds. UNIX is a registered trademark of The Open Group. NetWare® is a trademark of Novell, Inc.