

Overview

HPE OfficeConnect 1920 Series switches are advanced Gigabit web managed "smart" switches supporting Layer 3 static routing, Access Control Lists, 802.1X network login. This JG927A has 48 x 10/100/1000 ports plus four additional (non combo) Gigabit SFP ports for fiber connectivity. Notable additional features include three levels of Spanning Tree Protocol STP, RSTP, MSTP IPv4/IPv6 management and routing, STP root guard, and ARP and DOS attack protection. Part of the OfficeConnect portfolio of small business networking products from Hewlett Packard Enterprise.

Quick Spec

Figure 1 shows the appearance of HPE JG927A.

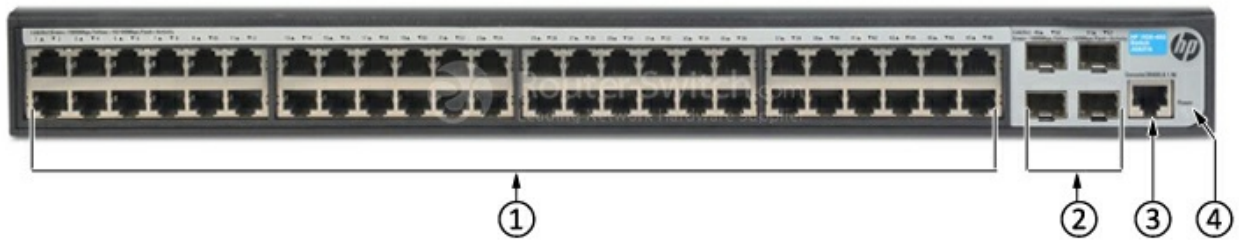


Table 1 shows the quick spec.

Product Code	JG927A
Type	HPE 1920-48G Switch
Ports	<ul style="list-style-type: none"> · 48 RJ-45 auto-negotiating 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T) · 4 SFP 1000 Mb/s ports · Supports a maximum of 48 autosensing 10/100/1000 ports plus 4 1000BASE-X SFP ports, or a combination
Throughput	77.4 Mp/s (64-byte packets)
Routing/switching capacity	104 Gb/s
Dimensions (W x D x H)	44 x 23.8 x 4.4 cm (17.32 x 9.37 x 1.73 in) (1U height)
Weight	3.15 kg (6.94 lb)

Product Details

Figure 2 shows the front panel of HPE JG927A.



Note:

(1)	48 × RJ-45 auto-negotiating 10/100/1000 ports
(2)	4 × SFP 1000 Mb/s ports
(3)	Console port
(4)	Power LED

Figure 3 shows the back panel of HPE JG927A.



Note:

(1)	Grounding screw
(2)	AC power connector

Compare to Similar Items

Table 2 shows the comparison.

Product Code	JG924A	JG925A	JG926A	JG927A	JG928A
Type	HPE 1920-24G Switch	HPE 1920-24G-PoE+ (180W) Switch	HPE 1920-24G-PoE+ (370W) Switch	HPE 1920-48G Switch	HPE 1920 48G PoE+ (370W) Switch
PoE power	N/A	180W	370W	N/A	370W
Throughput	41.7 Mp/s (64-byte packets)	41.7 Mp/s (64-byte packets)	41.7 Mp/s (64-byte packets)	77.4 Mp/s (64-byte packets)	77.4 Mpps (64-byte packets)

Routing/Switching capacity	56 Gb/s	56 Gb/s	56 Gb/s	104 Gb/s	104 Gbps
-----------------------------------	---------	---------	---------	----------	----------

Get more information

Do you have any question about the JG927A?

Contact us now via [Live Chat](#) or sales@router-switch.com.

Specification

JG927A Specifications	
Type	HPE 1920-48G Switch
Physical specifications	
Dimensions	44 x 23.8 x 4.4 cm (17.32 x 9.37 x 1.73 in) (1U height)
Weight	3.15 kg (6.94 lb)
Technical specifications	
I/O ports and slots	<ul style="list-style-type: none"> · 48 RJ-45 auto-negotiating 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T) · 4 SFP 1000 Mb/s ports · Supports a maximum of 48 autosensing 10/100/1000 ports plus 4 1000BASE-X SFP ports, or a combination
Additional ports and slots	1 RJ-45 console port to access limited CLI port
Memory and processor	MIPS @ 650 MHz, 32MB flash, 128MB SDRAM; packet buffer size: 12Mb
Mounting and enclosure	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware included)
Performance	100Mb latency: < 5 μ s 1000Mb latency: < 5 μ s Throughput: 77.4 Mp/s (64-byte packets) Routing/switching capacity: 104 Gb/s Routing table size: 32 entries (IPv4), 32 entries (IPv6) MAC address table size: 16384 entries
Reliability	MTBF (years) : 76.92
Environmental specifications	
Operating temperature	0° to 40°C (32° to 104°F)
Operating relative humidity	10% to 90%, noncondensing
Nonoperating/storage temperature	-40° to 70°C (-40° to 158°F)
Nonoperating/storage relative humidity	10% to 95%, noncondensing
Altitude	-
Acoustic	Pressure: 49.7 dB; ISO 7779
Electrical specifications	

Frequency	50/60 Hz
AC voltage	100 - 240 V ac
Maximum power rating	32 W
Notes	Maximum power rating and maximum heat dissipation are the worst-case theoretical maximum numbers provided for planning the infrastructure with fully loaded PoE (if equipped), 100% traffic, all ports plugged in, and all modules populated. PoE power is the power supplied by the internal power supply. It is dependent on the type and quantity of power supplies and may be supplemented with the use of an external power supply (EPS). When supplemented with the use of an HPE RPS1600 Redundant Power System, up to 795 W of PoE+ can be supplied. Unit max. power consumption with RPS is 833 W.
Safety certifications	
Safety	UL 60950; IEC 60950-1; EN 60950-1; CAN/CSA-C22.2 No. 60950-1-03
Emissions	FCC part 15 Class A; VCCI Class A; EN 55022 Class A; CISPR 22 Class A; EN 55024; EN 61000-3-2 2000, 61000-3-3; ICES-003 Class A
Management	IMC - Intelligent Management Center; limited command-line interface; Web browser; SNMP Manager; IEEE 802.3 Ethernet MIB
Notes	SFP ports and copper ports work simultaneously, independent of each other, to provide a total of 52 Gigabit Ethernet-capable ports.

Want to Buy

[Order Now](#)
[Get a Quote](#)

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

Contact Us

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: sales@router-switch.com