

Get a Quote

Overview

The HPE FlexNetwork 5510 HI Switch Series delivers outstanding resiliency, security, and multiservice support for medium and large enterprise networks. JH147A supports 24 10/100/1000Base-T autosensing Ethernet PoE ports and 4 SFP+ ports.

Quick Spec

Figure 1 shows the appearance of HPE JH147A.




Table 1 shows the quick spec.

Product Code	JH147A
Type	HPE FlexNetwork 5510 24G PoE+ 4SFP+ HI 1-slot Switch
PoE+ Available	(24) RJ-45 autosensing 10/100/1000 PoE+ ports; 740 W PoE+ capability
I/O ports and slots	24 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T) Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only; Ports 1 - 8 support MACSec 4 SFP+ 10GbE ports 1 port expansion module slot Supports a maximum of 6 SFP+ ports or 2 1/10GBASE-T ports or 2 40GbE ports, with optional module
Additional ports and slots	1 dual-personality (RJ-45 or USB micro-B) serial console port 1 RJ-45 out-of-band management port 1 USB 2.0
1000 Mb Latency	< 5 μ s
10 Gbps Latency	< 3 μ s
Throughput	up to 214 Mp/s
Routing/Switching capacity	288 Gb/s
Routing table size	IPv4 : 32768 entries IPv6 : 16384 entries
MAC address table size	32768 entries
Dimensions (W x D x H)	43.99 x 46 x 4.37 cm (17.32 x 18.11 x 1.72 in)

Weight	12.5 kg (27.56 lb)
--------	--------------------

Product Details


Figure 2 shows the front panel of HPE JH147A.

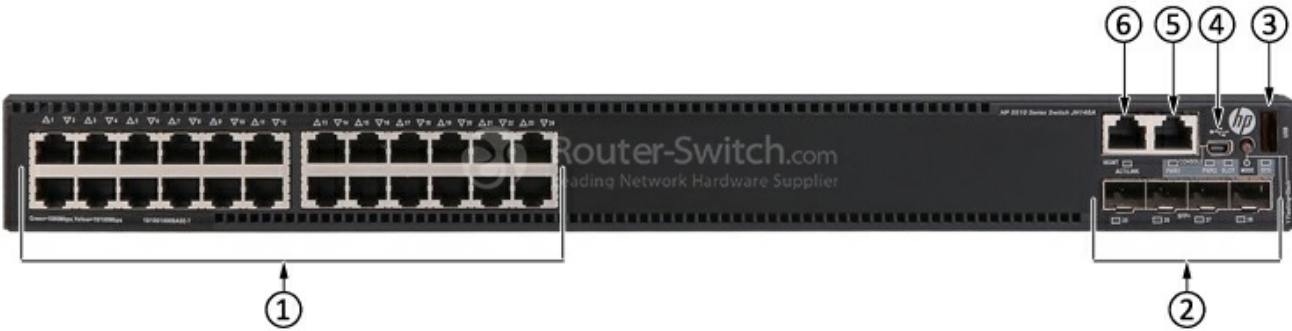

Note:

(1)	24 x RJ-45 autosensing 10/100/1000 PoE+ ports
(2)	4 x SFP+ port
(3)	USB port
(4)	Mini USB console port
(5)	Console port (CONSOLE)
(6)	Management Ethernet port

Figure 3 shows the back panel of HPE JH147A.

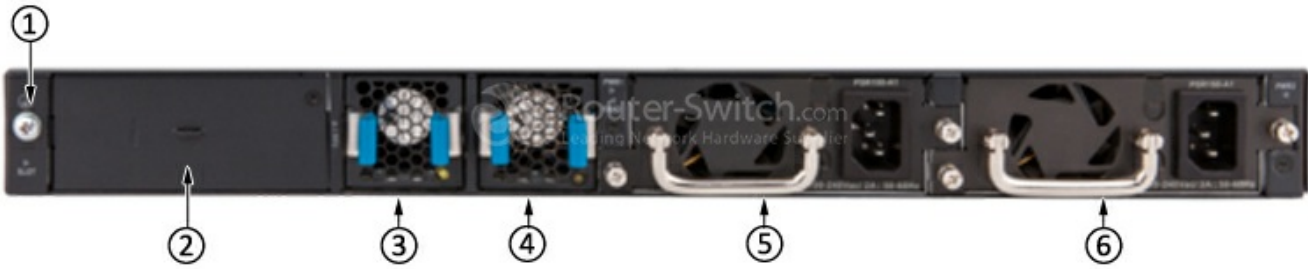

Note:

(1)	Grounding screw
(2)	Interface card (optional)
(3)	Fan tray 1
(4)	Fan tray 2

(5)	Power supply 1 This power supply needs to be purchased separately. Purchase JG545A (1100W) or JG544A (720W).
(6)	Power supply 2 (optional)

Compare to Similar Items

Table 2 shows the comparison.

Product Code	JH145A	JH146A	JH147A	JH148A	JH149A
Type	HPE FlexNetwork 5510 24G 4SFP+ HI 1-slot Switch	HPE FlexNetwork 5510 48G 4SFP+ HI 1-slot Switch	HPE FlexNetwork 5510 24G PoE+ 4SFP+ HI 1-slot Switch	HPE FlexNetwork 5510 48G PoE+ 4SFP+ HI 1-slot Switch	HPE FlexNetwork 5510 24G SFP 4SFP+ HI 1-slot Switch
1000 Mb Latency	< 5 μ s	< 5 μ s	< 5 μ s	< 5 μ s	< 5 μ s
10 Gbps Latency	< 3 μ s	< 3 μ s	< 3 μ s	< 3 μ s	< 3 μ s
Throughput	up to 214 Mp/s	up to 250 Mp/s	up to 214 Mp/s	up to 250 Mp/s	up to 214 Mp/s
Routing/Switching capacity	288 Gb/s	336 Gb/s	288 Gb/s	336 Gb/s	288 Gb/s
Routing table size	IPv4 : 32768 entries IPv6 : 16384 entries	IPv4 : 32768 entries IPv6 : 16384 entries	IPv4 : 32768 entries IPv6 : 16384 entries	IPv4 : 32768 entries IPv6 : 16384 entries	IPv4 : 32768 entries IPv6 : 16384 entries

Get more information

Do you have any question about the JH147A?

Contact us now via [Live Chat](#) or sales@router-switch.com.

Specification

JH147A Specifications	
System specifications	
Type	HPE FlexNetwork 5510 24G PoE+ 4SFP+ HI 1-slot Switch
I/O ports and slots	<ul style="list-style-type: none"> · 24 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T) · Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only; Ports 1 - 8 support MACSec · 4 SFP+ 10GbE ports · 1 port expansion module slot · Supports a maximum of 6 SFP+ ports or 2 1/10GBASE-T ports or 2 40GbE ports, with optional module
Additional ports and slots	<ul style="list-style-type: none"> · 1 dual-personality (RJ-45 or USB micro-B) serial console port · 1 RJ-45 out-of-band management port · 1 USB 2.0
Performance	
1000 Mb Latency	< 5 μ s
10 Gbps Latency	< 3 μ s
Throughput	up to 214 Mp/s
Routing/Switching capacity	288 Gb/s
Routing table size	IPv4 : 32768 entries IPv6 : 16384 entries

MAC address table size	32768 entries
Physical specifications	
Dimensions (W x D x H)	43.99 x 46 x 4.37 cm (17.32 x 18.11 x 1.72 in)
Weight	12.5 kg (27.56 lb)
Electrical specifications	
Frequency	50/60 Hz
Maximum heat dissipation	238 BTU/hr (686.81 kJ/hr), Ranges from 201 BTU/hr to 443 BTU/hr, depending on power supply configuration
Voltage	100 - 240 V ac, rated (90 - 264 Vac, max) -48 to -60 V dc, rated (-36 to -72 V dc, max) (depending on power supply chosen)
Maximum power rating	150 W
Idle power	70 W
PoE power	740 W PoE+
Environmental specifications	
Operating temperature	0°C to 45°C (32°F to 113°F)
Operating relative humidity	10% to 90%, noncondensing
Nonoperating/Storage temperature	-40°C to 70°C (-40°F to 158°F)
Nonoperating/Storage relative humidity	5% to 95%, noncondensing
Acoustic	Low-speed fan: 57.6 dB, High-speed fan: 66.9 dB ISO 7779
Safety and emissions	
Safety	UL 60950-1 EN 60825-1 Safety of Laser Products-Part 1 EN 60825-2 Safety of Laser Products-Part 2 IEC 60950-1 EN 60950-1 CAN/CSA-C22.2 No. 60950-1 FDA 21 CFR Subchapter J ROHS Compliance AS/NZS 60950-1 GB 4943 EAC (EurAsian Conformity Certification)
Emissions	EMC Directive 2004/108/EC FCC (CFR 47, Part 15) Class A EN 61000-4-11:2004 ANSI C63.4-2009 EN 61000-3-3:2008 VCCI V-3/2012.04 EN 61000-3-2:2006+A1:2009+A2:2009 EN 61000-4-3:2006 EN 61000-4-4:2012; EN 61000-4-5:2006 EN 61000-4-6:2009 CISPR 22:2008 Class A EN 55022:2010 Class A EN 61000-4-29: 2000 CISPR 24:2010 EN 300 386 V1.6.1 VCCI V-3/2013.04 Class A
Immunity	Generic: EN 55024 ESD: EN300 386

Management	IMC - Intelligent Management Center Command-line interface Web browser SNMP manager
------------	--

Want to Buy

Order Now

Get a Quote

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

Contact Us

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: sales@router-switch.com