

Get a Quote

## Overview

HPE FlexNetwork 5130 HI Series switches deliver scalability and resiliency at the access layer of medium and large enterprise campus networks. This JH324A has 48 x 10/100/1000 ports and 4 x GbE SFP slots and 2x 10GbE SFP+ slots. At the back of the unit, is an empty module slot supporting two choices of expansion module, either 2 port 1/10GBASE T module or 2 port SFP+ ports.

### Quick Spec

Figure 1 shows the appearance of HPE JH324A.

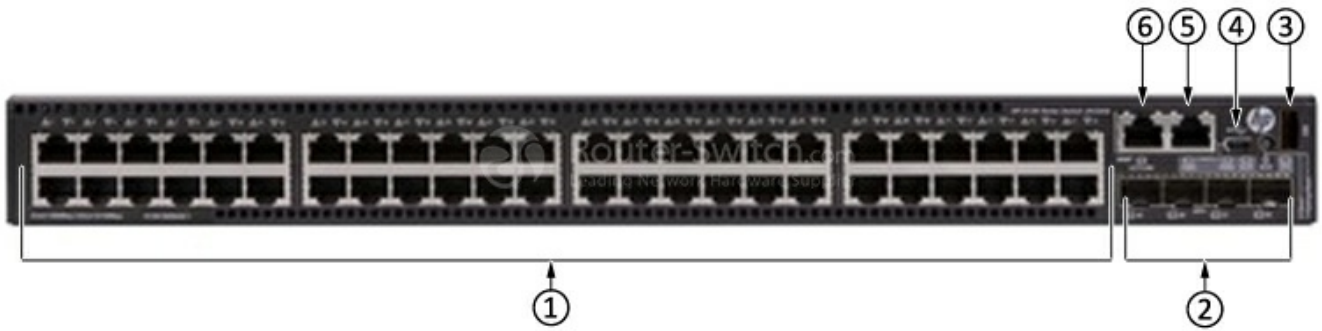


Table 1 shows the quick spec.

<b>Product Code</b>	JH324A
<b>Type</b>	HPE 5130 24G PoE+ 4SFP+ HI with 1 Interface Slot Switch
<b>Ports</b>	48 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only; Ports 1 - 8 support MACSec 4 SFP+ 10GbE ports 1 port expansion module slot Supports a maximum of 6 SFP+ ports or 2 1/10GBASE-T ports, with optional module
<b>Memory and processor</b>	2 GB SDRAM; Packet buffer size: 4 MB, 512 MB flash
<b>Mounting</b>	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware include
<b>Performance</b>	1000 Mb Latency: < 5 $\mu$ s 10 Gbps Latency: < 3 $\mu$ s Throughput: up to 190.5 Mpps Routing/Switching capacity: 256 Gbps Routing table size: 32768 entries (IPv4), 16384 entries (IPv6) MAC address table size: 32768 entries
<b>Dimensions</b>	4.37 x 44.0 x 36 cm (1.72 x 17.32 x 14.17 in) (1U height)
<b>Weight</b>	7.5 kg (16.53 lb)

### Product Details


Figure 2 shows the front panel of HPE JH324A.



Note:

(1)	48 x 10/100/1000Base-T autosensing Ethernet port
(2)	4 x 1000Base-X SFP port
(3)	USB port
(4)	Mini USB console port
(5)	Console port (CONSOLE)
(6)	Management Ethernet port

Figure 3 shows the back panel of HPE JH324A.

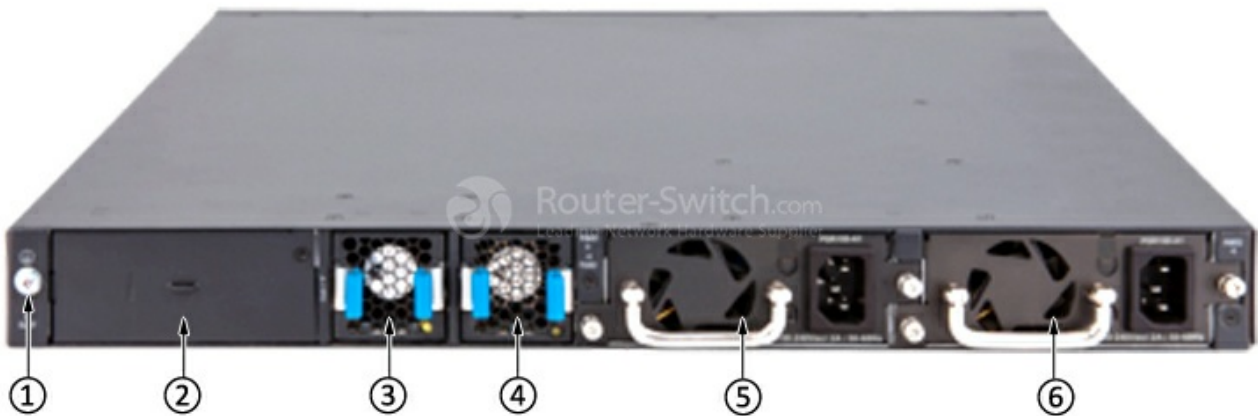

Note:

(1)	Grounding screw
(2)	Interface card (optional)
(3)	Fan tray 1
(4)	Fan tray 2
(5)	Power supply 1
(6)	Power supply 2 (optional)

### Compare to Similar Items

Table 2 shows the comparison.

<b>Product Code</b>	JH323A	JH324A	JH325A	JH326A
<b>Type</b>	HPE 5130 24G 4SFP+ HI with 1 Interface Slot Switch	HPE 5130 48G 4SFP+ HI with 1 Interface Slot Switch	HPE 5130 24G PoE+ 4SFP+ HI with 1 Interface Slot Switch	HPE 5130 48G PoE+ 4SFP+ HI with 1 Interface Slot Switch
<b>Memory and processor</b>	2 GB SDRAM; Packet buffer size: 4 MB, 512 MB flash	2 GB SDRAM; Packet buffer size: 4 MB, 512 MB flash	2 GB SDRAM; Packet buffer size: 4 MB, 512 MB flash	2 GB SDRAM; Packet buffer size: 4 MB, 512 MB flash
<b>Mounting</b>	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware include)	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware include)	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware include)	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware include)
<b>Performance</b>	1000 Mb Latency: < 5 $\mu$ s 10 Gbps Latency: < 3 $\mu$ s Throughput: up to 154.8 Mpps Routing/Switching capacity: 208 Gbps Routing table size: 32768 entries (IPv4), 16384 entries (IPv6) MAC address table size: 32768 entries	1000 Mb Latency: < 5 $\mu$ s 10 Gbps Latency: < 3 $\mu$ s Throughput: up to 190.5 Mpps Routing/Switching capacity: 256 Gbps Routing table size: 32768 entries (IPv4), 16384 entries (IPv6) MAC address table size: 32768 entries	1000 Mb Latency: < 5 $\mu$ s 10 Gbps Latency: < 3 $\mu$ s Throughput: up to 154.8 Mpps Routing/Switching capacity: 208 Gbps Routing table size: 32768 entries (IPv4), 16384 entries (IPv6) MAC address table size: 32768 entries	1000 Mb Latency: < 5 $\mu$ s 10 Gbps Latency: < 3 $\mu$ s Throughput: up to 190.5 Mpps Routing/Switching capacity: 256 Gbps Routing table size: 32768 entries (IPv4), 16384 entries (IPv6) MAC address table size: 32768 entries

## Get more information

Do you have any question about the JH324A?

Contact us now via [Live Chat](#) or [sales@router-switch.com](mailto:sales@router-switch.com).

## Specification

<b>JH324A Specifications</b>	
<b>Physical specifications</b>	
Type	HPE 5130 48G 4SFP+ HI with 1 Interface Slot Switch
Dimensions (H x W x D)	4.37 x 44.0 x 36 cm (1.72 x 17.32 x 14.17 in) (1U height)
Weight	7.5 kg (16.53 lb)
<b>System specifications</b>	
1000 Mb Latency	< 5 $\mu$ s
10 Gbps Latency	< 3 $\mu$ s
Throughput	up to 190.5 Mpps
Routing/Switching capacity	256 Gbps
Routing table size	32768 entries (IPv4), 16384 entries (IPv6)
MAC address table size	32768 entries
I/O ports and slots	48 RJ-45 autosensing 10/100/1000 ports (IEEE 802.3 Type 10BASE-T, IEEE 802.3u Type 100BASE-TX, IEEE 802.3ab Type 1000BASE-T); Media Type: Auto-MDIX; Duplex: 10BASE-T/100BASE-TX: half or full; 1000BASE-T: full only; Ports 1 - 8 support MACSec 4 SFP+ 10GbE ports 1 port expansion module slot Supports a maximum of 6 SFP+ ports or 2 1/10GBASE-T ports, with optional module
Power supplies	2 power supply slots 1 minimum power supply required (ordered separately)
Fan tray	Airflow direction is Front (port side) to Back (power cord side)

Memory and processor	2 GB SDRAM; Packet buffer size: 4 MB, 512 MB flash
Mounting and enclosure	Mounts in an EIA standard 19-inch telco rack or equipment cabinet (hardware include
<b>Electrical specifications</b>	
Frequency	50/60 Hz
Maximum heat dissipation	419 BTU/hr (442.04 kJ/hr), Ranges from 201 BTU/hr to 443 BTU/hr, depending on power supply configuration
Voltage	100 - 240 V ac, rated (90 - 264 V ac, max) -48 to -60 V dc, rated (-36 to -72 V dc, max) (depending on power supply chosen)
Maximum power rating	150 W
Idle power	70 W
PoE power	N/A
<b>Environmental specifications</b>	
Operating temperature	0°C to 45°C(32°F to 113°F)
Operating relative humidity	10% to 90%, noncondensing
Nonoperating/Storage temperature	-40°C to 70°C (-40°F to 158°F)
Nonoperating/Storage relative humidity	5% to 95%, noncondensing
Acoustic	Low-speed fan: 49.9 dB, High-speed fan: 64.8 dB; ISO 7779
<b>Safety certifications</b>	
Safety	UL 60950-1; EN 60825-1 Safety of Laser Products-Part 1; EN 60825-2 Safety of Laser Products-Part 2; IEC 60950-1; EN 60950-1; CAN/CSA-C22.2 No. 60950-1; FDA 21 CFR Subchapter J; ROHS Compliance; AS/NZS 60950-1; GB 4943; EAC (EurAsian Conformity Certification)
Emissions	EMC Directive 2004/108/EC; FCC (CFR 47, Part 15) Class A; EN 61000-4-11:2004; ANSI C63.4-2009; EN 61000-3-3:2008; VCCI V-4/2012.04; EN 6100-3-2:2006+A1:2009 + A2:2009; EN 61000-3- 2:2006+A1:2009+A2:2009 ; EN 61000-4-3:2006; EN 61000-4-4:2012; EN 61000-4-5:2006; EN 61000- 4-6:2009; AS/NZS CISPR 22:2009 Class A; CISPR 22:2008 Class A; EN 55022:2010 Class A; EN 61000- 4-29: 2000; CISPR 24:2010; EN 300 386 V1.6.1; VCCI V-3/2013.04 Class A
Immunity	Generic EN 55024 ESD EN300 386
Management	IMC - Intelligent Management Center, Command-line interface, Web browser, SNMP manager

## Want to Buy

Order Now

Get a Quote

## Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold

18,000+

Customers Trusted

\$20,000,000

Inventory Available

50%-98%

Off Global List Price

100%

Safe Online Shopping

## Contact Us

---

- Tel: +1-626-655-0998 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: [sales@router-switch.com](mailto:sales@router-switch.com)