

SMMSe / SHRMe VRF Indoor Unit MMD-AP0721HP-UL1—HIGH STATIC DUCT



Submittal Data

Job Name _____ Location _____
Tag _____



A210695

SMMSe / SHRMe VRF High Static Ducted Features

- R-410A refrigerant
- Five sizes from 24,000 to 96,000 Btu/h
- Quiet operation, as low as 30 dBA
- Rear return
- DC inverter driven motor
- Optional wired or wireless controls
- Five-year parts limited warranty

INDOOR UNIT MODEL	MMD-AP0721HP-UL1	
PERFORMANCE		
Total Cooling Rated Capacity	Btu/h	72,000
Total Heating Rated Capacity	Btu/h	81,000
Fan Type (Qty)	Centrifugal (1)	
Standard Airflow (H / M / L)	CFM	2236 / 1883 / 1471
Sound Pressure, 208V (H / M / L)	dBA	44 / 40 / 36
External Static Pressure (ESP)	in.wg	0.6 (Factory Default)
		1.0 (Max.)
FILTER (Optional, Accessory)		
Type	Washable	
Quantity	1	
MERV Corresponding Value	5	
Dimensions (W x L x D)	in.	9-5/8 x 53 x 1/2
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
Power Consumption	kW	0.54
Full Load Amps (FLA)	A	4.6
Minimum Circuit Amps (MCA)	A	5.7
Maximum Overcurrent Protection	A	15


MOTOR		
Motor Type	DC	
Motor Watts	W	1000
PHYSICAL DATA		
Pipe Connection Size - Liquid (High Pressure)	in.	1/2 (OD)
Pipe Connection Size - Gas (Low Pressure)	in.	7/8 (OD)
Pipe Connection Size - Drain (OD)	in.	1-1/4
Pipe Connection Size - Drain (ID)	in.	1
Refrigerant	R-410A	
Unit Width	in.	55-1/8
Unit Height	in.	17-5/8
Unit Depth	in.	35-3/8
Net Weight	lb	218

ACCESSORIES

- Wired Remote Controller (7-Day Programmable) - RBC-AMS54E-UL
- Simple Wired Remote Control - RBC-AS41UL
- Stand Alone Receiver with Wireless Remote TCB-AX32UL
- Remote Sensor TCB-TC41LUL
- Wired Remote Controller - RBC-AMT32UL
- Filter Kit - TCB-LK2801DP-UL
- Drain Pump Kit - TCB-DP40DPE

DIMENSIONAL DRAWING

INDOOR UNIT HIGH STATIC DUCT MMD-AP0721HP-UL1

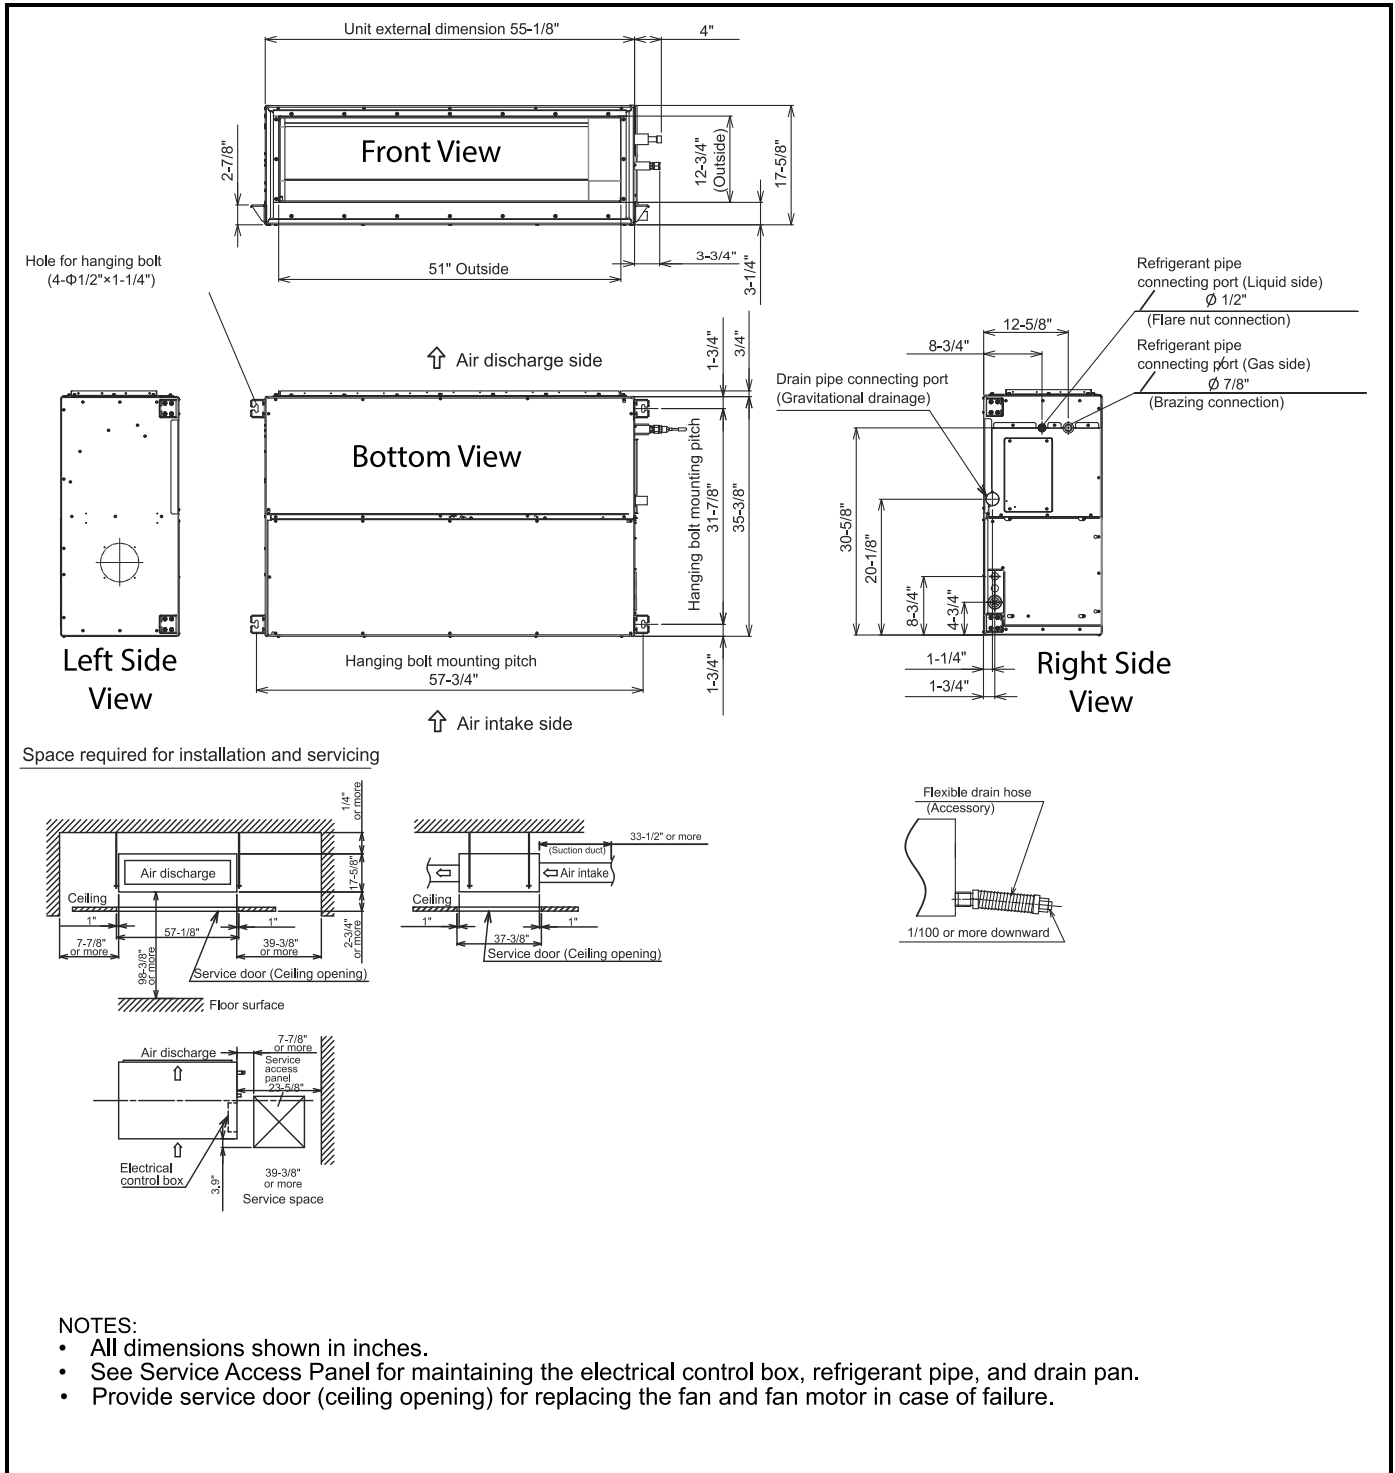

A210696

