

CATALOG
14

Section D



SPAENNAUR

Fasteners Right Now[®]

CATALOG
14

CATALOG 14

SPAENAUR

P: 1-800-265-8772 F: 1-888-252-6380 service@spenaar.com

© 2018 Spenaar Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spenaar Inc. Subject to Catalog Terms and Conditions of Use available at Spenaar.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spenaar Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spenaar Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spenaar.com et à la page TC4 et TC5 à la fin de ce catalogue.

Washers



Rondelles

Flat Washers Standard, Fender, Structural, Teflon®, Nylon, Fibre, Leather, High Strength, Copper Burrs, Insulating	Inch & Metric	D2	Pouce et métrique	Rondelles plates Ordinaires, larges, structurales, en Téflon ^{MD} , en nylon, en fibre, en cuir, haute résistance, d'appui en cuivre, isolées
Sealing Rings Aluminum, Fibre, Copper & Copper with KFC	Metric	D20	Métrique	Anneaux d'étanchéité Aluminium, fibre, cuivre et cuivre avec KFC
Lockwashers Split, Split Bowed, Split Twisted, Tab, Long Tab, Double Coil, High Collar, Internal Tooth, External Tooth, Overlap Tooth, Nord-Lock® Wedge, Disc-Lock® Wedge	Inch & Metric	D22	Pouce et métrique	Rondelles de blocage Fendues, fendues et courbées, fendues et tordues, à pattes, à pattes longues, à spire double, à collet haut, à dents internes, à dents externes, à dents chevauchantes, en coin Nord-Lock ^{MD} , en coin Disc-Lock®
Disc Spring (Washers) Series: "AM", "Stainless Steel", "AI/SAI", "SP/SSP", "Contact Disc", "AK"	Inch & Metric	D39	Pouce et métrique	Rondelles à ressort (Belleville) Series "AM", "Stainless Steel", "AI/SAI", "SP/SSP", "Contact Disc", "AK"
Spring Tension Washers Bowed, Single Wave, Double Wave	Inch & Metric	D65	Pouce et métrique	Rondelles tendueuses à ressort Courbées, ondulation simple, ondulation double
Finishing Washers Countersunk, Flush, Cup, Flange & Recessed	Inch & Metric	D68	Pouce et métrique	Rondelles de finition Fraisées, affleurantes, en coupelle, à bride et encastrées
Rubber Flat Washers Neoprene, SBR, Natural, EPDM, Nitrile & Silicone	Inch & Metric	D69	Pouce et métrique	Rondelles plates en caoutchouc Néoprène, SBR, naturel, EPDM, nitrile et silicone
Sealing & Insulating Washers Nyltite; Master Seal™; Bartite; Nylon Machine Screw Insulators & Shoulder Washers	Inch	D71	Pouce	Rondelles d'étanchéité et isolantes Nyltite, Master Seal ^{MC} , Bartite, Isolateurs à vis en nylon et rondelles d'épaulement
Beveled Washers Steel, Iron & Aluminum	Inch & Metric	D74	Pouce et métrique	Rondelles biseautées Acier, fer et aluminium
Shim Rings Steel with/without Keyway	Inch & Metric	D75	Pouce et métrique	Rondelles d'ajustage Avec ou sans clavette
Shim Stock (In Rolls & Sheets) Plain Steel, Blue Tempered, Stainless Steel & Brass	Inch	D78	Pouce	Matériau de cales (en rouleau ou en feuille) Acier ordinaire, acier trempé bleu, acier inoxydable et laiton
Automotive Flat Shims Ball-Joint, Body, All Purpose, Washer, Fender, Caster-Camber, Rear Suspension, Aligning, Break-Off	Inch	D81	Pouce	Cales plates pour l'automotive Pour rotules, carrosserie, tout usage, rondelles, d'appui, chasse-carrossage, suspension arrière, géométrie, à rupture
Section Index		D86 D86		Index de section

D

CATALOG 14

SPAENAUUR



USS STANDARD WASHERS

Steel - Plain and Zinc Plated

For Bolt Size	SPAENAUR No.		I.D.	O.D.	Thickness Range	PKG QTY.
	Plain	Zinc Plated				
3/16"	656-B58-1X	656-B46-1X	1/4"	9/16"	.036-.065"	100
1/4"	90-SN	656-B01-1Y	5/16"	3/4"	.051-.080"	100
5/16"	91-SN	656-B72-1X	3/8"	7/8"	.064-.104"	50
3/8"	92-SN	92-SN-ZP	7/16"	1"	.064-.104"	50
7/16"	93-SN	656-B68-1W	1/2"	1-1/4"	.064-.104"	50
1/2"	94-SN	656-B57-1M	9/16"	1-3/8"	.086-.132"	50
9/16"	656-B71-1M	B-927-ZP	5/8"	1-1/2"	.086-.132"	25
5/8"	95-SN	95-SN-ZP	11/16"	1-3/4"	.108-.160"	25
3/4"	105-SN	105-SN-ZP	13/16"	2"	.122-.177"	25
7/8"	656-024	—	15/16"	2-1/4"	.136-.192"	25
1"	106-SN	656-020	1-1/16"	2-1/2"	.136-.192"	20
1-1/8"	W-271	—	1-1/4"	2-3/4"	.136-.192"	25
1-1/4"	656-B49-1Y	—	1-3/8"	3"	.136-.192"	25
1-3/8"	656-B70-1W	656-B69-1M	1-1/2"	3-1/4"	.153-.213"	25
1-1/2"	W-274	656-069	1-5/8"	3-1/2"	.153-.213"	25
1-3/4"	656-B73-1A	—	1-7/8"	4"	.153-.213"	25
2"	W-298	—	2-1/8"	4-1/2"	.153-.213"	25




S.A.E. FLAT WASHERS

Low Carbon Steel

Plain and Zinc Plated

For Bolt Size	SPAENAUR No.		I.D.	O.D.	Thickness Range	PKG QTY.
	Plain	Zinc Plated				
#6	—	656-B48-1P	5/32"	3/8"	.036-.065"	100
#8	59-SN	656-B37-2Y	3/16"	7/16"	.036-.065"	100
#10	—	656-B07-1M	7/32"	1/2"	.036-.065"	100
1/4"	—	656-B33-1M	9/32"	5/8"	.051-.080"	100
5/16"	—	656-B47-1A	11/32"	11/16"	.051-.080"	100
3/8"	—	656-B02-1Z	13/32"	13/16"	.051-.080"	100
7/16"	—	656-B09-1A	15/32"	59/64"	.051-.080"	100
1/2"	—	656-B05-1G	17/32"	1-1/16"	.074-.121"	50
9/16"	—	656-049	19/32"	1-3/16"	.074-.121"	50
5/8"	—	656-B24-1P	21/32"	1-5/16"	.074-.121"	50
3/4"	—	656-051	13/16"	1-1/2"	.108-.160"	50
7/8"	656-023	656-052	15/16"	1-3/4"	.108-.160"	25
1"	—	656-053	1-1/16"	2"	.108-.160"	25



Steel Fender Washers Low Carbon Steel

Large O.D. for extra wide bearing surface

For Bolt Size	SPAENAUR No.		I.D.	O.D.	Nominal Thickness	PKG QTY.
	Plain	Zinc Plated Clear or Yellow our option				
#4	W-207	—	1/8"	1"	.062"	100
#7	—	W-168	11/64"	9/16"	.032"	100
#8	1183	656-B54-1T	11/64"	3/4"	.031"	100
#8	—	656-B65-1N	3/16"	1-1/8"	.056"-.064"	100
#10	—	656-B10-1X	.196"	1"	.062"	100
#10	—	656-B43-1K	7/32"	7/8"	.062"	100
#10	—	656-B12-1P	7/32"	1-1/4"	.035"	50
#14	—	W-287	.261"	1-17/64"	.017"	100
1/4"	—	2333	9/32"	1-1/4"	.065"	50
1/4"	—	656-B45-1M	9/32"	1-3/16"	.031"	50
5/16"	—	656-B34-1Y	11/32"	1-1/4"	.065"	50
5/16"	—	656-B19-1M	11/32"	1-1/2"	.083"	50
3/8"	—	656-B66-1T	25/64"	1-1/2"	.083"	50
3/8"	—	656-B56-1W	13/32"	1-1/4"	.120"	50
3/8"	656-070	—	13/32"	1-3/8"	.098"-.112"	50
3/8"	—	656-B28-1E	7/16"	1-3/4"	.078"	50
7/16"	—	W-223	15/32"	2-3/8"	.095"	25
1/2"	—	656-B03-1S	17/32"	2"	.150"	25
5/8"	—	656-B18-1W	41/64"	2-1/2"	.187"	25



Hardened Steel Structural Washers

Plain Finish

conforming to ASTM F436 for use with 38 to 45 HRC
A325 and A490 Structural Bolts

For Bolt Size	SPAENAUR No.	I.D.	O.D.	Thickness Range	PKG QTY.
1/2"	W-325	17/32"	1-1/16"	.097-.177"	100
5/8"	W-326S	21/32"	1-5/16"	.122-.177"	100
3/4"	W-327-S	13/16"	1-15/32"	.122-.177"	100
7/8"	W-328	15/16"	1-3/4"	.136-.177"	100
1"	W-329	1-1/8"	2"	.136-.177"	100
1-1/8"	W-330	1-1/4"	2-1/4"	.136-.177"	100
1-1/4"	W-331	1-3/8"	2-1/2"	.136-.177"	100



For maximum protection Hot Dipped Galvanized!


STEEL PLATE WASHERS

(These are not ASTM F436)

SPAENAUR No.	Bolt Diameter	Outside Diameter	Hole Diameter	Nominal Thickness		PKG QTY.
				Gauge	Inches	
656-002	1/4"	3/4"	5/16"	16	1/16"	100
656-003	5/16"	7/8"	3/8"	14	5/64"	100
656-004	3/8"	1"	7/16"	14	5/64"	100
656-005	1/2"	1-3/8"	9/16"	12	7/64"	50
656-006	5/8"	1-3/4"	11/16"	10	9/64"	50
656-007	3/4"	2"	13/16"	10	9/64"	50
656-008	7/8"	2-1/4"	15/16"	9	5/32"	50
656-009	1"	2-1/2"	1-1/16"	9	5/32"	25
656-010	1-1/8"	2-3/4"	1-1/4"	9	5/32"	25
656-016	1-1/4"	3"	1-3/8"	9	5/32"	25

Additional Steel Flat Washers

Plain, Zinc, Nickel or Copper Finishes

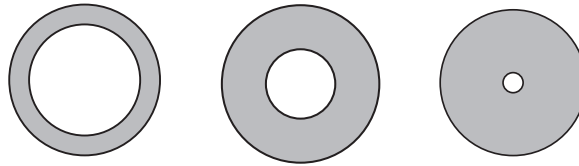

FOR BOLT SIZE	SPAENAUR No.	INSIDE DIAMETER	OUTSIDE DIAMETER	THICKNESS RANGE	FINISH	PKG QTY.
2	656-034	3/32"	7/32"	.018-.024"	Zinc	100
3	656-035	7/64"	3/8"	.033-.039"	Zinc	100
3	656-058	7/64"	7/16"	.030-.036"	Nickel	100
4	656-B08-1X	1/8"	.281"	.018-.024"	Copper	100
4	656-B04-1E	1/8"	5/16"	.030-.036"	Zinc	100
4	656-B30-1E	1/8"	3/8"	.033-.039"	Zinc	100
4	656-B64-1C	1/8"	3/8"	.038-.046"	Zinc	100
5	656-B38-1C	.130"	7/16"	.038-.046"	Zinc	100
6	656-B63-1Y	9/64"	7/16"	.044-.052"	Zinc	100
6	656-B13-2Y	.142"	5/16"	.030-.036"	Zinc	100
6	656-B27-1S	.144"	5/16"	.038-.046"	Zinc	100
6	656-060	5/32"	7/16"	.113-.127"	Nickel	100
8	W-216	.170"	3/8"	.030-.036"	Plain	100
8	656-B23-1A	.170"	3/8"	.030-.036"	Zinc	100
8	656-B55-1X	.175"	1/2"	.044-.052"	Zinc	100
8	656-062	3/16"	1/2"	.044-.052"	Plain	100
8	656-B32-1W	3/16"	1/2"	.055-.065"	Zinc	100
10	656-B59-1A	13/64"	3/8"	.044-.052"	Zinc	100
10	1183-A	13/64"	3/4"	.044-.052"	Plain	100
10	656-B06-1W	.203"	1/2"	.044-.052"	Nickel	100
10	656-B67-1K	.203"	9/16"	.033-.039"	Zinc	100
10	656-015	.216"	1/2"	.042"	Nickel	100
12	656-B60-1X	.227"	5/8"	.044-.052"	Zinc	100
12	656-B11-1A	.243"	.840"	.113-.127"	Zinc	100
14	W-203	1/4"	3/8"	.030-.036"	Plain	100
14	W-203NP	.260"	.375"	.033-.039"	Nickel	100
14	656-B35-1A	1/4"	5/8"	.044-.052"	Zinc	100
14	2008	1/4"	5/8"	.044-.052"	Plain	100
1/4"	656-B53-1N	17/64"	1/2"	.030-.036"	Nickel	100
1/4"	656-B52-1C	17/64"	5/8"	.055-.065"	Zinc	100
1/4"	656-B17-1G	17/64"	3/4"	.055-.065"	Zinc	100
1/4"	656-063	.312"	.750"	.068-.082"	Zinc	100
5/16"	656-B31-1G	21/64"	19/32"	.055-.065"	Zinc	100
5/16"	W-165	21/64"	5/8"	.113-.127"	Zinc	100
5/16"	656-B26-1Z	21/64"	7/8"	.055-.065"	Zinc	100
5/16"	656-030	11/32"	9/16"	.030-.036"	Nickel	100
5/16"	656-B29-1G	11/32"	7/8"	.113-.127"	Zinc	100
5/16"	656-B21-1M	11/32"	1-1/8"	.068-.082"	Zinc	100
5/16"	656-B36-1P	3/8"	3/4"	.062-.074"	Zinc	100
5/16"	656-B50-1P	3/8"	1"	.173-.187"	Plain	50
3/8"	656-032	25/64"	5/8"	.030-.036"	Nickel	100
3/8"	656-B42-1T	25/64"	11/16"	.113-.127"	Zinc	100
3/8"	656-B41-1N	25/64"	3/4"	.128-.142"	Zinc	100
3/8"	656-B14-1Z	13/32"	5/8"	.038-.046"	Zinc	100
3/8"	656-047	15/32"	15/16"	.055-.062"	Zinc	100
3/8"	656-B15-1S	7/16"	3/4"	.050-.058"	Zinc	50
3/8"	656-B25-1Y	7/16"	1"	.021-.027"	Zinc	100
3/8"	656-B44-1W	7/16"	1"	.083-.097"	Zinc	100
7/16"	656-033	31/64"	3/4"	.030-.036"	Nickel	100

Continued on next page...

...continued from previous page

Additional Steel Flat Washers

FOR BOLT SIZE	SPAENAUR No.	INSIDE DIAMETER	OUTSIDE DIAMETER	THICKNESS RANGE	FINISH	PKG QTY.
7/16"	W-389	1/2"	5/8"	.044-.052"	Nickel	100
1/2"	W-318	17/32"	7/8"	.030-.036"	Zinc	100
1/2"	656-013	17/32"	1-1/16"	.113-.127"	Zinc	50
1/2"	W-177	17/32"	1-5/64"	.098-.112"	Zinc	50
1/2"	656-B16-1E	17/32"	1-1/4"	.113-.127"	Zinc	100
9/16"	656-001	37/64"	1"	.055-.065"	Plain	100
5/8"	656-B51-1Y	41/64"	1"	.062-.074"	Zinc	100
5/8"	656-B40-1C	41/64"	1-5/16"	.113-.127"	Zinc	50
5/8"	2473	21/32"	7/8"	.030-.036"	Zinc	50
11/16"	W-150	23/32"	1-3/8"	.044-.052"	Zinc	100
3/4"	W-288	51/64"	1"	.055-.062"	Zinc	100
7/8"	656-B39-1N	59/64"	1-19/64"	.029-.034"	Zinc	100
7/8"	656-027	.938"	1.47"	.098-.112"	Zinc	50
7/8"	656-121	1"	1-3/8"	.055-.062"	Zinc	100
1"	656-B20-1W	1-1/32	1-3/8"	.055-.062"	Zinc	100
1-1/4"	656-056	1-5/16"	2-3/4"	.143-.157"	Plain	25
1-3/4"	W-285	1-7/8"	3-1/4"	.113-.127"	Plain	25
2"	W-297	2-1/16"	4-1/4"	.186-.202"	Plain	25

ASSORTMENT B-558C



STEEL FLAT WASHERS
Zinc Plated
17 SIZES
1190 PIECES

REGULAR SIZE welded Steel grey enamel
Drawer has hinged lid and "scooped" Bins.
Drawer fits the Slide Racks shown on Page A2
Shipping Weight - **8.16 kg** (18 lbs.)

Compatible Bolt Size	Spaenaur No.	Inner Diameter	Outer Diameter	Thickness	Qty.	Page
#8	656-B54-1T	11/64"	3/4"	0.031"	100	D3
	656-B37-2Y	3/16"	7/16"	0.036" - 0.065"	200	D2
	656-B32-1W		1/2"	0.055" - 0.065"	150	D4
#14	656-B35-1A	1/4"	5/8"	0.044" - 0.052"		100
3/16"	656-B46-1X	5/16"	9/16"	0.036" - 0.065"	50	
1/4"	656-B01-1Y		3/4"	0.051" - 0.080"		40
5/16"	656-B34-1Y	11/32"	1-1/4"	0.065"	50	D3
	656-B19-1M	3/8"	1-1/2"	0.083"	40	D2
	656-B72-1X		7/8"	0.064" - 0.104"	50	D2
3/8"	656-B66-1T	25/64"	1-1/2"	0.083"	40	D3
	92-SN-ZP	7/16"	1"	0.064" - 0.104"		D2
	656-B28-1E		1-3/4"	0.078"		D3
7/16"	656-B68-1W	1/2"	1-1/4"	0.064" - 0.104"	25	D2
1/2"	656-B57-1M	9/16"	1-3/8"	0.086" - 0.132"		
9/16"	B-927-ZP	5/8"	1-1/2"			
5/8"	95-SN-ZP	11/16"	1-3/4"	0.108" - 0.160"	10	
3/4"	105-SN-ZP	13/16"	2"	0.122" - 0.177"		


PLASTIKIT 804-081

FLAT AND HELICAL LOCKWASHERS
STEEL, Zinc Plated


Put up in a clear durable plastic container with hinged lid.
Size: 1" x 2-3/4" x 4-1/2"



14 SIZES
270 PIECES

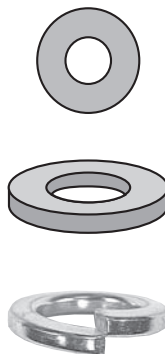

Name	Spaenaur No.	Compatible Bolt Size	Thickness	Qty.	Page
Steel Flat Washer Zinc Plated	656-B48-1P	#6	0.036" - 0.065"	20	D2
	656-B55-1X	#8	0.044" - 0.052"		D4
	656-B07-1M	#10	0.036" - 0.065"		E33
	656-B33-1M	1/4"	0.051" - 0.080"	10	D2
	656-B47-1A	5/16"			
	656-B02-1Z	3/8"			
W-177	1/2"	0.098" - 0.112"	D5		
Helical Lockwasher Zinc Plated	W-311	#6	0.031"	20	D22
	663-W03-1M	#8	0.040"		
	663-W05-1A	#10	0.047"		
	16-SN	1/4"	0.062"		
	17-SN	5/16"	0.078"		
	663-W06-1P	3/8"	0.094"		
20-SN	1/2"	0.125"			

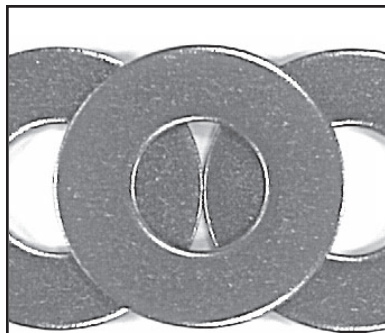

SPAENAUR No.	BOLT SIZE	INSIDE DIAMETER	OUTSIDE DIAMETER	THICKNESS RANGE	PKG QTY.
W-2009	2	.0937"	1/4"	.012-.022"	100
658-014	2	.0937"	1/4"	.022-.041"	100
658-B06-2T	4	.125"	5/16"	.022-.041"	100
658-059	4	.125"	3/8"	.022-.041"	100
658-B05-1N	6	.147"	3/8"	.022-.041"	100
658-B08-2W	6	.156"	5/16"	.022-.041"	100
658-061	6	.156"	1/2"	.022-.041"	100
658-B04-1C	8	.171"	3/8"	.022-.041"	100
658-063	8	.171"	5/8"	.034-.061"	100
658-B02-2P	10	.200"	7/16"	.022-.041"	100
658-012	10	.200"	5/8"	.034-.068"	100
658-064	10	.203"	1/2"	.034-.068"	100
658-C01-1E	10	.203"	3/4"	.040-.075"	100
658-065	10	.203"	7/8"	.040-.075"	100
W-2037	12	.243"	1/2"	.045-.075"	100
658-B03-2Y	1/4"	.265"	1/2"	.045-.075"	100
658-066	1/4"	.265"	1"	.050-.084"	100
658-067	1/4"	.265"	1-1/4"	.050-.084"	100
W-2000	1/4"	.281"	11/16"	.034-.068"	100
658-015	1/4"	.281"	5/8"	.034-.068"	100
658-B17-1N	1/4"	.281"	1"	.034-.068"	50
658-B26-1P	5/16"	.343"	3/4"	.034-.068"	100
658-B30-1C	5/16"	.343"	1-1/4"	.045-.075"	100
658-072	5/16"	.343"	1-1/2"	.109-.140"	50
W-2038	5/16"	.375"	7/8"	.045-.075"	100
658-B32-1T	3/8"	.391"	1"	.034-.061"	100
W-2039	3/8"	.391"	1"	.040-.075"	100
658-069	3/8"	.391"	1-1/4"	.050-.084"	100
658-070	3/8"	.391"	1-1/2"	.056-.112"	100
658-073	-	.437"	1-1/2"	.109-.140"	50
658-B22-1W	7/16"	.500"	1-1/8"	.045-.075"	100
658-B21-1K	1/2"	.562"	1-1/4"	.056-.112"	100
658-071	1/2"	.562"	1-1/2"	.056-.112"	100
658-B16-1C	5/8"	.687"	1-1/2"	.056-.112"	100
658-002	3/4"	.813"	1.3/4"	.095-.115"	50
658-B20-1T	3/4"	.812"	1-7/8"	.075-.155"	50
658-008	7/8"	.937"	2"	.085-.115"	25
658-B29-1N	7/8"	.937"	2-1/4"	.075-.155"	50
658-074	1"	1.0625"	2"	.125"	25
658-B25-1A	1"	1.0625"	2-1/2"	.109-.140"	50
W-2072	1-1/4"	1.312"	2-3/4"	.109-.140"	50

"STANDARD"
18-8
Stainless
Steel

ASSORTMENT 805-520
ASSORTIMENT

FLAT WASHERS

18-8 Stainless Steel

16 SIZES - 967 PIECES




REGULAR SIZE Steel, grey enamel Drawer will fit Slide Racks shown on page A2.

Shipping Weight:
4.31 kg (9-1/2 lbs.)

Spaenaur No.	Compatible Bolt Size	Inner Diameter	Outer Diameter	Thickness	Qty.	Page		
W-2009	#2	0.0937"	1/4"	0.012" - 0.022"	100	D6		
658-B06-2T	#4	0.1250"	5/16"	0.022" - 0.041"		D6		
658-B05-1N	#6	0.1470"	3/8"			E33		
658-B04-1C	#8	0.1710"	7/16"			D6		
658-B02-2P	#10	0.2000"				D6		
W-2037	#12	0.2430"	1/2"		50	D6		
658-015	1/4"	0.2810"	5/8"	0.045" - 0.075"				
658-B26-1P	5/16"	0.3430"	3/4"				0.045" - 0.075"	
W-2039	3/8"	0.3910"	1"					0.056" - 0.112"
658-B22-1W	7/16"	0.5000"	1-1/8"					
658-B21-1K	1/2"	0.5620"	1-1/4"		25			
658-B16-1C	5/8"	0.6870"	1-1/2"	10				
658-B20-1T	3/4"	0.8120"	1-7/8"	20				
658-B29-1N	7/8"	0.9370"	2-1/4"	5				
658-B25-1A	1"	1.0625"	2-1/2"	0.109" - 0.140"	2			
W-2072	1-1/4"	1.3120"	2-3/4"					

CATALOG 14.06
SPAENAUR

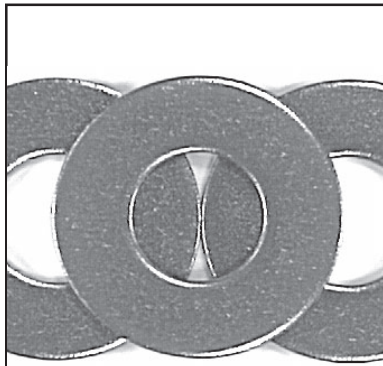


**“STANDARD”
316
Stainless
Steel**

SPAENAUR No.	BOLT SIZE	INSIDE DIAMETER	OUTSIDE DIAMETER	THICKNESS RANGE	PKG QTY.
658-B01-1A	4	.125"	5/16"	.022-.041"	100
W-2302	6	.156"	3/8"	.022-.041"	100
W-2303	8	.171"	3/8"	.022-.041"	100
658-B24-1X	10	.203"	.430"	.022-.041"	100
W-2305	1/4"	.281"	11/16"	.034-.068"	100
658-013	1/4"	.281"	5/8"	.034-.068"	100
658-023	1/4"	.281"	.734"	.045-.075"	100
658-024	5/16"	.343"	5/8"	.045-.075"	100
658-B19-1K	5/16"	.337"	3/4"	.034-.068"	100
W-2306	5/16"	.337"	7/8"	.045-.075"	100
658-018	3/8"	.391"	1"	.034-.060"	100
658-B31-2N	3/8"	.391"	1"	.038-.052"	100
658-020	7/16"	.468"	7/8"	.045-.075"	100
658-B28-1C	7/16"	.500"	1-1/8"	.045-.075"	100
658-B07-1K	1/2"	.531"	1"	.045-.075"	100
658-B23-1M	1/2"	.531"	1-1/4"	.055-.069"	100
W-2309	1/2"	.562"	1-1/4"	.056-.112"	100
658-021	5/8"	.656"	1-1/4"	.076-.131"	100
658-B18-1T	5/8"	.687"	1-1/2"	.056-.112"	100
658-022	3/4"	.812"	1-3/8"	.062-.131"	100
W-2311	3/4"	.812"	1-7/8"	.075-.155"	50
658-027	7/8"	.937"	2"	.102-.116"	50
W-2312	7/8"	.937"	2-1/4"	.075-.155"	50
658-028	1"	1.0625"	2"	.118-.132"	50
658-B27-1Y	1"	1.0625"	2-1/2"	.109-.140"	50
658-017	1-1/2"	1.625"	3-1/4"	.109-.140"	25

High Strength 17-7 (PH) Stainless Steel Flat Washers

These washers are made of 17-7 precipitation hardened (PH) stainless steel, heat treated to Rockwell **40-48° C** hardness. They provide the strength of heat-treated steel and corrosion resistance of a stainless steel. They can be used in atmospheres where plain steel, no matter how well plated, cannot survive.

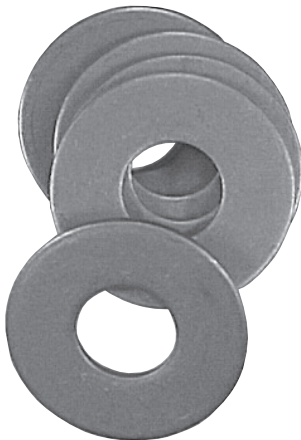

SPAENAUR No.	BOLT SIZE	INSIDE DIAMETER	OUTSIDE DIAMETER	NOMINAL THICKNESS	PKG QTY.
658-B15-1Y	1/4"	.312"	3/4"	.063"	100
658-B14-1P	5/16"	.375"	7/8"	.078"	100
658-B13-1A	3/8"	.437"	1"	.078"	100
658-B12-2X	7/16"	.500"	1-1/4"	.078"	50
658-054	1/2"	.562"	1-3/8"	.078"	50
658-055	9/16"	.625"	1-1/2"	.090"	50
658-056	5/8"	.687"	1-3/4"	.125"	25
658-057	3/4"	.812"	2"	.122"	25
658-B10-1W	1"	1.0625"	2"	.131"	10



D

“STANDARD”
BRASS
Flat
Washers

SPAENAU No.	SCREW SIZE	BOLT SIZE	INSIDE DIAMETER	OUTSIDE DIAMETER	THICKNESS	PKG QTY.
W-527	00	-	.050"	7/64"	.015"	200
649-003	0	-	.065"	5/32"	.018"	200
W-525	1	-	.078"	3/16"	.018"	200
649-B01-2C	2	-	.092"	3/16"	.018"	500
W-501	3	-	.105"	1/4"	.020"	500
649-B20-1M	4	-	.119"	9/32"	.025"	500
*W-502NP	4	-	.119"	9/32"	.025"	500
649-002	5	1/8"	.125"	3/4"	.060"	100
W-528	5	1/8"	.133"	9/32"	.025"	250
649-B21-1X	6	-	.147"	5/16"	.028"	250
W-503	6	-	.147"	3/8"	.032"	250
649-B14-1N	8	5/32"	.172"	3/8"	.032"	250
W-504	8	5/32"	.172"	7/16"	.036"	250
649-B13-1C	10	3/16"	.200"	7/16"	.036"	100
*W-531NP	10	3/16"	.200"	7/16"	.036"	100
W-505	10	3/16"	.200"	1/2"	.040"	100
649-B19-1X	12	7/32"	.227"	1/2"	.040"	100
W-506	12	7/32"	.227"	9/16"	.040"	100
W-523	-	-	1/4"	1/2"	.016"	100
649-B09-1P	14	1/4"	.260"	9/16"	.040"	100
W-508	14	1/4"	.260"	11/16"	.051"	100
649-001	-	-	17/64"	15/32"	.032"	100
W-509	16	-	.282"	5/8"	.040"	100
W-510	16	-	.282"	3/4"	.064"	100
649-B15-1T	18	-	.310"	11/16"	.051"	100
W-512	18	-	.310"	7/8"	.064"	100
649-B18-1M	20	5/16"	.337"	3/4"	.064"	100
W-514	20	5/16"	.337"	7/8"	.064"	100
W-540	-	3/8"	.390"	.682"	.050"	100
649-B22-1A	24	3/8"	.391"	7/8"	.064"	50
W-516	24	3/8"	.391"	1"	.081"	50
649-B17-1W	30	7/16"	1/2"	1-1/8"	.081"	50
649-B12-1Y	34	1/2"	9/16"	1-1/4"	.091"	50
649-B02-1N	34	1/2"	9/16"	1-3/8"	.091"	50
W-519	-	5/8"	11/16"	1-1/2"	.102"	50
649-B03-1M	-	3/4"	13/16"	1-7/8"	.114"	50
649-B08-1A	-	7/8"	15/16"	2-1/4"	.128"	25
W-522	-	1"	1-1/16"	2-1/2"	.144"	25
W-580	-	1-1/8"	1-3/16"	2-3/4"	.156"	25

*Nickel Plated

ASSORTMENT **805-519**

BRASS FLAT WASHERS
16 SIZES - 1315 PIECES

REGULAR SIZE Steel, grey enamel Drawer will fit Slide Racks shown on page A2

Shipping Weight:
3.18 kg (7 lbs.)



Spaenaur No.	Compatible Screw Size	Compatible Bolt Size	Inner Diameter	Outer Diameter	Thickness	Qty.	Page
649-B01-2C	#2		0.092"	3/16"	0.018"	200	D8
W-501	#3		0.105"	1/4"	0.020"		
649-B20-1M	#4		0.119"	9/32"	0.025"		
W-528	#5	1/8"	0.133"				
649-B21-1X	#6		0.147"	5/16"	0.028"		
649-B14-1N	#8	5/32"	0.172"	3/8"	0.032"		
649-B13-1C	#10	3/16"	0.200"	7/16"	0.036"		
649-B19-1X	#12	7/32"	0.227"	1/2"	0.040"		
649-B09-1P	#14	1/4"	0.260"	9/16"			
649-B15-1T	#18		0.310"	11/16"	0.051"		
649-B18-1M	#20	5/16"	0.337"	3/4"	0.064"		
W-540		3/8"	0.390"	0.682"	0.050"		
649-B17-1W	#30	7/16"	1/2"	1-1/8"	0.081"		
649-B12-1Y	#34	1/2"	9/16"	1-1/4"	0.091"		
W-519		5/8"	11/16"	1-1/2"	0.102"		
649-B03-1M		3/4"	13/16"	1-7/8"	0.114"		
						25	
						10	

CATALOG 14

SPAENAU

D8


P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

Inch

Flat Washers / Copper Burrs

Pouce

Rondelles plates / rondelles d'appui en cuivre

 "STANDARD"	SPAENAUR No.	BOLT SIZE	INSIDE DIAMETER	OUTSIDE DIAMETER	THICKNESS	PKG QTY.
	Aluminum	647-013	3	.108"	.400"	.031"
647-012		4	.125"	3/8"	.031"	100
647-D01-1E		6	.147"	3/8"	.032"	100
656-B22-1X		8	.172"	3/8"	.032"	100
W-189		10	.196"	7/8"	.064"	100
647-W01-1A		10	.203"	7/16"	.037"	100
W-3001		1/4"	.260"	11/16"	.047"	100
647-014		5/16"	.343"	7/8"	.064"	100
647-011		5/16"	.344"	9/16"	.064"	100
W-3005		5/16"	.375"	7/8"	.064"	100
647-W03-1Y		3/8"	.406"	7/8"	.062"	100
W-3007		1/2"	.563"	1-1/4"	.091"	100
W-3008		5/8"	.687"	1-1/2"	.095"	100
647-W02-1P		3/4"	.812"	1-7/8"	.095"	50
647-016	3/8"	.406-.416"	3"	.097-.112"	25	
Copper	W-4007	3/16"	.189"	1/2"	.040"	100
	W-4008	1/4"	.253"	11/16"	.047"	100
	W-4009	5/16"	.337"	7/8"	.064"	100
	W-4010	3/8"	.391"	1"	.062"	100
	651-A02-1C	1/2"	.563"	1-1/4"	.093"	50
	W-4012	5/8"	.687"	1-1/2"	.095"	50
W-4013	3/4"	.812"	1-7/8"	.095"	50	
Silicon Bronze	SPAENAUR No.	BOLT SIZE	INSIDE DIAMETER	OUTSIDE DIAMETER	THICKNESS	PKG QTY.
	649-B05-1W	1/4"	.260"	11/16"	.041"	100
	649-B07-1X	5/16"	21/64"	3/4"	.065"	100
	W-553	5/16"	.337"	7/8"	.064"	100
	649-B11-1P	3/8"	.391"	7/8"	.064"	100
	649-B06-1M	3/8"	25/64"	1"	.065"	100
	649-B10-1A	1/2"	9/16"	1-1/4"	.070"	100
	649-B16-1K	5/8"	11/16"	1-1/2"	.092"	25
	W-559	3/4"	13/16"	1-7/8"	.102"	25
	W-560	7/8"	15/16"	2-1/4"	.109"	10
W-561	1"	1-1/16"	2-1/2"	.125"	10	
Lead	653-W01-1A	10	7/32"	1/2"	.062"	100
	653-W02-1T	12	1/4"	1/2"	.062"	100
	W-5901	1/4"	17/64"	11/16"	.062"	100
	W-5903	5/16"	11/32"	7/8"	.062"	100
	653-002	-	5/8"	1-1/8"	.188"	100
Copper Burrs - for Rivets -	SPAENAUR No.	B.W. Gauge (or inches)	INSIDE DIAMETER	OUTSIDE DIAMETER	THICKNESS	PKG QTY.
	W-4000	12	.101-.104"	.375-.385"	.042"	500
	W-4001	10	.128-.131"	.375-.385"	.042"	500
	651-A01-1Y	8	.157-.160"	.500-.510"	.042"	250
	W-4003	3/16"	.192-.195"	.500-.510"	.042"	250
	W-4004	4	.236-.239"	.625-.635"	.050"	250
	W-4005	1/4"	.257-.260"	.625-.635"	.050"	100
W-4006	5/16"	.320-.323"	.625-.635"	.050"	100	


CATALOG 14.11

SPAENAUR

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

D9

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.



TEFLON - PTFE Flat Washers

- the lowest static and dynamic coefficient of friction of any solid material. The most slippery substance known.
 Continuous temperature range **-100°F to +400°F (-73°C to 204°C)**
 Teflon is unaffected by outdoor weathering. Inert to almost all chemicals. No moisture absorption. Can be cemented only after special treatment.

SPAENAUR No.	BOLT SIZE	INSIDE DIAMETER	OUTSIDE DIAMETER	NOMINAL THICKNESS	PKG QTY.
654-100	#4	.120"	9/32"	.030"	50
654-G04-1Y	#6	.150"	5/16"	.045"	50
654-102	#8	.170"	3/8"	.045"	50
654-103	#10	.195"	7/16"	.060"	50
654-G10-1K	1/4"	.265"	9/16"	.060"	25
654-105	5/16"	.340"	11/16"	.060"	25
654-106	3/8"	.405"	13/16"	.060"	25
654-107	1/2"	.531"	1"	.060"	25

D

NYLON SHOULDER WASHERS 6/6



See pages D72 & D73 for Nylon 6/6 Insulators and Shoulder Washers

also page C102 for Nylon Retaining Washers.

654-001	2	.090"	.250"	.032"	100
654-G09-1W	2	.104"	.220"	.031"	100
654-G02-1A	4	.115"	.250"	.032"	100
W-5000	4	.115"	.290"	.047"	100
76961	4	.124"	.500"	.100"	100
W-5001	6	.140"	.312"	.047"	100
654-003	6	.140"	.312"	.062"	100
654-030	6	.156"	.320"	.031"	100
654-G06-1N	8	.170"	.375"	.062"	100
654-029	10	.187"	.750"	.156"	100
654-004	10	.194"	.375"	.062"	100
W-5003	10	.200"	.437"	.062"	100
654-028	1/4"	.250"	.625"	.032"	100
654-G07-1T	1/4"	.257"	.500"	.062"	100
654-013	1/4"	.257"	.875"	.031"	100
654-010	1/4"	.257"	.875"	.062"	100
W-5004	1/4"	.260"	.562"	.062"	100
654-014	5/16"	.317"	.500"	.031"	100
654-006	5/16"	.317"	.500"	.062"	100
654-011	5/16"	.336"	.709"	.079"	100
654-G01-1X	5/16"	.344"	.687"	.062"	100
654-G08-1K	5/16"	.343"	.885"	.062"	100
654-007	3/8"	.380"	.625"	.062"	100
W-5007	3/8"	.402"	.807"	.065"	100
654-008	7/16"	.443"	.750"	.093"	100
654-023	—	.500"	1.500"	.125"	100
654-016	1/2"	.503"	1.120"	.033"	100
654-009	1/2"	.505"	.750"	.093"	100
654-017	1/2"	.540"	1.120"	.125"	100
W-5012	1/2"	.563"	.812"	.093"	100
654-019	—	.625"	.812"	.032"	100
654-012	5/8"	.630"	.812"	.100"	100
654-031	5/8"	.630"	.812"	.220"	100
654-018	3/4"	.768"	1.425"	.100"	100
654-022	7/8"	1.015"	1.5"	.080"	100

Inch

Flat Washers / Insulating Washers / Fibre Sheets

Pouce

Rondelles plates / Rondelles isolantes / Feuilles de fibres

FLAT FIBRE WASHERS
Vulcanized Red Fibre. A hard, dense, bone-like material. Tough yet pliable.

SPAENAUR No.		Diameter		PKG QTY.
1/32" Thick	1/16" Thick	Inside	Outside	
W-20F	W-21F	3/32"	3/16"	100
W-64F	W-65F	3/32"	1/4"	100
638-C01-1C	W-23F	1/8"	1/4"	100
W-24F	638-C04-1K	1/8"	5/16"	100
W-251F	-	1/8"	3/8"	100
638-C02-1N	-	.130"	3/8"	100
-	W-250F	5/32"	3/8"	100
W-26F	638-C11-1P	3/16"	5/16"	100
W-28F	W-29F	3/16"	3/8"	100
-	638-098	.191"	11/16"	100
W-30F	638-C05-1W	1/4"	3/8"	100
638-C03-1T	638-C09-1P	1/4"	1/2"	100
W-32F	W-33F	5/16"	7/16"	100
W-38F	W-39F	5/16"	9/16"	100
W-36F	W-37F	3/8"	1/2"	100
W-40F	W-41F	3/8"	5/8"	100
W-44F	W-45F	7/16"	11/16"	100
W-42F	W-43F	1/2"	5/8"	100
638-100	-	1/2"	11/16"	100
W-46F	W-47F	1/2"	3/4"	100
W-50F	W-51F	9/16"	13/16"	50
W-48F	W-49F	5/8"	3/4"	100
W-52F	W-53F	5/8"	7/8"	50
W-54F	W-55F	11/16"	15/16"	50
W-56F	W-57F	3/4"	1"	50
W-58F	W-59F	3/4"	1-1/16"	50
-	638-087	3/4"	1-1/4"	100
W-60F	638-C07-1X	13/16"	1-1/8"	50
W-62F	W-63F	7/8"	1-3/16"	25
-	W-67F	15/16"	1-1/4"	25
W-68F	W-69F	1"	1-5/16"	25
-	W-84F	1-1/4"	1-7/16"	25
638-002(.017" Thick. - Grey Colour)		1/8"	1/4"	100
638-003(.037" Thick. - Grey Colour)		1/8"	1/4"	100
638-004(.067" Thick. - Grey Colour)		1/8"	1/4"	100
W-85F(3/32" Thick)		5/16"	15/32"	100
W-275F (1/8" Thick)		1/4"	3/4"	100
638-088 (1/8" Thick)		3/16"	1-1/8"	100

FLAT FIBROUS WASHERS
Light Grey Colour
Made of ELECTRICAL INSULATING TRANSFORMER BOARD

SPAENAUR No.	Nominal Thickness	I.D.	O.D.	PKG QTY.
638-C10-1A	1/32"	.130"	3/8"	100
W-86F	1/16"	.219"	1/2"	100
UH-11	1/16"	1/4"	3/4"	100

FLAT FIBRE WASHERS
BLACK COLOUR (Hard)

SPAENAUR No.	Nominal Thickness	I.D.	O.D.	PKG QTY.
638-001	1/32"	5/32"	5/16"	100
638-C08-1A	1/16"	3/16"	7/8"	100
UH-10	1/16"	3/16"	1-3/8"	100

FLAT PHENOLIC WASHERS
Fabric Base - Natural Colour

SPAENAUR No.	Nominal Thickness	I.D.	O.D.	PKG QTY.
W-257F	1/16"	3/8"	7/8"	100
W-334F	.025"	11/16"	1-1/16"	100
W-333F	.010"	1-1/16"	1-5/16"	100

LEATHER WASHERS

639-001 5/16" I.D., 1" O.D., 1/8" thick
639-002 1/4" I.D., 1" O.D., 1/8" thick

PKG QTY. 100

EXTRUDED FIBRE WASHERS
STANDARD SIZES
Shoulder Washers to fit metal panels.
Used wherever a metal panel has to be insulated.

SPAENAUR No.	Inside Dia. A	Shoulder B	O.D. C	Base D	Height E	PKG QTY.
638-C06-1M	#4 (1/8")	13/64"	5/16"	3/64"	5/64"	100
W-75F	#6 (9/64")	7/32"	3/8"	3/64"	5/64"	100
W-76F	#8 (11/64")	1/4"	7/16"	1/16"	3/32"	100
W-77F	#10 (13/64")	9/32"	1/2"	1/16"	3/32"	100
W-78F	1/4"	3/8"	1/2"	1/16"	3/32"	100
W-79F	5/16"	7/16"	9/16"	1/16"	3/32"	100
W-80F	3/8"	1/2"	5/8"	1/16"	3/32"	100
W-81F	3/8"	1/2"	3/4"	1/16"	3/32"	100

VULCANIZED RED FIBRE SHEETS

SPAENAUR No.	Size	PKG QTY.
W-70FS	1/32" x 2" x 3"	25
W-71FS	1/16" x 2" x 3"	25

Useful for cutting into special shapes- Washers, Gaskets, etc.

ASSORTMENT B-584A

FIBRE WASHERS
of Red, Vulcanized Fibre
24 SIZES - 1000 PIECES

REGULAR SIZE Steel, grey enamel Drawer will fit Slide Racks shown on page A2


Shipping Weight: **2.49 kg (5-1/2 lbs.)**

Page A73

CATALOG 14 SPAENAUR

~DIN 125

This Standard has been replaced. Please see Catalog Page R21 for more information.



Metric STEEL FLAT WASHERS

Available finishes:

Plain, Zinc and Yellow Zinc Plated.

Regular Style

Hardness: ISO 7089 HV 200-300. (HRB 90-105)

(All Dimensions in Millimetres.)

ORDER BY SPAENAU ^R NUMBER LISTED BELOW			BOLT SIZE (mm)	INSIDE DIA. (MIN.)	OUTSIDE DIA. (MAX.)	THICK-NESS (NOM.)	PKG QTY.
PLAIN	ZINC PLATED	YELLOW ZINC PLTD.					
657-067	657-067ZP		1.6	1.7	4.0	.3	250
657-001	657-001ZP		1.7	1.8	4.5	.3	250
657-002	657-002ZP	657-002YZ	2	2.2	5.0	.3	250
657-068	657-003ZP	657-003YZ	2.3	2.5	6.0	.5	100
657-W19-1Y	657-068ZP	657-068YZ	2.5	2.7	6.0	.5	100
	657-004ZP	657-004YZ	2.6	2.8	7.0	.5	100
657-005	657-W02-1W	657-005YZ	3	3.2	7.0	.5	100
657-006	657-006ZP	657-006YZ	3.5	3.7	8.0	.5	100
657-007	657-W03-1M	657-007YZ	4	4.3	9.0	.8	100
657-008	657-008ZP	657-008YZ	5	5.3	10.0	1.0	100
657-W23-1N	657-W04-1Y	657-009YZ	6	6.4	12.0	1.6	100
657-010	657-010ZP	657-010YZ	7	7.4	14.0	1.6	100
657-011	657-011ZP	657-011YZ	8	8.4	16.0	1.6	100
657-833			10	10.5	20.0	2	100
657-012	657-012ZP	657-W17-1A	10	10.5	20.0	2.0	100
657-832			12	13.0	24.0	2.5	100
657-013	657-013ZP	657-013YZ	12	13.0	24.0	2.5	100
657-014	657-014ZP	657-W05-1A	14	15.0	28.0	2.5	100
657-015	657-015ZP	657-015YZ	16	17.0	30.0	3.0	100
657-016	657-016ZP	657-016YZ	18	19.0	34.0	3.0	100
657-017	657-W21-1Y	657-017YZ	20	21.0	37.0	3.0	50
657-018	657-018ZP	657-018YZ	22	23.0	39.0	3.0	50
657-W20-1P	657-019ZP	657-019YZ	24	25.0	44.0	4.0	50
657-069	657-020ZP		27	28.0	50.0	4.0	25
	657-W07-1Y		30	31.0	56.0	4.0	25
			33	34.0	60.0	5.0	10
657-070	657-070ZP		36	37.0	66.0	5.0	10
657-071	657-071ZP		39	42.0	72.0	6.0	10
657-072	657-072ZP		42	43.0	78.0	7.0	10
657-074			48	52.0	92.0	8.0	10

(All Dimensions in Millimetres.)

Steel
Metric Flat Washers




Cold Rolled
Plain Finish

Hardness: 200 Brinell (HRB 94)

SPAENAU ^R No.	BOLT SIZE (mm)	INSIDE DIA. (MIN.)	OUTSIDE DIA. (MAX.)	THICK-NESS (AVG.)	PKG QTY.
657-170	5	5.3	10.0	1 ±0.1	100
657-171	6	6.4	12.0	1.6 ±0.2	100
657-172	8	8.4	16.0	1.6 ±0.2	100
657-173	10	10.5	20.0	2 ±0.2	100
657-174	12	13.0	24.0	2.5 ±0.3	100
*657-174ZP	12	13.0	24.0	2.5 ±0.3	100
657-175	14	15.0	28.0	2.5 ±0.3	100
657-176	16	17.0	30.0	3 ±0.3	100
657-177	18	19.0	34.0	3 ±0.3	100
657-178	20	21.0	37.0	3 ±0.3	50

*Zinc Plated

~DIN 125

This Standard has been replaced. Please see
Catalog Page R21 for more information.**Metric STEEL FLAT WASHERS**Available finishes:
Plain, Zinc and Yellow Zinc Plated.**Single Chamfer Style**

(All Dimensions in Millimetres.)

ORDER BY SPAENAUR NUMBER LISTED BELOW			BOLT SIZE (mm)	INSIDE DIA. (MIN.)	OUTSIDE DIA. (MAX.)	THICK- NESS (NOM.)	PKG QTY.
PLAIN	ZINC PLATED	YELLOW ZINC PLATED					
	657-053ZP		3	3.2	7.0	.5	100
657-056	657-056ZP		5	5.3	10.0	1.0	100
657-W14-1W	657-057ZP	657-057YZ	6	6.4	12.0	1.6	100
657-058	657-058ZP		7	7.4	14.0	1.6	100
657-059	657-059ZP	657-059YZ	8	8.4	16.0	1.6	100
657-060	657-060ZP	657-060YZ	10	10.5	20.0	2.0	100
657-061	657-061ZP	657-061YZ	12	13.0	24.0	2.5	100
657-062	657-062ZP	657-062YZ	14	15.0	28.0	2.5	100
	657-063ZP	657-063YZ	16	17.0	30.0	3.0	100
657-064	657-064ZP		18	19.0	34.0	3.0	100
657-065	657-065ZP	657-065YZ	20	21.0	37.0	3.0	50
657-169	657-169ZP		22	23.0	39.0	3.0	50
657-066	657-066ZP	657-066YZ	24	25.0	44.0	4.0	50
		657-162YZ	27	28.0	50.0	4.0	25
657-143	657-143ZP	657-143YZ	30	31.0	56.0	4.0	25
657-135			33	34.0	60.0	5.0	10
657-136	657-136ZP		36	37.0	66.0	5.0	10
657-137			39	40.0	72.0	6.0	10
657-138			42	45.0	78.0	8.0	10
657-139			45	48.0	85.0	8.0	10
657-140			48	52.0	92.0	8.0	10
657-141			52	56.0	98.0	8.0	10
*657-142	*657-142ZP		64	66.15	114.0	9.0	10


* Not to DIN Specification.

**EXTERNAL
TAB WASHER**

Dimensions in mm.

DIN 432Steel
Plain Finish

Bolt Size	SPAENAUR No.	I.D.	O.D.	Tab Width	Thickness
M6	657-294	6.4	19	3.5	.75
M8	657-295	8.4	22	3.5	1.0
M12	657-296	13	30	4.5	1.2



PKG QTY. 100

PLASTIKIT
«PLASTIKIT» **804-082**

~DIN 125

This Standard has been replaced. Please see
Catalog Page R21 for more information.**Metric FLAT
and HELICAL
LOCKWASHERS**Steel, Zinc Plated
14 SIZES – 280 PIECESPut up in a clear durable plastic container
with hinged lid. Size: 1" x 2-3/4" x 4-1/2".

Name	Spaenaur No.	Compatible Bolt Size	Inner Diameter	Outer Diameter	Thickness	Qty.	Page
Split Lockwashers	664-C07-1P	M4	4.1mm	7.6mm	0.9mm	20	D25
	664-007ZP	M5	5.1mm	9.2mm	1.2mm		
	664-008ZP	M6	6.1mm	11.8mm	1.6mm		
	664-009ZP	M7	7.1mm	12.8mm			
	664-C10-1Y	M8	8.1mm	14.8mm	2.0mm		
	664-011ZP	M10	10.2mm	18.1mm	2.2mm		
Flat Washers	664-012ZP	M12	12.2mm	21.1mm	2.5mm	20	D12
	657-W03-1M	M4	4.3mm	9.0mm	0.8mm		
	657-008ZP	M5	5.3mm	10.0mm	1.0mm		
	657-W04-1Y	M6	6.4mm	12.0mm	1.6mm		
	657-010ZP	M7	7.4mm	14.0mm			
	657-011ZP	M8	8.4mm	16.0mm			
	657-012ZP	M10	10.5mm	20.0mm	2.0mm		
657-013ZP	M12	13.0mm	24.0mm	2.5mm			

D

ASSORTMENT **805-446**
ASSORTMENT

~DIN 125

This Standard has been replaced. Please see Catalog Page R21 for more information.

20 Sizes
893 Pieces

Shipping Weight:
3.2 kg (7 lb.)



Metric FLAT WASHERS
A2 Stainless Steel

ASSORTMENT **805-447**
ASSORTMENT

~DIN 125

This Standard has been replaced. Please see Catalog Page R21 for more information.

20 Sizes
940 Pieces

Shipping Weight:
3.2 kg (7 lb.)



Metric FLAT WASHERS
Brass


ASSORTMENT **805-448**
ASSORTMENT

~DIN 125

This Standard has been replaced. Please see Catalog Page R21 for more information.

18 Sizes
1000 Pieces

Shipping Weight:
2.27 kg (5 lb.)



Inch & Metric FLAT WASHERS
6/6 Nylon



For the complete assortment contents turn to A74

ASSORTMENT **805-411**
ASSORTMENT

~DIN 125

This Standard has been replaced. Please see Catalog Page R21 for more information.

Metric
FLAT WASHERS
Steel, Plated & Plain
21 SIZES - 943 PIECES






All drawers shown above are **REGULAR SIZE**, welded steel, have hinged lids and finished in grey enamel. Drawers will fit Slide Racks shown on A2


Shipping Weight: **3.52 kg (7-1/4 lbs.)**



For the complete assortment contents turn to A75

MATERIAL	SPAENAU No.		BOLT SIZE (mm)	INSIDE DIAMETER (MIN.)	OUTSIDE DIAMETER (MAX.)	THICKNESS (NOM.)	PKG QTY.
	STAINLESS STEEL A2	STAINLESS STEEL A4					
<p>Metric FLAT WASHERS</p> <p>~DIN 125</p> <p><small>This Standard has been replaced. Please see Catalog Page R21 for more information.</small></p>  <p>Property Classes A2 & A4</p> <p>STAINLESS STEEL</p> <p><small>* May not be to DIN Specification</small></p>	*659-022		1	1.1	3.2	.3	250
	*659-023		1.2	1.3	3.8	.3	250
	*659-024		1.4	1.5	3.8	.3	250
	659-F12-1M		1.6	1.7	4	.3	250
	659-F06-1N	659-F08-1K	2	2.2	5.0	.3	250
	659-003		2.3	2.5	6.0	.5	100
	659-F05-1C	659-031	2.5	2.7	6.0	.5	100
	659-004		2.6	2.8	7.0	.5	100
	659-F03-1P	659-032	3	3.2	7.0	.5	100
	659-006	659-F13-1X	3.5	3.7	8.0	.5	100
	659-F04-2Y	659-033	4	4.3	9.0	.8	100
	659-008	659-F09-1W	5	5.3	10.0	1.0	100
	659-F01-1X	659-035	6	6.4	12.0	1.6	100
	659-F10-1K	659-036	8	8.4	16.0	1.6	100
	659-F02-1A	659-037	10	10.5	20.0	2.0	100
	659-013	659-038	12	13.0	24.0	2.5	100
	659-014	659-039	14	15.0	28.0	2.5	100
	659-015	659-040	16	17.0	30.0	3.0	100
	659-016	659-041	18	19.0	34.0	3.0	100
	659-F11-1W	659-042	20	21.0	37.0	3.0	50
659-018	659-043	22	23.0	39.0	3.0	50	
659-019	659-044	24	25.0	44.0	4.0	50	
659-020	659-045	27	28.0	50.0	4.0	25	
659-021	659-046	30	31.0	56.0	4.0	25	
<p>Metric FLAT WASHERS</p> <p>~DIN 125</p> <p><small>This Standard has been replaced. Please see Catalog Page R21 for more information.</small></p>  <p>BRASS</p>	PLAIN BRASS	NICKEL PLATED					
	650-001	650-001NP	1.7	1.8	4.5	.3	250
	650-002		2	2.2	5.0	.3	250
	650-003		2.3	2.5	6.0	.5	100
	650-022		2.5	2.7	6.0	.5	100
	650-004	650-004NP	2.6	2.8	7.0	.5	100
	650-005		3	3.2	7.0	.5	100
	650-006		3.5	3.7	8.0	.5	100
	650-007	650-007NP	4	4.3	9.0	.8	100
	650-008		5	5.3	10.0	1.0	100
	650-009		6	6.4	12.0	1.6	100
	650-026		7	7.4	14.0	1.6	100
	650-K01-1C		8	8.4	16.0	1.6	100
	650-012		10	10.5	20.0	2.0	100
	650-013		12	13.0	24.0	2.5	100
	650-014		14	15.0	28.0	2.5	100
	650-015		16	17.0	30.0	3.0	100
	650-K02-1N		18	19.0	34.0	3.0	100
650-017		20	21.0	37.0	3.0	50	
650-018		22	23.0	39.0	3.0	50	
650-019		24	25.0	44.0	4.0	50	
650-021		30	31.0	56.0	4.0	25	
<p>Metric FLAT WASHERS</p>  <p>Type 6/6 UL 94V2 NYLON</p> <p>See pages D72 and D73 for Nylon 6/6 Insulators and Shoulder Washers.</p>	655-020		2	2.15	5.00	0.80	100
	655-021		2.5	2.65	5.60	0.80	100
	655-010		3	3.20	7.00	0.50	100
	655-001		3	3.20	8.00	0.80	100
	655-022		3.5	3.70	8.00	0.80	100
	655-011		4	4.30	9.00	0.80	100
	655-012		5	5.30	11.00	1.00	100
	655-013		6	6.40	12.00	1.50	100
	655-015		8	8.40	16.00	1.60	100
	655-002		8	8.40	18.00	2.00	100
	655-023		8	8.50	25.00	2.00	100
	655-016		10	10.50	22.00	2.50	100
	655-017		12	13.00	24.00	2.50	100
655-018		16	17.00	30.00	3.00	100	
655-019		20	21.00	37.00	3.00	50	


All Dimensions in millimetres




Round Flat Washers

DIN 126
This Standard has been replaced. Please see Catalog Page R21 for more information.

Cold Rolled Steel Washers for **Metric** Hexagon Bolts
and **Metric** Nuts, (not chamfered)




For Bolt Size	Plain Steel	Zinc Plated	Yellow Zinc Plated	All Dimensions in Millimetres			PKG QTY.
				I.D. (Min.)	O.D. (Max.)	Thick. (Nom.)	
M5	657-032			5.5	10	1	100
M6	657-033			6.6	12	1.6	100
M7	657-034			7.6	14	1.6	100
M8	657-035	657-035ZP		9	16	1.6	100
M10	657-036	657-036ZP	657-036YZ	11	20	2	100
M12	657-037	657-037ZP		13.5	24	2.5	100
M14	657-038		657-038YZ	15.5	28	2.5	100
M16	657-W22-1C	657-039ZP		17.5	30	3	100
M18	—	657-054ZP		20	34	3	50
M20	657-040	657-040ZP		22	37	3	50
M22	657-077	657-077ZP		23	39	3	50
M24	657-041			26	44	4	50
M27	657-042	657-042ZP		30	50	4	25
M30	657-043	657-043ZP		33	56	4	25
M33	657-044	657-044ZP		36	60	5	10
M36	657-045	657-045ZP		39	66	5	10
M39	657-046			42	72	6	10
M42	657-047			45	78	8	10
M45	657-076			48	85	8	10
M48	657-048			52	92	8	10
M52	657-049			56	98	8	10



Round Flat Washers

DIN 7349

For use with **Metric** Bolts with HEAVY Clamping Sleeves
and for close tolerance use with DIN 1481.




For Bolt Size	Plain Steel	Zinc Plated	All Dimensions in Millimetres			PKG QTY.
			I.D.	O.D.	Thickness	
M3	657-183	657-183ZP	3.2	9	1	100
M4	657-184	657-184ZP	4.3	12	1.6	100
M5	657-185		5.3	15	2	100
M6	657-186	657-186ZP	6.4	17	3	100
M8	657-187	657-187ZP	8.4	21	4	100
M10	657-188		10.5	25	4	100
M12	657-189	657-189ZP	13	30	6	100
M14	657-191	657-191ZP	15	36	6	100
M16	657-192	657-192ZP	17	40	6	100
M18	657-194		19	44	8	100
M20	657-195		21	44	8	100
M22	657-196		23	50	8	50
M24	657-197	657-197ZP	25	50	10	50
M27	657-198		28	60	10	25
M30	657-199	657-199ZP	31	68	10	25

D16

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com


© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.



Metric Flat Washers with reduced O.D.


DIN 433

For use with Machine Screws.



For Bolt Size	Plain Steel	Zinc Plated	A4 Stainless Steel	All Dimensions in Millimetres			PKG QTY.
				I.D. (Min.)	O.D. (Max.)	Thick. (Nom.)	
M1		657-078ZP		1.1	2.5	0.3	100
M1.2	657-079	657-079ZP		1.3	3	0.3	100
M1.4		657-080ZP		1.5	3	0.3	100
M1.6		657-081ZP		1.7	3.5	0.3	100
M2	657-083	657-W29-1A		2.2	4.5	0.3	100
M2.5	657-084	657-W01-1K		2.7	5	0.5	100
M3		657-W06-1P		3.2	6	0.5	100
M3.5	657-144			3.7	7	0.5	100
M4	657-086	657-086ZP	657-W25-1K	4.3	8	0.5	100
M5	657-087	657-087ZP	657-815	5.3	9	1	100
M6	657-088	657-088ZP	657-W11-1N	6.4	11	1.6	100
M8	657-089	657-089ZP	657-802	8.4	15	1.6	100
M10	657-090	657-090ZP	657-W18-1P	10.5	18	1.6	100
M12	657-091	657-091ZP		13	20	2	100
M14	657-092	657-092ZP		15	24	2.5	100
M16	657-093	657-093ZP		17	28	2.5	100
M18	657-094	657-094ZP		19	30	3.0	100
M20	657-095	657-095ZP		21	34	3.0	50

■657-502NP Brass - Nickel Plated



Metric Fender Washers

~DIN 9021

This Standard has been replaced. Please see Catalog Page R21 for more information.

Washers with O.D. approximate 3 times I.D.
Previously unmachined.


Washers with Large O.D.

Plain Steel Similar to DIN 9021

SPAENAUR No.	I.D. x O.D. x Thickness	PKG QTY. 100
657-W26-1X	6.4 x 25 x 1.25 mm	
657-149	8.4 x 30 x 1.25 mm	
657-319	10.5 x 38 x 1.5 mm	

For Bolt Size	Plain Steel	Zinc Plated	Yellow Zinc Plated	A2 Stainless Steel	Nylon 6/6	All Dimensions in Millimetres			PKG QTY.
						I.D. (Min.)	O.D. (Max.)	Thick. (Nom.)	
M2.5	657-253	657-253ZP		657-804		2.7	8	0.8	100
M3	657-254	657-254ZP	657-254YZ	657-805	657-400	3.2	9	0.8	100
M3.5	657-255	657-255ZP		657-806		3.7	11	0.8	100
M4	657-256	657-256ZP	657-256YZ	657-W09-1N	657-401	4.3	12	1	100
M5	657-257	657-257ZP	657-257YZ	657-808	657-402	5.3	15	1.1	100
M6	657-258	657-258ZP	657-258YZ	657-W13-1K	657-403	6.4	18	1.6	100
M7	657-259	657-259ZP				7.4	22	2	100
M8	657-260	657-260ZP		657-810	657-W16-1X	8.4	24	2	100
M10	657-261	657-W24-1T	657-261YZ	▲657-811	657-405	10.5	30	2.5	100
M12	657-262	657-262ZP	657-262YZ	657-812	657-406	13	37	3	100
M14	657-263	657-263ZP	657-263YZ			15	44	3	100
M16	657-264	657-264ZP				17	50	3	100
M18	657-265	657-265ZP				19	56	4	100
M20	657-266	657-266ZP				21	60	4	50


▲ 657-813 A4 Stainless Steel (same dimensions as 657-811)




Metric Flat Washers

DIN 7989


This Standard has been replaced. Please see
Catalog Page R21 for more information.

For Steel Construction - Plain Steel



For Bolt Size	SPAENAUR No.	All Dimensions in Millimetres			PKG QTY.
		I.D.	O.D.	Thickness	
M10	657-050	11	20	8	100
M12	657-051	13.5	24	8	100
M16	657-096	17.5	30	8	100
M20	657-052	22	37	8	50
M24	657-097	26	44	8	50
M24	657-097ZP (Zinc Plated)	26	44	8	50
M27	657-098	30	50	8	25
M30	657-099	33	56	8	25




Metric Flat Washers

Plain Steel - Black Finish
DIN 6916
Hardened
For use with steel structures (joints with high-tensile, prestressed bolts)
and DIN 6914 High Tension Hexagon Bolts (Pg. B170) and DIN 6915 Heavy Hex Nuts (Pg. C20).


For Bolt Size	SPAENAUR No.	All Dimensions in Millimetres			PKG QTY.
		I.D.	O.D.	Thickness	
M12	657-150	13	24	3	100
M16	657-151	17	30	4	100
M20	657-152	21	37	4	50
M22	657-153	23	39	4	50
M24	657-154	25	44	4	50
M27	657-155	28	50	5	25
M30	657-156	31	56	5	25
M33	657-157	34	60	5	10



Metric Flat Washers


Plain Steel - Black Finish
DIN 6340
Hardened



For Bolt Size	SPAENAUR No.	All Dimensions in Millimetres			PKG QTY.
		I.D.	O.D.	Thickness	
M6	657-298	6.4	17	3	100
M8	657-299	8.4	23	4	100
M10	657-W27-1M	10.5	28	4	100
M12	657-301	13	35	5	100
M14	657-302	15	40	5	100
M16	657-303	17	45	6	100
M18	657-304	19	45	6	100
M20	657-305	21	50	6	50
M24	657-306	25	60	8	50

**For Spherical Seat Washer DIN 6319C
and Dished Washer DIN 6319D see page B302.**

Bolt Size (mm)	Plain Steel	Zinc Plated	Yellow Zinc Plated	All Dimensions in Millimetres			PKG QTY.
				I.D.	O.D.	Thickness	
3	657-234	657-234ZP		3	6	0.8	100
4	657-235	657-235ZP	657-235YZ	4	8	0.8	100
5	657-236	657-236ZP	657-236YZ	5	10	0.8	100
6	657-237	657-237ZP		6	12	1.6	100
8	657-238	657-238ZP	657-W28-1X	8	16	2	100
10	657-239	657-239ZP		10	20	2.5	100
12	657-240	657-240ZP		12	25	3	100
13	657-241			13	25	3	100
14	657-242	657-242ZP		14	28	3	100
16	657-243	657-243ZP	657-243YZ	16	28	3	100
18	657-244	657-244ZP		18	30	4	100
20	657-245	657-245ZP	657-245YZ	20	32	4	50
22	657-246	657-246ZP	657-246YZ	22	34	4	50
25	657-247			25	40	4	50
28	657-248	657-W08-1C		28	42	5	25
30	657-249			30	45	5	25
36	657-250			36	52	6	10

For Bolt Size	SPAENAUR No.	All Dimensions in Millimetres			Overall Height	PKG QTY.
		I.D.	O.D.	Thickness		
M3	657-275	3.2	5.5	0.45	0.9	100
M4	657-276	4.3	7.0	0.50	1.0	100
M5	657-277	5.3	9.0	0.60	1.1	100
M6	657-278	6.4	10.0	0.70	1.2	100
M7	657-279	7.4	12.0	0.70	1.3	100
M8	657-280	8.4	13.0	0.80	1.4	100
M10	657-282	10.5	16.0	1.00	1.6	100
M12	657-284	13.0	18.0	1.10	1.7	100
M14	657-286	15.0	22.0	1.20	2.0	100
M16	657-293	17.0	24.0	1.30	2.1	100
M18	657-287	19.0	27.0	1.50	2.3	100
M20	657-288	21.0	30.0	1.50	2.4	50
M22	657-289	23.0	33.0	1.50	2.5	50
M24	657-290	25.6	36.0	1.80	2.7	50
M27	657-291	28.6	39.0	2.00	2.9	25
M30	657-292	31.6	45	2.00	3.2	25

	Flat Small O.D. Washers Steel – Zinc Plated	PKG QTY. 100
	SPAENAUR No. 657-407 M6 Thick Flat Washer Steel – Zinc Plated 6.4 I.D. x 16 O.D. x 0.8 mm Thick.	SPAENAUR No. 657-408 8 I.D. x 12 O.D. x 2 mm Thick.
	SPAENAUR No. 657-409 9 I.D. x 13 O.D. x 2 mm Thick.	



Metric Sealing Rings

DIN 7603

Form 7603A – Flat Gasket Form 7603C – Packing Gasket

Available in Aluminum Natural, Fibre Natural, Copper Natural and Copper Natural with "KFC" packing.

PKG QTY. 100

D

DIN 7603A			DIN 7603C	All Dimensions in Millimetres			DIN 7603A			DIN 7603C	All Dimensions in Millimetres		
Aluminum Natural	Fibre Natural	Copper Natural	Copper Filled with "KFC"	I.D.	O.D.	Thick.	Aluminum Natural	Fibre Natural	Copper Natural	Copper Filled with "KFC"	I.D.	O.D.	Thick.
661-300	661-400	661-700		4	8	1			661-749		12	17	1
		661-701		5	7.5	1	661-316	661-410	661-750		12	17	1.5
661-301		661-702		5	9	1			661-751	661-879	12	17	2
		661-703		5	9	1.5			661-752		12	18	1
		661-705		5.5	8	1	661-317	661-411	661-753		12	18	1.5
661-302	661-402	661-706		6	10	1			661-754	661-880	12	18	2
		661-707	661-867	6	10	1.5	661-318	661-412	661-755		12	19	1.5
		661-708		6	10	2			661-756		12	20	1
661-303	661-403	661-709		6	12	1		661-413	661-757		12	20	1.5
		661-710	661-868	6	12	1.5			661-758		12	20	2
		661-711		6	12	2		661-414			12	22	1.5
	661-404	661-712		6.2	17.5	2			661-759		13	17	1
661-305		661-713		6.5	9.5	1			661-760		13	17	1.5
		661-714		6.5	11	1			661-761		13	17	2
661-307		661-715		8	11.5	1			661-762		13	18	1
		661-716	661-869	8	11.5	1.5		661-415	661-763		13	18	1.5
		661-717		8	11.5	2			661-764	661-881	13	18	2
661-308	661-405	661-718		8	12	1			661-765		13	19	1
		661-719	661-870	8	12	1.5			661-766		13	19	1.5
		661-720		8	12	2			661-767	661-882	13	19	2
661-309		661-721		8	13	1			661-768		13	20	1
		661-722	661-871	8	13	1.5		661-416	661-769		13	20	1.5
		661-723		8	13	2			661-770		13	20	2
661-310	661-406	661-724		8	14	1			661-771		14	18	1
		661-725	661-872	8	14	1.5	661-320	661-417	661-772		14	18	1.5
		661-726		8	14	2			661-773	661-883	14	18	2
661-311		661-727		10	13.5	1			661-774		14	20	1
		661-728	661-873	10	13.5	1.5	661-321	661-418	661-775		14	20	1.5
		661-729		10	13.5	2			661-776	661-884	14	20	2
661-312	661-407	661-730		10	14	1	661-322	661-419	661-777		14	22	1.5
		661-731	661-874	10	14	1.5			661-778		14	24	1
		661-732		10	14	2		661-420	661-779		14	24	1.5
		661-733		10	15	1			661-780		14	24	2
		661-734	661-875	10	15	1.5	661-323	661-421	661-781		15	19	1.5
		661-735		10	15	2		661-422			15	24	1.5
661-313	661-408	661-736		10	16	1			661-782		16	20	1
		661-737	661-876	10	16	1.5	661-325	661-423	661-783		16	20	1.5
		661-738		10	16	2			661-784	661-885	16	20	2
		661-739		10	18	1			661-785		16	22	1
		661-740		10	18	1.5	661-326	661-424	661-786		16	22	1.5
		661-741		10	18	2			661-787	661-886	16	22	2
		661-742		10	20	1			661-788		16	24	1.5
		661-743		10	20	1.5			661-789		17	21	1
		661-744		10	20	2	661-327	661-425	661-790		17	21	1.5
661-314		661-745		12	15.5	1.5			661-791	661-887	17	21	2
			661-877	12	15.5	2			661-792		17	22	1
		661-746		12	16	1			661-793		17	22	1.5
661-315	661-409	661-747		12	16	1.5			661-794		17	22	2
		661-748	661-878	12	16	2							

Continued on next page...


Metric Sealing Rings (cont'd)

DIN 7603

Form 7603A – Flat Gasket Form 7603C – Packing Gasket

Available in Aluminum Natural, Fibre Natural, Copper Natural and Copper Natural with “KFC” packing.

“KFC” packing is made from cellulose fibre and binding materials, developed for use as a filler in Sealing Rings. Good compressibility, springiness and workability - easy on forming tools. **250°C** Max.



Continued from Previous Page

DIN 7603A			DIN 7603C	All Dimensions in Millimetres			DIN 7603A			DIN 7603C	All Dimensions in Millimetres		
Aluminum Natural	Fibre Natural	Copper Natural	Copper Filled with “KFC”	I.D.	O.D.	Thick.	Aluminum Natural	Fibre Natural	Copper Natural	Copper Filled with “KFC”	I.D.	O.D.	Thick.
		661-795		17	23	1	661-341		661-839		26	34	2
661-328	661-426	661-796		17	23	1.5				661-901	26	34	2.5
		661-797	661-888	17	23	2			661-840		27	32	1.5
		661-798		18	22	1	661-342	661-436	661-841		27	32	2
661-329	661-427	661-799		18	22	1.5				661-902	27	32	2.5
		661-800	661-889	18	22	2			661-842		27	35	2
		661-801		18	24	1			661-843		28	33	2
661-330	661-428	661-802		18	24	1.5	661-343	661-437	661-844		28	34	2
		661-803	661-890	18	24	2				661-903	28	34	2.5
		661-804		20	24	1			661-845		28	36	2
661-331	661-429	661-805		20	24	1.5			661-846		30	36	1.5
		661-806	661-891	20	24	2	661-W03-1A	661-438	661-847		30	36	2
		661-807		20	26	1				661-904	30	36	2.5
661-332	661-430			20	26	1.5	661-345		661-848		30	38	2
		661-809		20	26	2				661-905	30	38	2.5
		661-810		21	26	1	661-346	661-439	661-849		32	38	2
661-333	661-431	661-811		21	26	1.5				661-906	32	38	2.5
		661-812	661-893	21	26	2			661-850		33	39	1.5
		661-813		21	27	1	661-347	661-440	661-851		33	39	2
		661-814		21	27	1.5				661-907	33	39	2.5
		661-815		21	27	2			661-852		35	41	1.5
		661-816		21	28	1	661-348	661-441	661-853		35	41	2
	661-432	661-817		21	28	1.5				661-908	35	41	2.5
		661-818		21	28	2			661-854		36	42	1.5
		661-819		22	26	1.5	661-349	661-442	661-855		36	42	2
		661-820		22	27	1				661-909	36	42	2.5
661-335	661-433	661-821		22	27	1.5			661-856		36	44	2
		661-822	661-894	22	27	2	661-350		661-857		38	44	2
		661-823		22	28	1				661-910	38	44	2.5
		661-824		22	28	1.5	661-351	661-443	661-858		40	47	2
		661-825		22	28	2				661-911	40	47	2.5
		661-826		22	29	1			661-859		40	49	2
661-336	661-434	661-827		22	29	1.5	661-352	661-444	661-860		42	49	2
		661-828	661-895	22	29	2				661-912	42	49	2.5
		661-829		23	28	2	661-353	661-445	661-861		45	52	2
661-337		661-830		24	29	2				661-913	45	52	2.5
			661-896	24	29	2.5		661-446	661-862		48	55	2
661-338	661-435	661-831		24	30	2				661-914	48	55	2.5
			661-897	24	30	2.5			661-863		50	57	2
		661-832		24	32	1.5			661-864		52	60	2.5
		661-833		24	32	2				661-915	52	60	3
		661-917	661-898	24	32	2.5	661-354				48	55	2
		661-834		26	31	1.5			661-865		60	68	2.5
661-339		661-835		26	31	2				661-916	60	68	3
			661-899	26	31	2.5			661-866		75	84	2.5
		661-836		26	32	1.5							
661-340	661-447	661-837		26	32	2							
			661-900	26	32	2.5							
		661-838		26	34	1.5							

PKG QTY.

 17 & 18 mm I.D. - 100
 20-24 mm I.D. - 50

 26-30 mm I.D. - 25
 32-75 mm I.D. - 10

ASME/ANSI
B18.21.1

**REGULAR STYLE
HELICAL - SPLIT TYPE**



D

STEEL
Zinc Plated
and
Plain Finish



Material	SPAENAU No.		Nominal Bolt Size	Washer Section		PKG QTY.
	Zinc Plated	Plain Finish		Width	Thickness	
STEEL Zinc Plated and Plain Finish	663-W04-1X		2	.035"	.020"	100
	W-308		3	.040"	.025"	100
	663-W02-1W		4	.040"	.031"	100
	W-310		5	.047"	.031"	100
	W-311		6	.047"	.031"	100
	663-W03-1M		8	.055"	.040"	100
	663-W05-1A		10	.062"	.047"	100
	16-SN	663-079	1/4"	.109"	.062"	100
	17-SN	663-299	5/16"	.125"	.078"	100
	663-W06-1P	18-SNB	3/8"	.141"	.094"	100
	19-SN	663-090	7/16"	.156"	.109"	100
	20-SN		1/2"	.171"	.125"	100
	21-SN		9/16"	.188"	.141"	100
	22-SN	663-091	5/8"	.203"	.156"	100
	23-SN		3/4"	.234"	.188"	100
	W-237	W-239B	7/8"	.266"	.219"	100
	W-239		1"	.297"	.250"	100
	W-241		1-1/8"	.328"	.281"	50
	W-243		1-1/4"	.359"	.312"	50
	W-244		1-5/16"	.375"	.328"	50
W-245		1-3/8"	.391"	.344"	25	
W-246		1-7/16"	.406"	.359"	25	
663-W09-1N		1-1/2"	.422"	.375"	25	
W-363		1-5/8"	.500"	.375"	25	
W-364		1-3/4"	.500"	.375"	25	
W-365		1-7/8"	.500"	.375"	25	
W-366		2"	.500"	.375"	20	
663-002		2-1/4"	.442"	.440"	10	

ASSORTMENT
ASSORTIMENT **A-203**

Inch Sizes



SPLIT LOCKWASHERS
Steel, Plated

Helical, "Regular"
and "Light" Styles

**14 SIZES
582 PIECES**

Regular Size Drawer Size:
13-3/8" x 9-1/4" x 2"
See page A2 for Storage
Slide Rack

Shipping Weight:
2.95 kg (6-1/2 lbs.)



Style	Spaenaur No.	Bolt Size	Width	Thickness	Qty.
Light	B-488	#4	0.035"	0.020"	50
	B-489	#6	0.040"	0.025"	
	B-490	#8	0.047"	0.031"	
	663-W01-1K	#10	0.055"	0.040"	
	B-492	#12	0.062"	0.047"	
663-W05-1A	#10				
Regular	16-SN	1/4"	0.109"	0.062"	75
	17-SN	5/16"	0.125"	0.078"	50
	663-W06-1P	3/8"	0.141"	0.094"	35
	19-SN	7/16"	0.156"	0.109"	30
	20-SN	1/2"	0.171"	0.125"	20
	21-SN	9/16"	0.188"	0.141"	15
	22-SN	5/8"	0.203"	0.156"	20
23-SN	3/4"	0.234"	0.188"	12	

CATALOG 14
SPAENAU



Stainless - Aluminum - Bronze

REGULAR STYLE

HELICAL - SPLIT TYPE

Dimensionally to
ASME B18.21.1

Nominal Bolt Size	Washer Section		18-8 STAINLESS STEEL	316 STAINLESS STEEL	ALUMINUM 7075-T6	SILICON BRONZE	PKG QTY.
	Width	Thickness					
2	.035"	.020"	667-P08-2N	W-2314		W-582	100
3	.040"	.025"	W-2022	W-2327		W-583	
4	.040"	.031"	667-P03-2X	667-P10-1N		W-584	
6	.047"	.031"	667-P04-2A	667-P09-1T		W-585	
8	.055"	.040"	667-P16-1A	W-2317	663-W11-1N	W-586	
10	.062"	.047"	667-P02-2M	667-P07-1C	663-305	W-587	
12	.070"	.056"	667-P12-1K			W-588	
1/4"	.109"	.062"	667-P06-2W	W-2319	663-W10-1C	665-A01-1N	
5/16"	.125"	.078"	667-P24-1K	667-P15-1X	663-301	665-A04-1W	
3/8"	.141"	.094"	667-P01-2W	W-2321	663-302	W-564	
7/16"	.156"	.109"	W-2031	667-P13-1W		665-A03-1K	
1/2"	.171"	.125"	667-P11-1T	667-P17-1P	663-306	665-A05-1M	50
5/8"	.203"	.156"	W-2033	W-2323	663-307	665-A02-1T	
3/4"	.234"	.188"	W-2034	W-2324	663-308	W-568	
7/8"	.266"	.219"	W-2035	W-2325		W-569	
1"	.297"	.250"	667-P23-1T	W-2326		W-570	

ASME
B18.21.1

REGULAR STYLE

HELICAL SPLIT TYPE



Material	SPAENAUR No.	Nominal Bolt Size	Washer Section		PKG QTY.
			Width	Thickness	
Hot Galvanized Steel	663-W07-1Y	1/4"	.109"	.062"	100
	663-083	5/16"	.125"	.078"	100
	663-084	3/8"	.141"	.094"	100
	663-085	1/2"	.171"	.125"	100
	663-086	5/8"	.203"	.156"	100
	663-087	3/4"	.234"	.188"	100
	663-088	7/8"	.266"	.219"	100
	663-089	1"	.297"	.250"	100

ASSORTMENT **805-528**

Inch Sizes
16 SIZES - 1000 PIECES

SPLIT LOCKWASHERS
(18-8) Stainless Steel
Helical, "Regular" Styles

Regular Drawer Size: 13-3/8" x 9-1/4" x 2"
See page A2 for Storage Slide Racks.

Shipping Wt. **3.62 kg** (8 lbs.)



For the complete assortment contents turn to A75

Zinc Plated
Steel

LIGHT STYLE
SPRING STEEL LOCKWASHERS

ASME
B18.21.1



SPAENAUR No.	Nominal Bolt Size	Washer Section		PKG QTY.
		Width	Thickness	
B-495	2	.030"	.015"	100
W-153	3	.035"	.020"	100
B-488	4	.035"	.020"	100
W-248	5	.040"	.025"	100
B-489	6	.040"	.025"	100
B-490	8	.047"	.031"	100
663-W01-1K	10	.055"	.040"	100
B-492	12	.062"	.047"	100
W-115	14	.107"	.047"	100

D



Zinc Plated
Steel

High-collar style is used with:
Socket Head Cap Screws
Pages B178-B187,
B189-B192, B196-B207.
Countr-Bor Cap Screws
Page B210.

* Plain Finish

HIGH-COLLAR STYLE
SPRING STEEL LOCKWASHERS

ASME
B18.21.1


SPAENAUR No.	Nominal Bolt Size	Washer Section		PKG QTY.
		Width	Thickness	
663-W14-1W	4	.022"	.022"	100
W-339	6	.030"	.030"	100
W-340	8	.042"	.047"	100
W-341	10	.042"	.047"	100
W-342	12	.047"	.078"	100
W-343	1/4"	.047"	.078"	100
W-344	5/16"	.062"	.093"	100
W-345	3/8"	.076"	.125"	100
W-346	7/16"	.090"	.140"	100
W-347	1/2"	.103"	.172"	100
W-348	9/16"	.116"	.187"	100
W-349	5/8"	.125"	.203"	100
W-350	3/4"	.154"	.218"	100
* 663-W19-1Y	7/8"	.182"	.234"	100
W-352	1"	.208"	.250"	100
W-353	1-1/8"	.236"	.313"	50
W-354	1-1/4"	.236"	.313"	50
W-355	1-1/2"	.292"	.375"	25

18-8
Stainless
Steel

ASME
B18.21.1

667-P05-1P	4	.022"	.022"	100
667-P18-1Y	6	.030"	.030"	100
667-P20-1Y	8	.042"	.047"	100
667-B20-1M	10	.042"	.047"	100
667-P21-1C	1/4"	.047"	.078"	100
667-P19-1C	5/16"	.062"	.093"	100
667-P14-1M	3/8"	.076"	.125"	100
667-P22-1N	1/2"	.103"	.172"	100

DOUBLE COIL STYLE
Spring Steel – Hot Galvanized Finish



SPAENAUR No.	Nominal Bolt Size	Washer Section		PKG QTY.
		Width	Thickness	
663-W08-1C	3/8"	.141"	.094"	100
W-358	1/2"	.203"	.156"	100
W-359	5/8"	.234"	.188"	100
W-360	3/4"	.266"	.219"	100

SPAENAUR CATALOG 14.07


**DIN
127B**

Metric LOCKWASHERS

Split Type – Helical – Plain Ends

For use with Hex Head Cap Screws
Styles DIN 931 and DIN 933 on B156 to B171

All Dimensions in Millimetres				ORDER BY SPAENAUR NUMBERS BELOW						PKG QTY.
BOLT SIZE	Inside Dia.	Outside Dia.	Nom. Section Thickness	STEEL		Yellow Zinc Plated	A2 Stainless Steel	A4 Stainless Steel	Silicon Bronze	
				Plain	Zinc Plated					
2	2.1	4.4	.5	664-001	664-001ZP	664-001YZ	668-A03-1C			100
2.3	2.4	4.9	.6	664-002	664-002ZP		668-002			100
2.5	2.6	5.1	.6	664-131	664-131ZP	664-131YZ	668-A02-2Y			100
2.6	2.7	5.2	.6	664-003	664-003ZP		668-003			100
3	3.1	6.2	.8	664-C03-1A	664-004ZP	664-004YZ	668-A01-1P	668-A05-1T	666-004	100
3.5	3.6	6.7	.8	664-005	664-C13-1T	664-005YZ	668-005			100
4	4.1	7.6	.9	664-006	664-C07-1P	664-006YZ	668-006	668-028	666-006	100
5	5.1	9.2	1.2	664-007	664-007ZP	664-C09-1C	668-007	668-029	666-007	100
6	6.1	11.8	1.6	664-008	664-008ZP	664-008YZ	668-008	668-030	666-008	100
7	7.1	12.8	1.6	664-009	664-009ZP	664-009YZ	668-009			100
8	8.1	14.8	2	664-010	664-C10-1Y	664-010YZ	668-A09-1X	668-031	666-010	100
10	10.2	18.1	2.2	664-011	664-011ZP	664-011YZ	668-011	668-032	666-011	100
12	12.2	21.1	2.5	664-012	664-012ZP	664-012YZ	668-012	668-033	666-012	100
14	14.2	24.1	3	664-013	664-013ZP	664-013YZ	668-013	668-A07-1W		100
16	16.2	27.4	3.5	664-014	664-014ZP	664-014YZ	668-014	668-035	666-014	100
18	18.2	29.4	3.5	664-015	664-015ZP	664-015YZ	668-015	668-036		100
20	20.2	33.6	4	664-016	664-016ZP	664-016YZ	668-016	668-037		100
22	22.5	35.9	4	664-017	664-017ZP	664-017YZ	668-017		666-017	100
24	24.5	40	5	664-018	664-018ZP	664-018YZ	668-018	668-038		50
27	27.5	43	5	664-019	664-019ZP	664-019YZ	668-A06-1K			50
30	30.5	48.2	6	664-020	664-020ZP	664-020YZ	668-020			50
33	33.5	55.2	6	664-028	664-028ZP	664-028YZ				25
36	36.5	58.2	6	664-046	664-046ZP	664-046YZ				25
42	42.5	68.2	7	664-133						10
45	45.5	71.2	7	664-134						10
48	49.0	75	7	664-135						10
52	53.0	83	8	664-136						10



**DIN
127A**

Metric LOCKWASHERS

Split Type – Helical – Barbed Ends

For use with Hex Head Cap Screws
Styles DIN 931 and DIN 933


All Dimensions in Millimetres				ORDER BY SPAENAUR NUMBERS BELOW			PKG QTY.
BOLT SIZE	Inside Dia.	Outside Dia.	Section Thickness	STEEL			
				Plain	Zinc Plated	Yellow Zinc Plated	
2.6	2.7	5.2	.6		664-081ZP		100
3	3.1	6.2	.8	664-068	664-068ZP	664-068YZ	100
3.5	3.6	6.7	.8	664-069	664-069ZP	664-069YZ	100
4	4.1	7.6	.9	664-070	664-070ZP	664-070YZ	100
5	5.1	9.2	1.2	664-071	664-071ZP	664-071YZ	100
6	6.1	11.8	1.6	664-072	664-072ZP	664-072YZ	100
7	7.1	12.8	1.6	664-074	664-074ZP	664-074YZ	100
8	8.1	14.8	2	664-075	664-075ZP	664-075YZ	100
10	10.2	18.1	2.2	664-076	664-076ZP	664-076YZ	100
12	12.2	21.1	2.5	664-078	664-078ZP	664-078YZ	100
14	14.2	24.1	3	664-080	664-080ZP	664-080YZ	100
16	16.2	27.4	3.5	664-082	664-082ZP	664-082YZ	100
18	18.2	29.4	3.5	664-083	664-083ZP	664-083YZ	100
20	20.2	33.6	4	664-084	664-084ZP	664-084YZ	100
22	22.5	35.9	4	664-085	664-085ZP	664-085YZ	100
24	24.5	40	5	664-086	664-086ZP	664-086YZ	50
27	27.5	43	5	664-088	664-088ZP	664-088YZ	50
30	30.5	48.2	6	664-090	664-090ZP	664-090YZ	50
33	33.5	55.2	6	664-092	664-092ZP	664-092YZ	25
36	36.5	58.2	6	664-094	664-094ZP	664-094YZ	25
39	39.5	61.2	6	664-125			10
42	42.5	68.2	7	664-126			10
45	45.5	71.2	7	664-127			10
48	49	75	7	664-128			10

ASSORTMENT 805-449 DIN 127B

Metric SPLIT LOCKWASHERS A2 STAINLESS STEEL

Helical - Plain Ends

**20 SIZES
950 PIECES**



Regular Size grey enamel Steel Drawer
will fit Slide Racks on page A2
Shipping Wt. **3.4 kg** (7-1/2 lbs.)

Spaenaur No.	Bolt Size	Inner Diameter	Outer Diameter	Thickness	Qty.	Page
668-001	M2	2.1mm	4.4mm	0.5mm	100	
668-002	M2.3	2.4mm	4.9mm	0.6mm		
668-003	M2.6	2.7mm	5.2mm	0.8mm		
668-A01-1P	M3	3.1mm	6.2mm			
668-005	M3.5	3.6mm	6.7mm	0.9mm	80	
668-006	M4	4.1mm	7.6mm	1.2mm		
668-007	M5	5.1mm	9.2mm	1.6mm	60	D25
668-008	M6	6.1mm	11.8mm	1.6mm	50	
668-009	M7	7.1mm	12.8mm		2.0mm	
668-010	M8	8.1mm	14.8mm	2.2mm	30	
668-011	M10	10.2mm	18.1mm			
668-012	M12	12.2mm	21.1mm	2.5mm	15	
668-013	M14	14.2mm	24.1mm			
668-014	M16	16.2mm	27.4mm	3.5mm	10	
668-015	M18	18.2mm	29.4mm			
668-016	M20	20.2mm	33.6mm	4.0mm	6	
668-017	M22	22.5mm	35.9mm			
668-018	M24	24.5mm	40.0mm	5.0mm	5	
668-A06-1K	M27	27.5mm	43.0mm			
668-020	M30	30.5mm	48.2mm	6.0mm	4	



**DIN
7980**

Metric LOCKWASHERS

Split Type – Helical – Plain Ends

High Collar Style

For use with Socket Head Cap Screws
Style DIN 912.

All Dimensions in Millimetres				ORDER BY SPAENAUR NUMBERS BELOW					PKG QTY.
BOLT SIZE	Inside Dia.	Outside Dia.	Section Thickness	STEEL		A2 Stainless Steel	A4 Stainless Steel		
				Plain	Zinc Plated	Yellow Zinc Plated			
3	3.1	5.6	1	664-050	664-050ZP	664-050YZ	668-A04-1N	668-021	100
3.5	3.6	6.1	1	664-067	664-067ZP	664-067YZ			100
4	4.1	7	1.2	664-051	664-C02-1K	664-051YZ	668-045	668-022	100
5	5.1	8.8	1.6	664-052	664-052ZP	664-052YZ	668-046	668-023	100
6	6.1	9.9	1.6	664-053	664-053ZP	664-053YZ	668-A08-1M	668-024	100
8	8.1	12.7	2	664-054	664-054ZP	664-054YZ	668-048	668-025	100
10	10.2	16	2.5	664-055	664-055ZP	664-055YZ	668-049	668-039	100
12	12.2	18	2.5	664-056	664-056ZP	664-056YZ	668-050	668-040	100
14	14.2	21.1	3	664-057	664-C06-1A	664-057YZ			100
16	16.2	24.4	3.5	664-C12-1N	664-058ZP	664-058YZ	668-051	668-041	100
18	18.2	26.4	3.5	664-059	664-059ZP	664-059YZ			100
20	20.2	30.6	4.5	664-060	664-060ZP	664-060YZ	668-052	668-042	100
22	22.5	32.9	4.5	664-061	664-061ZP	664-061YZ			100
24	24.5	35.9	5	664-062	664-062ZP	664-062YZ		668-043	50
27	27.5	38.9	5	664-063	664-063ZP	664-063YZ			50
30	30.5	44.1	6	664-064	664-064ZP	664-064YZ			50
33	33.5	47.1	6	664-065	664-065ZP	664-065YZ			25
36	36.5	52.2	7	664-066	664-066ZP	664-066YZ			25
42	42.5	60.2	8	664-049					10

ASSORTMENT
ASSORTIMENT **805-413**

DIN 127B

for use with Hex Head
Cap Screws (DIN 931/933)

DIN 7980

for use with Socket Head
Cap Screws (DIN 912)

Metric SPLIT LOCKWASHERS
STEEL, ZINC PLATED


Helical - Plain Ends



24 SIZES
1381 PIECES

Regular Size grey enamel Steel
Drawer will fit Slide Racks on page A2
Shipping Wt. **3.4 kg** (7-1/2 lbs.)

Spaenaur No.	Bolt Size	Inner Diameter	Outer Diameter	Thickness	Qty.	Page
DIN 127B						
664-001ZP	M2	2.1mm	4.4mm	0.5mm	100	D25
664-002ZP	M2.3	2.4mm	4.9mm	0.6mm		
664-003ZP	M2.6	2.7mm	5.2mm	0.8mm		
664-004ZP	M3	3.1mm	6.2mm	0.8mm		
664-C13-1T	M3.5	3.6mm	6.7mm			
664-C07-1P	M4	4.1mm	7.6mm	0.9mm		
664-007ZP	M5	5.1mm	9.2mm	1.2mm	80	
664-008ZP	M6	6.1mm	11.8mm	1.6mm	60	
664-009ZP	M7	7.1mm	12.8mm	1.6mm	50	
664-C10-1Y	M8	8.1mm	14.8mm	2.0mm	40	
664-011ZP	M10	10.2mm	18.1mm	2.2mm	30	
664-012ZP	M12	12.2mm	21.1mm	2.5mm		
664-013ZP	M14	14.2mm	24.1mm	3.0mm	15	
664-014ZP	M16	16.2mm	27.4mm	3.5mm	10	
664-015ZP	M18	18.2mm	29.4mm	3.5mm	8	
664-016ZP	M20	20.2mm	33.6mm	4.0mm	6	
664-017ZP	M22	22.5mm	35.9mm	4.0mm		
664-018ZP	M24	24.5mm	40.0mm	5.0mm		
DIN 7980						
664-050ZP	M3	3.1mm	5.6mm	1.0mm	100	D27
664-C02-1K	M4	4.1mm	7.0mm	1.2mm		
664-052ZP	M5	5.1mm	8.8mm	1.6mm	80	
664-053ZP	M6	6.1mm	9.9mm	1.6mm	70	
664-054ZP	M8	8.1mm	12.7mm	2.0mm	50	
664-055ZP	M10	10.2mm	16.0mm	2.5mm	40	



**DIN
128A**

Metric

LOCKWASHERS

Split Bowed Type – Plain Ends

■ A2 Stainless Steel specification similar to DIN 128A.

D


All Dimensions in Millimetres				ORDER BY SPAENAUR NUMBERS BELOW					PKG QTY.
BOLT SIZE	Min. Inside Dia.	Max. Outside Dia.	Nom. Thickness (Ref. Only)	Plain	STEEL Zinc Plated	Yellow Zinc Plated	■ A2 Stainless Steel	A2 Stainless Steel Section Thick.	
2	2.1	4.4	0.5	664-030	664-030ZP	664-030YZ	664-900	0.6	100
2.3	2.4	4.9	0.6	-	664-031ZP	664-031YZ			100
2.5	2.6	5.1	0.6	664-032	664-032ZP	664-032YZ	664-902	0.6	100
2.6	2.7	5.2	0.6	664-033	664-033ZP	664-033YZ			100
3	3.1	6.2	0.7	664-034	664-034ZP	664-034YZ		0.8	100
3.5	3.6	6.7	0.7	664-035	664-035ZP	664-035YZ		0.8	100
4	4.1	7.6	0.8	664-036	664-C08-1Y	664-036YZ	664-908	0.8	100
5	5.1	9.2	1.0	664-037	664-037ZP	664-037YZ	664-910	1.2	100
6	6.1	11.8	1.3	664-038	664-038ZP	664-038YZ	664-912	1.5	100
7	7.1	12.8	1.3	664-095	664-095ZP	664-095YZ			100
8	8.1	14.8	1.6	664-039	664-039ZP	664-039YZ	664-914	1.9	100
10	10.2	18.1	1.8	664-C11-1C	664-040ZP	664-040YZ	664-916	2.0	100
12	12.2	21.1	2.1	664-041	664-041ZP	664-041YZ	664-C04-1M	2.4	100
14	14.2	24.1	2.4	664-042	664-042ZP	664-042YZ			100
16	16.2	27.4	2.8	664-043	664-043ZP	664-043YZ	664-920	3.3	100
18	18.2	29.4	2.8	664-044	664-044ZP	664-044YZ	664-922	3.4	100
20	20.2	33.6	3.2	664-045	664-045ZP	664-045YZ			100
22	22.5	35.9	3.2	664-096	664-096ZP	664-C05-1X			100
24	24.5	40	4.0	664-097	664-097ZP	664-097YZ			50
27	27.5	43	4.0	664-098	664-098ZP	664-098YZ			50
30	30.5	48.2	6.0	664-099	664-099ZP	664-099YZ			50
33	33.5	-	-	664-100	664-100ZP	664-100YZ			25
36	36.5	58.2	6.0	664-101	664-101ZP	664-101YZ			25

METRIC LONG TAB WASHERS (LOCKING)


Steel, Plain Finish

DIN 93


For Bolt Size	SPAENAUR No.	I.D. (d ₁)	O.D. (d ₂)	Tab Width (b)	Tab Length (l)	Radius (r)	Thick. (s)	PKG QTY.
M3	657-100	3.2	12	4	13	2.5	0.38	100
M3.5	657-101	3.7	12	4	13	2.5	0.38	100
M4	657-102	4.3	14	5	14	2.5	0.38	100
M5	657-103	5.3	17	6	16	2.5	0.5	100
M6	657-104	6.4	19	7	18	4	0.5	100
M8	657-105	8.4	22	8	20	4	0.75	100
M10	657-106	10.5	26	10	22	6	0.75	100
M12	657-107	13	30	12	28	10	1	100
M14	657-108	15	33	12	28	10	1	100
M16	657-109	17	36	15	32	10	1	100
M18	657-110	19	40	18	36	10	1	100
M20	*657-111	21	42	18	36	10	1	50
M22	657-112	23	50	20	42	10	1	50
M24	657-113	25	50	20	42	10	1	50
M27	657-114	28	58	23	48	16	1.6	25
M30	657-115	31	63	26	52	16	1.6	25
M33	657-W12-1T	34	68	28	56	16	1.6	10
M36	657-117	37	75	30	60	16	1.6	10

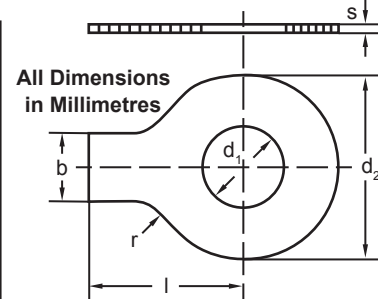

Applications



*657-111ZP Zinc Plated


**DIN
128B**
Metric

LOCKWASHERS

Split Twisted Type – Plain Ends

All Dimensions in Millimetres				ORDER BY SPAENAUR NUMBERS BELOW			PKG QTY.
BOLT SIZE	Min. Inside Dia.	Max. Outside Dia.	Nom. Section (Reference only)	STEEL		Yellow Zinc Plated	
				Plain	Zinc Plated		
2	2.1	4.4	.5	664-102	664-102ZP	664-102YZ	100
2.3	2.4	4.9	.6	664-103	664-103ZP	664-103YZ	100
2.5	2.6	5.1	.6	664-104	664-104ZP	664-104YZ	100
2.6	2.7	5.2	.6	664-105	664-105ZP	664-105YZ	100
3	3.1	6.2	.7	664-106	664-106ZP	664-106YZ	100
3.5	3.6	6.7	.7	664-107	664-107ZP	664-107YZ	100
4	4.1	7.6	.8	664-108	664-C01-1T	664-108YZ	100
5	5.1	9.2	1	664-109	664-109ZP	664-109YZ	100
6	6.1	11.8	1.3	664-110	664-110ZP	664-110YZ	100
7	7.1	12.8	1.3	664-111	664-111ZP	664-111YZ	100
8	8.2	14.9	1.6	664-112	664-112ZP	664-112YZ	100
10	10.2	18.1	1.8	664-113	664-113ZP	664-113YZ	100
12	12.2	21.1	2.1	664-114	664-114ZP	664-114YZ	100
14	14.2	24.1	2.4	664-115	664-115ZP	664-115YZ	100
16	16.2	27.4	2.8	664-116	664-116ZP	664-116YZ	100
18	18.2	29.4	2.8	664-117	664-117ZP	664-117YZ	100
20	20.2	33.6	3.2	664-118	664-118ZP	664-118YZ	100
22	22.5	35.9	3.2	664-119	664-119ZP	664-119YZ	100
24	24.5	40	4	664-120	664-120ZP	664-120YZ	50
27	27.5	43	4	664-121	664-121ZP	664-121YZ	50
30	30.5	48.2	6	664-122	664-122ZP	664-122YZ	50
33	33.5			664-123	664-123ZP	664-123YZ	25
36	36.5	58.2	6	664-124	664-124ZP	664-124YZ	25




Metric TAB WASHERS with LONG and SHORT TAB (LOCKING)

All Dimensions in Millimetres

For Bolt Size	Use SPAENAUR No.	I.D. (d ₁)	O.D. (d ₂)	Tab Width (b)	Tab1 Length (l ₁)	Tab2 Length (l ₂)	Thick. (s)	PKG QTY.
M3	657-118	3.2	7	4	13	5	0.38	100
M4	657-119	4.3	9	5	14	6.5	0.38	100
M5	657-120	5.3	10	6	16	8	0.5	100
M6	657-121	6.4	12.5	7	18	9	0.5	100
M8	657-122	8.4	17	8	20	11	0.75	100
M10	657-123	10.5	21	10	22	13	0.75	100
M12	657-124	13	24	12	28	15	1	100
M14	657-125	15	28	12	28	16	1	100
M16	*657-126	17	30	15	32	18	1	100
M18	657-145	19	34	18	36	20	1	100
M20	657-127	21	37	18	36	21	1	50
M22	657-128	23	39	20	42	23	1	50
M24	657-129	25	44	20	42	25	1	50
M27	657-130	28	50	23	48	29	1.6	25
M30	▲657-131	31	56	26	52	32	1.6	25
M33	657-132	34	60	28	56	34	1.6	10
M36	657-133	37	66	30	60	38	1.6	10
M42	657-W10-1C	43	78	35	70	44	1.6	10

DIN 463

Carbon Steel – Plain Finish



Application

(Metric Long Tab Washers on D28.)





 * 657-126ZP - Zinc Plated
 ▲ 657-131ZP - Zinc Plated

Tooth Lockwashers

Inch

Rondelles freins dentées

Pouce

Dimensionally to ASME B18.21.1	Nominal Screw or Bolt Size	DIMENSIONS		ORDER BY SPAENAU ^R NUMBERS LISTED BELOW			
		Outside Diameter	Thickness	Zinc Plated STEEL	410 STAINLESS STEEL	PHOSPHOR BRONZE	
 <p>EXTERNAL TOOTH (Flat)</p>	2	.285-.275"	.018"	W-215			
	4	.260-.245"	.019-.015"	42-SN	675-A01-2A	W-545	
	6	.320-.305"	.022-.016"	43-SN	W-2047	673-A03-1N	
	8	.381-.365"	.023-.018"	44-SN	675-A03-2Y	W-547	
	10	.410-.395"	.025-.020"	671-W04-1W	675-A08-1W	673-A04-1T	
	12	.475-.460"	.028-.023"	145-A	675-A09-1M		
	1/4"	.510-.494"	.028-.023"	145	675-A10-1W	673-A06-1W	
	5/16"	.610-.588"	.034-.028"	47-SN	675-A04-1C		
	3/8"	.694-.670"	.040-.032"	49-SN	W-2053		
	7/16"	.760-.740"	.040-.032"	1351	W-2054		
	1/2"	.900-.880"	.045-.037"	1352	W-2055		
	9/16"	.985-.960"	.045-.037"	1349			
	5/8"	1.070-1.045"	.050-.042"	1481	W-2056		
	11/16"	.922-914"	.035"	671-003			
	3/4"	1.260-1.220"	.055-.047"	51-SN	W-2057	673-001	
1"	-	-	671-006				
 <p>INTERNAL TOOTH (Flat)</p>	2	.200-.175"	.015-.010"		675-A11-1M		
	3	.232-.215"	.019-.012"	W-144			
	4	.270-.255"	.017"	671-W09-1Y	675-A02-2N	W-550	
	5	.280-.245"	.021-.017"	671-002		W-571	
	6	.295-.275"	.021-.017"	671-W07-1X	675-A05-1N	W-541	
	8	.340-.325"	.023-.018"	671-W11-1Y	675-A06-1T	W-542	
	10	.381-.365"	.025-.020"	671-W03-1K	W-2062	673-A01-1Y	
	12	.410-.394"	.025-.020"	1741	W-2063	W-572	
	1/4"	.478-.460"	.028-.023"	788	W-2064	W-544	
	1/4"	.536-.524"	.039"	W-391			
	5/16"	.610-.594"	.034-.028"	55-SN	W-2065	673-A02-1C	
	3/8"	.692-.670"	.040-.032"	671-W12-1C	675-A07-1K	673-A05-1K	
	7/16"	.789-.740"	.040-.032"	57-SN	W-2066	W-575	
	1/2"	.900-.867"	.045-.037"	671-W01-1N	W-2067	W-576	
	5/8"	1.071-1.045"	.050-.042"	B-404	W-2068	W-578	
11/16"	1.166-1.147"	.045"	671-004				
3/4"	1.245-1.220"	.055-.047"	B-405	675-001	W-579		
7/8"	1.410-1.364"	.060-.052"	B-919				
1"	1.637-1.590"	.067-.059"	B-493				
1-1/8"	1.830-1.799"	.067-.059"	B-859				
1-5/16"	1.950-1.921"	.063"	B-860				
<p>Zinc Plated STEEL</p>  <p>EXTERNAL TOOTH 82° COUNTERSUNK</p>	SPAENAU ^R No.	Screw Size	<p>Zinc Plated STEEL</p>  <p>INTERNAL-EXTERNAL FLAT</p> <p>■ W-259YZ Yellow Zinc Plated</p>	SPAENAU ^R No.	Screw Size	Outside Diameter	Nom. Thick.
	1063	6		671-061	6	.510-.495"	.024"
	671-W02-1T	8		671-062	8	.610-.580"	.030"
	888	10		671-063	10	.610-.580"	.030"
	671-W05-1M	12		671-W10-1P	1/4"	.760-.720"	.035"
	1072	1/4"		671-065	5/16"	.900-.865"	.035"
	901	5/16"		■ W-259	3/8"	.985-.965"	.040"
58-SN	3/8"	671-066	1/2"	1.260-1.220"	.050"		
W-335	7/16"	671-069	5/8"	1.620-1.590"	.062"		

SPAENAU^R CATALOG 14.09

D30

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

Contact Sales Desk
For Package Quantities

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

ASSORTIMENT 4640-S

Tooth Lockwashers

Steel, Zinc Plated
30 VARIETIES
877 PIECES

Furnished in a Regular Size grey enamelled steel drawer with hinged lid and scooped bins. Drawer will fit Slide Racks shown on page A2


Shipping Weight: **2.6 kg** (5.75 lbs.)



ASSORTIMENT 805-529

Tooth Lockwashers


410 Stainless Steel
18 VARIETIES
1050 PIECES



For the complete assortment contents turn to A77

ASSORTIMENT 805-533

**TOOTH LOCKWASHERS
PHOSPHOR BRONZE
16 VARIETIES - 1000 PIECES**



Furnished in a Regular Size grey enamelled steel drawer with hinged lid and scooped bins. Drawer will fit Slide Racks shown on page A2

Shipping Weight **2.04 kg** (4-1/2 lbs.)

Spaenaur No.	Screw / Bolt Size	Outer Diameter	Thickness	Qty.	Page
External Tooth Flat					
W-545	#4	0.260" - 0.245"	0.019" - 0.015"	100	D30
673-A03-1N	#6	0.320" - 0.305"	0.022" - 0.016"		
W-547	#8	0.381" - 0.365"	0.023" - 0.018"		
W-548	#10	0.410" - 0.395"	0.025" - 0.020"	50	D30
673-A06-1W	1/4"	0.510" - 0.494"	0.028" - 0.023"		
Internal Tooth Flat					
W-550	#4	0.270" - 0.255"	0.019" - 0.015"	50	D30
W-571	#5	0.280" - 0.245"	0.021" - 0.017"		
W-541	#6	0.285" - 0.275"	0.021" - 0.017"		
W-542	#8	0.340" - 0.325"	0.023" - 0.018"	100	D30
673-A01-1Y	#10	0.381" - 0.365"	0.025" - 0.020"		
W-572	#12	0.410" - 0.394"	0.025" - 0.020"	50	D30
W-544	1/4"	0.478" - 0.460"	0.028" - 0.023"		
673-A05-1K	3/8"	0.692" - 0.670"	0.040" - 0.032"	20	D30
W-576	1/2"	0.900" - 0.867"	0.045" - 0.037"		
W-578	5/8"	1.071" - 1.045"	0.050" - 0.042"	10	D30
W-579	3/4"	1.245" - 1.220"	0.055" - 0.047"		




PLASTIKIT «PLASTIKIT» 1706





**TOOTH LOCKWASHER
STEEL ZINC PLATED
19 VARIETIES - 188 PIECES**

Put up in a clear durable plastic container with hinged lid.
Size: 1" x 2-3/4" x 4-1/2"



Spaenaur No.	Screw / Bolt Size	Outer Diameter	Thickness	Qty.	Page
External Tooth Flat					
671-W04-1W	#10	0.410" - 0.395"	0.025" - 0.020"	15	D30
145-A	#12	0.475" - 0.460"	0.028" - 0.023"	20	
145	1/4"	0.510" - 0.494"	0.028" - 0.023"	20	
47-SN	5/16"	0.588" - 0.610"	0.034" - 0.028"	25	
49-SN	3/8"	0.694" - 0.670"	0.040" - 0.032"	10	
1351	7/16"	0.760" - 0.740"	0.040" - 0.032"	6	
1352	1/2"	0.900" - 0.880"	0.045" - 0.037"	5	
1349	9/16"	0.985" - 0.960"	0.045" - 0.037"	4	
1481	5/8"	1.070" - 1.045"	0.050" - 0.042"	3	
51-SN	3/4"	1.260" - 1.220"	0.055" - 0.047"	2	
Internal Tooth Flat					
671-W03-1K	#10	0.381" - 0.365"	0.025" - 0.020"	15	D30
1741	#12	0.410" - 0.394"	0.025" - 0.020"	20	
788	1/4"	0.478" - 0.460"	0.028" - 0.023"	10	
55-SN	5/16"	0.610" - 0.594"	0.034" - 0.028"	5	
671-W12-1C	3/8"	0.692" - 0.670"	0.040" - 0.032"	4	
57-SN	7/16"	0.789" - 0.740"	0.040" - 0.032"	4	
671-W01-1N	1/2"	0.867" - 0.900"	0.045" - 0.037"	2	
B-404	5/8"	1.071" - 1.045"	0.050" - 0.042"		
B-405	3/4"	1.245" - 1.220"	0.055" - 0.047"	2	

METRIC STYLES	ORDER BY SPAENAUER NUMBERS BELOW.					Dimensions in mm				PKG QTY.
	Plain	Zinc Plated	Yellow Zinc Plated	A2 STAINLESS STEEL	PHOSPHOR BRONZE	NOM. SIZE (Screw Size) mm	I.D.	O.D.	T	
 <p>DIN 6797A EXTERNAL TOOTH (Flat)</p>	672-029	672-029ZP	672-029YZ	676-001		2	2.2	4.5	0.3	100
	672-036	672-036ZP	672-036YZ			2.3	2.5	5.	0.4	100
	W-282	W-282ZP	W-282YZ			2.5	2.7	5.5	0.4	100
	672-037	672-037ZP	672-037YZ	676-F03-1K		2.6	2.8	5.5	0.4	100
	672-020	672-020ZP	672-020YZ	676-003	674-003	3	3.2	6.	0.4	100
	672-030	672-030ZP	672-030YZ	676-004	674-004	3.5	3.7	7.	0.5	100
	672-021	672-021ZP	672-021YZ	676-005	674-005	4	4.3	8.	0.5	100
	672-022	672-022ZP	672-022YZ	676-006	674-006	5	5.3	10.	0.6	100
	672-023	672-023ZP	672-023YZ	676-007	674-007	6	6.4	11.	0.7	100
			672-039YZ			7	7.4	12.5	0.8	100
	672-024	672-024ZP	672-024YZ	676-009		8	8.4	15.	0.8	100
	672-025	672-025ZP	672-025YZ	676-010	674-010	10	10.5	18.	0.9	100
	672-026	672-026ZP	672-026YZ	676-011		12	12.5	20.5	1.	100
	672-040	672-040ZP	672-040YZ			13	13.2	22	2.5	100
	672-027	672-027ZP	672-027YZ	676-012		14	14.5	24.	1.	100
	672-028	672-028ZP	672-028YZ	676-013	674-013	16	16.5	26.	1.2	100
	672-032	672-032ZP	672-032YZ	676-014		18	19.	30.	1.4	100
	672-033	672-033ZP	672-033YZ	676-015		20	21.	33.	1.4	50
672-034	672-034ZP	672-034YZ	676-016		24	25.	38.	1.5	50	
672-041	672-041ZP	672-041YZ			27	28.	44.	1.6	50	
672-035	672-035ZP	672-035YZ	676-017		30	31.	48.	1.6	50	
 <p>DIN 6797J INTERNAL TOOTH (Flat)</p>	W-306	W-306ZP	W-306YZ	676-018		2	2.2	4.5	0.3	100
	672-018	672-018ZP	672-018YZ			2.3	2.5	5.	0.4	100
	672-011	672-011ZP	672-011YZ	676-F04-1W		2.5	2.7	5.5	0.4	100
	672-019	672-019ZP	672-019YZ			2.6	2.8	5.5	0.4	100
	672-001	672-K03-1T	672-001YZ	676-F01-1N		3	3.2	6.	0.4	100
	672-012	672-012ZP	672-012YZ	676-021		3.5	3.7	7.	0.5	100
	672-002	672-K02-1N	672-002YZ	676-022	674-022	4	4.3	8.	0.5	100
	672-003	672-003ZP	672-003YZ	676-023	674-E01-1P	5	5.3	10.	0.6	100
	672-004	672-K05-1W	672-004YZ	676-024		6	6.4	11.	0.7	100
	672-043					7	7.4	12.5	0.8	100
	672-005	672-005ZP	672-005YZ	676-026	674-026	8	8.4	15.	0.8	100
	672-006	672-006ZP	672-006YZ	676-027		10	10.5	18.	0.9	100
	672-007	672-007ZP	672-007YZ	676-028		12	13.0	20.5	1.	100
	672-044	672-044ZP	672-044YZ			13	13.2	22	1.	100
	672-008	672-008ZP	672-008YZ	676-029		14	14.5	24.	1.	100
	672-009	672-009ZP	672-009YZ	676-030		16	16.5	26.	1.2	100
	672-014	672-014ZP	672-014YZ	676-031		18	19.	30.	1.4	100
672-015	672-015ZP	672-015YZ	676-032		20	21.	33.	1.4	50	
672-016	672-016ZP	672-016YZ	676-033		24	25.	38.	1.5	50	
672-045	672-045ZP	672-045YZ			27	28.	44.	1.6	50	
672-017	672-017ZP	672-017YZ	676-034		30	31.	48.	1.6	50	
 <p>DIN 6797V EXTERNAL TOOTH 90° Countersunk</p>		672-087				3.5	3.7	7.	0.25	100
		672-088				4	4.3	8.	0.25	100
		672-089				5	5.3	9.8	0.3	100
		672-090				6	6.4	11.8	0.4	100
		672-092				8	8.4	15.3	0.4	100
		672-K06-1M				10	10.5	19.	0.5	100
		672-094				12	12.5	23.	0.5	100
	672-095				14	14.5	26.3	0.6	100	
	672-096				16	16.5	30.2	0.6	100	

METRIC		ORDER BY SPAENAUR NUMBERS BELOW				Dimensions in mm				PKG QTY.
		STEEL		Yellow Zinc Plated	A2 STAINLESS STEEL	NOM. SIZE (Screw Size) mm	I.D.	O.D.	T	
STYLES		Plain	Zinc Plated	Yellow Zinc Plated	A2 STAINLESS STEEL	NOM. SIZE (Screw Size) mm	I.D.	O.D.	T	PKG QTY.
 DIN 6798A Carbon Steel Heat Treated  EXTERNAL TOOTH *672-055PH Black Phosphate Finish	672-050	672-050ZP	672-050YZ	676-035	2	2.2	4.5	0.3	100	
	672-051	672-051ZP	672-051YZ	676-036	2.5	2.7	5.5	0.4	100	
	672-052	672-052ZP	672-052YZ	676-037	3	3.2	6.0	0.4	100	
	672-053	672-053ZP		676-038	3.5	3.7	7.0	0.5	100	
	672-054	672-K07-1X	672-054YZ	676-039	4	4.3	8.0	0.5	100	
	*672-055	672-K08-1A	672-055YZ	676-040	5	5.3	10.0	0.6	100	
	672-056	672-056ZP	672-056YZ	676-041	6	6.4	11.0	0.7	100	
	672-057	672-057ZP	672-057YZ	676-043	8	8.4	15.0	0.8	100	
	672-058	672-058ZP	672-058YZ	676-044	10	10.5	18.0	0.9	100	
	672-059	672-059ZP	672-059YZ	676-045	12	12.5	20.5	1.0	100	
	672-060	672-060ZP		676-046	14	14.5	24.0	1.0	100	
	672-061	672-061ZP		676-047	16	16.5	26.0	1.2	100	
	672-062	672-062ZP			18	19.0	30.0	1.4	100	
	672-063	672-063ZP		676-042	20	21.0	33.0	1.4	50	
		672-109ZP			22	23.0	36.0	1.5	50	
672-064	672-064ZP		676-048	24	25.0	38.0	1.5	50		
672-110				27	28.0	44.0	1.6	50		
672-065	672-065ZP			30	31.0	48.0	1.6	50		
DIN 6798J Carbon Steel Heat Treated  INTERNAL TOOTH	672-066	672-066ZP	672-066YZ	676-F05-1M	2	2.2	4.5	0.3	100	
	672-067	672-067ZP	672-067YZ	676-053	2.5	2.7	5.5	0.4	100	
	672-111		672-111YZ		2.6	2.8	5.5	0.4	100	
	672-068	672-068ZP	672-068YZ	676-F02-1T	3	3.2	6.0	0.4	100	
	672-069	672-069ZP	672-069YZ	676-049	3.5	3.7	7.0	0.5	100	
	672-070	672-070ZP	672-070YZ	676-056	4	4.3	8.0	0.5	100	
	672-071	672-071ZP	672-071YZ	676-057	5	5.3	10.0	0.6	100	
	672-072	672-072ZP	672-072YZ	676-058	6	6.4	11.0	0.7	100	
	672-073	672-073ZP	672-073YZ	676-060	8	8.4	15.0	0.8	100	
	672-074	672-074ZP	672-074YZ	676-061	10	10.5	18.0	0.9	100	
	672-075	672-075ZP		676-062	12	12.5	20.5	1.0	100	
	672-076	672-076ZP		676-063	14	14.5	24.0	1.0	100	
	672-077	672-077ZP		676-064	16	16.5	26.0	1.2	100	
	672-078	672-078ZP			18	19.0	30.0	1.4	100	
	672-079	672-079ZP		676-050	20	21.0	33.0	1.4	50	
672-113				22	23.0	36.0	1.5	50		
672-080	672-080ZP		676-051	24	25.0	38.0	1.5	50		
672-114				27	28.0	44.0	1.6	50		
672-081	672-081ZP			30	31.0	48.0	1.6	50		
DIN 6798V EXTERNAL 90° COUNTERSUNK  Carbon Steel Heat Treated	672-098				3	3.2	6.0	0.2	100	
	672-099				3.5	3.7	7.0	0.25	100	
	672-100		672-100YZ		4	4.3	8.0	0.25	100	
	672-101	672-101ZP			5	5.3	9.8	0.3	100	
	672-102	672-102ZP			6	6.4	11.8	0.4	100	
	672-103				8	8.4	15.3	0.4	100	
	672-104				10	10.5	19.0	0.5	100	
	672-K01-1C				12	13.0	23.0	0.5	100	
672-106				14	14.5	24.0	1.0	100		
672-107				16	16.5	26.0	1.2	100		

ASSORTMENT **805-437A**
ASSORTIMENT

DIN 6797A
EXTERNAL TOOTH
DIN 6797J
INTERNAL TOOTH

Metric TOOTH LOCKWASHERS FLAT

STEEL, Zinc Plated

24 VARIETIES
850 PIECES



Page A78

ASSORTMENT **805-470**
ASSORTIMENT

DIN 6798A
EXTERNAL TOOTH
DIN 6798J
INTERNAL TOOTH

METRIC OVERLAP TOOTH LOCKWASHERS - FLAT

A2 Stainless Steel

22 VARIETIES
760 PIECES



Page A80


Furnished in a Regular Size grey enamelled steel drawer, with hinged lid and scoop bins. Drawer will fit Slide Racks shown on page A2
Shipping Wt: **2.72 kg** (6 lbs.)

ASSORTMENT **805-451**
ASSORTIMENT

DIN 6797A
EXTERNAL TOOTH
DIN 6797J
INTERNAL TOOTH

Metric TOOTH LOCKWASHERS - FLAT
A2 STAINLESS STEEL

24 VARIETIES - 850 PIECES
Shipping Wt. **2.95 kg** (6-1/2 lbs.)




ASSORTMENT **805-438**
ASSORTIMENT

DIN 6798A
EXTERNAL TOOTH
DIN 6798J
INTERNAL TOOTH

Metric OVERLAP TOOTH LOCKWASHERS - FLAT
SPRING STEEL, Zinc Plated

24 VARIETIES - 730 PIECES
Shipping Weight: **2.72 kg** (6 lbs.)



Furnished in a Regular Size grey enamelled steel drawer with hinged lid and scoop bins.
Drawer will fit Slide Racks shown on page A2.




For the complete assortment contents turn to A79

Nord-Lock Washers maintain preload at loosening movements.

The Nord-Lock Principle

The Nord-Lock washer has cams or wedges on one side, with a lead angle greater than a thread angle, and radial teeth or ribs on the other side. The washers are installed cam face to cam face, forming the unique Nord-Lock fastener.




When tightening the fastener to preload, the teeth penetrate and seat against the joint material and the nut and/or fastener head.


When subjected to vibration the interacting cams create a wedge action thereby maintaining preload in the joint which prevents the fasteners from vibrating loose.

Assemblies


Nord-Lock washers can be used on standard as well as high-grade bolts. When tightening, a 20% higher torque is used than on standard flat electro-zinc plated washers.

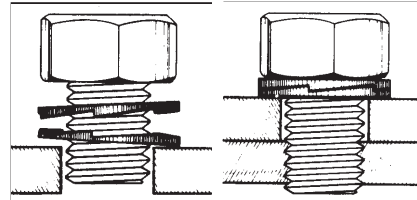

Hold the screw cap when tightening the nut.

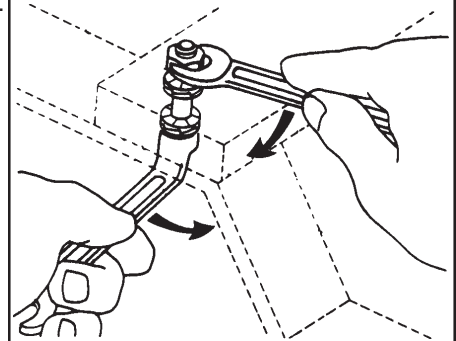

BENEFITS OF NORD-LOCK

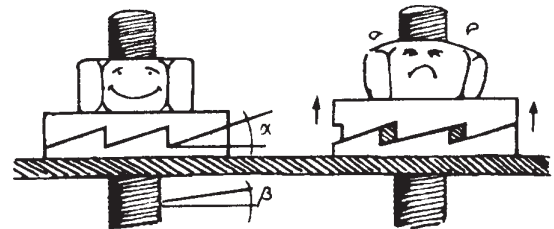


The key is the difference in angles. Here you see what happens when a nut attempts to loosen. The pair of washers expand more than the corresponding pitch of the thread. Nord-Lock washers positively lock the fastener in a joint which is subjected to extreme vibration.

See following pages for Nord-Lock® Washers.

*Recommended torque - ft./lbs.

Bolt Size	3/16" (M5)	1/4" (M6)	5/16" (M8)	3/8" (M10)	7/16" (M11)	1/2" (M12)	9/16" (M14)	5/8" (M16)	3/4" (M20)	7/8" (M22)	1" (M24)	1-1/8" (M30)	1-1/4" (M33)	1-3/8" (M36)	1-1/2" (M39)
Grade 5*	n/a	8.8	18	31	50	76	109	151	266	427	645	806	1127	1478	1949
Grade 8*	n/a	11	22	38	60	91	131	180	315	505	764	1085	1506	1982	2598

CAUTION READ BEFORE INSTALLING NORD-LOCK WASHER PAIRS

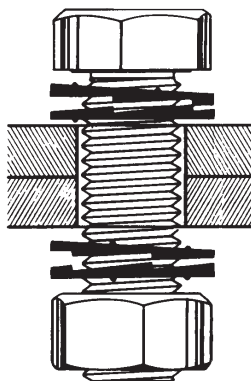

The superior locking performance of a Nord-Lock fastener is secured only if it is correctly assembled and the proper Nord-Lock fastener combination is selected. It is imperative that the following instructions are closely observed:

Nord-Lock Washer Pairs must be assembled cam face to cam face.



When used in conjunction with a bolt/nut fastener, install a pair of Nord-Lock Washers, cam face to cam face, between both the bolt head and the joint material and the nut and the joint material (see Fig. 1). The teeth of the washer pairs will now bite into the bolt head and the joint material as well as the nut, and the joint material on the corresponding side.

When used in conjunction with a cap screw or bolt in a threaded hole, install one pair of Nord-Lock Washers, cam face to cam face, under the cap screw or bolt head (see Fig. 2). The teeth of the washer pair will now bite into the cap screw or bolt head on one side and the joint material on the other side.

Due to the preload, the screw is prevented from turning in either direction. Should the screw tend to loosen, it causes the mating washer to slide up the cams on the other washer, producing a wedge action, and the preload is maintained.

These washers can be used on low-grade and high-grade screws, and on joint surfaces with hardness up to HRc45.

Technical Information provided by Nord-Lock. For critical applications testing in the actual assembly should be conducted to determine Torque Values.




INTERLOCKING CAMS

NORD-LOCK Bolt Securing System
C1020 LOW CARBON STEEL Heat Treated
Zinc Plated and Yellow Chromate Finish


INCH SIZES

Spaenaur No.	Bolt Size	Inch Dimensions			PKG QTY. Pairs
		ID	OD	T	
677-A48-1W	#5	0.13	0.28	0.07	50
677-A47-1G	#6	0.15	0.3	0.07	50
677-A46-1E	#6	0.15	0.35	0.07	50
677-A45-1S	#8	0.17	0.3	0.07	50
677-A44-1Z	#8	0.17	0.35	0.07	50
677-A43-1Y	#10	0.21	0.43	0.07	50
677-A62-2W	1/4"	0.28	0.45	0.07	50
677-A63-1M	1/4"	0.28	0.53	0.10	50
677-A68-1Z	3/8"	0.41	0.65	0.10	50
677-A81-1Y	3/8"	0.41	0.83	0.10	50
677-A70-1Z	7/16"	0.45	0.73	0.10	25
677-A71-1S	1/2"	0.53	0.77	0.10	25
677-A77-1A	1/2"	0.53	1.00	0.13	25
677-A80-1P	3/4"	0.79	1.21	0.13	20
677-A65-1A	3/4"	0.79	1.54	0.13	20
677-A59-1G	1"	1.10	1.54	0.13	20
677-A60-1E	1"	1.10	1.91	0.18	20
677-A03-1A	1-3/4"	1.81	2.75	0.27	5
677-A02-1X	1-7/8"	1.95	2.95	0.27	5
677-A01-1M	2"	2.11	3.15	0.28	5


Spaenaur No.	Bolt Size	Metric Dimensions (mm)			PKG QTY. Pairs
		ID	OD	T	
677-A61-1G	M5	5.4	9.0	1.8	50
677-A66-1P	M6	6.5	10.8	1.8	50
677-A76-1X	M6	6.5	13.5	2.5	50
677-A67-1Y	M8	8.7	13.5	2.5	50
677-A79-1Y	M8	8.7	16.6	2.5	50
677-A69-1S	M10	10.7	16.6	2.5	50
677-A84-1E	M10	10.7	21.0	2.5	50
677-A86-1W	M12	13.0	19.5	2.5	25
677-A78-1P	M12	13.0	25.4	3.4	25
677-A72-1E	M14	15.2	23.0	3.4	25
677-A73-1G	M14	15.2	30.7	3.4	25
677-A75-1M	M16	17.0	25.4	3.4	25
677-A74-1W	M16	17.0	30.7	3.4	25
677-A42-1P	M18	19.5	29.0	3.4	20
677-A41-1A	M18	19.5	34.5	3.4	20
677-A64-1X	M20	21.0	39.0	3.4	20
677-A56-1Z	M22	23.4	34.5	3.4	20
677-A55-1Y	M22	23.4	42.0	4.6	20
677-A54-1P	M24	25.3	39.0	3.4	20
677-A53-1A	M24	25.3	48.5	4.6	20
677-A58-1E	M27	28.4	42.0	4.6	20
677-A57-1S	M27	28.4	48.5	4.6	20
677-A82-1Z	M30	30.5	47.0	4.6	5
677-A40-1X	M30	31.4	58.5	6.6	5
677-A85-1G	M33	33.5	48.5	6.6	5
677-A39-1A	M33	34.4	58.5	6.6	5
677-A52-1X	M36	37.4	55.0	6.6	5
677-A38-1X	M36	37.4	63.0	6.6	5
677-A51-1M	M39	40.4	58.5	6.6	5
677-A50-1W	M42	42.5	63.0	4.6	5



Cam Side



Teeth Side




Inside Dia. Tolerances

For 1/4" to 5/16" Bolt Size ± .004"

For 3/8" to 1-1/2" Bolt Size ± .008"

For M3 to M8 Bolt Size ± 0,1mm


For M10 to M42 Bolt Size ± 0,2mm



Outside Dia. Tolerances

For 1/4" to 1-1/2" Bolt Size ± .008"

For M3 to M42 Bolt Size ± 0,2mm



Thickness Tolerances

For 1/4" to 1-1/2" Bolt Size ± .010"




For M3 to M42 Bolt Size ± 0,25mm

Larger Sizes are available - Prices on Request.
See following page for Stainless Steel Washers.


CATALOG 14.05
2019/12/18

SPAENAUR


NORD-LOCK
Bolt Securing System
316 STAINLESS STEEL



Inside Dia. Tolerances
For 1/4" to 5/16" Bolt Size ± .004"
For 3/8" to 1-1/2" Bolt Size ± .008"
For M3 to M8 Bolt Size ± 0,1mm
For M10 to M42 Bolt Size ± 0,2mm



Outside Dia. Tolerances
For 1/4" to 1-1/2" Bolt Size ± .008"
For M3 to M42 Bolt Size ± 0,2mm



Thickness Tolerances
For 1/4" to 1-1/2" Bolt Size ± .010"
For M3 to M42 Bolt Size ± 0,25mm



INCH SIZES

Spaenaur No.	Bolt Size	Inch Dimensions			PKG QTY. Pairs
		ID	OD	T	
677-A37-1M	#5	0.130	0.280	0.090	50
677-A36-1W	#6	0.150	0.300	0.090	50
677-A35-1G	#6	0.150	0.350	0.090	50
677-A34-1E	#8	0.170	0.300	0.090	50
677-A33-1S	#8	0.170	0.350	0.090	50
677-A32-1Z	#10	0.210	0.430	0.090	50
677-A93-1Y	1/4"	0.280	0.450	0.090	50
677-A30-1P	1/4"	0.280	0.530	0.090	50
677-A92-1P	3/8"	0.410	0.650	0.080	50
677-A28-1P	3/8"	0.410	0.830	0.080	50
677-A25-1M	1/2"	0.530	0.770	0.090	25
677-A24-1W	1/2"	0.530	1.000	0.130	25
677-A19-1S	3/4"	0.790	1.210	0.130	20
677-A18-1Z	3/4"	0.790	1.540	0.130	20
677-A11-1G	1"	1.100	1.540	0.130	20
677-A49-1M	1"	1.100	1.910	0.130	10

METRIC SIZES

Spaenaur No.	Bolt Size	Metric Dimensions (mm)			PKG QTY. Pairs
		ID	OD	T	
677-A87-1M	M5	5.4	9.0	2.2	50
677-A90-1X	M6	6.5	10.8	2.2	50
677-A31-1Y	M6	6.5	13.5	2.0	50
677-A96-1E	M8	8.7	13.5	2.0	50
677-A29-1Y	M8	8.7	16.6	2.0	50
677-A88-1X	M10	10.7	16.6	2.0	50
677-A27-1A	M10	10.7	21.0	2.0	50
677-A91-1A	M11	11.4	18.5	2.2	25
677-A89-1A	M12	13.0	19.5	2.0	25
677-A26-1X	M12	13.0	25.4	3.0	25
677-A94-1Z	M14	15.2	23.0	3.0	25
677-A23-1G	M14	15.2	30.7	3.2	25
677-A95-1S	M16	17.0	25.4	3.0	25
677-A22-1E	M16	17.0	30.7	3.2	25
677-A21-1S	M18	19.5	29.0	3.2	20
677-A20-1Z	M18	19.5	34.5	3.2	20
677-A17-1Y	M20	21.4	30.7	3.0	20
677-A16-1P	M20	21.4	39.0	3.2	20
677-A15-1A	M22	23.4	34.5	3.2	20
677-A14-1X	M22	23.4	42.0	3.2	20
677-A13-1M	M24	25.3	39.0	3.2	20
677-A12-1W	M24	25.3	48.5	4.5	10
677-A10-1E	M27	28.4	42.0	6.8	10
677-A09-1G	M27	28.4	48.5	6.8	5
677-A08-1E	M30	31.4	47.0	6.8	5
677-A07-1S	M30	31.4	58.5	6.8	5
677-A06-1Z	M33	34.4	48.5	6.8	5
677-A05-1Y	M36	37.4	55.0	6.8	5
677-A04-1P	M39	40.4	58.5	6.8	5

**Bolt it together
and it stays that way!**

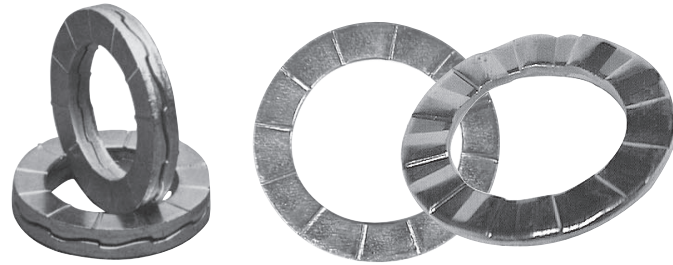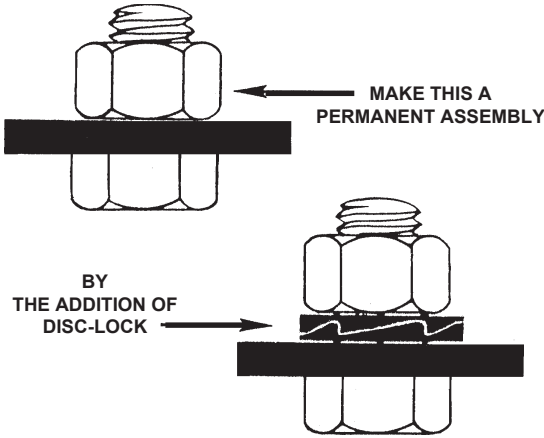

Disc-Lock self-locking washers are hardened steel washers that mate together against a series of inclined cams. The back side has ridges that will bite into the joint material and the nut or capscrew. As one of the Disc-Lock washers attempts to rotate with the nut or capscrew, the preload is actually increased, further locking the nut. When removal of the fastener is necessary, approximately 50% more torque is required for loosening than tightening. The Disc-Lock has been developed in America, and is virtually vibration-proof, according to U.S. Military specifications.

D

INCH SPECIFICATIONS



(with approximate mm bolt size)

A4 (316) Stainless Steel	For Bolt Size		Inch Dimensions			PKG QTY. Pairs
	Inches	mm	A	C	*EE	
677-810	3/16	5	.203	.401	.080	50
677-811	1/4	6	.262	.495	.129	50
677-812	5/16	8	.326	.628	.142	50
677-813	3/8	10	.409	.705	.160	50
677-814	1/2	12	.510	.937	.166	25
677-815	5/8	16	.651	1.247	.154	25

Hardened Steel (Zinc Plated)	For Bolt Size		Inch Dimensions			PKG QTY. Pairs
	Inches	mm	A	C	*EE	
677-017	#6	3	.150	.340	.080	50
677-018	#8	4	.175	.340	.080	50
677-001	3/16	5	.203	.401	.080	50
677-B06-1M	1/4	6	.262	.495	.129	50
677-B07-1X	5/16	8	.326	.628	.142	50
677-B05-1W	3/8	10	.409	.705	.160	50
677-B09-1P	7/16	11	.450	.880	.153	25
677-B10-1A	1/2	12	.510	.937	.166	25
677-B11-1P	9/16	14	.572	1.128	.175	25
677-B12-1Y	5/8	16	.651	1.247	.154	25
677-B13-1C	3/4	20	.820	1.381	.242	20
677-B14-1N	7/8	22	.883	1.470	.268	20
677-B15-1T	1	25	1.015	1.626	.240	20
677-B16-1K	1-1/8	28	1.140	1.715	.240	10
677-B17-1W	1-1/4	32	1.275	1.875	.265	10
677-B18-1M	1-3/8	36	1.430	2.196	.230	10
677-B19-1X	1-1/2	38	1.523	2.196	.230	10

* Weight and thickness of pairs will vary slightly with gauge of metal.

*When you bolt pieces together,
it's a good feeling to know
they will stay that way...*

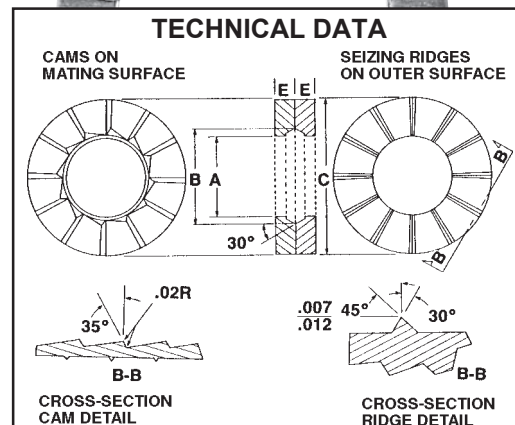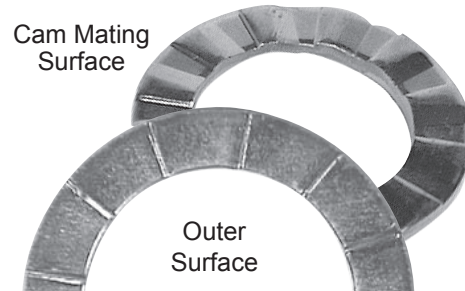

Disc-Lock washers are steel case hardened to RC55 and zinc plated.

Note: Disc-Lock washers are priced by the pair. A package of 50 (pairs) contains 100 identical pieces.

CATALOG 14

SPAENAUR

NEW


REUSABLE WEDGE LOCKING WASHERS

How Does It Work?

TEC Series washers secure joints using tension rather than friction, as with traditional locking fasteners. TEC washers consist of a pair of washers with cams on one side and radial teeth on the other. The cam sides are joined together with a mild adhesive, and installed between the bolt head and/or nut and the joint material.

During installation, the radial teeth cause one half of the washer to be seated to the bolt or nut, while the other half is seated to the joint material.

Because the cam angle (α) of the washers is greater than the thread pitch angle (β) of the bolt, a wedge effect is created by the cams, preventing the bolt or nut from rotating loose. Clamp load is maintained and the joint remains secure.

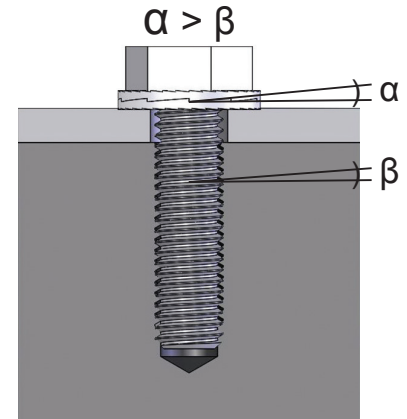

Features and Benefits

- Maintains clamp load in high vibration and load applications, thereby protecting the security of the joint
- Heavy duty, self-locking design
- For use with bolts up to Class 12.9, Grade 8
- Provided in preassembled glued pairs
- Easy to install and remove with standard tools
- No retightening needed after installation
- Reusable - will not distort threads on bolt
- Vibration proof according to MIL-STD-1312-7/DIN 25201
- Lubrication does not impair the locking function of the washer
- Can be used reliably for joints with short clamp length
- Secures joints with high and low preloads

Installation

- To install the TEC Series washer, place the preassembled pair between the nut and/or bolt and the joint material.
- As the nut or bolt is tightened, one half of the washer pair will be seated to the joint material and the other half will be seated to the nut or bolt.
- Tighten with standard tools. Retightening is not needed.
- The use of lubricants is highly recommended when installing TEC Series washers. A high-quality lubricant designed to prevent seizing will reduce friction during installation and improve the consistency of clamp load in joints.
- When installing TEC Series washers in a common application, expect an increase in required torque over recommended installation torque to achieve proper clamp load and maximum joint safety. See Torque Guidelines for more information.

Removal and Reuse

Removing TEC Series washers requires no special tools or procedure. Simply loosen the joint in the normal method and check the washer to ensure cam faces disengage.

While TEC Series washers are typically reusable, washers should always be inspected for deformation or excessive wear before reuse. If washers appear deformed or heavily worn, discard and use a new pair.




Continued...

NEW

Proven Results

TEC Series wedge locking washers have been tested on a Junker Vibration Machine. The Junker test, according to DIN 65151, considered the most severe point at which a bolted joint loses its preload when subjected to shear loading due to transverse vibration.

When tested against a standard washer using the Junker test, TEC Series wedge locking washers remained secure under severe vibration conditions, while the standard washer loosened significantly.

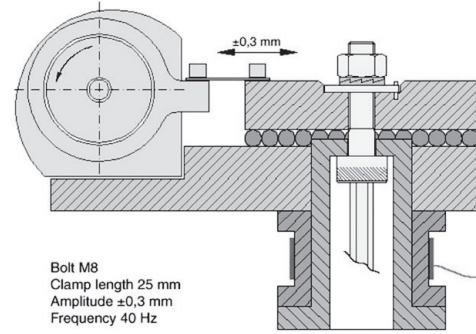

Torque Guidelines & Lubrication

The goal of a fastened joint is to maintain clamp load. The Torque Test Results chart highlights the effects of lubrication on achieving desired clamp load.

For the lubricated test conditions, bolts were coated with Molykote® 1000. Torque data is based on achieving clamp loads at 80% of proof load for both Class 8.8 and Class 10.9 bolts, according to ISO 898-1.

Corresponding Class 8.8 and 10.9 bolts were tightened to the same torque as the previous test, with lubrication omitted from the joint.

Class 10.9 bolts with zinc flake coating were also tested, with and without lubrication, to demonstrate the effect of coating on required installation torque.

**TORQUE TEST RESULTS
TEC SERIES STEEL M10 WASHERS**

		PITCH (MM)	TORQUE (Nm)	CLAMP LOAD (kN)
M10 Class 8.8 Bolt Zinc Plated	Lubricated	1.5	52	27.0
	Dry	1.5	52	19.8
M10 Class 10.9 Bolt Zinc Plated	Lubricated	1.5	66	38.5
	Dry	1.5	66	28.8
M10 Class 10.9 Bolt Zinc Flake	Lubricated	1.5	77	38.5
	Dry	1.5	77	36.7

Sherex recommends bolt-joint lubrication for consistent joint performance when using TEC Series washers.

Due to varying installation conditions and customer specific applications, additional information and torque recommendations are available by contacting Spaenaur.



Quality

Sherex manufacturing facilities are certified to AS9100, ISO 9001:2015, ISO 14001, ISO/TS 16949, and ISO 17025.

All TEC Series products are fully RoHS compliant.



DIMENSIONAL TOLERANCES FOR ALL MATERIALS AND STYLES

	INNER DIAMETER			OUTER DIAMETER			THICKNESS	
	M3 - M8	M10 - M42	M45 - M72	M3 - M24	M27 - M42	M45 - M72	M3 - M42	M45 - M72
STANDARD	± 0.004	± 0.008	+ 0.02 / -0.00	± 0.008	± 0.012	+ 0.000 / -0.080	± 0.010	± 0.030
METRIC	± 0.1	± 0.2	+ 0.5 / -0.00	± 0.2	± 0.3	+ 0.0 / -2.0	± 0.25	± 0.75


CATALOG 14.04
2019/08/08

SPAENAUR

NEW

ALLOY STEEL

- Weight and thickness of pairs will vary slightly with gauge of metal
- Coated in Delta Protekt® KL100 and V H302 GZ, protection to 600 hours salt spray. Other coatings available; please contact Spaenaur for more information.

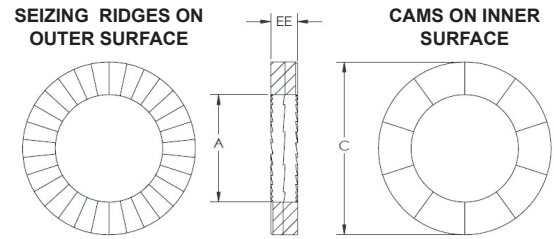


Spaenaur No.	Mfg. No.	BOLT SIZE		STANDARD DIMENSIONS (INCHES)			METRIC DIMENSIONS (MILLIMETERS)			PKG QTY (Pairs)
		INCHES	METRIC	INNER DIAMETER (A)	OUTER DIAMETER (C)	THICKNESS (EE)	INNER DIAMETER (A)	OUTER DIAMETER (C)	THICKNESS (EE)	
677-B21-1X	TEC-M3	#5	M3	0.134	0.276	0.071	3.4	7	1.8	50
677-B22-1A	TEC-M3.5	#6	M3.5	0.154	0.299	0.071	3.9	7.6	1.8	50
677-B23-1P	TEC-M4	#8	M4	0.173	0.299	0.071	4.4	7.6	1.8	50
677-B24-1Y	TEC-M5	#10	M5	0.213	0.354	0.071	5.4	9	1.8	50
677-B25-1C	TEC-M6		M6	0.256	0.425	0.071	6.5	10.8	1.8	50
677-B26-1N	TEC-1/4	1/4		0.283	0.453	0.098	7.2	11.5	2.5	50
677-B31-1W	TEC-M8	5/16	M8	0.343	0.531	0.098	8.7	13.5	2.5	50
677-B27-1T	TEC-3/8	3/8		0.406	0.654	0.098	10.3	16.6	2.5	50
677-B32-1M	TEC-M10		M10	0.421	0.654	0.098	10.7	16.6	2.5	50
677-B33-1X	TEC-M11	7/16	M11	0.449	0.728	0.098	11.4	18.5	2.5	25
677-B34-1A	TEC-M12		M12	0.512	0.768	0.098	13	19.5	2.5	25
677-B28-1K	TEC-1/2	1/2		0.531	0.768	0.098	13.5	19.5	2.5	25
677-B35-1P	TEC-M14	9/16	M14	0.598	0.906	0.134	15.2	23	3.4	25
677-B36-1Y	TEC-M16	5/8	M16	0.669	1	0.134	17	25.4	3.4	25
677-B37-1C	TEC-M18		M18	0.768	1.142	0.134	19.5	29	3.4	20
677-B29-1W	TEC-3/4	3/4		0.787	1.209	0.134	20	30.7	3.4	20
677-B38-1N	TEC-M20		M20	0.843	1.209	0.134	21.4	30.7	3.4	20
677-B39-1T	TEC-M22	7/8	M22	0.921	1.358	0.134	23.4	34.5	3.4	20
677-B40-1N	TEC-M24		M24	0.996	1.535	0.134	25.3	39	3.4	20
677-B30-1K	TEC-1	1		1.098	1.535	0.134	27.9	39	3.4	20
677-B42-1K	TEC-M30	1 1/8	M30	1.236	1.85	0.228	31.4	47	5.8	5
677-B44-1M	TEC-M36	1 3/8	M36	1.472	2.165	0.228	37.4	55	5.8	5
677-B45-1X	TEC-M39	1 1/2	M39	1.591	2.303	0.228	40.4	58.5	5.8	5
677-B46-1A	TEC-M42		M42	1.701	2.48	0.228	43.2	63	5.8	5
677-B47-1P	TEC-M45	1 3/4	M45	1.819	2.756	0.276	46.2	70	7	5
677-B48-1Y	TEC-M48		M48	1.953	2.953	0.276	49.6	75	7	5
677-B49-1C	TEC-M52	2	M52	2.11	3.15	0.276	53.6	80	7	5

NEW

LARGE DIAMETER ALLOY STEEL

- Weight and thickness of pairs will vary slightly with gauge of metal
- Coated in Delta Protekt® KL100 and V H302 GZ, protection to 600 hours salt spray.
Other coatings available; please contact Spaenaur for more information.

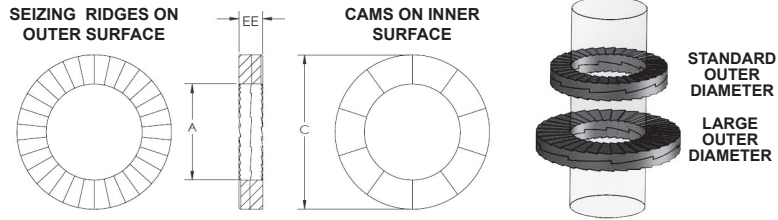

D

Spaenaur No.	Mfg. No.	BOLT SIZE		STANDARD DIMENSIONS (INCHES)			METRIC DIMENSIONS (MILLIMETERS)			PKG QTY (Pairs)
		INCHES	METRIC	INNER DIAMETER (A)	OUTER DIAMETER (C)	THICKNESS (EE)	INNER DIAMETER (A)	OUTER DIAMETER (C)	THICKNESS (EE)	
677-B67-1W	TEC-M3.5LD	#6	M3.5	0.154	0.354	0.071	3.9	9	1.8	50
677-B68-1M	TEC-M4LD	#8	M4	0.173	0.354	0.071	4.4	9	1.8	50
677-B69-1X	TEC-M5LD	#10	M5	0.213	0.425	0.071	5.4	10.8	1.8	50
677-B70-1M	TEC-M6LD		M6	0.256	0.531	0.098	6.5	13.5	2.5	50
677-B72-1A	TEC-1/4LD	1/4		0.283	0.531	0.098	7.2	13.5	2.5	50
677-B71-1X	TEC-M8LD	5/16	M8	0.343	0.654	0.098	8.7	16.6	2.5	50
677-B73-1P	TEC-3/8LD	3/8		0.406	0.827	0.098	10.3	21	2.5	50
677-B77-1T	TEC-M10LD		M10	0.421	0.827	0.098	10.7	21	2.5	50
677-B78-1K	TEC-M12LD		M12	0.512	1	0.134	13	25.4	3.4	25
677-B74-1Y	TEC-1/2LD	1/2		0.531	1	0.134	13.5	25.4	3.4	25
677-B79-1W	TEC-M14LD	9/16	M14	0.598	1.209	0.134	15.2	30.7	3.4	25
677-B80-1K	TEC-M16LD	5/8	M16	0.669	1.209	0.134	17	30.7	3.4	25
677-B81-1W	TEC-M18LD		M18	0.768	1.358	0.134	19.5	34.5	3.4	20
677-B75-1C	TEC-3/4LD	3/4		0.787	1.535	0.134	20	39	3.4	20
677-B82-1M	TEC-M20LD		M20	0.843	1.535	0.134	21.4	39	3.4	20
677-B83-1X	TEC-M22LD	7/8	M22	0.921	1.654	0.181	23.4	42	4.6	20
677-B84-1A	TEC-M24LD		M24	0.996	1.909	0.181	25.3	48.5	4.6	10
677-B76-1N	TEC-1LD	1		1.098	1.909	0.181	27.9	48.5	4.6	10
677-B86-1Y	TEC-M30LD	1 1/8	M30	1.236	2.303	0.26	31.4	58.5	6.6	5

CATALOG 14.05
2019/12/18

SPAENAUR


D38.4

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

NEW

316L STAINLESS STEEL

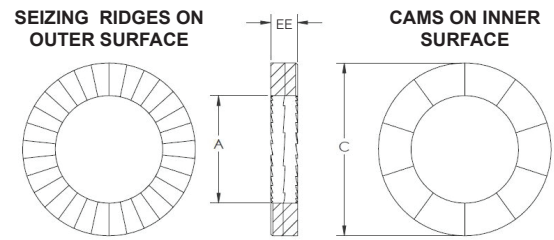


Spaenaur No.	Mfg. No.	BOLT SIZE		STANDARD DIMENSIONS (INCHES)			METRIC DIMENSIONS (MILLIMETERS)			PKG QTY (Pairs)
		INCHES	METRIC	INNER DIAMETER (A)	OUTER DIAMETER (C)	THICKNESS (EE)	INNER DIAMETER (A)	OUTER DIAMETER (C)	THICKNESS (EE)	
677-C01-1M	TEC-M3ss	#5	M3	0.134	0.276	0.087	3.4	7	2.2	50
677-C02-1X	TEC-M3.5ss	#6	M3.5	0.154	0.299	0.087	3.9	7.6	2.2	50
677-C03-1A	TEC-M4ss	#8	M4	0.173	0.299	0.087	4.4	7.6	2.2	50
677-C04-1P	TEC-M5ss	#10	M5	0.213	0.354	0.087	5.4	9	2.2	50
677-C05-1Y	TEC-M6ss		M6	0.256	0.425	0.087	6.5	10.8	2.2	50
677-C07-1N	TEC-1/4ss	1/4		0.283	0.453	0.087	7.2	11.5	2.2	50
677-C06-1C	TEC-M8ss	5/16	M8	0.343	0.531	0.079	8.7	13.5	2	50
677-C08-1T	TEC-3/8ss	3/8		0.406	0.654	0.079	10.3	16.6	2	50
677-C12-1W	TEC-M10ss		M10	0.421	0.654	0.079	10.7	16.6	2	50
677-C13-1M	TEC-M11ss	7/16	M11	0.449	0.728	0.087	11.4	18.5	2.2	50
677-C14-1X	TEC-M12ss		M12	0.512	0.768	0.079	13	19.5	2	25
677-C09-1K	TEC-1/2ss	1/2		0.531	0.768	0.079	13.5	19.5	2	25
677-C15-1A	TEC-M14ss	9/16	M14	0.598	0.906	0.118	15.2	23	3	25
677-C16-1P	TEC-M16ss	5/8	M16	0.669	1	0.118	17	25.4	3	25
677-C17-1Y	TEC-M18ss		M18	0.768	1.142	0.126	19.5	29	3.2	20
677-C10-1T	TEC-3/4ss	3/4		0.787	1.209	0.126	20	30.7	3.2	20
677-C18-1C	TEC-M20ss		M20	0.843	1.209	0.118	21.4	30.7	3	20
677-C19-1N	TEC-M22ss	7/8	M22	0.921	1.358	0.126	23.4	34.5	3.2	20
677-C20-1C	TEC-M24ss		M24	0.996	1.535	0.126	25.3	39	3.2	20
677-C11-1K	TEC-1ss	1		1.098	1.535	0.126	27.9	39	3.2	20

D


NEW

**LARGE DIAMETER
316L STAINLESS
STEEL**



SEIZING RIDGES ON
OUTER SURFACE



EE



CAMS ON INNER
SURFACE



STANDARD
OUTER
DIAMETER

LARGE
OUTER
DIAMETER

D

Spaenaur No.	Mfg. No.	BOLT SIZE		STANDARD DIMENSIONS (INCHES)			METRIC DIMENSIONS (MILLIMETERS)			PKG QTY (Pairs)
		INCHES	METRIC	INNER DIAMETER (A)	OUTER DIAMETER (C)	THICKNESS (EE)	INNER DIAMETER (A)	OUTER DIAMETER (C)	THICKNESS (EE)	
677-C37-1M	TEC-M3.5LDss	#6	M3.5	0.154	0.354	0.087	3.9	9	2.2	50
677-C38-1X	TEC-M4LDss	#8	M4	0.173	0.354	0.087	4.4	9	2.2	50
677-C39-1A	TEC-M5LDss	#10	M5	0.213	0.425	0.087	5.4	10.8	2.2	50
677-C40-1X	TEC-M6LDss		M6	0.256	0.531	0.079	6.5	13.5	2	50
677-C42-1P	TEC-1/4LDss	1/4		0.283	0.531	0.087	7.2	13.5	2.2	50
677-C41-1A	TEC-M8LDss	5/16	M8	0.343	0.654	0.079	8.7	16.6	2	50
677-C43-1Y	TEC-3/8LDss	3/8		0.406	0.827	0.079	10.3	21	2	50
677-C47-1K	TEC-M10LDss		M10	0.421	0.827	0.079	10.7	21	2	50
677-C48-1W	TEC-M12LDss		M12	0.512	1	0.118	13	25.4	3	25
677-C44-1C	TEC-1/2LDss	1/2		0.531	1	0.126	13.5	25.4	3.2	25
677-C49-1M	TEC-M14LDss	9/16	M14	0.598	1.209	0.126	15.2	30.7	3.2	25
677-C50-1W	TEC-M16LDss	5/8	M16	0.669	1.209	0.126	17	30.7	3.2	25
677-C51-1M	TEC-M18LDss		M18	0.768	1.358	0.126	19.5	34.5	3.2	20
677-C45-1N	TEC-3/4LDss	3/4		0.787	1.535	0.126	20	39	3.2	20
677-C52-1X	TEC-M20LDss		M20	0.843	1.535	0.126	21.4	39	3.2	20
677-C53-1A	TEC-M22LDss	7/8	M22	0.921	1.654	0.126	23.4	42	3.2	20
677-C54-1P	TEC-M24LDss		M24	0.996	1.909	0.126	25.3	48.5	3.2	20

CATALOG 14.05
2019/12/18

SPAENAUR

D38.6

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com








© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

**Predictable performance
for rated load at given deflection**

- for high loads in limited space
- to replace coil springs for economy and improved design
- for use with bolted sections
- for use with ball bearings

In the following pages, we have listed over 350 sizes of DISC SPRINGS, complete with accurate dimensional and technical data.

FINISH: All sizes are normally stocked in 'self-colour' (unplated). Plating and/or special finishes are NOT recommended due to risk of mechanical impairment.

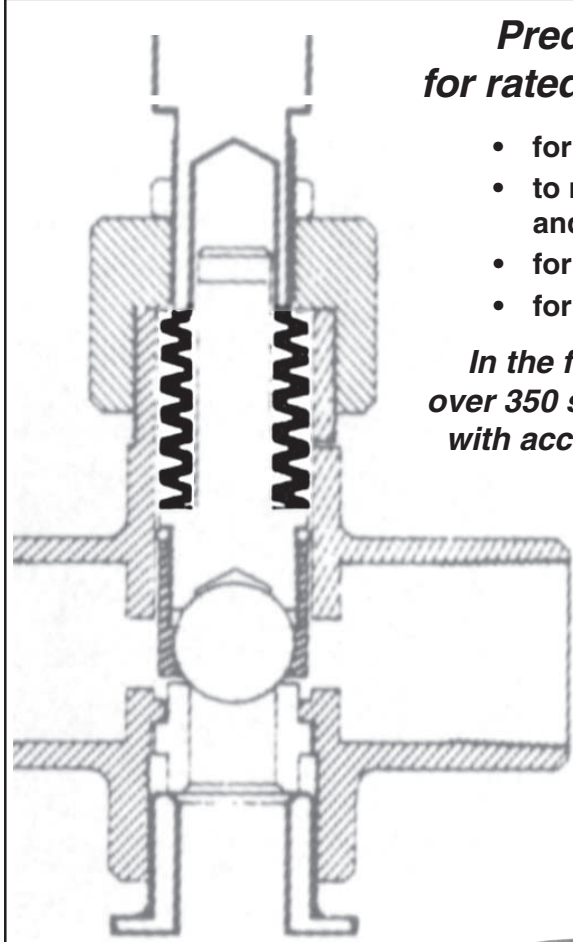

D

CATALOG 14

SPAENAUR

Disc Springs (Washers) - Introduction (Continued)

Rondelles à ressort (Belleville) – introduction (suite)

Disc springs are precision springs made of high carbon spring steel, alloy steel, stainless, and heat resisting steels and non-ferrous materials. Conical in shape and made to special geometrical relationships of OD, ID, thickness, and height, they are subject to exacting manufacturing and quality control standards. Materials used are generally in annealed condition & hardened to range of RC 42-51 depending on material thickness used. Load/deflection relationships are closely controlled. Disc springs are made of cold rolled strip, hot rolled sheet, or forgings of flat or conical shape. After the spring is formed by stamping, it may be machined at the inner and outer diameters or on all surfaces. Machining operations eliminate surface defects obtained in the blanking operation and increase spring life, particularly under dynamic or fatigue loading conditions. All disc springs are “preset”. This is a controlled overstress of the spring so that it will not significantly relax under load when applied. Additionally, shot peening for surface consolidation may be employed. Accurate control of spring height and thickness is critical to predictable performance within close tolerances.

Disc springs are used singly or in stacks to achieve desired load and travel. In general, they function best under conditions requiring very high load in confined space or short travel. Under these design constraints it is often not practical or even possible to use a coil spring.

A further advantage of disc springs results from the various characteristic performance due to height/thickness ratio employed. The curve of the spring is non-linear (as distinguished from normal coil springs, which are linear) and may be progressive, regressive, or even exhibit a constant load over a significant portion of its useful deflection.

Disc springs used in parallel stack arrangements may be useful as load damping devices. The friction of the surface generates heat and dissipates energy under load release - a useful hysteresis effect under certain conditions.

When properly designed and used, disc springs have a long life, superior performance, and may result in significant cost reduction.

Typical disc spring applications are as follows:

1. Power transmission components such as clutches, brakes, transmissions, etc.
2. Valves, piping and drilling tools.
3. Screwed or bolted sections.
4. Bearing preload.
5. Hoists, cranes, and heavy engineering applications.
6. Electrical switchgear and buss bars.

The unique engineering value aspect of disc springs is that of the most efficient space utilization with energy employed. As machines and vehicles get smaller due to energy cost reduction needs, the designer is obliged to consider the disc spring element as the only practical solution to his problem in many cases.

While disc springs may not always be used interchangeably with coil springs because of their relatively long travel aspect when they are considered at the initial stages of design, they may be employed to great economic advantage. Disc springs and coil springs are complimentary.

Materials generally employed are C1075, SAE6150, Stainless 17/7 PH (ARMCO), Inconel X-750, Inconel 718, and Monels.

The company uses sophisticated computer programs for load and stress evaluation and performance prediction.

The manufacture and application of disc springs is widely known and understood in Europe. Their use in North American engineering and manufacturing industry is increasing in popularity and acceptance. Originally, the disc spring was first patented by J. Belleville (France) over 100 years ago. In early 1930's the engineers (G.M.) Almen and Laszlo developed the theoretical foundation for disc springs calculation and use. This theory was formalized for general industrial use in West Germany at the end of World War II. The Germans standardized the theory, manufacture and quality requirements in DIN 2093 and DIN 2092. These specs became accepted world wide as the first industrial standardization of disc springs. The standard has spread throughout Europe and is now widely employed by multi-national engineering companies. The Japanese developed their own version of this standard.

No U.S.A. industry standard has yet been written on disc springs. Many U.S. manufacturers accept the DIN as a guide to performance and quality standards.

D

D40

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

INTRODUCTION

TO COST-SAVING, SPACE-SAVING DISC SPRINGS


Compared to a coil spring, a disc spring achieves economy in design, and reduces the cost of the overall assembly by the maximum utilization of space.

The disc spring is unique among the various types of springs because it offers several distinct advantages over its counterparts. Among them are the following:


1. A choice of a wide range of load deflection characteristics, such as a straight line, progressive and regressive.
2. Flexibility in stack arrangement in order to achieve a desired performance.
3. Space saving.
4. Self-damping (especially when stacked in parallel).
5. Longer fatigue life.
6. Simplified inventory because an individual spring size can be used for a wide range of applications.

DISC SPRING STACK COMPARED TO HELICAL SPRING

Note that the same load is achieved at substantial reduction in space. Disc stacks may be designed for extremely high loads where coil springs are not feasible at all.

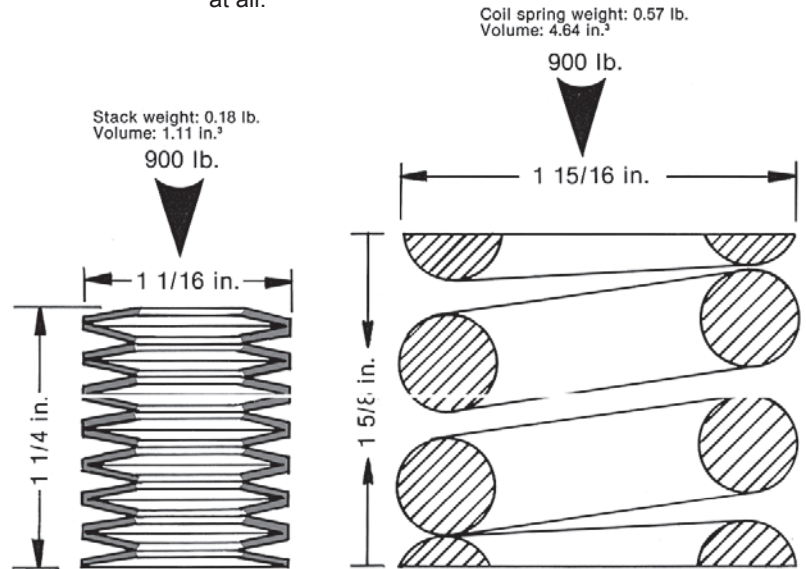

THEORETICAL VS. MEASURED CHARACTERISTIC OF A DISC SPRING

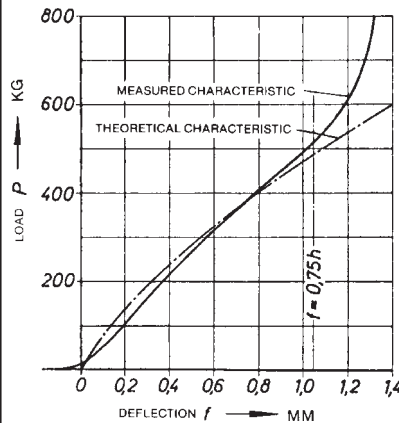


The characteristic of the individual disc spring is non-linear. Its shape depends on the ratio h/t . At the lower portion of the deflection range, the characteristic in practice departs slightly from the theoretical.

When $f/h > 0.75$, the characteristic in practice again departs increasingly from the theoretical because the disc springs roll upon one another or upon the supporting surface, and this leads to a continuous shortening of the lever arm.

Disc springs of differing thickness can be

DISC SPRING CHARACTERISTICS

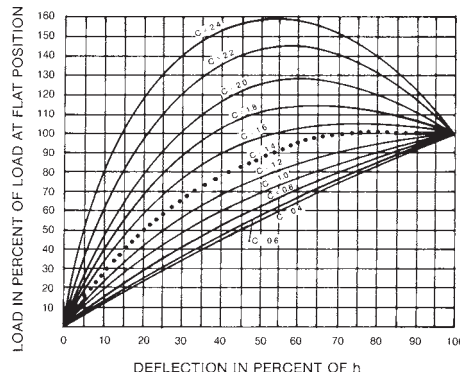


This is a graphic illustration of the values contained in Table 1, page D42

The characteristic or load-deflection relationship depends on the ratio of cone height h to the thickness t (h/t).

$$C = (\text{characteristic}) = h/t$$

If C is small (up to 0.6), the graph is almost a straight line. If C is 1.4, the graph is nearly straight over a considerable range of deflection, and this is called a constant-load disc spring, and is shown above as a dotted line.


DISC SPRINGS MAY BE USED SINGLY OR IN COMBINATIONS

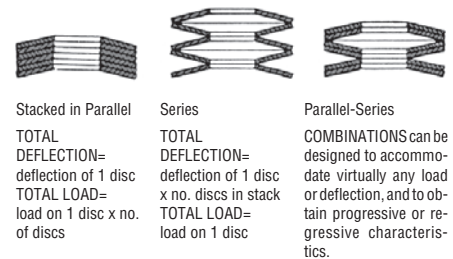

Stacked in Parallel
TOTAL DEFLECTION = deflection of 1 disc
TOTAL LOAD = load on 1 disc x no. of discs

Series
TOTAL DEFLECTION = deflection of 1 disc x no. discs in stack
TOTAL LOAD = load on 1 disc


Parallel-Series COMBINATIONS can be designed to accommodate virtually any load or deflection, and to obtain progressive or regressive characteristics.

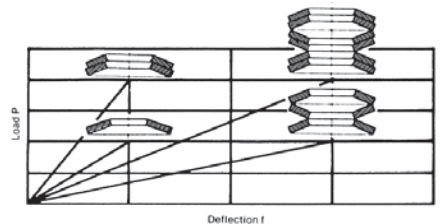

DISC SPRINGS 6 Styles


Page No's

- Metric - "AM" Series D52-D61
- Inch - "Stainless Steel" D64
- Inch - "AI" "SAI" Series D48-D49
- Inch - "SP/SSP" Series D50
- Inch - "Contact Disc" D62
- Inch - "AK" Series D51




stacked in series to obtain a progressively rising load. This effect is also obtained using same thickness springs but incrementally increasing the units in the stack. Care must be taken not to over-stress the spring in the stack.

(Note: Friction forces between springs must be considered.)

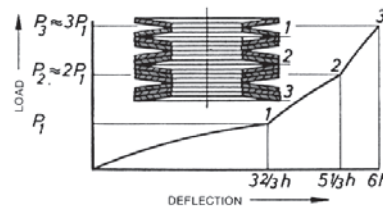

Disc Springs (Washers) - Load & Stress Calculations

Rondelles à ressort (Belleville) – calcul des charges et des contraintes

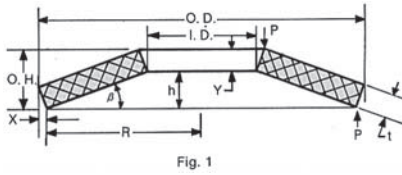

Nomenclature

- O.D. = Maximum outside dia. (upper surface)
- I.D. = Minimum inside dia. (bottom surface)
- h = Conical disc height (cone height)
- O.H. = Overall height = Y + h
- t = Actual thickness of disc
- β = Cone angle of disc
- R = Radius from centreline to load bearing circle (bottom surface)
- M = Ratio factor
- μ = Poisson's ratio (.3 for steel)
- E = Young's modulus (30,000,000 for steel)
- f = Deflection of disc
- δ = Ratio of diameters (O.D./I.D.)
- P = Load in lbs. at a given deflection
- P_f = Load in lbs. at flat
- X = Sin β • t
- Y = Cos β • t

The load-deflection formula was developed by J. Almen and A. Laszlo, and published in the Transactions of Amer. Soc. of Mech. Engineers, May 1936, and is rendered as follows:

LOAD IN LBS. AT A GIVEN DEFLECTION

$$P = \frac{E \cdot f}{(1-\mu^2) \cdot M \cdot R^2} \cdot [(h-f/2) \cdot (h-f) \cdot t + t^3]$$

$$\text{WHERE } M = \frac{6}{\pi \cdot L_n \cdot \delta} \cdot \frac{(\delta-1)^2}{\delta^2}$$

DISC SPRING AT FLAT:

In the flattened condition, the deflection f is equal to the conical height h and the equation becomes:

$$P_f = \frac{E \cdot h \cdot t^3}{(1-\mu^2) \cdot M \cdot R^2}$$

SIMPLIFIED PROCEDURE FOR APPROXIMATE LOAD CALCULATIONS

In the flattened condition the load formula is as follows:

$$P_f = \frac{E \cdot h \cdot t^3}{(1-\mu^2) \cdot M \cdot R^2} \quad (1)$$

By simplification:

$$K = \frac{E}{(1-\mu^2) \cdot M \cdot R^2} \quad (2)$$

Where the K factor is dependent only on the diameters and the material.

Hence:

$$P_f = K \cdot h \cdot t^3 \quad (3)$$

For a specific disc spring curvature c = h/t and h = c • t.

The formula becomes by simplification:

$$P_f = K \cdot c \cdot t^4 \quad (4)$$

By solving this equation for t (thickness), we obtain:


$$t = \sqrt[4]{\frac{P_f}{K \cdot c}} \quad (5)$$

To find the load for any deflection, multiply the load at flat by a factor I, found in Table 1.

$$P = P_f \cdot I \quad (6)$$

With the above formulas we have a simple procedure for determining the load at different deflections or calculating the thickness for a given load:

1. Find value of constant M in Table 2
2. Solve for constant K
3. Choose C from Table 1
4. If load is given, solve for t (equation 5)
5. If thickness is given, solve for load (equation 4)
6. To find the load for different deflections (equation 6)

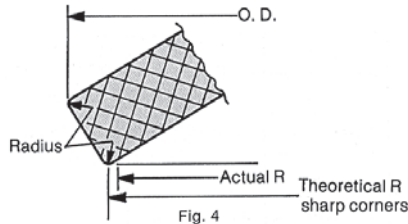

A well designed disc spring has radii at all corners to reduce stress concentrations at the edges. A suitable radius is approx. = t/6. This radius further reduces dimension R (see Fig. 4).

Usually the overall height of the disc spring is specified because it is easy to measure and control. The cone height h, on the other hand, is difficult to measure (see Fig. 5).





Fig. 5

For an approximate calculation, h = (overall height - t) is acceptable. However, this is not accurate. In fact, h = (overall height - Y), where Y = Cos β • t. For small thicknesses (under 2 mm), this is not significant. With thicker disc springs, this becomes a major factor for accurate load and stress calculations. This has not been adequately considered in previous technical literature.

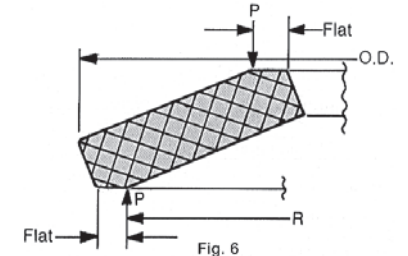

Disc springs 7.49 mm and thicker are made with a bearing flat at Upper I.D. and Lower O.D. as standard (see Fig. 6). This bearing flat assures more uniform loading and better alignment of the disc stack.

The flat is equal approx. to O.D./150. For load calculations, R must be calculated to the inner edge of the flat.

DISC SPRING STRESS CALCULATIONS

$$S1 = \frac{E \cdot f}{(1-\mu^2) \cdot M \cdot R^2} \cdot [C1 \cdot (h-f/2) + C2 \cdot t]$$

$$S2 = \frac{E \cdot f}{(1-\mu^2) \cdot M \cdot R^2} \cdot [C1 \cdot (h-f/2) - C2 \cdot t]$$

$$S3 = \frac{E \cdot f}{(1-\mu^2) \cdot R^2} \cdot [T1 \cdot (h-f/2) + T2 \cdot t]$$


Where M, C₁ and C₂ are from Table 2, E and μ from Table 3, and

$$T1 = \frac{(\delta \cdot L_n \cdot \delta) - (\delta-1)}{L_n \cdot \delta} \cdot \frac{\delta}{(\delta-1)^2}$$

$$T2 = \frac{(.5) \cdot \delta}{\delta-1}$$


δ = D/d and L_n = natural logarithm. Stress as given is psi

To calculate the load accordingly, the following important factors must be considered:

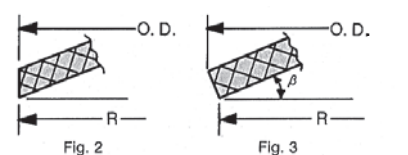

Disc with theoretical sharp corners. If the disc spring is made as in Fig. 2, which is unusual, then R = O.D./2. Most disc springs are made as in Fig. 3.

Therefore, the load bearing radius is not equal to half of the maximum outside diameter. To calculate R, the angle β first has to be determined.

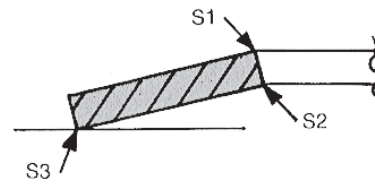

For evaluation of compressive stress, use formula S1. It computes the compressive stress at the upper inner diameter. This compressive stress may be as high as 400,000 psi for certain bolted applications.

For dynamic applications, it is necessary to consider the tensile stresses at the points marked S2 and S3. The stresses at these points depend on the ratio of diameters (δ) and the spring characteristic (C) as well as on the deflection (f). This stress should not exceed 200,000 psi at .75h deflection.

SUMMARY

Precise load and stress calculations require the determination of the disc spring angle β. Since this is not easily determined by physical measurement, we have developed a computer program that calculates the precise angle and arrives at the exact dimension for conical height h. This then determines accurate load and stress calculation. When designing special disc springs and wishing to evaluate the resultant load and stress with accuracy, please consult our Engineering Department.

The load and stress formulas are correct only with the assumption that the spring will be worked within the elastic limit of the material.

Table 1

To find the load at any intermediate point (between 10% h and flat), multiply the load at flat by the constant I found in Table 1 below.

C	Deflection in Percent of h										
	h/t	10	20	30	40	50	60	70	75	80	90
0.30	0.11	0.21	0.32	0.42	0.52	0.62	0.71	0.76	0.81	0.91	
0.40	0.11	0.22	0.33	0.43	0.53	0.63	0.72	0.77	0.82	0.91	
0.50	0.12	0.24	0.35	0.45	0.55	0.64	0.73	0.78	0.82	0.91	
0.60	0.13	0.25	0.36	0.47	0.57	0.66	0.75	0.79	0.84	0.92	
0.70	0.14	0.27	0.39	0.49	0.59	0.68	0.77	0.81	0.85	0.92	
0.80	0.16	0.29	0.41	0.52	0.62	0.71	0.79	0.83	0.86	0.93	
0.90	0.17	0.32	0.45	0.56	0.65	0.74	0.81	0.85	0.88	0.94	
1.00	0.19	0.34	0.48	0.59	0.69	0.77	0.84	0.87	0.90	0.95	
1.05	0.19	0.36	0.50	0.61	0.71	0.79	0.85	0.88	0.91	0.96	
1.10	0.20	0.37	0.52	0.63	0.73	0.80	0.87	0.89	0.92	0.96	
1.15	0.21	0.39	0.54	0.65	0.75	0.82	0.88	0.91	0.93	0.97	
1.20	0.22	0.41	0.56	0.68	0.77	0.84	0.90	0.92	0.94	0.97	
1.25	0.23	0.43	0.58	0.70	0.79	0.86	0.91	0.93	0.95	0.98	
1.30	0.25	0.44	0.60	0.73	0.82	0.88	0.93	0.95	0.96	0.98	
1.35	0.26	0.46	0.63	0.75	0.84	0.91	0.95	0.96	0.98	0.99	
1.40	0.27	0.48	0.65	0.78	0.87	0.93	0.97	0.98	0.99	1.00	
1.50	0.29	0.52	0.70	0.83	0.92	0.98	1.01	1.01	1.02	1.01	
1.60	0.32	0.57	0.76	0.89	0.98	1.03	1.05	1.05	1.05	1.03	
1.80	0.38	0.67	0.88	1.02	1.12	1.14	1.14	1.13	1.11	1.06	
2.00	0.44	0.78	1.01	1.17	1.25	1.27	1.25	1.22	1.18	1.10	
2.50	0.63	1.10	1.40	1.60	1.67	1.65	1.55	1.48	1.40	1.21	
3.00	0.87	1.48	1.91	2.13	2.19	2.11	1.93	1.81	1.66	1.35	
3.50	1.15	1.96	2.49	2.75	2.80	2.66	2.37	2.19	1.98	1.51	
4.00	1.47	2.50	3.16	3.50	3.50	3.29	2.88	2.63	2.34	1.69	

Table 2
Constant M, C₁ and C₂

OD/ID	M	C ₁	C ₂	δ			
				OD/ID	M	C ₁	C ₂
1.10	.166	.986	1.002	2.10	.706	1.242	1.416
1.15	.232	1.001	1.025	2.20	.721	1.264	1.453
1.20	.291	1.016	1.048	2.30	.733	1.286	1.490
1.25	.342	1.030	1.070	2.40	.742	1.307	1.527
1.30	.388	1.044	1.092	2.50	.750	1.328	1.563
1.35	.428	1.058	1.114	2.60	.757	1.348	1.599
1.40	.463	1.072	1.135	2.80	.767	1.388	1.669
1.45	.495	1.085	1.157	3.00	.773	1.426	1.738
1.50	.523	1.098	1.178	3.20	.776	1.464	1.806
1.60	.571	1.124	1.219	3.40	.778	1.500	1.873
1.70	.610	1.149	1.260	3.60	.778	1.535	1.938
1.80	.642	1.173	1.300	3.80	.777	1.570	2.003
1.90	.668	1.197	1.339	4.00	.775	1.604	2.067
2.00	.689	1.220	1.378				

Table 3
Modulus of elasticity and Poisson's ratio for different materials

Material	E Modulus Vs. Temperature in F°				Poisson's Ratio μ
	68F°	250F°	400F°	600F°	
Steel - 1075	30 x 10 ⁶	29.5 x 10 ⁶	—	—	0.30
Steel - 6150	30 x 10 ⁶	29.8 x 10 ⁶	28.5 x 10 ⁶	—	0.30
Stainless 1777 PH	29 x 10 ⁶	N/A	N/A	26.5 x 10 ⁶	0.34
Stainless 302	28 x 10 ⁶	N/A	26.5 x 10 ⁶	—	0.30
Inconel x -750	31 x 10 ⁶	30.8 x 10 ⁶	29.5 x 10 ⁶	28.3 x 10 ⁶	0.29

Also available
Series AK Disc
Springs for use with
BALL BEARINGS,
page D51.

Dynamic Loading & Fatigue Life

Dynamic loading of disc springs occurs when the load continuously changes from preload to final load.

The “stress-time” curve of such disc springs which pulsate uniformly is sinusoidal. This is not true in cases of impact loading, and therefore it is difficult to predict their life and behaviour.

Disc spring “life” may be differentiated into 2 categories:

- 1) Limited life: where cycles vary without failure between 40,000 and 2,000,000 cycles.
- 2) Unlimited life: cycles in excess of 2.10^6 without failure. For virtually indefinite life, the table below indicates the appropriate values required, given in percent of travel, relating preload to final load AND considering the disc spring thickness:

Preload in % of h	Max. Deflection in % of h	
	Disc Thickness	
	$\leq .039''$	$\geq .157''$
15	50	44
25	56	49
50	67	64

Fatigue Life

Fatigue life for disc springs is defined by the effective number of stress cycles that can be sustained prior to failure under certain conditions. This depends on the minimum stress, maximum stress, and stress range.

The diagrams presented here are for evaluating fatigue life of single disc springs or series stacks not more than 6 springs. There are three basic groups, depending on thickness (see legend under each diagram).

The horizontal axis represents PRELOAD STRESS.

The vertical axis represents FINAL STRESS.

The fatigue life is found at the intersection of these points on the graph. The ZONE in which they fall tells the predicted life. If they fall outside the zones, their life is not generally predictable.

The horizontal border line enclosing the top portion of the graph (zone) represents the yield strength of the spring steel material.

Intersection points of min/max stress limits which fall outside the graph/zone boundaries are to be avoided as they indicate spring failure is likely at an early stage.

The graphs were developed based on empirical test data. The test loads were sinusoidally executed.

How to Use the Graphs

1. For standard catalog disc springs:
 - a) Determine preload stress.
 - b) Determine final load stress.

The intersection of the stress coordinates will indicate the range of fatigue life that may be expected.

2. For non-standard or special disc springs:
 - a) Determine the preload stress for points S_2 and S_3 . Use the HIGHER of the two values for preload and final load.
 - b) Repeat above procedure for FINAL STRESS, using again the higher value found.

EXAMPLE (Dotted Line)




AM188207: .709 x .323 x .0276 (See catalog page D46)

Preload stress at deflection $f = .5h$: 124000 psi

Final load stress at deflection $f = .75h$: 174000psi

Intersection point between nearby 2MIO-cycles-line:

Predicted cycles: 1.5 MIO

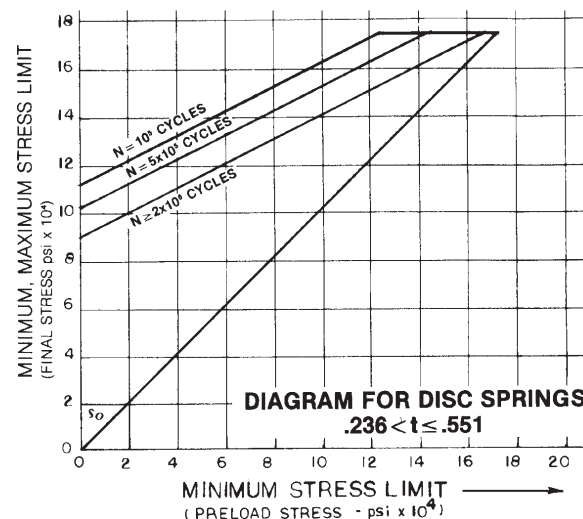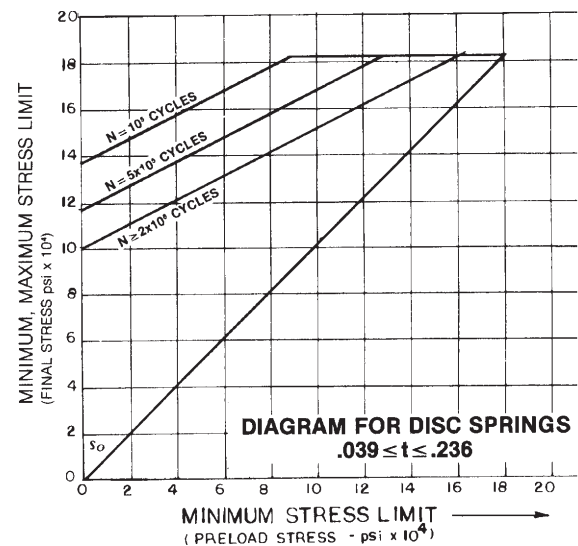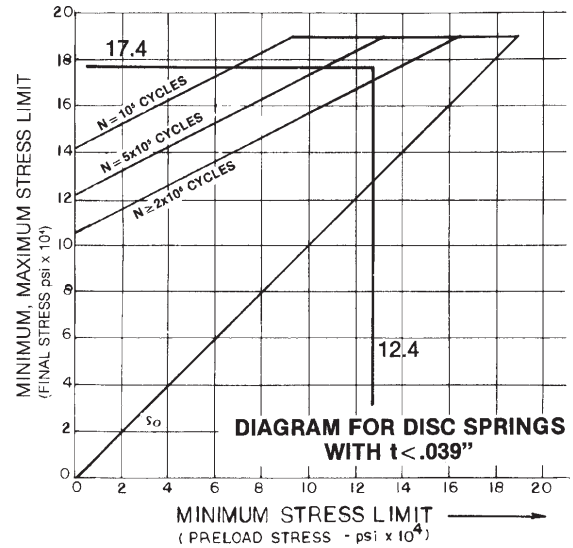

D

Disc Springs (Washers) - Typical Characteristics

Rondelles à ressort (Belleville) – caractéristiques typiques


DISC SPRING Damping (Hysteresis)

In disc spring stacks, particularly those with parallel units, friction must be considered. Friction occurs due to contact of the spring face (radial wall). As a result, the spring force increases on loading, and decreases on unloading....giving the damping effect. The load value is a function of the number of disc springs in parallel, as shown on the graph. An approximation of load increase or decrease is on the order of 2-3 per cent per each set of 2.

18 x 8.2 x 0.7 x 1.25 OA
(.709 x .323 x .0276 x .0492 OA)

Measured characteristic of various disc spring stacks:
Stacks consisting of 10 single disc springs or 10 multi spring components were tested.


- Curve 1: Single discs of 10 in series
- Curve 2: 10 sets of 2 parallel
- Curve 3: 10 sets of 3 parallel

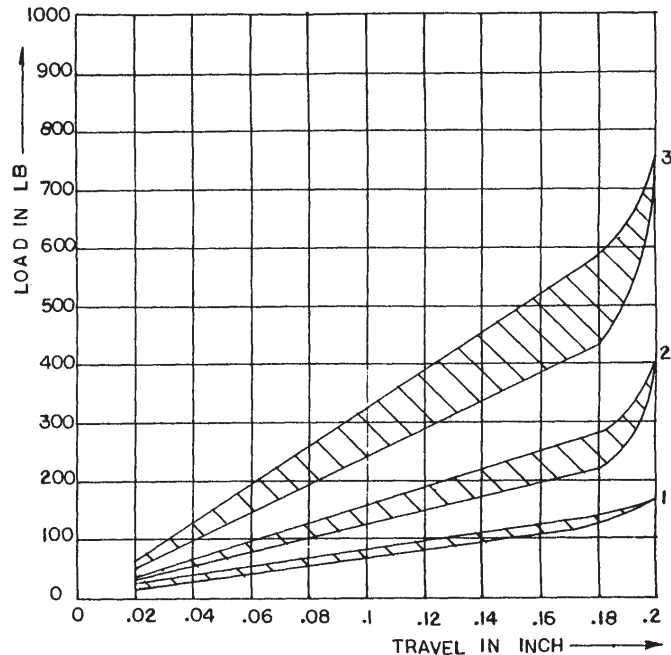

GUIDING THE DISC SPRING

It is preferable to guide disc springs by means of a rod through the I.D. rather than in a sleeve over the O.D. The springs at either end of the stack should contact hardened thrust washers with their outer diameter. The surface finish of the thrust washer should match that of the guide rods.

Springs at the moving end of a stack are more or less over deflected by comparison to the calculated value. Springs at the opposite ends are under deflected. The greatest relative movement occurs between the last spring in a stack and the guide rod. Friction between the disc springs, as well as between the springs and the guide rod, are greatest at the moving end.

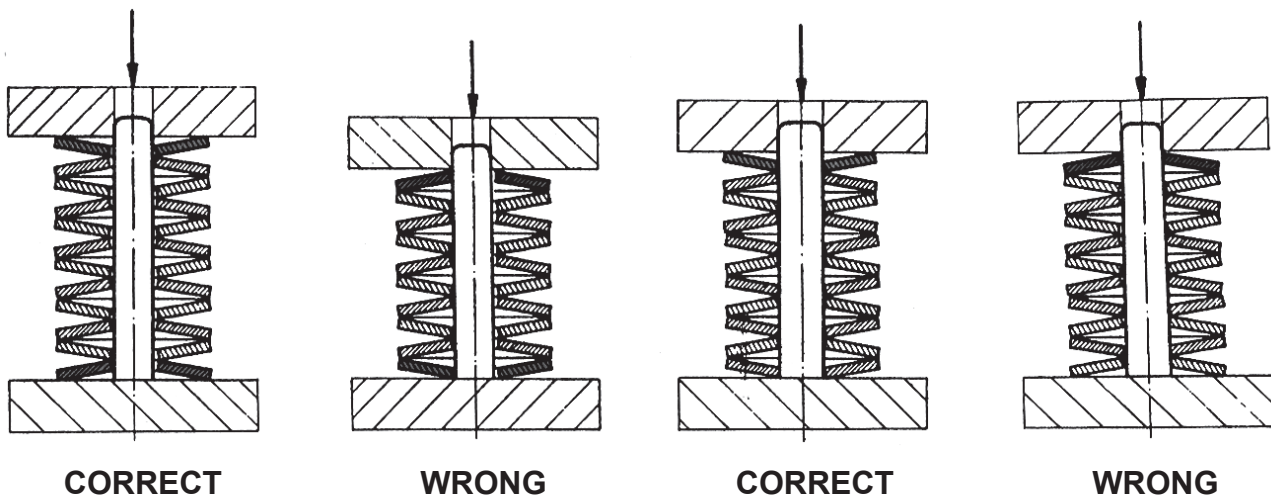

CORRECT

WRONG

CORRECT

WRONG

The tolerances shown on this page are for unplated AM series only. For tolerances on other series, consult SPAENAUR.

TOLERANCE AND THICKNESS

THICKNESS t		TOLERANCE	
mm	Inch	mm	Inch
0.3	.0118	+.02	+.0008
0.4	.0157		
0.5	.0197	-.06	-.0024
0.6	.0236		
0.7	.0276	+.03	+.0012
0.8	.0315		
0.9	.035		
1.0	.039		
1.1	.043		
1.25	.049	-.09	-.0035
1.5	.059		
1.75	.069		
2.0	.078		
2.25	.088		
2.5	.098	+.04	+.0016
3.0	.118		
3.5	.138		
4.0 to 16.0	.157 to .630	±.127	±.005

OVERALL HEIGHT TOLERANCE

GROUP	SPRING THICKNESS Range		OVERALL HEIGHT TOLERANCE	
	mm	Inch	mm	Inch
1	less than 1.25	less than 0.049	+0.010 -0.05	+0.0004 -0.002
2	1.25 to 2.00	0.049 to 0.078	+0.15 -0.08	+0.006 -0.003
	over 2.00 to 3.00	over 0.078 to 0.118	+0.30 -0.10	+0.012 -0.004
	over 3.00 to 6.00	over 0.118 to 0.236	+0.30 -0.15	+0.012 -0.006
3	over 6.00 to 14.00	over 0.236 to 0.551	±0.30	±0.012

DISC SPRING HARDNESS RANGE

THICKNESS OF DISC		ROCKWELL C
mm	Inch	
0.2 to 0.9	.008 to .035	46 to 51
1.0 to 4.0	.039 to .157	44 to 49
4.25 to 16.0	.164 to .630	42 to 48

For Stainless Steel and Inconel, consult SPAENAUR.

CONVERSION TABLE

inches x 25.4 = millimetres
 millimetres ÷ 25.4 = inches
 1 lb. = .454 kg
 1 kg = 2.2 lbs.
 1 psi = .0007 kg/mm²
 1 kg/mm² = 1422 psi
 1 Newton (N) = .225 lbs. force
 1 lb. force = 4.44 N
 1 N/mm² = .102 kg/mm² = 145 psi
 1 kg/mm² = 9.81 N/mm² = 1422 psi

OD AND ID GUIDE CLEARANCE

OD OR ID SIZE		CLEARANCE FOR OD OR ID	
mm	Inch	mm	Inch
up to 16	up to 0.63	0.2	0.008
over 16 to 20	0.63 to 0.79	0.3	0.012
over 20 to 26	0.79 to 1.02	0.4	0.016
over 26 to 31.5	1.02 to 1.24	0.5	0.020
over 31.5 to 50	1.24 to 1.97	0.6	0.024
over 50 to 80	1.97 to 3.14	0.8	0.031
over 80 to 140	3.15 to 5.52	1.0	0.039
over 140 to 250	5.52 to 9.85	1.6	0.063

NOTE: Inside Guiding is preferred. Guide Bolts should be Rc55-60 ground and polished.

OD/ID TOLERANCE

OD/ID RANGE		TOTAL TOLERANCE	
mm	Inch	mm	Inch
1.6 to 3	.063 to .118	0.102	0.004
3.0 to 6	.118 to .236	0.127	0.005
6.0 to 10	.236 to .394	0.152	0.006
10 to 18	.394 to .709	0.178	0.007
18 to 30	.709 to 1.18	0.203	0.008
30 to 50	1.18 to 1.97	0.254	0.010
50 to 80	1.97 to 3.15	0.305	0.012
80 to 120	3.15 to 4.72	0.356	0.014
120 to 180	4.72 to 7.09	0.406	0.016
180 to 250	7.09 to 9.84	0.457	0.018

NOTE: For OD, tolerance is MINUS value shown. For ID, tolerance is PLUS value shown.

LOAD TOLERANCE

GROUP	THICKNESS RANGE		TOLERANCE FOR LOAD AT DEFLECTION =.75h
	mm	Inch	
1	less than 1.25	0.049	+25% -7.5%
2	1.25 to 3.00	0.049 - 0.118	+15% -7.5%
	over 3.00 to 6.00	0.118 - 0.236	+10% -5%
3	over 6.00 to 14.00	0.236 - 0.551	±5%

NOTE: Load will vary in stacked springs in proportion to number of springs in stack.

When thickness, OA Height AND LOAD VALUES are specified, the controlling factor shall be the load shown.

MATERIALS

High-grade spring steel of selected surface condition. Most commonly used are C-1075 or SAE 6150 chrome vanadium steel. Other alloy steels are also used. We use 17-7Ph stainless for corrosion resistance. It is slightly magnetic.

HARDNESS

Disc springs are carefully heat treated with austempering process, and in such a manner as to prevent surface decarburization.

Disc Springs (Washers) - Technical Data


Rondelles à ressort (Belleville) – données techniques

Size	Tensile Stress Area Bolt Dia. A (sq. in.) D (in.)		SAE Grade 2 Bolts					SAE Grade 5 Bolts					SAE Grade 7 ³			SAE Grade 8 ⁴		
			Tensile Strength (min psi)	Proof Load (psi)	Clamp ² Load P (lb.)	Tightening Torque		Tensile Strength (min psi)	Proof Load (psi)	Clamp ² Load P (lb.)	Tightening Torque		Clamp ² Load P (lb.)	Tightening Torque		Clamp ² Load P (lb.)	Tightening Torque	
						Dry	Lub.				Dry	Lub.		Dry	Lub.		Dry	Lub.
						lb. in.	lb. in.				lb. in.	lb. in.			lb. in.	lb. in.		
4-40	0.1120	0.00604	74,000	55,000	240	5	4	120,000	85,000	380	8	6	480	11	8	540	12	9
4-48	0.1120	0.00661			280	6	5			420	9	7	520	12	9	600	13	10
6-32	0.1380	0.00909			380	10	8			580	16	12	720	20	15	820	23	17
6-40	0.1380	0.01015			420	12	9			640	18	13	800	22	17	920	25	19
8-32	0.1640	0.01400			580	19	14			900	30	22	1100	36	27	1260	41	31
8-36	0.1640	0.01474			600	20	15			940	31	23	1160	38	29	1320	43	32
10-24	0.1900	0.01750			720	27	21			1120	43	32	1380	52	39	1580	60	45
10-32	0.1900	0.02000			820	31	23			1285	49	36	1580	60	45	1800	68	51
1/4-20	0.2500	0.0318			1320	66	49			2020	96	75	2500	120	96	2860	144	108
1/4-28	0.2500	0.0364			1500	76	56			2320	120	86	2860	144	108	3280	168	120
						lb. ft.	lb. ft.				lb. ft.	lb. ft.			lb. ft.	lb. ft.		
5/16-18	0.3125	0.0524			2160	11	8			3340	17	13	4120	21	16	4720	25	18
5/16-24	0.3125	0.0580			2400	12	9			3700	19	14	4560	24	18	5220	25	20
3/8-16	0.3750	0.0775			3200	20	15			4940	30	23	6100	40	30	7000	45	35
3/8-24	0.3750	0.0878			3620	23	17			5600	35	25	6900	45	35	7900	50	35
7/16-14	0.4375	0.1063			4380	30	24			6800	50	35	8400	60	45	9550	70	55
7/16-20	0.4375	0.1187			4900	35	25			7550	55	40	9350	70	50	10700	80	60
1/2-13	0.5000	0.1419			5840	50	35			9050	75	55	11200	95	70	12750	110	80
1/2-20	0.5000	0.1599			6600	55	40			10700	90	65	12600	100	80	14400	120	90
9/16-12	0.5625	0.1820			7500	70	55			11600	110	80	14350	135	100	16400	150	110
9/16-18	0.5625	0.2030			8400	80	60			12950	120	90	16000	150	110	18250	170	130
5/8-11	0.6250	0.2260			9300	100	75			14400	150	110	17800	190	140	20350	220	170
5/8-18	0.6250	0.2560			10600	110	85			16300	170	130	20150	210	160	23000	240	180
3/4-10	0.7500	0.3340	60,000	33,000	13800	175	130			21300	260	200	26300	320	240	30100	380	280
3/4-16	0.7500	0.3730			15400	195	145			23800	300	220	29400	360	280	33600	420	320
7/8-9	0.8750	0.4620			11400	165	125			29400	430	320	36400	520	400	41600	600	460
7/8-14	0.8750	0.5090			12600	185	140			32400	470	350	40100	580	440	45800	660	500
1-8	1.0000	0.6060			15000	250	190			38600	640	480	47700	800	600	54500	900	680
1-12	1.0000	0.6630			16400	270	200	105,000	74,000	42200	700	530	52200	860	660	59700	1000	740
1-1/8-7	1.1250	0.7630			18900	350	270			42300	800	600	60100	1120	840	68700	1280	960
1-1/8-12	1.1250	0.8560			21200	400	300			47500	880	660	67400	1260	940	77000	1440	1080
1-1/4-7	1.2500	0.9690			24000	500	380			53800	1120	840	76300	1580	1100	87200	1820	1360
1-1/4-12	1.2500	1.0730			26600	550	420			59600	1240	920	84500	1760	1320	96600	2000	1500
1-3/8-6	1.3750	1.1550			28600	660	490			64100	1460	1100	91000	2080	1560	104000	2380	1780
1-3/8-12	1.3750	1.3150			32500	740	560			73000	1680	1260	104000	2380	1780	118400	2720	2040
1-1/2-6	1.5000	1.4050			34800	870	650			78000	1940	1460	111000	2780	2080	126500	3160	2360
1-1/2-12	1.5000	1.5800			39100	980	730			87700	2200	1640	124005	3100	2320	142200	3560	2660

Notes:

- Tightening torque values are calculated from the formula $T = KDP$, where T = tightening torque, lb-in.; K = torque-friction coefficient; D = nominal bolt diameter, in.; and P = bolt clamping load developed by tightening, lb.
 - Clamp load is also known as preload or initial load in tension on bolt. Clamp load (lb.) is calculated by arbitrarily assuming usable bolt strength is 75% of bolt proof load (psi) times tensile stress area (sq. in.) of threaded section of each bolt size. Higher or lower values of clamp load can be used depending on the application requirements and the judgement of the designer.
 - Tensile strength (min psi) of all Grade 7 bolts is 125,000. Proof load is 105,000 psi.
 - Tensile strength (min psi) of all Grade 8 bolts is 150,000 psi. Proof load is 120,000 psi.
- Ref.: Fastening Reference. Machine Design. Nov. 1977.

Bolt Clamping Force vs. Tightening Torque for Unlubricated Steel Bolts.

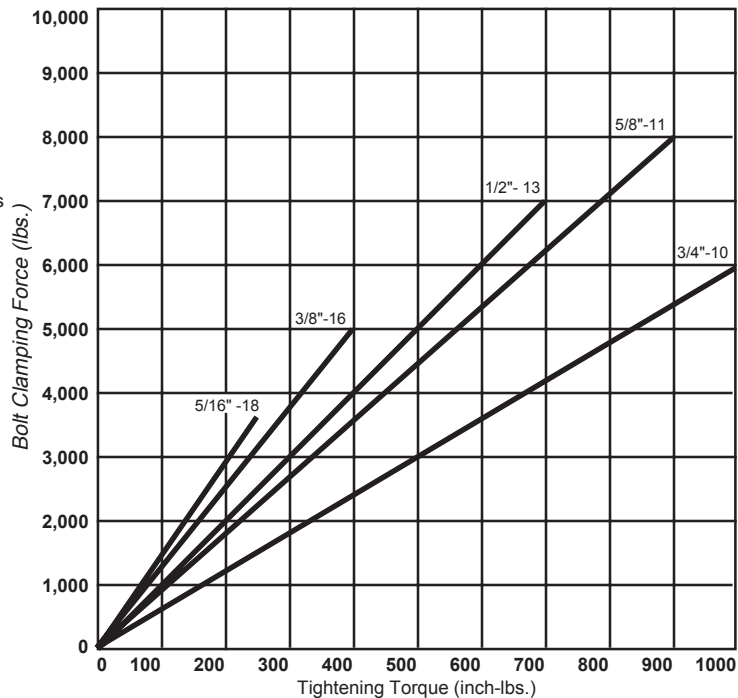


Disc Springs (Washers) - Technical Data


Rondelles à ressort (Belleville) – données techniques

Nom- inal Dia.	Bolt stress, psi											
	7,500		15,000		30,000		45,000		60,000		90,000	
	Torque ft-lb.	Load lb.	Torque ft-lb.	Load lb.	Torque ft-lb.	Load lb.	Torque ft-lb.	Load lb.	Torque ft-lb.	Load lb.	Torque ft-lb.	Load lb.
National Coarse Series												
1/4"	1	240	2	480	4	950	6	1,430	8	1,900	-	-
5/16"	2	390	4	780	8	1,570	12	2,350	16	3,130	-	-
3/8"	3	600	6	1,160	12	2,320	18	3,480	24	4,640	-	-
7/16"	5	800	10	1,590	20	3,180	30	4,770	40	6,360	-	-
1/2"	8	1,060	15	2,120	30	4,250	45	6,370	60	8,500	-	-
9/16"	12	1,360	23	2,720	45	5,450	68	8,170	90	10,900	-	-
5/8"	15	1,690	30	3,380	60	6,770	90	10,200	120	13,500	-	-
3/4"	25	2,510	50	5,010	100	10,000	150	15,000	200	20,000	-	-
7/8"	40	3,460	80	6,920	160	13,800	240	20,800	320	27,700	-	-
1"	62	4,540	123	9,080	245	18,200	-	-	-	-	-	-
1-1/8"	98	5,720	195	11,400	390	22,900	-	-	-	-	-	-
1-1/4"	137	7,260	273	14,500	545	29,100	-	-	-	-	-	-
1-3/8"	183	8,650	365	17,300	730	34,600	-	-	-	-	-	-
1-1/2"	219	10,500	437	21,100	875	42,100	-	-	-	-	-	-
1-3/4"	390	14,200	775	28,500	1,550	56,900	-	-	-	-	-	-
2"	563	18,700	1,125	37,500	2,250	74,900	-	-	-	-	-	-
8-thread Series												
1"	-	-	-	-	245	18,200	368	27,200	490	36,300	-	-
1-1/8"	-	-	-	-	355	23,700	533	35,500	710	47,400	-	-
1-1/4"	-	-	-	-	500	30,000	750	44,900	1,000	59,900	-	-
1-3/8"	-	-	-	-	680	37,000	1,020	55,400	1,360	73,900	-	-
1-1/2"	-	-	-	-	800	44,700	1,200	67,000	1,600	89,400	-	-
1-5/8"	-	-	-	-	1,100	53,200	1,650	79,800	2,200	106,300	-	-
1-3/4"	-	-	-	-	1,500	62,400	2,250	93,600	3,000	124,800	-	-
1-7/8"	-	-	-	-	2,000	72,300	3,000	108,500	4,000	144,600	-	-
2"	-	-	-	-	2,200	83,000	3,300	124,500	4,400	166,000	-	-
2-1/4"	-	-	-	-	3,180	106,600	4,770	159,800	6,360	213,100	-	-
2-1/2"	-	-	-	-	4,400	133,100	6,600	199,600	8,800	266,100	-	-
2-3/4"	-	-	-	-	5,920	162,500	8,800	243,700	11,840	325,000	-	-
3"	-	-	-	-	7,720	194,900	11,580	292,300	15,440	389,700	-	-
National Fine Series												
1/4"	-	-	-	-	6	1,090	9	1,630	12	2,120	18	2,930
5/16"	-	-	-	-	12	1,740	18	2,600	24	3,480	36	5,210
3/8"	-	-	-	-	22	2,630	31	3,940	44	5,260	66	7,880
7/16"	-	-	-	-	32	3,560	50	5,070	64	7,100	96	10,700
1/2"	-	-	-	-	50	4,790	76	7,100	100	9,600	150	14,200
9/16"	-	-	-	-	72	6,080	109	9,120	144	12,200	216	18,200
5/8"	-	-	-	-	98	7,670	148	11,500	196	15,300	294	23,000
3/4"	-	-	-	-	170	11,200	255	16,800	340	22,300	510	33,500
7/8"	-	-	-	-	270	15,300	404	22,800	540	30,500	810	45,800
1"	-	-	-	-	390	19,900	587	29,800	780	39,700	1,170	59,600
1-1/8"	-	-	-	-	574	25,600	860	38,500	1,148	51,300	1,722	76,900
1-1/4"	-	-	-	-	790	32,200	1,180	48,300	1,580	64,300	2,370	96,500
1-3/8"	-	-	-	-	1,044	42,400	1,565	59,000	2,088	78,800	3,132	118,200
1-1/2"	-	-	-	-	1,358	47,400	2,060	71,000	2,716	94,800	4,074	142,200

**TECHNICAL DATA and RELATED INFORMATION
can be found on pages D40 to D47 and D63.**

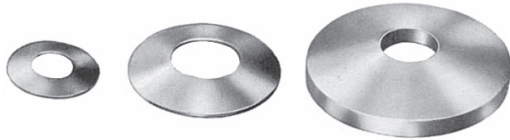

Disc springs can be used singly, or may be combined to make a stacked spring column.




For INCH Bolt Sizes
AI/SAI Series
STEEL & STAINLESS STEEL

DISC SPRINGS - for BOLTS

Materials: 1075 high carbon steel or 6150 chrome vanadium steel, plain or phosphate finish, our option.

Series AI **pre-stressed** disc springs are used to maintain load or tension in bolted assemblies. Pressure begins at the outer radius and flattens gradually toward the bolt as deflection progresses. Disc springs exert a uniform pressure that remains constant in spite of tension losses caused by thermal expansion and contraction, compression set, or wear of parts. Because pressures are predictable, disc springs provide a simple and effective means of determining bolt tension that is far more accurate than "torque" readings.

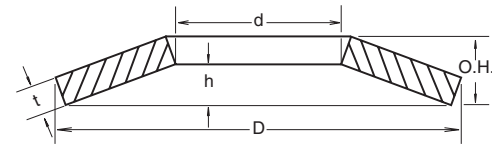

Load Values for Stainless Steel approximate 95% of Spring Steel values shown.

See AM Series for LARGER SIZES

POWERFUL SPRING ACTION IN LIMITED SPACE

Note: Tested only at f = .75h.
P Load at flat in lbs.
f Deflection in inches

SPAENAUR No. STEEL	STAINLESS STEEL	•Cross-Reference AI/SAI Series Part No.	Nom. Bolt or Shaft Size	Inch Dimensions					f = .75h		P max.	f max.
				D	d	t	h	O.H.	P	f		
680-005	680-806 680-807	180907 180910	#2	.187	.093	.007	.006	.013	10	.005	12	.006
680-006 680-007	680-808 680-800	251209 251213	#4	.250	.125	.009	.008	.017	16	.006	19	.008
680-113 680-009	680-809	281315 311511	#6	.281	.138	.015	.008	.023	54	.006	69	.008
680-019 680-035	680-B13-1K 680-812	311517 341619	5/32" #6 #8	.312 .312 .343	.156 .156 .164	.011 .017 .019	.011 .008 .009	.022 .025 .028	26 63 80	.008 .006 .007	30 82 104	.011 .008 .009
DS-10	680-813 680-814	371915 371920	3/16" 3/16"	.375 .375	.195 .195	.015 .020	.012 .010	.027 .030	49 92	.009 .008	59 118	.012 .010
■DS-20 680-B02-1W	680-B14-1W	502518 502519 502523	1/4" 1/4" 1/4"	.500 .500 .500	.255 .258 .258	.018 .019 .023	.016 .016 .016	.034 .035 .039	64 75 130	.012 .012 .012	75 89 160	.016 .016 .016
	680-818	502525	1/4"	.500	.255	.025	.013	.038	129	.010	165	.013
	680-B04-1Y	502538	1/4"	.500	.255	.038	.010	.048	344	.008	454	.010
	680-820 680-821	623122 623132	5/16" 5/16"	.625 .625	.317 .317	.022 .032	.020 .016	.042 .048	93 213	.015 .012	110 273	.020 .016
■680-100 DS-40 680-B11-1N	680-801	753227 753231	5/16" 5/16"	.750 .750	.320 .320	.028 .032	.024 .024	.052 .056	146 213	.018 .018	174 261	.024 .024
DS-60 DS-70	680-823	683823 683827 753828	3/8" 3/8" 3/8"	.688 .688 .750	.382 .382 .380	.024 .028 .028	.020 .020 .023	.044 .048 .051	104 162 150	.015 .015 .017	125 200 180	.020 .020 .023
■680-101 DS-80 DS-90	680-803 680-824 680-825 680-826	753831 753835 753840 753856	3/8" 3/8" 3/8" 3/8"	.750 .750 .750 .750	.382 .382 .382 .380	.032 .035 .040 .056	.020 .022 .019 .014	.052 .057 .059 .070	188 272 343 679	.015 .017 .014 .011	236 342 441 897	.020 .022 .019 .014
■DS-100	680-827 680-828	874431 874445 104435	7/16" 7/16" 7/16"	.875 .875 1.000	.442 .442 .445	.031 .045 .035	.028 .022 .032	.059 .067 .067	185 413 219	.021 .017 .024	218 530 258	.028 .022 .032

Material and finish must be specified on order.

■ Conform to MIL-W-12133/1"B"

Continued on next page...

● Prefix Cross-Reference Part No. with an AI for Steel and SAI for Stainless Steel.

...Continued from previous page.


For INCH Bolt Sizes

AI/SAI Series

STEEL & STAINLESS STEEL

POWERFUL SPRING ACTION IN LIMITED SPACE

Contact Sales Desk For Package Quantities

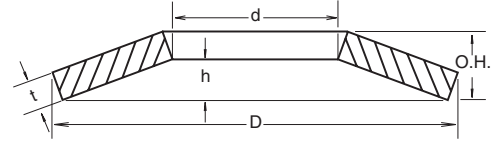

Note: Tested only at $f = .75h$.
P Load at flat in lbs.
f Deflection in inches

SPAENAUR No.	Cross-Ref. AI/SAI Series Part No.	Nom. Bolt or Shaft Size	Inch Dimensions						f = .75h		P max.	f max.
			D	d	t	h	O.H.	P	f			
DS-110	104439	7/16"	1.000	.445	.039	.032	.071	298	.024	359	.032	
DS-120	104449	7/16"	1.000	.445	.049	.026	.075	455	.020	580	.026	
680-102	680-830 105135	1/2"	1.000	.512	.035	.032	.067	236	.024	277	.032	
DS-130	115139	1/2"	1.100	.512	.039	.036	.075	289	.027	339	.036	
■DS-140	115149	1/2"	1.100	.512	.049	.030	.083	517	.025	640	.034	
DS-150	115159	1/2"	1.100	.512	.059	.028	.087	717	.021	923	.028	
	680-833 105173	1/2"	1.000	.512	.073	.018	.091	1092	.014	1442	.018	
	680-835 115638	9/16"	1.125	.567	.038	.035	.073	258	.026	303	.035	
	680-836 115656	9/16"	1.125	.567	.056	.028	.084	612	.021	784	.028	
680-104	680-837 126340	5/8"	1.250	.630	.040	.042	.082	303	.031	344	.042	
	680-839 126389	5/8"	1.250	.630	.089	.022	.111	1529	.017	2019	.022	
DS-160	136349	5/8"	1.375	.637	.049	.046	.095	469	.034	549	.046	
■DS-170	136359	5/8"	1.375	.637	.059	.043	.102	733	.032	901	.043	
680-B10-1C	— 136378	5/8"	1.375	.637	.078	.032	.110	1198	.024	1556	.032	
680-107	680-841 157545	3/4"	1.500	.755	.045	.048	.093	342	.036	386	.048	
680-108	680-844 157572	3/4"	1.500	.755	.072	.037	.109	965	.028	1235	.037	
■DS-190	157659	3/4"	1.500	.761	.059	.055	.114	871	.041	1019	.055	
■DS-200	157678	3/4"	1.500	.761	.078	.044	.122	1495	.033	1897	.044	
DS-210	157698	3/4"	1.500	.761	.098	.036	.134	2373	.027	3097	.036	
	680-845 1575107	3/4"	1.500	.755	.107	.027	.134	2266	.020	2991	.027	
■680-109	680-B16-1X 178885	7/8"	1.750	.880	.085	.043	.128	1354	.032	1735	.043	
680-110	680-B15-1M 201065	1"	2.000	1.016	.065	.065	.130	778	.049	895	.065	
■DS-220	201078	1"	2.000	1.016	.078	.060	.138	1178	.045	1436	.060	
DS-230	680-B17-1A 201098	1"	2.000	1.016	.098	.060	.158	2290	.045	2881	.060	
DS-240	201011	1"	2.000	1.016	.118	.047	.165	3033	.035	3944	.047	
DS-250	231078	1"	2.375	1.016	.078	.079	.157	1073	.059	1231	.079	
■DS-260	231098	1"	2.375	1.016	.098	.079	.177	2038	.059	2463	.079	
DS-270	231011	1"	2.375	1.016	.118	.063	.181	2693	.047	3434	.063	
680-111	251280	1-1/4"	2.500	1.250	.080	.080	.160	1131	.060	1301	.080	
680-112	251212	1-1/4"	2.500	1.250	.120	.060	.180	2591	.045	3322	.060	

- Prefix Cross-Reference Part No. with an AI for Steel and SAI for Stainless Steel.
- Conform to MIL-W-12133/1"B"

See "AM" Series for larger sizes on D52 to D61.
 Also available Mechanical Zinc or Cadmium Plated Special to Order.

SP/SSP Series

STEEL AND STAINLESS STEEL
for **HEAVY BOLTED**
SECTIONS




For INCH Bolt Sizes

- ELECTRICAL INDUSTRY APPLICATIONS
Bus Bar Joints | Transformers
- AUTOMOTIVE
- FARM IMPLEMENTS

Materials: High-grade **SPRING STEEL**, in self colour or phosphate finish, our option. **17-7PH STAINLESS STEEL**

This series of Disc Springs has been specifically designed for heavy bolted sections, such as those used in electrical industries - on bus bar applications, transformers, etc. They are widely used to compensate for developed looseness due to thermal expansion of bolted sections. These conical spring washers are not as accurately formed as our AI series, which are generally used for lighter loads and more predictable load/deflection characteristics. SP Disc Springs are made of high quality spring steel, heat treated to Rockwell C43-50. 17-7PH stainless steel is heat treated to Rockwell hardness C40-48.

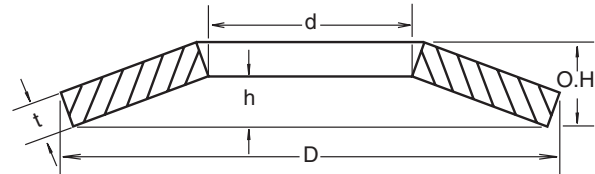

IMPORTANT NOTE: SP Series Disc Springs are not pre-stressed. They are designed for static bolted applications only. *See Series AM or AI as shown on other pages, for other applications.*


Load Values for Stainless Steel approx. 95% of Spring Steel values shown.

•Prefix Cross-Reference Part No. with an SP for Steel and SSP for Stainless Steel.

SPAENAUR No.		● Cross-Ref. SP/SSP Part No.	NOMINAL BOLT SIZE Inch	INCH DIMENSIONS						3) Load Flat (in lbs.)	Weight per M (in lbs.)
STEEL	STAINLESS STEEL			D	d	t	1) O.H.	2) O.H.			
—	680-852	52203	—	.197	.087	.012	.020	.016	65	0.08	
680-203	680-853	62704	—	.236	.106	.016	.026	.020	146	0.16	
680-205	680-854	73205	1/8" #5	.276	.126	.020	.030	.025	210	0.26	
680-207	680-855	83705	#6	.315	.146	.020	.031	.027	176	0.34	
680-209	680-856	94308	5/32" #8	.354	.169	.031	.043	.037	590	0.68	
680-211	680-804	115310	3/16" #10	.433	.209	.039	.055	.047	1070	1.3	
680-213	680-B08-1C	146412	1/4"	.551	.252	.050	.067	.056	1390	2.5	
680-215	—	177415	—	.669	.291	.059	.079	.070	1800	4.8	
680-217	680-B07-1Y	188420	5/16"	.709	.331	.078	.102	.088	4755	6.9	
680-219	680-861	218425	5/16"	.827	.331	.098	.118	.108	5345	12.5	
680-B18-1P	680-B09-1N	231120	3/8"	.906	.413	.078	.106	.094	3200	11.4	
680-223	680-B21-1Y	241130	3/8"	.945	.413	.118	.146	.130	8000	18.9	
680-225	680-B06-1P	291325	1/2"	1.142	.512	.098	.130	.116	4700	22.9	
680-227	680-864	321335	1/2"	1.260	.512	.138	.169	.156	9900	40.0	
680-229	—	351530	9/16"	1.378	.591	.118	.157	.141	6500	40.7	
—	680-865	351530	9/16"	1.378	.591	.125	.157	.141	6500	40.7	
680-231	—	391540	9/16"	1.535	.591	.157	.197	.181	12000	70.0	
▲680-233	680-867	391735	5/8"	1.535	.669	.138	.185	.162	10000	58.5	
680-235	680-868	421740	5/8"	1.654	.669	.157	.204	.201	13000	90.0	
680-237	—	471950	—	1.850	.748	.197	.244	.222	20000	125.0	
680-239	680-870	522160	3/4"	2.047	.827	.236	.287	.246	31000	169.0	
680-245	—	702870	1"	2.756	1.102	.276	.362	.317	46000	392.0	
680-217ZP	(Mechanical Zinc)	188420	5/16	.709	.331	.079	.102	.088	4755	6.9	
680-221ZP	(Mechanical Zinc)	231120	3/8	.906	.413	.0798	.106	.094	3200	11.4	

- 1) When delivered.
- 2) After first loading.
- 3) Load ± 20% of nominal shown.

Note: Values for Load at Flat shown in the table are computed.

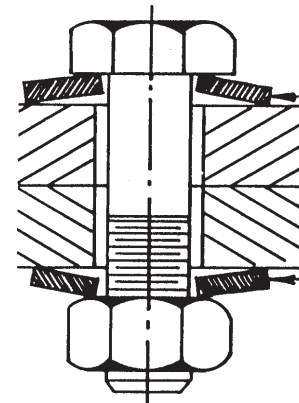

A typical application of SP/SSP Series Disc Springs

▲680-233MZ Mechanical Zinc




AK Series

FOR BALL BEARING APPLICATIONS

Series AK disc springs are specially designed as preloading springs for use with radial ball bearings. They help maintain positioning accuracy of the bearing with no end play. They also minimize vibration and shaft deflection. Proper preloading will increase bearing rigidity and eliminate excessive running noise.

Material: C1075 STEEL, Not plated or phosphate finish, our option.

Hardness Range: depending on size, RC 40-51.

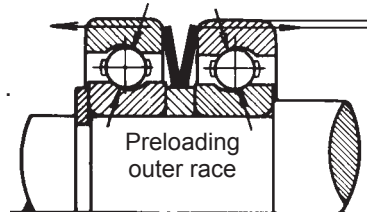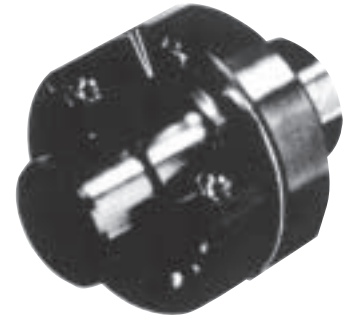

Load tolerances: ±20% at .75h

P Load in lbs. **Note:** Tested only at f = .75h.
f Deflection in inches


SPAENAUR No.	Ball Bearing Size	INCH DIMENSIONS					Ratio h/t	f = .75h		PKG QTY.
		D	d	t	h	O.H.		P	f	
680-250	AK-R-2	.366	.228	.0079	.0080	.0158	1.01	5.9	.0060	100
680-251	AK-623/EL-3	.386	.244	.0079	.0080	.0158	1.01	5.4	.0060	100
680-252	AK-R-3	.492	.319	.0098	.0100	.0197	1.02	8.3	.0075	100
680-253	AK-624/EL-4	.504	.283	.0098	.0099	.0197	1.01	6.7	.0075	100
680-255	AK-625/634/EL-5	.622	.323	.0098	.0119	.0217	1.22	5.3	.0089	100
680-256	AK-626/635/EL-6	.740	.362	.0118	.0138	.0256	1.17	7.2	.0104	100
680-257	AK-607/EL-7	.740	.402	.0138	.0138	.0276	1.00	11.8	.0104	100
680-B12-1T	AK-608/627/EL-8	.858	.484	.0138	.0157	.0295	1.14	10.7	.0118	100
680-259	AK-R-6	.862	.539	.0138	.0158	.0295	1.14	11.8	.0118	100
680-260	AK-609/EL-9	.933	.563	.0157	.0198	.0354	1.26	18.5	.0148	50
680-261	AK-6000/629	1.012	.563	.0157	.0198	.0354	1.26	14.5	.0148	50
680-262	AK-6001	1.091	.681	.0157	.0238	.0394	1.52	18.4	.0179	50
680-263	AK-R-8	1.110	.724	.0157	.0278	.0433	1.77	24.1	.0208	50
680-264	AK-6200	1.169	.685	.0157	.0277	.0433	1.77	19.0	.0208	50
680-265	AK-6002/6201	1.248	.803	.0157	.0277	.0433	1.77	18.6	.0208	50
680-266	AK-R-10	1.358	1.000	.0197	.0277	.0472	1.41	34.8	.0208	25
680-267	AK-6300	1.362	.803	.0157	.0277	.0433	1.76	14.1	.0208	25
680-268	AK-6003/6202	1.362	.882	.0197	.0276	.0472	1.40	27.3	.0207	25
680-269	AK-6301	1.441	.803	.0197	.0316	.0512	1.60	25.5	.0237	25
680-270	AK-6203	1.559	1.004	.0197	.0316	.0512	1.61	25.3	.0237	25
680-271	AK-6004/6302	1.638	1.004	.0197	.0355	.0551	1.80	26.1	.0266	10
680-272	AK-6005/6204/6303	1.831	1.201	.0236	.0357	.0591	1.51	35.3	.0267	10
680-273	AK-6205/6304	2.028	1.398	.0236	.0357	.0591	1.51	31.1	.0267	10
680-274	AK-6006	2.146	1.594	.0236	.0357	.0591	1.51	32.5	.0268	10
680-275	AK-6007/6206/6305	2.421	1.594	.0276	.0434	.0708	1.57	40.3	.0325	10
680-276	AK-6306	2.815	1.791	.0276	.0553	.0827	2.00	42.5	.0414	10
680-277	AK-6207	2.815	1.988	.0276	.0554	.0827	2.01	50.3	.0415	10
680-278	AK-6307	3.130	1.988	.0315	.0593	.0906	1.88	52.2	.0445	10
680-279	AK-6010/6208	3.130	2.185	.0315	.0594	.0906	1.88	60.6	.0445	10
680-280	AK-6209	3.327	2.382	.0354	.0633	.0984	1.79	82.4	.0475	10
680-281	AK-6308	3.524	2.382	.0354	.0632	.0984	1.79	65.9	.0474	1
680-282	AK-6011/6210	3.524	2.579	.0354	.0633	.0984	1.79	76.9	.0475	1
680-283	AK-6309	3.898	2.579	.0394	.0632	.1024	1.60	67.1	.0474	1
680-284	AK-6013/6211	3.898	2.776	.0394	.0633	.1024	1.61	76.4	.0474	1
680-286	AK-6014/6212	4.291	2.972	.0492	.0573	.1063	1.16	91.1	.0430	1
680-287	AK-6311	4.685	2.972	.0492	.0611	.1102	1.24	73.0	.0458	1
680-288	AK-6312	5.079	3.366	.0492	.0770	.1260	1.57	92.7	.0578	1

Larger bearing sizes available upon request

See Page D45-D47 for Technical Data

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

D51




AM SERIES INCH DISC SPRINGS

NOTE 1. Disc springs are tested only at $f = .75h$.

DIN 2093

NOMENCLATURE

P = load in lbs.
 σ = stress in (psi)
 lbs./sq. in. $\times 10^3$
 f = deflection in inches



MATERIALS and HARDNESS

High grade spring steel of selected surface condition, plain or phosphate finish, our option. Most commonly used are C-1075 or SAE 6150 chrome vanadium steel. Other alloys & 17-7 Stainless Steel available.

Disc springs are carefully heat treated with austempering process and in such a manner as to prevent surface decarburization.

SERIES AM DISC SPRING DIMENSIONS

SPAENAUR No.	Cross-Reference AM Series Part No.	SPRING DIMENSIONS in Millimetres			INCH DIMENSIONS Subject to normal commercial tolerances.				
		D O.D.	d I.D.	t Thick	D	d	t	h	O.H.
681-200	AM63203	6	3.2	0.3	.236	.126	.0118	.0060	.0177
681-D09-1C	AM83202	8	3.2	0.2	.315	.126	.0079	.0078	.0157
681-202	AM83203	8	3.2	0.3	.315	.126	.0118	.0099	.0216
▲681-203	AM83204	8	3.2	0.4	.315	.126	.0157	.0080	.0236
681-204	AM84202	8	4.2	0.2	.315	.165	.0079	.0099	.0177
681-001	AM84203	8	4.2	0.3	.315	.165	.0118	.0099	.0216
681-205	AM103203	10	3.2	0.3	.394	.126	.0118	.0139	.0256
681-206	AM103204	10	3.2	0.4	.394	.126	.0157	.0120	.0276
681-207	AM103205	10	3.2	0.5	.394	.126	.0197	.0099	.0295
681-208	AM104204	10	4.2	0.4	.394	.165	.0157	.0120	.0276
681-209	AM104205	10	4.2	0.5	.394	.165	.0197	.0099	.0295
681-210	AM105225	10	5.2	0.25	.394	.205	.0098	.0120	.0217
681-003	AM105204	10	5.2	0.4	.394	.205	.0157	.0120	.0276
681-004	AM105205	10	5.2	0.5	.394	.205	.0197	.0099	.0295
681-211	AM124204	12	4.2	0.4	.472	.165	.0157	.0159	.0315
681-212	AM124205	12	4.2	0.5	.472	.165	.0197	.0139	.0335
681-213	AM124206	12	4.2	0.6	.472	.165	.0236	.0159	.0394
681-214	AM125205	12	5.2	0.5	.472	.205	.0197	.0158	.0354
681-215	AM125206	12	5.2	0.6	.472	.205	.0236	.0139	.0374
681-216	AM126205	12	6.2	0.5	.472	.244	.0197	.0140	.0335
681-217	AM126206	12	6.2	0.6	.472	.244	.0236	.0140	.0374
681-218	AM135205	12.5	5.2	0.5	.492	.205	.0197	.0139	.0335
681-219	AM136235	12.5	6.2	0.35	.492	.244	.0138	.0178	.0315
681-005	AM136205	12.5	6.2	0.5	.492	.244	.0197	.0139	.0335
681-006	AM136207	12.5	6.2	0.7	.492	.244	.0276	.0119	.0394
681-220	AM147235	14	7.2	0.35	.551	.283	.0138	.0178	.0315
681-007	AM147205	14	7.2	0.5	.551	.283	.0197	.0158	.0354
681-008	AM147208	14	7.2	0.8	.551	.283	.0315	.0119	.0433
681-221	AM155204	15	5.2	0.4	.591	.205	.0157	.0218	.0374
681-222	AM155205	15	5.2	0.5	.591	.205	.0197	.0198	.0394
681-223	AM155206	15	5.2	0.6	.591	.205	.0236	.0178	.0413
681-224	AM155207	15	5.2	0.7	.591	.205	.0276	.0158	.0433
681-225	AM156205	15	6.2	0.5	.591	.244	.0197	.0198	.0394
681-226	AM156206	15	6.2	0.6	.591	.244	.0236	.0178	.0413
681-227	AM156207	15	6.2	0.7	.591	.244	.0276	.0158	.0433
681-228	AM158207	15	8.2	0.7	.591	.323	.0276	.0159	.0433
■681-229	AM158208	15	8.2	0.8	.591	.323	.0315	.0159	.0472
681-230	AM168204	16	8.2	0.4	.630	.323	.0157	.0198	.0354
681-009	AM168206	16	8.2	0.6	.630	.323	.0236	.0179	.0413
681-011	AM168207	16	8.2	0.7	.630	.323	.0276	.0179	.0453
681-231	AM168208	16	8.2	0.8	.630	.323	.0315	.0159	.0472

■ 681-836 17-7PH Stainless Steel ▲ 681-D29-1X 17-7PH Stainless Steel

Continues on Next Page

SPAENAUR CATALOG 14.04 2019/08/08

Inch

Pouce

NOMENCLATURE

P = load in lbs.

 σ = stress in (psi) lbs./sq. in. x 10³

f = deflection in inches

Disc Springs (Washers) Part 2

Rondelles à ressort (Belleville) 2e partie

See pages B74-B77 for TAPCON ANCHOR SYSTEM

SPAENAUR No.	f = .25h		f = .50h		f = .75h			f = h		PKG QTY.
	P Load	f Deflection	P Load	f Deflection	P Load	f Deflection	Stress σ	P Load	f Deflection	
681-200	11	.0015	20	.0030	29	.0045	188	37	.0060	100
681-D09-1C	3	.0020	5	.0039	6	.0059	89	7	.0078	100
681-202	11	.0025	19	.0049	25	.0074	159	30	.0099	100
▲681-203	17	.0020	31	.0040	44	.0060	196	56	.0080	100
681-204	5	.0025	8	.0049	9	.0074	155	10	.0099	100
681-001	12	.0025	21	.0050	28	.0074	199	33	.0099	100
681-205	12	.0035	19	.0069	23	.0104	146	26	.0139	100
681-206	18	.0030	32	.0060	43	.0090	173	52	.0120	100
681-207	25	.0025	47	.0049	66	.0074	218	85	.0099	100
681-208	19	.0030	33	.0060	45	.0090	164	55	.0120	100
681-209	26	.0025	49	.0049	70	.0074	192	90	.0099	100
681-210	7	.0030	11	.0060	14	.0090	147	15	.0120	100
681-003	21	.0030	37	.0060	50	.0090	198	61	.0120	100
681-004	29	.0025	54	.0050	78	.0074	186	99	.0099	100
681-211	20	.0040	34	.0079	42	.0119	152	48	.0159	100
681-212	28	.0035	50	.0069	68	.0104	174	84	.0139	100
681-213	54	.0040	98	.0080	135	.0120	248	168	.0159	100
681-214	36	.0040	63	.0079	84	.0119	199	101	.0158	100
681-215	47	.0035	87	.0070	122	.0105	210	154	.0139	100
681-216	32	.0035	57	.0070	78	.0105	195	97	.0140	100
681-217	52	.0035	95	.0070	133	.0105	223	168	.0140	100
681-218	27	.0035	48	.0069	65	.0104	148	80	.0139	100
681-219	20	.0045	31	.0089	36	.0134	194	38	.0178	100
681-005	29	.0035	51	.0070	70	.0104	171	87	.0139	100
681-006	58	.0030	110	.0060	159	.0090	213	206	.0119	100
681-220	16	.0045	25	.0089	29	.0134	159	31	.0178	100
681-007	28	.0040	50	.0079	66	.0119	167	80	.0158	100
681-008	68	.0030	131	.0060	191	.0090	201	249	.0119	100
681-221	24	.0055	36	.0109	41	.0164	152	42	.0218	100
681-222	32	.0050	52	.0099	66	.0149	150	76	.0198	100
681-223	41	.0045	72	.0089	96	.0134	164	118	.0178	100
681-224	51	.0039	94	.0079	133	.0118	197	168	.0158	100
681-225	33	.0050	54	.0099	69	.0149	166	79	.0198	100
681-226	42	.0045	74	.0089	100	.0134	161	123	.0178	100
681-227	53	.0040	98	.0079	138	.0119	182	174	.0158	100
681-228	61	.0040	114	.0080	159	.0119	198	202	.0159	100
■681-229	88	.0040	166	.0080	236	.0120	220	303	.0159	100
681-230	20	.0050	31	.0099	36	.0149	152	38	.0198	100
681-009	41	.0045	72	.0089	97	.0134	169	119	.0179	100
681-011	61	.0045	111	.0089	153	.0134	189	191	.0179	100
681-231	74	.0040	138	.0079	197	.0119	186	252	.0159	100

NOTE 1: Disc springs are tested only at f = .75h

DIN 2093

■ 681-836 17-7PH Stainless Steel

▲ 681-D29-1X 17-7PH Stainless Steel


CATALOG 14.04
2019/08/08
SPAENAUR

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

D53

Disc Spring (Washers) Part 1

Rondelles à ressort (Belleville) 1re partie



Inch

Pouce

SPAENAUR No.	Cross-Reference AM Series Part No.	SPRING DIMENSIONS in Millimetres			INCH DIMENSIONS Subject to normal commercial tolerances.				
		D O.D.	d I.D.	t Thick	D	d	t	h	O.H.
681-010	AM168209	16	8.2	0.9	.630	.323	.0354	.0140	.0492
681-232	AM186204	18	6.2	0.4	.709	.244	.0157	.0238	.0394
681-233	AM186205	18	6.2	0.5	.709	.244	.0197	.0237	.0433
681-234	AM186206	18	6.2	0.6	.709	.244	.0236	.0237	.0472
681-235	AM186207	18	6.2	0.7	.709	.244	.0276	.0217	.0492
681-236	AM186208	18	6.2	0.8	.709	.244	.0315	.0198	.0512
681-237	AM188205	18	8.2	0.5	.709	.323	.0197	.0238	.0433
681-238	AM188207	18	8.2	0.7	.709	.323	.0276	.0218	.0492
681-239	AM188208	18	8.2	0.8	.709	.323	.0315	.0199	.0512
681-012	AM188210	18	8.2	1.0	.709	.323	.0394	.0158	.0551
681-240	AM189245	18	9.2	0.45	.709	.362	.0177	.0238	.0413
681-241	AM189207	18	9.2	0.7	.709	.362	.0276	.0198	.0472
681-242	AM189210	18	9.2	1.0	.709	.362	.0394	.0159	.0551
681-243	AM208206	20	8.2	0.6	.787	.323	.0236	.0278	.0512
681-244	AM208207	20	8.2	0.7	.787	.323	.0276	.0257	.0531
681-245	AM208208	20	8.2	0.8	.787	.323	.0315	.0238	.0551
681-246	AM208209	20	8.2	0.9	.787	.323	.0354	.0219	.0571
681-247	AM208210	20	8.2	1.0	.787	.323	.0394	.0218	.0610
681-248	AM201005	20	10.2	0.5	.787	.402	.0197	.0258	.0453
681-013	AM201008	20	10.2	0.8	.787	.402	.0315	.0218	.0531
681-249	AM201009	20	10.2	0.9	.787	.402	.0354	.0219	.0571
681-250	AM201010	20	10.2	1.0	.787	.402	.0394	.0219	.0610
681-014	AM201011	20	10.2	1.1	.787	.402	.0433	.0179	.0610
▲ 681-251	AM201013	20	10.2	1.3	.787	.402	.0492	.0200	.0689
681-252	AM201015	20	10.2	1.5	.787	.402	.0591	.0119	.0709
681-253	AM221106	22.5	11.2	0.6	.886	.441	.0236	.0317	.0551
681-015	AM221108	22.5	11.2	0.8	.886	.441	.0315	.0258	.0571
■ 681-016	AM221113	22.5	11.2	1.25	.886	.441	.0492	.0199	.0689
681-254	AM238207	23	8.2	0.7	.906	.323	.0276	.0317	.0591
681-255	AM238208	23	8.2	0.8	.906	.323	.0315	.0297	.0610
681-256	AM238209	23	8.2	0.9	.906	.323	.0354	.0278	.0630
681-257	AM238210	23	8.2	1.0	.906	.323	.0394	.0277	.0669
681-258	AM231009	23	10.2	0.9	.906	.402	.0354	.0299	.0650
681-259	AM231010	23	10.2	1.0	.906	.402	.0394	.0278	.0669
681-260	AM231013	23	10.2	1.3	.906	.402	.0492	.0259	.0748
681-261	AM231210	23	12.2	1.0	.906	.480	.0394	.0239	.0630
681-D13-1T	AM231213	23	12.2	1.3	.906	.480	.0492	.0239	.0728
681-263	AM231215	23	12.2	1.5	.906	.480	.0591	.0199	.0787
681-264	AM251010	25	10.2	1.0	.984	.402	.0394	.0297	.0689
681-265	AM251207	25	12.2	0.7	.984	.480	.0276	.0357	.0630
681-017	AM251209	25	12.2	0.9	.984	.480	.0354	.0278	.0630
681-266	AM251210	25	12.2	1.0	.984	.480	.0394	.0318	.0709
681-D10-1Y	AM251213	25	12.2	1.3	.984	.480	.0492	.0279	.0768
681-D20-1A	AM251215	25	12.2	1.5	.984	.480	.0591	.0218	.0807
681-268	AM281008	28	10.2	0.8	1.100	.402	.0315	.0376	.0689
681-269	AM281010	28	10.2	1.0	1.100	.402	.0394	.0356	.0748
681-D11-1C	AM281013	28	10.2	1.3	1.100	.402	.0492	.0317	.0807
681-D07-1P	AM281015	28	10.2	1.5	1.100	.402	.0591	.0277	.0866
681-272	AM281210	28	12.2	1.0	1.100	.480	.0394	.0377	.0768
681-273	AM281213	28	12.2	1.3	1.100	.480	.0492	.0338	.0827
681-274	AM281215	28	12.2	1.5	1.100	.480	.0591	.0298	.0886
681-275	AM281408	28	14.2	0.8	1.100	.559	.0315	.0398	.0709
681-019	AM281410	28	14.2	1.0	1.100	.559	.0394	.0318	.0709

DIN 2093

Chart continues across facing pages.

D54

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

■ 681-016YZ Yellow Zinc Plated
▲ 681-838 17-7PH Stainless Steel

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

CATALOG 14.04
2019/08/08
SPAENAUR

Inch

Pouce

NOMENCLATURE

P = load in lbs.

 σ = stress in (psi) lbs./sq. in. x 10³

f = deflection in inches

Disc Springs (Washers) Part 2

Rondelles à ressort (Belleville) 2e partie

SPAENAUR No.	f = .25h		f = .50h		f = .75h			f = h		PKG QTY.
	P Load	f Deflection	P Load	f Deflection	P Load	f Deflection	Stress σ	P Load	f Deflection	
681-010	87	.0035	167	.0070	242	.0105	200	315	.0140	100
681-232	20	.0059	30	.0119	33	.0178	120	32	.0238	100
681-233	31	.0059	49	.0119	58	.0178	134	63	.0237	100
681-234	45	.0059	75	.0119	95	.0178	149	109	.0237	100
681-235	56	.0054	99	.0109	132	.0163	159	160	.0217	100
681-236	68	.0050	125	.0099	173	.0149	189	218	.0198	100
681-237	33	.0059	52	.0119	62	.0178	160	68	.0238	100
681-238	61	.0054	106	.0109	142	.0163	174	172	.0218	100
681-239	74	.0050	135	.0099	187	.0149	169	234	.0199	100
681-012	101	.0040	194	.0079	282	.0119	200	366	.0158	100
681-240	28	.0059	43	.0119	50	.0178	167	52	.0238	100
681-241	55	.0049	99	.0099	134	.0148	169	165	.0198	100
681-242	108	.0040	207	.0079	300	.0119	198	389	.0159	100
681-243	51	.0069	81	.0139	97	.0208	167	107	.0278	100
681-244	62	.0064	105	.0128	135	.0193	164	159	.0257	100
681-245	75	.0059	133	.0119	179	.0178	161	219	.0238	100
681-246	89	.0055	164	.0109	227	.0164	176	286	.0219	100
681-247	118	.0054	220	.0109	310	.0163	207	394	.0218	100
681-248	34	.0064	52	.0129	60	.0193	161	63	.0258	100
681-013	72	.0055	130	.0109	178	.0164	171	220	.0218	100
681-249	99	.0055	181	.0110	251	.0165	188	316	.0219	100
681-250	131	.0055	243	.0109	343	.0164	202	436	.0219	100
681-014	132	.0045	252	.0090	364	.0134	198	473	.0179	100
681-251	217	.0050	415	.0100	601	.0150	255	781	.0200	100
681-252	207	.0030	409	.0060	608	.0089	209	805	.0119	100
681-253	57	.0079	87	.0159	100	.0238	186	104	.0317	100
681-015	73	.0065	127	.0129	167	.0194	165	202	.0258	100
681-016	166	.0050	318	.0100	461	.0149	199	600	.0199	100
681-254	66	.0079	107	.0158	129	.0238	154	143	.0317	100
681-255	79	.0074	133	.0148	170	.0223	151	199	.0297	100
681-256	93	.0069	163	.0139	218	.0208	157	265	.0278	100
681-257	121	.0069	217	.0138	296	.0208	187	366	.0277	100
681-258	111	.0075	191	.0149	252	.0224	188	302	.0299	100
681-259	129	.0069	230	.0139	314	.0208	183	388	.0278	100
681-260	210	.0065	391	.0129	555	.0194	231	709	.0259	100
681-261	113	.0060	208	.0119	290	.0179	176	365	.0239	100
681-D13-1T	208	.0060	392	.0120	560	.0180	216	720	.0239	100
681-263	279	.0050	542	.0099	794	.0149	241	1040	.0199	100
681-264	117	.0074	207	.0149	279	.0223	160	342	.0297	100
681-265	79	.0089	122	.0178	142	.0268	191	150	.0357	100
681-017	87	.0070	153	.0139	204	.0209	156	248	.0278	100
681-266	140	.0080	245	.0159	325	.0239	202	393	.0318	100
681-D10-1Y	204	.0070	378	.0140	532	.0209	200	675	.0279	100
681-D20-1A	250	.0055	482	.0109	702	.0164	219	917	.0218	100
681-268	83	.0094	131	.0188	157	.0282	145	171	.0376	100
681-269	123	.0089	209	.0178	270	.0267	153	319	.0356	100
681-D11-1C	177	.0079	321	.0159	444	.0238	188	556	.0317	100
681-D07-1P	242	.0069	457	.0138	655	.0208	225	845	.0277	100
681-272	142	.0094	238	.0189	303	.0283	186	354	.0377	100
681-273	203	.0085	366	.0169	500	.0254	185	621	.0338	100
681-274	278	.0074	522	.0149	743	.0223	221	952	.0298	100
681-275	104	.0099	163	.0199	191	.0298	200	204	.0398	100
681-019	114	.0079	199	.0159	264	.0238	167	320	.0318	100

Continued Next page

NOTE 1: Disc springs are tested only at f = .75h

See Page D45-D47 for Technical Data


P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

D55

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

Disc Springs (Washers) Part 1

Rondelles à ressort (Belleville) 1re partie



Inch

Pouce

Chart continues across facing pages.

SPAENAU No.	Cross-Reference AM Series Part No.	SPRING DIMENSIONS in Millimetres			INCH DIMENSIONS Subject to normal commercial tolerances.				
		D O.D.	d I.D.	t Thick	D	d	t	h	O.H.
681-D14-1K	AM281413	28	14.2	1.3	1.100	.559	.0492	.0339	.0827
681-020	AM281415	28	14.2	1.5	1.100	.559	.0591	.0258	.0846
681-277	AM321210	31.5	12.2	1.0	1.240	.480	.0394	.0436	.0827
681-278	AM321213	31.5	12.2	1.25	1.240	.480	.0492	.0377	.0866
681-279	AM321215	31.5	12.2	1.5	1.240	.480	.0591	.0336	.0925
681-280	AM321608	31.5	16.3	0.8	1.240	.642	.0315	.0416	.0728
681-021	AM321613	31.5	16.3	1.25	1.240	.642	.0492	.0358	.0846
681-281	AM321615	31.5	16.3	1.5	1.240	.642	.0591	.0359	.0945
681-022	AM321618	31.5	16.3	1.75	1.240	.642	.0690	.0278	.0965
681-282	AM321620	32	16.3	2.0	1.240	.642	.0787	.0300	.1083
681-839(S.S)	SAM321620	31.5	16.3	2.0	1.240	.642	.0787	.0300	.1083
681-283	AM341210	34	12.3	1.0	1.340	.484	.0394	.0495	.0886
681-285	AM341215	34	12.3	1.5	1.340	.484	.0591	.0396	.0984
681-286	AM341413	34	14.3	1.3	1.340	.563	.0492	.0457	.0945
681-287	AM341415	34	14.3	1.5	1.340	.563	.0591	.0417	.1004
681-288	AM341615	34	16.3	1.5	1.340	.642	.0591	.0417	.1004
681-289	AM341620	34	16.3	2.0	1.340	.642	.0787	.0339	.1122
681-290	AM361809	35.5	18.3	0.9	1.400	.720	.0354	.0456	.0807
681-023	AM361813	35.5	18.3	1.25	1.400	.720	.0492	.0398	.0886
681-024	AM361820	35.5	18.3	2.0	1.400	.720	.0787	.0319	.1102
681-291	AM401413	40	14.3	1.3	1.570	.563	.0492	.0554	.1043
681-292	AM401415	40	14.3	1.5	1.570	.563	.0591	.0495	.1083
681-293	AM401420	40	14.3	2.0	1.570	.563	.0787	.0417	.1201
681-294	AM401615	40	16.3	1.5	1.570	.642	.0591	.0515	.1102
681-295	AM401620	40	16.3	2.0	1.570	.642	.0787	.0437	.1220
681-296	AM401820	40	18.3	2.0	1.570	.720	.0787	.0458	.1240
681-297	AM402010	40	20.4	1.0	1.570	.803	.0394	.0516	.0906
◆681-025	AM402015	40	20.4	1.5	1.570	.803	.0591	.0456	.1043
681-298	AM402020	40	20.4	2.0	1.570	.803	.0787	.0439	.1220
■681-026	AM402023	40	20.4	2.25	1.570	.803	.0886	.0358	.1240
681-299	AM402025	40	20.4	2.5	1.570	.803	.0984	.0379	.1358
681-300	AM452213	45	22.4	1.25	1.770	.882	.0492	.0635	.1122
681-027	AM452218	45	22.4	1.75	1.770	.882	.0689	.0517	.1201
681-028	AM452225	45	22.4	2.5	1.770	.882	.0984	.0398	.1378
681-D15-1W	AM501813	50	18.4	1.3	1.970	.724	.0492	.0633	.1122
681-302	AM501815	50	18.4	1.5	1.970	.724	.0591	.0712	.1299
681-303	AM501820	50	18.4	2.0	1.970	.724	.0787	.0595	.1378
681-304	AM501825	50	18.4	2.5	1.970	.724	.0984	.0635	.1614
681-305	AM501830	50	18.4	3.0	1.970	.724	.1181	.0556	.1732
681-306	AM502020	50	20.4	2.0	1.970	.803	.0787	.0595	.1378
681-307	AM502025	50	20.4	2.5	1.970	.803	.0984	.0536	.1516
681-308	AM502220	50	22.4	2.0	1.970	.882	.0787	.0636	.1417
681-309	AM502225	50	22.4	2.5	1.970	.882	.0984	.0556	.1535
681-310	AM502513	50	25.4	1.25	1.970	1.000	.0492	.0634	.1122
681-311	AM502515	50	25.4	1.5	1.970	1.000	.0591	.0634	.1220
▲681-312	AM502520	50	25.4	2.0	1.970	1.000	.0787	.0557	.1339
681-029	AM502525	50	25.4	2.5	1.970	1.000	.0984	.0558	.1535
681-313	AM502530	50	25.4	3.0	1.970	1.000	.1181	.0438	.1614
681-314	AM562915	56	28.5	1.5	2.200	1.122	.0591	.0773	.1358
681-315	AM562920	56	28.5	2.0	2.200	1.122	.0787	.0636	.1417
681-316	AM562930	56	28.5	3.0	2.200	1.122	.1181	.0518	.1693
681-318	AM572320	57	23	2.0	2.250	.890	.0787	.0755	.1537

◆ 681-025YZ Yellow Zinc ▲ 681-312YZ Yellow Zinc ■ 681-825 17-7PH Stainless Steel (PKG QTY. 25)

CATALOG 14.04
 2019/08/08
 SPAENAU

D56

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

See Page D45-D47 for Technical Data

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

Inch

Pouce

NOMENCLATURE

P = load in lbs.

 σ = stress in (psi) lbs./sq. in. x 10³

f = deflection in inches

Disc Springs (Washers) Part 2

Rondelles à ressort (Belleville) 2e partie

SPAENAUR No.	f = .25h		f = .50h		f = .75h			f = h		PKG QTY.
	P Load	f Deflection	P Load	f Deflection	P Load	f Deflection	Stress σ	P Load	f Deflectio	
681-D14-1K	220	.0085	395	.0170	540	.0254	213	670	.0339	100
681-020	249	.0064	473	.0129	683	.0193	196	884	.0258	100
681-277	140	.0109	226	.0218	277	.0327	166	310	.0436	100
681-278	181	.0094	319	.0188	429	.0282	155	524	.0377	50
681-279	247	.0084	457	.0168	642	.0252	194	814	.0336	50
681-280	91	.0104	140	.0208	161	.0312	171	169	.0416	50
681-021	188	.0089	335	.0179	454	.0268	182	559	.0358	50
681-281	304	.0090	557	.0179	776	.0269	208	979	.0359	50
681-022	335	.0070	641	.0139	930	.0209	199	1209	.0278	50
681-282	535	.0075	1029	.0150	1497	.0225	251	1952	.0300	50
681-283	151	.0124	237	.0247	278	.0371	164	297	.0495	50
681-285	262	.0099	472	.0198	649	.0297	187	809	.0396	50
681-286	217	.0114	367	.0228	473	.0342	182	555	.0457	50
681-287	293	.0104	523	.0208	713	.0312	181	882	.0417	50
681-288	309	.0104	553	.0209	753	.0313	202	932	.0417	50
681-289	505	.0085	962	.0170	1389	.0254	234	1799	.0339	50
681-290	107	.0114	167	.0228	194	.0342	162	206	.0456	50
681-023	173	.0099	301	.0199	400	.0298	163	484	.0398	50
681-024	445	.0080	853	.0159	1236	.0239	204	1607	.0319	50
681-291	216	.0139	348	.0277	424	.0416	159	472	.0554	50
681-292	268	.0124	463	.0247	610	.0371	151	733	.0495	50
681-293	434	.0104	811	.0208	1149	.0313	214	1467	.0417	50
681-294	294	.0129	504	.0257	658	.0386	172	785	.0515	50
681-295	475	.0109	882	.0218	1244	.0328	208	1582	.0437	50
681-296	528	.0114	974	.0229	1365	.0343	206	1729	.0458	50
681-297	135	.0129	208	.0258	241	.0387	162	254	.0516	50
681-025	266	.0114	468	.0228	627	.0342	175	765	.0456	50
681-298	527	.0110	978	.0219	1377	.0329	204	1751	.0439	50
681-026	565	.0090	1083	.0179	1570	.0269	205	2042	.0358	50
681-299	817	.0095	1573	.0190	2286	.0284	246	2979	.0379	50
681-300	248	.0159	385	.0318	447	.0476	191	473	.0635	50
681-027	364	.0129	644	.0258	868	.0388	176	1064	.0517	50
681-028	666	.0100	1277	.0199	1851	.0299	199	2406	.0398	50
681-D15-1W	178	.0158	277	.0316	322	.0474	123	342	.0633	50
681-302	327	.0178	517	.0356	616	.0534	162	670	.0712	50
681-303	456	.0149	806	.0297	1085	.0446	159	1328	.0595	50
681-304	891	.0159	1618	.0318	2235	.0477	235	2798	.0635	50
681-305	1218	.0139	2303	.0278	3299	.0417	283	4252	.0556	50
681-306	468	.0149	826	.0298	1111	.0446	160	1360	.0595	50
681-307	720	.0134	1339	.0268	1891	.0402	204	2409	.0536	50
681-308	535	.0159	933	.0318	1240	.0477	187	1500	.0636	50
681-309	780	.0139	1445	.0278	2032	.0417	203	2580	.0556	50
681-310	201	.0159	312	.0317	363	.0476	156	384	.0634	50
681-311	293	.0159	479	.0317	592	.0476	173	668	.0634	50
681-312	464	.0139	829	.0279	1129	.0418	175	1396	.0557	50
681-029	834	.0139	1543	.0279	2169	.0418	206	2754	.0558	50
681-313	1021	.0110	1970	.0219	2871	.0329	218	3747	.0438	50
681-314	437	.0193	537	.0387	622	.0580	186	654	.0773	25
681-315	456	.0159	794	.0318	1055	.0477	167	1276	.0636	25
681-316	999	.0129	1903	.0259	2742	.0388	196	3549	.0518	25
681-317	460	.0186	764	.0372	966	.0558	158	1116	.0745	25
681-318	525	.0189	881	.0378	1123	.0566	166	1310	.0755	25

NOTE 1: Disc springs are tested only at f = .75h

DIN 2093

Continued Next Page

See Page D45-D47 for Technical Data


P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

D57

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

Disc Springs (Washers) Part 1

Rondelles à ressort (Belleville) 1re partie



Inch

Pouce

Chart continues across facing pages.

SPAENAU No.	Cross-Reference AM Series Part No.	SPRING DIMENSIONS in Millimetres			INCH DIMENSIONS				
		D	d	t	Subject to normal commercial tolerances.				
		O.D.	I.D.	Thick	D	d	t	h	O.H.
▲681-319	AM602120	60	20.5	2.0	2.360	.807	.0787	.0832	.1614
681-320	AM602125	60	20.5	2.5	2.360	.807	.0984	.0713	.1693
681-321	AM602130	60	20.5	3.0	2.360	.807	.1181	.0674	.1850
681-323	AM602630	60	25.5	3.0	2.360	1.004	.1181	.0656	.0831
681-324	AM603125	60	30.5	2.5	2.360	1.201	.0984	.0717	.1693
681-325	AM603130	60	30.5	3.0	2.360	1.201	.1181	.0678	.1850
681-326	AM603135	60	30.5	3.5	2.360	1.201	.1378	.0599	.1969
681-327	AM633118	63	31	1.8	2.480	1.220	.0709	.0933	.1634
681-328	AM633125	63	31	2.5	2.480	1.220	.0984	.0695	.1673
681-329	AM633130	63	31	3.0	2.480	1.220	.1181	.0717	.1890
681-330	AM633135	63	31	3.5	2.480	1.220	.1378	.0557	.1929
681-331	AM702620	70	25.5	2.0	2.760	1.004	.0787	.0990	.1172
681-332	AM703125	70	30.5	2.5	2.760	1.201	.0984	.0953	.1929
681-333	AM703130	70	30.5	3.0	2.760	1.201	.1181	.0834	.2008
681-334	AM703630	70	35.5	3.0	2.760	1.398	.1181	.0836	.2008
681-335	AM703640	70	35.5	4.0	2.760	1.398	.1575	.0717	.2283
681-336	AM704140	70	40.5	4.0	2.760	1.595	.1575	.0641	.2205
681-337	AM704150	70	40.5	5.0	2.760	1.595	.1968	.0480	.2441
681-338	AM713620	71	36	2.0	2.800	1.420	.0787	.1033	.1811
681-339	AM713625	71	36	2.5	2.800	1.420	.0984	.0795	.1772
681-340	AM713640	71	36	4.0	2.800	1.420	.1575	.0637	.2205
681-341	AM803125	80	31	2.5	3.150	1.220	.0984	.1110	.2087
681-342	AM803130	80	31	3.0	3.150	1.220	.1181	.0990	.2165
681-343	AM803140	80	31	4.0	3.150	1.220	.1575	.0833	.2402
681-344	AM803630	80	36	3.0	3.150	1.420	.1181	.1072	.2244
681-345	AM803640	80	36	4.0	3.150	1.420	.1575	.0875	.2441
681-346	AM804123	80	41	2.25	3.150	1.610	.0886	.1172	.2047
681-D04-1M	AM804130	80	41	3.0	3.150	1.610	.1181	.0915	.2087
681-348	AM804140	80	41	4.0	3.150	1.610	.1575	.0877	.2441
681-349	AM804150	80	41	5.0	3.150	1.610	.1968	.0678	.2638
681-350	AM904625	90	46	2.5	3.540	1.810	.0984	.1271	.2244
681-351	AM904635	90	46	3.5	3.540	1.810	.1378	.0994	.2362
681-352	AM904650	90	46	5.0	3.540	1.810	.1968	.0797	.2756
681-353	AM1004140	100	41	4.0	3.940	1.610	.1575	.1270	.2835
681-354	AM1001450	100	41	5.0	3.940	1.610	.1968	.1092	.3051
681-355	AM1005127	100	51	2.7	3.940	2.010	.1063	.1389	.2441
681-356	AM1005135	100	51	3.5	3.940	2.010	.1378	.1112	.2480
681-357	AM1005140	100	51	4.0	3.940	2.010	.1575	.1194	.2756
■681-358	AM1005150	100	51	5.0	3.940	2.010	.1968	.1117	.3071
681-359	AM1005160	100	51	6.0	3.940	2.010	.2362	.0877	.3228
681-361	AM1125730	112	57	3.0	4.410	2.240	.1181	.1548	.2717
681-362	AM1125740	112	57	4.0	4.410	2.240	.1575	.1271	.2835
681-363	AM1125760	112	57	6.0	4.410	2.240	.2362	.0995	.3346
681-365	AM1254140	125	41	4.0	4.920	1.610	.1575	.1661	.3228
681-366	AM1255140	125	51	4.0	4.920	2.010	.1575	.1783	.3346
681-367	AM1255150	125	51	5.0	4.920	2.010	.1968	.1548	.3504
681-368	AM1255160	125	51	6.0	4.920	2.010	.2362	.1350	.3701
681-370	AM1256150	125	61	5.0	4.920	2.400	.1968	.1592	.3543
681-371	AM1256160	125	61	6.0	4.920	2.400	.2362	.1434	.3780
681-372	AM1256160-R	125	61	5.59	4.920	2.400	.2200	.1600	.3780
681-D16-1M	AM1256180	125	61	7.49	4.920	2.400	.2950	.1361	.4291
681-374	AM1256435	125	64	3.5	4.920	2.520	.1378	.1788	.3150

D

SPAENAU
CATALOG 14.04
2019/08/08

D58

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

▲681-319YZ Yellow Zinc
■681-837 17-7PH Stainless Steel

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

Inch

Pouce

NOMENCLATURE

P = load in lbs.

 σ = stress in (psi) lbs./sq. in. x 10³

f = deflection in inches

Disc Springs (Washers) Part 2

Rondelles à ressort (Belleville) 2e partie

SPAENAU No.	f = .25h		f = .50h		f = .75h			f = h		PKG QTY.
	P Load	f Deflection	P Load	f Deflection	P Load	f Deflection	Stress σ	P Load	f Deflection	
681-319	553	.0208	906	.0416	1125	.0624	160	1278	.0832	25
681-320	723	.0178	1287	.0357	1745	.0535	178	2150	.0713	25
681-321	1070	.0168	1979	.0337	2781	.0505	229	3528	.0674	25
681-323	1081	.0164	2006	.0328	2827	.0492	204	3596	.0656	25
681-324	828	.0179	1473	.0358	1995	.0538	199	2456	.0717	25
681-325	1228	.0169	2268	.0339	3184	.0508	210	4037	.0678	25
681-326	1599	.0150	3047	.0299	4393	.0449	232	5690	.0599	25
681-327	563	.0233	869	.0467	1004	.0700	206	1054	.0933	25
681-328	700	.0174	1252	.0348	1705	.0521	166	2108	.0695	25
681-329	1176	.0179	2155	.0359	3004	.0538	198	3786	.0717	25
681-330	1293	.0139	2479	.0278	3594	.0418	199	4672	.0557	25
681-331	570	.0248	890	.0495	1046	.0743	155	1118	.0990	25
681-332	892	.0238	1493	.0476	1900	.0714	187	2210	.0953	25
681-333	1114	.0209	1992	.0417	2714	.0626	175	3356	.0834	25
681-334	1201	.0209	2148	.0418	2924	.0627	201	3615	.0836	25
681-335	2106	.0179	3996	.0359	5742	.0538	229	7415	.0717	25
681-336	2024	.0160	3878	.0320	5619	.0480	216	7304	.0641	25
681-337	2786	.0120	5481	.0240	8117	.0360	227	10723	.0480	25
681-338	678	.0258	1048	.0517	1212	.0775	204	1273	.1033	25
681-339	685	.0199	1193	.0397	1585	.0596	160	1917	.0795	25
681-340	1766	.0159	3386	.0319	4907	.0478	204	6380	.0637	20
681-341	874	.0277	1407	.0555	1714	.0832	165	1906	.1110	20
681-342	1078	.0248	1864	.0495	2456	.0743	157	2950	.0990	20
681-343	1753	.0208	3272	.0417	4637	.0625	205	5923	.0833	10
681-344	1291	.0268	2194	.0536	2837	.0804	194	3351	.1072	20
681-345	1960	.0219	3637	.0437	5125	.0656	201	6520	.0875	10
681-346	878	.0293	1354	.0586	1562	.0879	208	1635	.1175	20
681-D04-1M	1058	.0229	1860	.0457	2491	.0686	174	3036	.0915	20
681-348	2097	.0219	3890	.0438	5480	.0658	203	6969	.0877	10
681-349	2844	.0170	5511	.0339	8062	.0509	224	10553	.0678	10
681-350	1007	.0318	1563	.0636	1818	.0953	196	1923	.1271	10
681-351	1392	.0248	2480	.0497	3366	.0745	171	4151	.0994	10
681-352	2709	.0199	5191	.0399	7524	.0598	199	9781	.0797	10
681-353	2077	.0317	3622	.0635	4812	.0952	175	5825	.1270	1
681-354	2951	.0273	5477	.0546	7719	.0819	206	9820	.1092	1
681-355	1132	.0347	1751	.0695	2028	.1042	187	2134	.1389	1
681-356	1331	.0278	2321	.0556	3084	.0834	159	3732	.1112	1
681-357	2071	.0298	3657	.0597	4918	.0895	193	6017	.1194	1
681-358	3351	.0279	6200	.0559	8715	.0838	207	11063	.1117	1
681-359	4099	.0219	7907	.0438	11520	.0657	218	15037	.0877	1
681-361	1381	.0387	2135	.0774	2470	.1161	185	2596	.1548	1
681-362	1813	.0318	3160	.0636	4197	.0954	166	5078	.1271	1
681-363	3775	.0249	7212	.0497	10424	.0746	190	13524	.0995	1
681-365	2023	.0415	3315	.0831	4119	.1246	144	4678	.1661	1
681-366	2404	.0446	3866	.0892	4701	.1337	180	5222	.1783	1
681-367	3120	.0387	5468	.0774	7302	.1161	169	8878	.1548	1
681-368	4078	.0337	7539	.0675	10589	.1012	194	13433	.1350	1
681-370	3500	.0398	6099	.0796	8097	.1194	202	9795	.1592	1
681-371	4760	.0359	8725	.0717	12160	.1076	200	15331	.1434	1
681-372	4775	.0400	8495	.0800	11513	.1200	225	14179	.1600	1
681-D16-1M	8356	.0340	15835	.0680	22728	.1021	263	29330	.1361	1
681-374	2027	.0447	3141	.0894	3648	.1341	201	3851	.1788	1

NOTE 1: Disc springs are tested only at f = .75h

DIN 2093

See Page D45-D47 for Technical Data


P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

D59

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

Disc Springs (Washers) Part 1

Rondelles à ressort (Belleville) 1re partie



Inch

Pouce

Chart continues across facing pages.

SPAENAUR No.	Cross-Reference AM Series Part No.	SPRING DIMENSIONS in Millimetres			INCH DIMENSIONS				
		D O.D.	d I.D.	t Thick	Subject to normal commercial tolerances.				
		D	d	t	D	d	t	h	O.H.
681-375	AM1256450	125	64	5.0	4.920	2.520	.1968	.1392	.3346
681-376	AM1256480	125	64	7.5	4.920	2.520	.2950	.1241	.4173
681-377	AM1257160	125	71	6.0	4.920	2.800	.2362	.1319	.3661
681-379	AM1257180	125	71	7.49	4.920	2.800	.2950	.1165	.4094
681-380	AM1257110	125	71	9.4	4.920	2.800	.3700	.0964	.4646
681-381	AM1407238	140	72	3.8	5.510	2.830	.1496	.1945	.3425
681-382	AM1407250	140	72	5.0	5.510	2.830	.1968	.1590	.3543
681-383	AM1407280	140	72	7.5	5.510	2.830	.2950	.1480	.4409
681-384	AM1506150	150	61	5.0	5.910	2.400	.1968	.2102	.4055
681-385	AM1506160	150	61	6.0	5.910	2.400	.2362	.1905	.4252
681-386	AM1506160-R	150	61	5.59	5.910	2.400	.2200	.2069	.4252
681-387	AM1507160	150	71	6.0	5.910	2.800	.2362	.1909	.4252
681-D08-1Y	AM1507160-R	150	71	5.99	5.910	2.800	.2200	.2074	.4252
681-D17-1X	AM1507180	150	71	7.49	5.910	2.800	.2950	.1796	.4724
681-D18-1A	AM1508180	150	81	7.49	5.910	3.200	.2950	.1682	.4606
681-391	AM1508110	150	81	9.4	5.910	3.200	.3700	.1443	.5118
681-392	AM1608243	160	82	4.3	6.300	3.230	.1693	.2223	.3898
681-393	AM1608260	160	82	6.0	6.300	3.230	.2362	.1789	.4134
681-394	AM1608260-R	160	82	5.59	6.300	3.230	.2200	.1954	.4134
681-395	AM1608210	160	82	9.4	6.300	3.230	.3700	.1639	.5315
681-396	AM1809248	180	92	4.8	7.090	3.620	.1890	.2461	.4331
681-397	AM1809260	180	92	6.0	7.090	3.620	.2362	.2025	.4370
681-398	AM1809260-R	180	92	5.59	7.090	3.620	.2200	.2189	.4370
681-399	AM1809210	180	92	9.4	7.090	3.620	.3700	.1836	.5512
681-D19-1P	AM2008280	200	82	7.49	7.870	3.230	.2950	.2662	.5591
681-401	AM2008210	200	82	9.4	7.870	3.230	.3700	.2424	.6102
681-402	AM2008212	200	82	11.25	7.870	3.230	.4430	.2126	.6535
681-403	AM2009210	200	92	9.4	7.870	3.620	.3700	.2470	.6142
681-404	AM2009212	200	92	11.25	7.870	3.620	.4430	.2211	.6614
681-D12-1N	AM2009214	200	92	13.11	7.870	3.620	.5160	.1992	.7126
681-406	AM20010255	200	102	5.5	7.870	4.020	.2165	.2779	.4921
681-407	AM20010280	200	102	7.5	7.870	4.020	.2950	.2430	.5354
681-408	AM20010210	200	102	9.4	7.870	4.020	.3700	.2477	.6142
681-409	AM20010212	200	102	11.4	7.870	4.020	.4430	.1972	.6375
681-410	AM20010214	200	102	13.11	7.870	4.020	.5160	.2039	.7165
681-411	AM20011212	200	112	11.25	7.870	4.410	.4430	.1982	.6378
681-412	AM20011214	200	112	13.11	7.870	4.410	.5160	.1762	.6890
681-413	AM20011216	200	112	15.01	7.870	4.410	.5910	.1519	.7402
681-414	AM22511265	225	112	6.5	8.860	4.410	.2559	.2817	.5354
681-415	AM22511280	225	112	7.5	8.860	4.410	.2950	.2784	.5709
681-416	AM22511212	225	112	11.3	8.860	4.410	.4430	.2289	.6693
681-417	AM25010210	250	102	9.4	9.840	4.020	.3700	.3415	.7087
681-418	AM25010212	250	102	11.25	9.840	4.020	.4430	.3077	.7480
681-419	AM25012770	250	127	7.0	9.840	5.000	.2756	.3096	.5827
681-420	AM25012710	250	127	9.4	9.840	5.000	.3700	.3025	.6693
681-421	AM25012712	250	127	11.25	9.840	5.000	.4430	.3212	.7598
681-D06-1A	AM25012714	250	127	13.1	9.840	5.000	.5160	.2591	.7717
681-423	AM25012716	250	127	15.01	9.840	5.000	.5910	.2716	.8583

DIN 2093

Disc springs **7.49 mm and thicker** are made with a bearing flat at upper I.D. and lower O.D., as Standard. See Figure 6 on page D42.

CATALOG 14.09
SPAENAUR

D60

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

See Page D45-D47 for Technical Data

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

Inch

Pouce

NOMENCLATURE

P = load in lbs.

 σ = stress in (psi) lbs./sq. in. x 10³

f = deflection in inches

Disc Springs (Washers) Part 2

Rondelles à ressort (Belleville) 2e partie

SPAENAUR No.	f = .25h		f = .50h		f = .75h			f = h		PKG QTY.
	P Load	f Deflection	P Load	f Deflection	P Load	f Deflection	Stress σ	P Load	f Deflection	
681-375	2919	.0348	5219	.0696	7107	.1044	176	8788	.1392	1
681-376	7662	.0310	14640	.0621	21163	.0931	246	27458	.1241	1
681-377	4721	.0330	8754	.0659	12330	.0989	212	15676	.1319	1
681-379	7682	.0291	14753	.0582	21417	.0874	239	27876	.1165	1
681-380	11965	.0241	23492	.0482	34727	.0723	274	45817	.0964	1
681-381	2256	.0486	3495	.0973	4055	.1459	190	4277	.1945	1
681-382	2853	.0397	4972	.0795	6603	.1192	168	7990	.1590	1
681-383	7588	.0370	14254	.0740	20306	.1110	219	26051	.1480	1
681-384	3634	.0525	5934	.1051	7346	.1576	179	8313	.2102	1
681-385	4663	.0476	8130	.0952	10801	.1428	174	13074	.1905	1
681-386	4650	.0517	7836	.1034	10047	.1551	192	11770	.2069	1
681-387	4953	.0477	8632	.0954	11462	.1432	196	13868	.1909	1
681-D08-1Y	4941	.0518	8322	.1037	10664	.1555	216	12486	.2074	1
681-D17-1X	8168	.0449	14967	.0898	20852	.1347	217	26281	.1796	1
681-D18-1A	8090	.0421	14960	.0841	21018	.1262	228	26669	.1682	1
681-391	12487	.0361	24003	.0721	34871	.1082	256	45416	.1443	1
681-392	2884	.0556	4456	.1112	5153	.1668	188	5412	.2223	1
681-393	4092	.0447	7225	.0894	9719	.1342	169	11892	.1789	1
681-394	4084	.0488	6974	.0977	9068	.1465	187	10765	.1954	1
681-395	12321	.0410	23437	.0820	33750	.1229	244	43660	.1639	1
681-396	3464	.0615	5365	.1230	6223	.1845	182	6560	.2461	1
681-397	3915	.0506	6738	.1012	8834	.1519	157	10565	.2025	1
681-398	3905	.0547	6491	.1095	8198	.1642	172	9467	.2189	1
681-399	11120	.0459	20914	.0918	29824	.1377	206	38293	.1836	1
681-D19-1P	7920	.0666	13475	.1331	17455	.1997	185	20646	.2662	1
681-401	11956	.0606	21660	.1212	29862	.1818	204	37313	.2424	1
681-402	16228	.0531	30631	.1063	43816	.1594	247	56392	.2126	1
681-403	12796	.0617	23110	.1235	31770	.1852	211	39602	.2470	1
681-404	17786	.0553	33430	.1160	47645	.1658	245	61147	.2211	1
681-D12-1N	23996	.0498	46160	.0996	67103	.1494	280	87434	.1992	1
681-406	4710	.0695	7322	.1390	8536	.2085	190	9051	.2779	1
681-407	7414	.0608	12974	.1215	17158	.1823	194	20684	.2430	1
681-408	13575	.0619	24507	.1238	33676	.1858	234	41963	.2477	1
681-409	16230	.0493	30859	.0986	44422	.1479	225	57451	.1972	1
681-410	26090	.0510	50101	.1019	72728	.1529	283	94662	.2039	1
681-411	17489	.0495	33237	.0991	47825	.1486	228	61833	.1982	1
681-412	23472	.0440	45514	.0881	66604	.1321	256	87217	.1762	1
681-413	29561	.0380	58068	.0760	85874	.1139	269	113328	.1519	1
681-414	5421	.0704	8784	.1409	10774	.2113	168	12078	.2817	1
681-415	7271	.0696	12243	.1392	15681	.2088	180	18353	.2784	1
681-416	15165	.0572	28392	.1145	40326	.1717	194	51613	.2289	1
681-417	13017	.0854	22034	.1707	28383	.2561	191	33399	.3415	1
681-418	17073	.0769	30627	.1539	41834	.2308	192	51868	.3077	1
681-419	6211	.0774	10010	.1548	12202	.2322	165	13590	.3096	1
681-420	11651	.0756	20257	.1513	26833	.2269	193	32393	.3025	1
681-421	20008	.0803	35617	.1606	48293	.2409	237	59503	.3212	1
681-D06-1A	22121	.0648	41550	.1295	59185	.1943	210	75924	.2591	1
681-423	34298	.0679	65017	.1358	93351	.2037	263	120492	.2716	1

DIN 2093

See Page D45-D47 for Technical Data

NOTE 1: Disc springs are tested only at f = .75h


P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

D61

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

High Quality Carbon Spring Steel (oil Finish) for locking bolts, screws and nuts

CONTACT Disc Springs combine two important features for improved bolt connections. Their conical shape provides a reactive force and a high elasticity of spring return to compensate for developed looseness, loss of bolt tension due to applied surface deterioration, or movement due to thermal expansion and contraction. The hardened, serrated profile "grips" the lower surface of the bolt or nut to prevent the loss of tension that normally occurs during extreme vibration or severe shock.

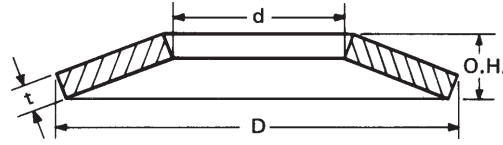

PKG QTY. 100

CONTACT "NARROW" (Typical Use: in confined space under socket head cap screw.)

SPAENAUR No.	Use with Bolt Dia.		D (O.D.)	d (I.D.)	t (thickness)	Max. O.H. (O/A height)	Calculated load at Flat lbs.
	Inch	mm	Inch	Inch	Inch	Inch	lbs.
680-010	-	M3	0.244	0.122	0.024	0.037	700
680-011	#6	M3.5	0.284	0.140	0.028	0.043	930
680-013	#10	M5	0.402	0.201	0.039	0.059	1700
*680-B23-1N	-	M6	0.481	0.240	0.047	0.071	2500
680-B19-1Y	9/32"	M7	0.559	0.284	0.055	0.081	3200
680-016	5/16"	M8	0.638	0.323	0.055	0.095	3800
680-017	3/8"	M10	0.798	0.402	0.063	0.095	2700
680-018	7/16"	M12	0.955	0.489	0.063	0.102	2300

* Zinc Plated

CONTACT "REGULAR" (For general use)

680-020	-	M3	0.315	0.122	0.024	0.039	400
680-021	#6	M3.5	0.362	0.142	0.027	0.047	590
680-022	#8	M4	0.402	0.161	0.039	0.059	1480
680-023	#10	M5	0.481	0.201	0.047	0.073	2420
680-024	-	M6	0.559	0.240	0.052	0.087	3350
680-026	1/4"	-	0.559	0.254	0.052	0.087	3450
680-027	5/16"	M8	0.717	0.323	0.055	0.095	2680
680-030	3/8"	M10	0.877	0.402	0.063	0.108	3010
680-031	7/16"	M12	1.074	0.489	0.079	0.120	3510
680-032	1/2"	-	1.074	0.512	0.079	0.120	3600
680-033	9/16"	M14	1.192	0.567	0.095	0.138	5350
680-034	5/8"	M16	1.273	0.646	0.099	0.156	7460


CONTACT "WIDE" (Typical use: for oversize holes in sheet metal applications making use of wide bearing surface.)

680-036	#8	M4	0.559	0.161	0.039	0.071	1120
680-037	#10	M5	0.638	0.201	0.047	0.085	1820
680-B05-2A	-	M6	0.717	0.240	0.055	0.100	2780
680-039	1/4"	-	0.717	0.254	0.055	0.100	2810
680-040	5/16"	M8	0.877	0.323	0.055	0.095	1610
680-041	3/8"	M10	1.074	0.402	0.063	0.112	1980
680-042	-	M12	1.273	0.488	0.071	0.138	2780
680-B24-1T	1/2"	-	1.273	0.512	0.071	0.138	2820

Loads are computed. Actual loads are obtained in practice can vary as much as 25% due to fluctuation in overall height tolerances.

SPAENAUR
CATALOG 14.03
2019/04/18



Use the elastic properties of disc springs in the flange system to maintain a positive seal under varying thermal and mechanical operating conditions.

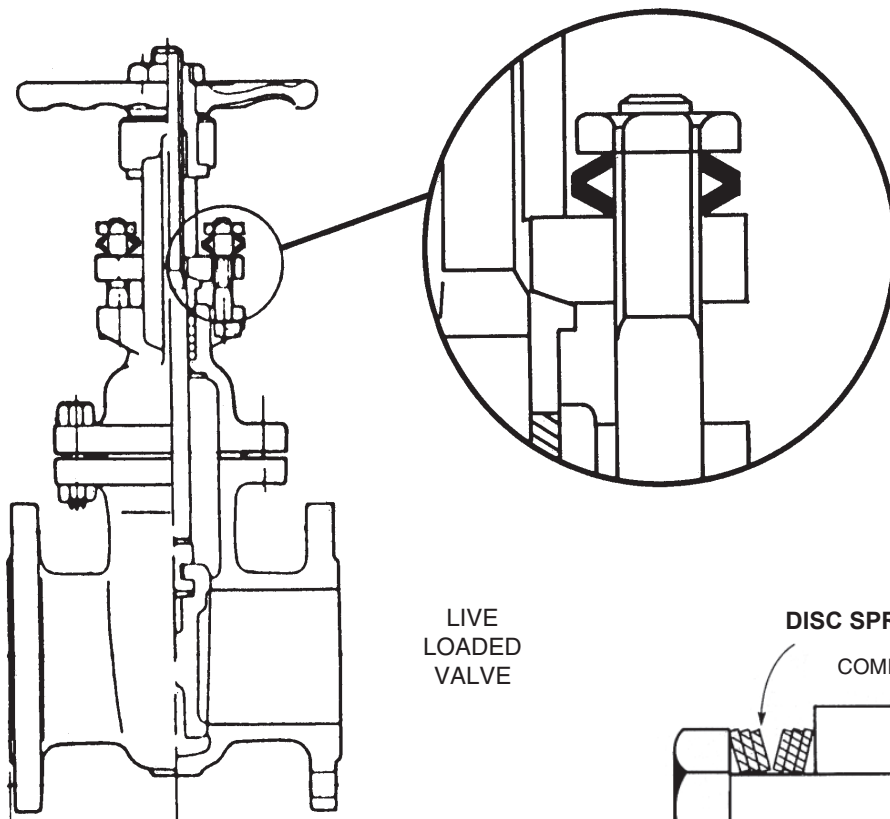

LIVE
LOADED
VALVE

Disc Springs help to eliminate gasket leakage by maintaining sufficient load under the following conditions:

- GASKET SET
- BOLT CREEP
- LOSS OF GASKET RESILIENCY
- VIBRATION
- SHOCK LOADING
- THERMAL EXPANSION
- PRESSURE VARIATIONS

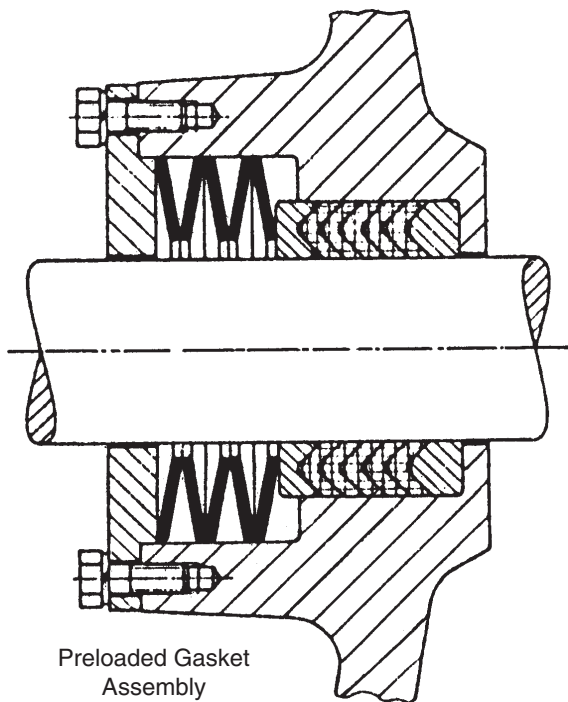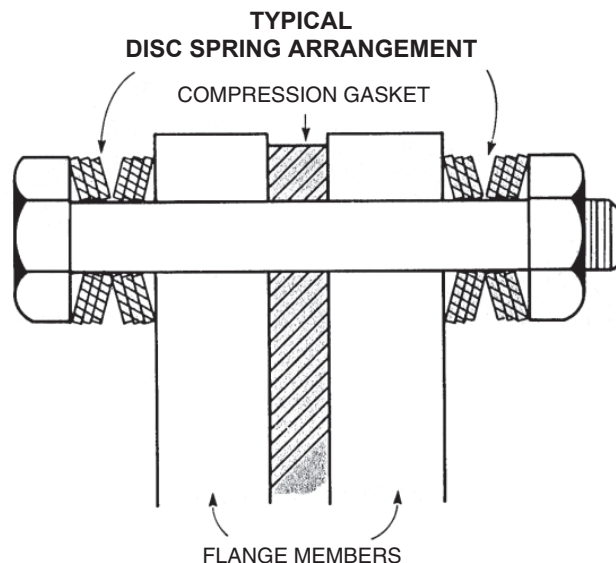

Preloaded Gasket
Assembly

- Preload by torquing bolts to proper operating condition for gasket loading.
- As unit heats up, temperature differences occur between flange members and bolts, causing flange members to grow in relation to bolt.
- This growth further compresses disc springs, thereby not damaging bolts or compression gasket.
- As bolt temperature approaches that of flange members during stable operations, disc spring relaxes to original preload position, thereby producing the optimal gasket sealing force.

Independent tests have shown a “live loaded” valve can operate up to 100 times longer than a conventionally loaded valve.


Stainless Steel 17-7PH Armco is available “Special to Order” on most common sizes.

STAINLESS STEEL for Flange Applications

Spring Discs are an elastic mechanical element. When used in bolt joints that are subject to thermal or mechanical shock, they deflect and move with the bolted joint. Hence, they compensate for developed looseness. The reactive power of the spring disc serves to keep the bolt joint tight under all conditions. Principal applications include piping construction, compression joints, steam piping joints, valve and pump connections, and others in the petrochemical field.

A principal cause of flange leakage is abnormally high loads produced by thermal expansion and contraction of a bolted joint. Generally, flanges are under static load conditions. However, in large piping systems, there may also be mechanical shock from compressor related piping. Thermal and mechanical shock differential can cause variation and yielding in bolt loads. To protect against these conditions, always use spring discs under the nut or bolt head.

Pre-stressing or torquing the bolt at factory installation is not sufficient to protect the flange joint under unexpected temperature variations and mechanical shock loads in the field. By absorbing peak stresses, spring discs prevent damage to the bolt, gasket, and joint.

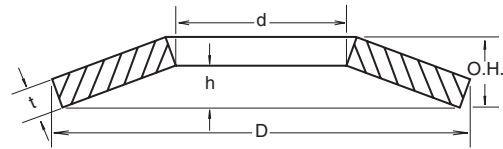

2/parallel Cross-section




Series Stack



Spring Discs make secure, reliable bolted connections and flanges, as used in:

- Piping construction
- Compression joints
- Steam piping joints
- Petrochemical field applications
- Valve and pump connections

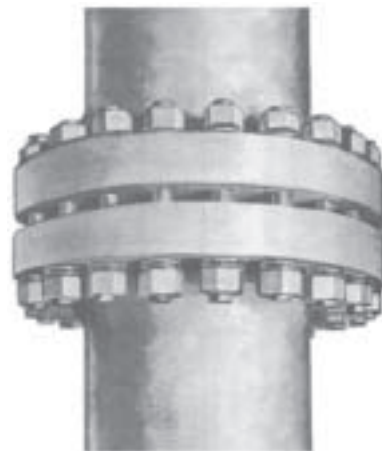

Typical Application of Flanged (bolted) Piping

SPAENAUR No.	Use with Bolt Dia.		INCH DIMENSIONS				*LOAD AT FLAT P (lbs.)	PKG QTY.
	Inch	mm	D	d	t (± 10%)	O.H.		
681-800	1/2"	M12	.900	.515	.089	.100	2100	50
681-801	5/8"	M16	1.145	.656	.125	.143	6000	50
681-802	3/4"	M20	1.365	.781	.131	.150	5100	50
681-803	7/8"	M22	1.585	.906	.160	.180	7100	50
681-804	1"	M26	1.805	1.032	.168	.195	8600	10
681-805	1-1/8"	M29	2.020	1.156	.187	.217	10600	10
681-806	1-1/4"	M32	2.240	1.281	.190	.225	10500	10
681-807	1-3/8"	M35	2.450	1.406	.250	.290	23000	10
681-808	1-1/2"	M38	2.680	1.531	.250	.290	19000	10
681-809	1-5/8"	M42	2.950	1.687	.262	.307	20000	1
681-810	1-3/4"	M45	3.170	1.812	.281	.329	23000	1
681-811	1-7/8"	M48	3.380	1.937	.300	.353	28000	1
681-812	2"	M52	3.600	2.062	.318	.375	32000	1
681-813	2-1/4"	M58	4.040	2.312	.356	.418	39000	1
681-814	2-1/2"	M64	4.470	2.562	.394	.464	48000	1

*For single spring disc; for higher loads, use parallel stacks.

Note: Load calculated for 17-7PH stainless steel with large radii. $R = \frac{t}{4}$

MATERIAL:

STAINLESS: 17-7PH (Armco) precipitation hardened
Hardness: Rc 40-45

TEMPERATURE RANGE: -220°C to +300°C.

For higher temperatures, to +600°C, we can supply Inconel X-750 (non-standard). Prices on application.

Note: For normal operating temperatures, we can supply Chrome Vanadium SAE 6150. Prices on request.

TOLERANCE:

OD - Plus .000/Minus 1.5% x OD

(Designed for standard flange spot face diameter.)

ID - Minus .000/Plus 1.5% ID

THICKNESS - Tolerance may vary ±10% of nominal thickness shown.

LOAD - Plus/Minus 20% of nominal shown.

(When ordering, ALWAYS specify materials after part number.)

LOAD CHANGE (DECREASE) (▲P) VS. TEMPERATURE

For flanges subject to high temperature conditions, the relative load loss resultant is shown in the table below. Therefore, it may be necessary to use two discs in parallel to compensate and achieve adequate clamping load. (See illustration at upper right.)

LOAD CHANGE (DECREASE) (▲P) VS. TEMPERATURE

Temperature	21°C (70°F)	205°C (400°F)	302°C (575°F)	399°C (750°F)	455°C (850°F)
	E	E	▲P	E	▲P
Material	psi•10 ⁶	psi•10 ⁶	%	psi•10 ⁶	%
SAE6150	30	28.5	5	27.5	8.3
17-7PH	28	24.4	6.2	23.2	10.8
	E	▲P	E	▲P	E
Temperature	21°C (70°F)	121°C (250°F)	260°C (500°F)	538°C (1000°F)	649°C (1200°F)
Inconel X-750	31	30.8	.6	28.7	7.4
	E	▲P	E	▲P	E
	psi•10 ⁶	%	psi•10 ⁶	%	psi•10 ⁶
	25	19.4	23	25.8	

▲P = Load Change E = Modulus of Elasticity

CATALOG 14
SPAENAUR

**WAVE
SPRING TENSION WASHERS**



Undulated surface with many bands or contact points. Provides stability - more "load build-up" and less deflection than in the bowed washer at left. Used to provide pressure between surfaces and prevent rattles. Controlled friction provided between surfaces.

Spring Steel - Plain Finish

SPAENAUR No.	For Bolt Size	Inside Diameter	Outside Diameter	Nominal Height	Material Thickness
W-379	#10	.204-.195"	.313-.293"	.060"	.016"
W-305	1/4"	1/4"	9/16"	3/32"	.010"
B-1373	1/4"	9/32"	1/2"	1/16"	.008"
W-382	3/8"	25/64"	3/4"	.090"	.015"
B-1374	3/8"	27/64"	39/64"	3/64"	.010"
W-383	7/16"	29/64"	.840"	.060"	.015"
W-142	9/16"	19/32"	7/8"	5/64"	.032"
W-385	5/8"	.659-.640"	.885-.865"	.125"	.015"

PKG QTY. 100

**SPHERICAL
SPRING TENSION
WASHERS**




Plain Finish


SPAENAUR No.	Inside Diameter	Outside Diameter	Height	Material Thickness	Material
680-001	1/8"	15/32"	5/64"	.020"	Steel
W-141	3/16"	1/2"	.068"	.016"	Steel

PKG QTY. 100

**BOWED
SPRING TENSION WASHERS**



To provide tension between two rotating or static surfaces, to eliminate play and prevent rattle.

Plain Finish *Alternate Style 

SPAENAUR No.	Inside Diameter	Outside Diameter	Material Thickness	Material
W-2075	.095-.099"	.297-.307"	.009"	410 Stainless Steel
*W-224	1/8"	3/8"	.010"	Steel
*W-209	1/8"	1/2"	.016"	Steel
W-261	11/64"	15/64"	.010"	Steel
680-008	.171"	5/16"	.010"	Steel
W-172	3/16"	9/16"	.008"	Steel
*W-208	3/16"	3/4"	.020"	Steel
680-003	.200"	.370"	.010"	Steel
W-262	13/64"	7/16"	.010"	Steel
680-002	13/64"	17/32"	.014"	Steel
W-392	1/4"	1/2"	.008"	Steel
W-265	1/4"	1/2"	.010"	Steel
W-210	1/4"	1/2"	.016"	Steel
W-162S	17/64"	1/2"	.010"	Steel
680-B03-1T	17/64"	1/2"	.012"	Phosphor Bronze
W-266	17/64"	7/16"	.015"	Steel
W-174S	17/64"	9/16"	.010"	Steel
W-174	17/64"	9/16"	.010"	Phosphor Bronze
W-211	9/32"	5/8"	.012"	Steel
W-213	.320"	5/8"	.020"	Steel
W-267	.320"	1/2"	.015"	Steel
W-214	21/64"	1/2"	.012"	Steel
W-268	25/64"	3/4"	.020"	Steel
W-269	7/16"	3/4"	.017"	Steel
W-393	11/16"	29/32"	.025"	Steel
649-B04-1K	49/64"	1"	.020"	Steel

PKG QTY. 100

**ASSORTMENT
ASSORTIMENT 805-527**


**Inch & Metric Sizes
SPRING TENSION WASHERS**

Steel - Plain Finish

**Bowed and Wave
29 SIZES - 1175 WASHERS**

Furnished in a Regular Size grey enamelled STEEL Drawer, with scooped bins. Drawer will fit into Slide Racks shown on page A2


Shipping Weight: **2.26 kg** (5 lbs.)



For the complete assortment contents turn to A81

CATALOG 14.05
2019/12/18

SPAENAUR




DIN 137A

Metric BOWED SPRING WASHERS

High Grade, Tempered Steel - Plain Finish (Oil), Zinc Plated, Yellow Zinc Plated and A2 Stainless Steel


These parts are appropriately used in light metal construction where a useful elastic spring action proportionally high with respect to the washer's outer diameter is looked for. These washers can be flattened out completely without effect on their resiliency.



PKG QTY. 100

ORDER BY SPAENAUR NUMBERS BELOW

STEEL				Bolt Size in mm	Sizes in Millimetres				Approximate sizes in Inches			
(Oil) Plain Finish	Zinc Plated	Yellow Zinc Plated	A2 Stainless Steel		I.D. Min.	O.D. Max.	TH Thick.	H HIGH Min.	I.D. Min.	O.D. Max.	TH Thick.	H HIGH Min.
681-100		681-100YZ	681-D25-1T	2	2.2	4.5	0.3	0.50	.087	.177	.012	.020
681-101	681-101ZP	681-101YZ	681-D26-1K	2.5	2.8	5.5	0.3	0.55	.110	.217	.012	.022
681-102	681-102ZP	681-102YZ	681-D05-1X	3	3.2	6.0	0.4	0.65	.126	.236	.016	.026
681-135	681-135ZP	681-135YZ	681-D27-1W	3.5	3.7	7.0	0.4	0.70	.146	.276	.016	.028
681-103	681-103ZP	681-D02-1K	681-820	4	4.3	8.0	0.5	0.80	.169	.315	.020	.031
681-104	681-104ZP	681-104YZ	681-821	5	5.3	10.0	0.5	0.90	.207	.394	.020	.035
681-D28-1M	681-105ZP	681-105YZ	681-822	6	6.4	11.0	0.5	1.10	.252	.433	.020	.043
681-106	681-106ZP	681-106YZ		7	7.4	12.0	0.5	1.20	.291	.472	.020	.047
681-107	681-107ZP	681-107YZ	681-823	8	8.4	15.0	0.5	1.70	.331	.591	.020	.067
681-D22-1Y	681-108ZP	681-108YZ	681-824	10	10.5	18.0	0.8	2.00	.413	.709	.031	.079
681-109	681-109ZP	681-109YZ		12	13	22	0.8	2.00	.510	.869	.031	.079




DIN 137B

Metric SINGLE WAVE SPRING WASHERS

High Grade, Tempered Steel - Plain Finish (Oil), Zinc Plated, Yellow Zinc Plated and A2 Stainless Steel

This type is used wherever a higher pressure than with type A is required, and when this pressure is to be distributed at several points. It is particularly recommended with aluminum screws and parts to be fixed, as the resilient effect catches up with the extrusion of this metal under the tightening pressure.




PKG QTY. 100

ORDER BY SPAENAUR NUMBERS BELOW

STEEL				Bolt Size in mm	Sizes in Millimetres				Approximate sizes in Inches			
(Oil) Plain Finish	Zinc Plated	Yellow Zinc Plated	A2 Stainless Steel		I.D. Min.	O.D. Max.	TH Thick.	H HIGH Min.	I.D. Min.	O.D. Max.	TH Thick.	H HIGH Min.
681-110				2	2.1	4.7	0.3	0.7	.083	.185	.012	.028
681-111	681-D24-1N	681-111YZ	681-826	3	3.2	8	0.5	0.8	.126	.315	.020	.031
681-136	681-136ZP	681-136YZ	681-827	3.5	3.7	8	0.5	0.9	.146	.315	.020	.035
681-112	681-112ZP	681-112YZ	681-828	4	4.3	9	0.5	1.0	.169	.354	.020	.039
681-113	681-113ZP	681-113YZ	681-829	5	5.3	11	0.5	1.1	.207	.433	.020	.043
681-114	681-114ZP	681-114YZ	681-830	6	6.4	12	0.5	1.3	.252	.472	.020	.057
681-115		681-115YZ		7	7.4	14	0.8	1.5	.291	.551	.031	.059
681-D23-1C	681-116ZP	681-116YZ	681-831	8	8.4	17	0.8	1.5	.331	.591	.031	.059
~681-117	~681-117ZP		681-832	10	10.5	21	1.0	2.1	.413	.826	.039	.083
681-118	681-118ZP	681-118YZ	681-D21-1P	12	13.0	24	1.2	2.5	.512	.945	.047	.098
681-119	681-119ZP	681-119YZ		14	15.0	28	1.6	3.0	.591	1.102	.063	.118
681-120	681-120ZP	681-120YZ	681-834	16	17.0	30	1.6	3.2	.669	1.181	.063	.126
681-137	681-137ZP	681-137YZ		18	19.0	34	1.6	3.3	.748	1.339	.063	.130
681-138	681-138ZP	681-138YZ	681-835	20	21.0	36	1.6	3.7	.827	1.417	.063	.146
681-139	681-139ZP	681-139YZ		22	23.0	40	1.8	3.9	.906	1.575	.071	.154
681-140	681-140ZP	681-140YZ		24	25.0	44	1.8	4.1	.984	1.732	.071	.161
681-141	681-141ZP			27	28.0	50	2.0	4.7	1.102	1.969	.079	.185
681-142	681-142ZP	681-142YZ		30	31.0	56	2.2	5.0	1.220	2.205	.087	.197

~ Approximately to standard




PKG QTY.
100

**Metric DOUBLE WAVE
SPRING WASHERS – Steel**

High Grade, Tempered Steel - Plain Finish (Oil)

This part is useful when pressure has to be distributed at several points without marking the parts brought under tension.



STEEL (Oil) Plain Finish	Bolt Size in mm	Sizes in Millimetres				Approximate sizes in Inches			
		I.D. Min.	O.D. Max.	Thick.	HIGH Min.	I.D. Min.	O.D. Max.	Thick.	HIGH Min.
681-127	6	6.2	10.2	0.2	1.4	.244	.402	.008	.055
681-D01-1E	8	8.1	14.15	0.1	1.35	.319	.557	.004	.053
681-129	8	8.1	13.8	0.2	1.35	.319	.543	.008	.053
681-130	10	10.3	15.1	0.2	1.4	.406	.594	.008	.055
681-131	10	10.6	19.25	0.2	1.4	.417	.758	.008	.055
681-132	10	10.6	19.25	0.3	1.5	.417	.758	.012	.059
681-133	10	10.6	19.25	0.15	1.4	.417	.758	.006	.055
681-D30-1M	12	12.4	20.3	0.2	1.7	.488	.799	.008	.067

ASSORTMENT 805-417A

Bowed Spring **DIN 137A** Single Wave Spring **DIN 137B**
Bowed Spring Washers **DIN 137A**

METRIC SPRING TENSION WASHERS

High Grade Tempered Steel
Plain Finish (Oil)

Contains 24 SIZES - 1800 PIECES

Regular Size welded STEEL drawer is finished in grey enamel with 24 scooped bins. Will fit into the Slide Racks shown on page A2

Shipping weight **3.06 kg** (6.75 lbs.)



ASSORTMENT B-598

**INCH
FINISHING WASHERS**

Steel, Stainless Steel & Brass Plated

Contains 20 SIZES - 1700 PIECES

Regular Size welded STEEL drawer is finished in grey enamel with 24 scooped bins. Will fit into the Slide Racks shown on page A2



Shipping weight **3.06 kg** (6.75 lbs.)



For the complete assortment contents turn to A82

FINISHING (SCREW) WASHERS

ORDER BY SPAENAUER NUMBERS LISTED BELOW PKG QTY. 100

COUNTERSUNK  ▲ 7/8" O.D.	Screw Size	Outside Diameter	BRASS	BRASS NIC. PL.	STEEL NIC. PL.	18-8 STAINLESS	Nylon O.D.	NATURAL 6/6 NYLON	BLACK 6/6 NYLON
	No. 4	25/64"	7/16"	7141B	7141		W-2073		
No. 6	7/16"		7143B	7143	641-A01-1K	W-2010	.437"	W-5008	644-102
No. 8	17/32"		7145B	643-A02-1T	W-372NP	W-2011	.510"	W-5009	644-103
No. 9	17/32"		7146B	7146					
No. 10	19/32"		7147B	7147	W-255NP	W-2012	.575"	W-5010	644-105
No. 12	11/16"		7148B	7148	W-373NP	W-2013	.609"		
1/4"	25/32"			7150	W-374NP	W-2014	.683"	W-5011	644-107
9/32"	25/32"			7151					
5/16"	15/16"		7151B	7151	▲W-375NP	642-003			
3/8"	1-1/8"		7153B	7153					
FLUSH TYPE 	No. 6	11/32"	7137B	7137					
	No. 6	.358"				W-2015			
	No. 8	3/8"	7138B	7138					
	No. 10	15/32"	7139B	7139	W-254	W-2017			
	No. 12	9/16"	7140B	643-A04-1W					
	No. 14	5/8"		W-539N					

D

COUNTERSUNK WASHER

SPAENAUER No. 641-A03-1M

Wide Flange
STEEL, Zinc Plated

PKG QTY. 50




1/4" I.D.
1-3/16" O.D.
.035" Thick

CUP WASHER

SPAENAUER No. 641-001


STEEL,
Zinc Plated

PKG QTY. 50



FLANGE-TYPE COUNTERSUNK WASHERS

PKG QTY. 100


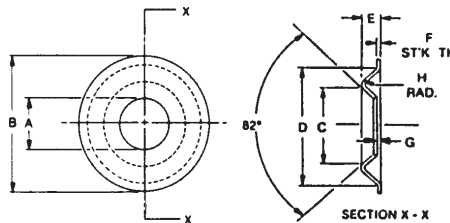


ORDER BY SPAENAUER No's.

STAINLESS STEEL 18-8	BRASS PLAIN	BRASS NICKEL PLTD.	Size Screw	Dimensions in Inches						
				A	B	C	D	E	F	G
642-002	643-002	643-003	#6	.200	.500	.290	.420	.090	.012	.020
W-10	643-004	643-A01-1N	#8	.220	.615	.355	.531	.099	.020	.020
642-A01-1T	643-006	643-007	#10	.293	.719	.370	.625	.109	.020	.020


FLUSH COUNTERSUNK WASHERS

STEEL, Zinc Plated
FOR NO. 8
OVAL HEAD SCREWS



RECESSED WASHERS


STEEL, Zinc Plated



SPAENAUER No.	Dimensions in Inches						PKG QTY.
	A	B	C	D	H	T	
W-314	11/16	9/32	1/4	1/32	5/32	.020	100



CUP WASHERS
STEEL, Zinc Plated
PKG QTY. 100



SPAENAUER No.	Outside Dia. A	Dia. B	Hole C	Material Thickness
641-A02-1W	9/16"	3/8"	5/32"	.020"
641-A04-1X	3/4"	1/2"	3/16"	.034"




SPAENAUER No. 696-K01-1P

SPACER WASHER
for 1/4" Bolt
STEEL, Zinc Plated
Hole Dia. 5/16" Outside Dia. 3/4"
Height 1/4"
PKG QTY. 50

D68

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

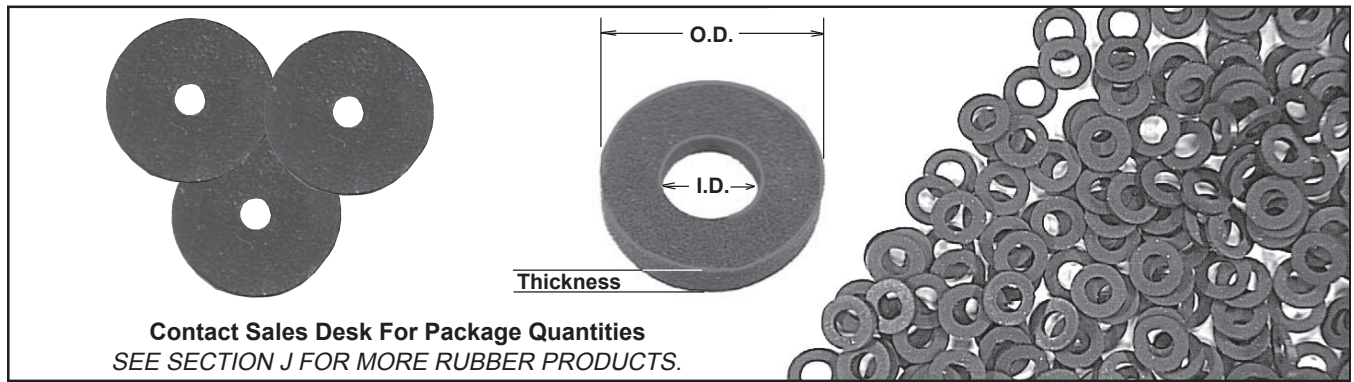

SPAENAUR No.	I.D.	O.D.	Thickness	Material	Durometer	Colour
RB-374	3/32"	1/2"	1/8"	Neoprene	60-70	Black
315-286	9/64"	3/8"	1/4"	SBR	60	Black
315-G09-1C	5/32"	5/16"	1/32"	Neoprene	75-85	Black
RB-170	5/32"	1/2"	1/4"	Natural Rubber	65-70	Black
RB-291	11/64"	33/64"	3/32"	Neoprene	65-70	Black
315-G05-1X	3/16"	5/8"	3/32"	Neoprene	65-70	Black
315-G21-1C	3/16"	3/4"	1/8"	Nitrile	75-85	Black
B-1253	3/16"	3/4"	9/32"	SBR	65-75	Black
RB-72	3/16"	1"	1/8"	SBR	55-60	Black
RB-114	7/32"	5/8"	3/32"	SBR	70-75	Black
315-005	7/32"	7/16"	1/16"	Neoprene	60-65	Black
RB-351	15/64"	1-1/4"	1/4"	Neoprene	60-65	Black
315-040	1/4"	1/2"	1/8"	SBR	55-65	Black
RB-145	1/4"	5/8"	7/64"	Neoprene	60-70	Black
RB-318	9/32"	15/16"	1/16"	SBR	55-65	Black
315-G32-1A	5/16"	7/16"	1/16"	Neoprene	60-70	Black
315-003	5/16"	5/8"	1/8"	Neoprene	60-70	Black
315-100	7.93 mm	30 mm	6 mm	Neoprene	70-80	Black
315-G58-1Y	5/16"	1-1/2"	1/4"	SBR	65-70	Black
RB-86	3/8"	1/2"	1/16"	SBR	65-75	Black
RB-352	3/8"	5/8"	3/64"	Neoprene	60-70	Black
315-039	3/8"	5/8"	1/8"	SBR	50-60	Black
315-G02-1K	3/8"	1"	1/8"	Neoprene	65-75	Black
RB-64	3/8"	1"	19/32"	Neoprene	85-95	Black
315-035	25/64"	15/16"	9/16"	EPDM	65-75	Black
315-034	.498/.485"	.781/.812"	.125"	SBR	60-70	Black
RB-167	1/2"	1"	5/16"	SBR	65-75	Black
RB-135	1/2"	1-3/16"	1/2"	SBR	75-85	Black
315-170	5/8"	1-1/2"	1/4"	Neoprene	60-65	Black
315-076	5/8"	25/32"	3/16"	SBR	70	Black
RB-307	13/16"	1-3/32"	3/32"	Neoprene	60-65	Black
4228	7/8"	2"	3/8"	Closed Cell Neoprene Sponge	-	Black
315-H24-1X	1.625"	2.854"	.060"	Nitrile	75-80	Black

More Rubber (E.P.D.M.) and Silicone Washers on following page.
Property Reference Chart shown on Page R19.



RUBBER (E.P.D.M.) WASHER



Colour - Black **Standard Thickness is 3/32"** Durometer 70 ±5

SPAENAUR No.	Screw Size	Inside Diameter	Outside Diameter	PKG QTY.	SPAENAUR No.	Screw Size	Inside Diameter	Outside Diameter	PKG QTY.
315-I05-1X	#6 Standard	.120"	1/4"	100	315-G34-1Y	#14 Optional	.230"	5/8"	50
315-057	#6 Optional	.120"	3/8"	100	315-066	5/16" Standard	.290"	9/16"	50
315-058	#8 Standard	.150"	5/16"	100	315-067	5/16" Optional	.290"	11/16"	50
315-H43-1N	#8 Optional	.150"	7/16"	100	315-068	3/8" Standard	.355"	5/8"	50
315-078	#8 Optional	.152"	3/8"	100	315-069	3/8" Optional	.355"	13/16"	50
315-G61-1C	#10 Standard	.170"	3/8"	100	315-070	1/2" Optional	.490"	1-1/16"	25
315-061	#10 Optional	.170"	1/2"	100	315-071	5/8" Optional	.615"	1-5/16"	25
315-062	#12 Standard	.195"	7/16"	100	315-072	3/4" Optional	.740"	1-1/2"	25
315-063	#12 Optional	.195"	9/16"	100	315-073	1" Optional	.990"	2"	25
315-G66-1M	#14 Standard	.230"	1/2"	50					

D



Colour - Red

SILICONE WASHER

“Hi/Low Temp”

Excellent Heat Resistance - Extreme Low Temperature

-62°C to 230°C (-80°F to 450°F)

Low Compression Set



Durometer 60 ±5

SPAENAUR No.	Inside Diameter	Outside Diameter	Thickness	PKG QTY.	SPAENAUR No.	Inside Diameter	Outside Diameter	Thickness	PKG QTY.
315-G11-1C	.125"	.375"	.062"	100	315-404	.312"	.687"	.125"	50
315-401	.156"	.437"	.062"	100	315-405	.375"	.750"	.125"	50
315-402	.187"	.500"	.093"	100	315-406	.500"	1.00"	.125"	25
315-403	.250"	.625"	.093"	50					

ASSORTMENT B-598

Bowed Spring **DIN 137A**

Single Wave Spring **DIN 137B**

Bowed Spring Washers **DIN 137A**

INCH & METRIC SPRING TENSION WASHERS

High Grade Tempered Steel Plain Finish (Oil)

Contains 20 SIZES - 1700 PIECES

Regular Size welded STEEL drawer is finished in grey enamel with 24 scooped bins. Will fit into the Slide Racks shown on page A2
Shipping weight **3.06 kg** (6.75 lbs.)



For the complete assortment contents turn to A82

CATALOG 14-03
2019/04/18

SPAENAUR

NYLTITE ROLLED NYLON WASHERS




Made of DuPont Zytel which meets specs: MIL-M-20693A; MIL-P-17091-B.

Used as an insulator or sealer with bolt, screw, nail or rivet.

Screw Size	I.D.	Wall Thickness	SPAENAUR No.	PKG QTY.
1	.075"	.012"	—	100
2	.088"	.012"	W-5801	100
3	.101"	.012"	W-5802	100
4	.116"	.013"	230-W05-1C	100
5	.129"	.014"	W-5804	100
6	.142"	.015"	230-W01-1X	100
8	.168"	.015"	230-W04-1Y	100
10	.194"	.015"	W-5807	100
12	.220"	.017"	W-5808	100
1/4"	.252"	.019"	230-W02-1A	100
5/16"	.316"	.020"	W-5810	100
3/8"	.379"	.022"	W-5811	100
7/16"	.441"	.022"	W-5812	100
1/2"	.504"	.022"	W-5813	100
5/8"	.630"	.025"	W-5814	100
3/4"	.755"	.028"	W-5815	100

HERE IS HOW NYLTITE ROLLED WASHER WORKS



The Nyltite washer deforms under pressure to conform and seal with any STANDARD fastener. The nylon flows inward towards the inner cut edges, providing a positive seal around the screw threads. The rolled washers offer this positive seal because they expand and contract with surrounding materials. Note: The absence of flow outward at the rolled edge, eliminates the need for back-up washers.

SEALING WASHER
Reusable
Stainless Steel Clad,
with Neoprene Sealer

SPAENAUR No.	Screw Size	O.D.	Overall Height	PKG QTY.
679-803	6	3/8"	.100"	100
679-804	8	3/8"	.085"	100
679-805	10	7/16"	.085"	100
679-A01-1K	1/4"	7/16"	.085"	100

"BARTITE" PERMANENT SEALING WASHERS

BARTITE Sealing Washer is both economical, and a permanent seal against liquids and vapors, resistant to water, gasoline, petroleum oils, salt sprays, etc. The 300 series stainless steel washer is partially dome-shaped, with a flattened perimeter. When under torque, the tightening creates a tension effect, which adds to the permanency of the complete assembly. Neoprene sealant with stands temperatures up to 250°F; it also retains its sealability at -60°F.

SPAENAUR No.	Thread Size	Metal O.D.	Overall Height	PKG QTY.
679-810	#8	1/2"	.065"	100
679-811	#10	9/16"	.065"	100
679-812	#14	5/8"	.073"	100
679-813	5/16"	11/16"	.077"	100
679-814	3/8"	51/64"	.082"	100
679-815	7/16"	57/64"	.090"	100
679-A02-1W	1/2"	63/64"	.090"	50

NYLTITE HEADED SLEEVE



Used with bolt, screw, nail or rivet

- Provides electrical insulation.
- Eliminates electrolytic action.
- Creates a leak-proof seal.
- Acts as grommet, bearing, or housing.
- Reduces "fastener vibration".

PKG QTY. 100- All Sizes

Screw Size	I.D.	Wall Thickness	1/4" Shank	1/2" Shank	3/4" Shank
1	.075	.012	W-5500		
2	.088	.012	W-5501		
3	—	—	W-5502	W-5503	
4	.116	.013	W-5504	W-5505	W-5506
5	.129	.014			
6	.142	.015	W-5510	W-5511	W-5512
8	.168	.015	W-5513	W-5514	W-5515
10	.194	.015	W-5516	W-5517	W-5518
12	.220	.017	W-5519	W-5520	W-5521
1/4"	.252	.019	W-5522	W-5523	W-5524
5/16"	.316	.020	W-5525	W-5526	W-5527
3/8"	.379	.022	W-5528	W-5529	W-5530
7/16"	.441	.022	W-5531	W-5532	W-5533
1/2"	.504	.022	W-5534	W-5535	W-5536
5/8"	.629	.025	W-5537	W-5538	W-5539
3/4"	.754	.027	W-5540	W-5541	W-5542



HERE IS HOW NYLTITE HEADED SLEEVE WORKS

A NYLTITE headed sleeve, long enough to extend from bolt head to nut before tightening, is either slipped over the bolt before insertion, or dropped into bolt hole. In the latter case, the rim-flange at one end prevents the sleeve from falling through the hole. The rim-flange also insures the positioning of sufficient plastic material between bolt head and work. As the nut is drawn up on the bolt, the NYLTITE sleeve is compressed, and cold-flows into a new shape, forming washer-like discs at both ends.



MASTER SEAL™ WASHERS



Used with Round, Pan or Hex Head Screws – as with Weather Seal Fasteners shown on page B94. Also available: High Tensile Neoprene or EPDM Bonded Washer on special orders of minimum quantities. PKG QTY. 100

SPAENAUR No.	Screw Size	Dimensions			MATERIAL
		I.D.	O.D.	GA.	
W-227	6	5/32"	3/8"	20	Galvanized Steel bonded to Neoprene
685-005	8	11/64"	1/2"	24	
W-228	8	11/64"	1/2"	20	
W-230	10	13/64"	1/2"	20	
685-W02-1W	12	7/32"	5/8"	20	
685-002	1/4"	.275"	5/8"	20	302 Stainless Steel bonded to Neoprene
685-003	5/16"	.330"	3/4"	20	
685-W01-1K	3/8"	.434"	7/8"	20	
685-001	1/2"	.532"	1"	20	
W-2001	6	5/32"	3/8"	20	
W-2002	8	11/64"	1/2"	20	
W-2005	10	13/64"	1/2"	20	
W-2006	12	7/32"	5/8"	20	
W-2008	14	9/32"	5/8"	20	
685-006	14	.275"	1/2"	20	Galvanized Steel bonded to EPDM

CATALOG 14

SPAENAUR

NYLON MACHINE SCREW INSULATORS



Nylon screw insulators are used to isolate metal screws electrically as well as to reduce corrosion. They can be used as light load bearings in many applications.




Material 6/6 Nylon - Natural Colour

PKG QTY. 100

SPAENAUR No.	Screw Size	Inch Dimensions (Millimetre equivalent in brackets)				
		L	A	B	C	D
230-014	2	1/8" (3.18)	.181" (4.60)	3/64" (1.19)	.120" (3.05)	.090" (2.29)
230-015	2	3/16" (4.76)	.181" (4.60)	3/64" (1.19)	.120" (3.05)	.090" (2.29)
230-016	2	1/4" (6.35)	.181" (4.60)	3/64" (1.19)	.120" (3.05)	.090" (2.29)
230-001	4	3/64" (1.19)	.235" (5.97)	3/64" (1.19)	.145" (3.68)	.115" (2.92)
230-002	4	1/16" (1.59)	.235" (5.97)	3/64" (1.19)	.145" (3.68)	.115" (2.92)
230-003	4	3/32" (2.38)	.235" (5.97)	3/64" (1.19)	.145" (3.68)	.115" (2.92)
230-004	4	1/8" (3.18)	.235" (5.97)	3/64" (1.19)	.145" (3.68)	.115" (2.92)
230-017	4	3/16" (4.76)	.235" (5.97)	3/64" (1.19)	.145" (3.68)	.115" (2.92)
230-018	4	1/4" (6.35)	.235" (5.97)	3/64" (1.19)	.145" (3.68)	.115" (2.92)
230-005	6	1/8" (3.18)	.290" (7.37)	3/64" (1.19)	.170" (4.32)	.140" (3.56)
230-019	6	3/16" (4.76)	.290" (7.37)	3/64" (1.19)	.170" (4.32)	.140" (3.56)
230-006	6	1/4" (6.35)	.290" (7.37)	3/64" (1.19)	.170" (4.32)	.140" (3.56)
230-020	6	3/8" (9.53)	.290" (7.37)	3/64" (1.19)	.170" (4.32)	.140" (3.56)
230-007	8	1/8" (3.18)	.344" (8.74)	1/16" (1.59)	.205" (5.21)	.173" (4.39)
230-021	8	1/4" (6.35)	.344" (8.74)	1/16" (1.59)	.205" (5.21)	.173" (4.39)
230-022	8	3/8" (9.53)	.344" (8.74)	1/16" (1.59)	.205" (5.21)	.173" (4.39)
230-023	8	1/2" (12.70)	.344" (8.74)	1/16" (1.59)	.205" (5.21)	.173" (4.39)
230-024	10	3/16" (4.76)	.399" (10.13)	1/16" (1.59)	.260" (6.60)	.200" (5.08)
230-008	10	1/4" (6.35)	.399" (10.13)	1/16" (1.59)	.260" (6.60)	.200" (5.08)
230-009	10	3/8" (9.53)	.399" (10.13)	1/16" (1.59)	.260" (6.60)	.200" (5.08)
230-025	10	1/2" (12.70)	.399" (10.13)	1/16" (1.59)	.260" (6.60)	.200" (5.08)
230-026	1/4"	1/8" (3.18)	.513" (13.03)	1/16" (1.59)	.312" (7.92)	.260" (6.60)
230-010	1/4"	3/16" (4.76)	.513" (13.03)	1/16" (1.59)	.312" (7.92)	.260" (6.60)
230-027	1/4"	1/4" (6.35)	.513" (13.03)	1/16" (1.59)	.312" (7.92)	.260" (6.60)
230-011	1/4"	3/8" (9.53)	.513" (13.03)	1/16" (1.59)	.312" (7.92)	.260" (6.60)
230-012	1/4"	1/2" (12.70)	.513" (13.03)	1/16" (1.59)	.312" (7.92)	.260" (6.60)
230-028	1/4"	5/8" (15.88)	.513" (13.03)	1/16" (1.59)	.312" (7.92)	.260" (6.60)
230-029	1/4"	3/4" (19.05)	.513" (13.03)	1/16" (1.59)	.312" (7.92)	.260" (6.60)
230-030	5/16"	1/4" (6.35)	.620" (15.75)	1/16" (1.59)	.360" (9.14)	.320" (8.13)
230-013	5/16"	3/8" (9.53)	.620" (15.75)	1/16" (1.59)	.360" (9.14)	.320" (8.13)
230-031	5/16"	1/2" (12.70)	.620" (15.75)	1/16" (1.59)	.360" (9.14)	.320" (8.13)


D

NYLON SHOULDER WASHERS



Material:
6/6 Nylon
Natural Colour

These washers are suitable for a variety of insulation and mechanical applications. Strong and corrosion resistant, they seal, reduce vibration, act as spacers and guides.



PKG QTY.
100

SPAENAUR No.	Inch Dimensions (Millimetre equivalent in brackets)				
	L	A	B	F	G
230-114	3/16" (4.76)	.187" (4.75)	1/32" (0.79)	.119" (3.02)	.063" (1.60)
230-115	3/16" (4.76)	.205" (5.21)	1/32" (0.79)	.125" (3.18)	.093" (2.36)
230-100	1/32" (0.79)	.218" (5.54)	3/64" (1.19)	.135" (3.43)	.115" (2.92)
230-101	1/32" (0.79)	.235" (5.97)	3/64" (1.19)	.137" (3.48)	.115" (2.92)
230-116	7/32" (5.55)	.250" (6.35)	11/64" (4.37)	.150" (3.81)	.115" (2.92)
230-102	3/64" (1.19)	.234" (5.94)	3/64" (1.19)	.147" (3.73)	.115" (2.92)
230-103	1/16" (1.59)	.250" (6.35)	1/32" (0.79)	.143" (3.63)	.115" (2.92)
230-117	1/8" (3.18)	.250" (6.35)	3/64" (1.19)	.139" (3.53)	.118" (3.00)
230-118	1/8" (3.18)	.500" (12.70)	1/8" (3.18)	.375" (9.53)	.285" (7.14)
230-119	.250" (6.35)	.250" (6.35)	.047" (1.19)	.156" (3.96)	.125" (3.18)
230-120	1/32" (0.79)	.252" (6.40)	1/32" (0.79)	.186" (4.72)	.140" (3.56)
230-121	1/8" (3.18)	.281" (7.14)	3/32" (2.38)	.158" (4.01)	.093" (2.36)
230-104	1/64" (0.41)	.310" (7.87)	1/16" (1.59)	.183" (4.65)	.139" (3.53)
230-122	3/64" (1.19)	.312" (7.93)	1/16" (1.59)	.170" (4.32)	.127" (3.23)
230-123	3/16" (4.76)	.312" (7.93)	1/16" (1.59)	.250" (6.35)	.156" (3.96)
230-105	3/64" (1.19)	.250" (6.35)	3/64" (1.19)	.143" (3.63)	.113" (2.87)
230-106	1/32" (0.79)	.265" (6.73)	1/32" (0.79)	.157" (3.99)	.126" (3.20)
230-107	1/32" (0.79)	.312" (7.93)	1/16" (1.59)	.187" (4.75)	.141" (3.58)
230-124	5/16" (7.94)	.312" (7.93)	1/32" (0.79)	.154" (3.91)	.130" (3.30)
230-W03-1P	1/4" (6.35)	.290" (7.37)	3/64" (1.19)	.170" (4.32)	.140" (3.56)
230-108	3/64" (1.19)	.328" (8.33)	3/64" (1.19)	.218" (5.54)	.146" (3.71)
230-126	3/8" (9.53)	.345" (8.76)	1/16" (1.59)	.205" (5.21)	.173" (4.39)
230-127	13/32" (10.32)	.510" (12.95)	1/16" (1.59)	.250" (6.35)	.171" (4.34)
230-128	1/8" (3.18)	.375" (9.53)	1/16" (1.59)	.280" (7.11)	.201" (5.10)
230-109	3/64" (1.19)	.375" (9.53)	3/64" (1.19)	.245" (6.22)	.192" (4.88)
230-110	1/32" (0.79)	.375" (9.53)	1/16" (1.59)	.308" (7.82)	.196" (4.98)
230-129	1/8" (3.18)	.370" (9.40)	.110" (2.79)	.307" (7.80)	.255" (6.48)
230-111	1/32" (0.79)	.385" (9.78)	1/16" (1.59)	.240" (6.10)	.145" (3.68)
230-W06-1N	3/32" (2.38)	.375" (9.53)	1/64" (0.41)	.185" (4.70)	.140" (3.56)
230-131	1/8" (3.18)	.433" (10.99)	1/16" (1.59)	.312" (7.92)	.199" (5.05)
230-132	1/8" (3.18)	.400" (10.16)	1/8" (3.18)	.275" (6.99)	.140" (3.56)
230-133	3/32" (2.38)	.438" (11.13)	1/32" (0.79)	.267" (6.78)	.203" (5.16)
230-134	.187" (4.75)	.495" (12.57)	.065" (1.65)	.312" (7.92)	.200" (5.08)
230-135	1/8" (3.18)	.697" (17.70)	1/16" (1.59)	.359" (9.12)	.266" (6.76)
230-112	3/64" (1.19)	.625" (15.88)	1/16" (1.59)	.375" (9.53)	.190" (4.83)
230-113	5/16" (7.94)	.500" (12.70)	1/16" (1.59)	.312" (7.92)	.200" (5.08)
230-136	3/16" (4.76)	.490" (12.45)	1/4" (6.35)	.310" (7.87)	.195" (4.95)
230-137	1/8" (3.18)	.502" (12.75)	1/32" (0.79)	.399" (10.13)	.349" (8.86)
230-W07-1T	9/64" (3.58)	.515" (13.08)	1/16" (1.59)	.312" (7.93)	.260" (6.60)
230-139	.062" (1.57)	.625" (15.88)	1/32" (0.79)	.310" (7.87)	.195" (4.95)
230-140	1/2" (12.70)	.620" (15.75)	1/16" (1.59)	.370" (9.40)	.316" (8.03)
230-141	3/8" (9.53)	.687" (17.45)	3/8" (9.53)	.359" (9.12)	.263" (6.68)
230-142	3/16" (4.76)	.743" (18.87)	1/16" (1.59)	.443" (11.25)	.375" (9.53)
230-143	1/4" (3.38)	.750" (19.05)	5/64" (1.98)	.505" (12.83)	.378" (9.60)
230-144	7/32" (5.55)	.750" (19.05)	3/32" (2.38)	.380" (9.65)	.266" (6.76)
230-145	1" (25.40)	.875" (22.23)	1/16" (1.59)	.500" (12.70)	.375" (9.53)
230-147	1/2" (12.70)	7/8" (22.23)	1/16" (1.59)	3/4" (19.05)	.635" (16.13)
230-146	3/4" (19.05)	1.000" (25.40)	1/8" (3.18)	.500" (12.70)	.375" (9.53)

D

DIN 434 8% Slope for "U" Beams Steel, Plain (Suffix ZP indicates Zinc Plated)	SPAENAUR No.	For BOLT DIAMETER		Hole Dia. d (mm)	Dimensions in Millimetres				PKG QTY.	
		Metric	Inch		a	b	e	f		
	635-050	M8	5/16"	9	22	22	2.9	3.8	100	
	635-051	M10	3/8"	11	22	22	2.9	3.8	100	
	635-051ZP	M10	3/8"	11	22	22	2.9	3.8	100	
	635-052	M12	1/2"	13.5	30	26	3.7	4.9	50	
	635-053	M16	5/8"	17.5	36	32	4.45	5.9	50	
	635-053ZP	M16	5/8"	17.5	36	32	4.45	5.9	50	
	635-054	M20	3/4"	22	44	40	5.25	7	50	
	635-055	M22	7/8"	24	50	44	6	8	25	
	635-055ZP	M22	7/8"	24	50	44	6	8	25	
	635-056	M24	1"	26	56	56	6.26	8.5	25	
	635-056ZP	M24	1"	26	56	56	6.26	8.5	25	
	635-057	M27	-	30	56	56	6.26	8.5	25	
	*635-058	M30	-	1-1/8"	33	62	62	6.5	9	10

DIN 435 14% Slope for "I" Beams Steel, Plain	SPAENAUR No.	For BOLT DIAMETER		Hole Dia. d (mm)	Dimensions in Millimetres				PKG QTY.	
		Metric	Inch		a	b	e	f		
	635-060	M8	5/16"	9	22	22	3.05	4.6	100	
	635-061	M10	3/8"	11	22	22	3.05	4.6	100	
	635-062	M12	1/2"	13.5	30	26	4.1	6.2	50	
	635-062ZP	M12	1/2"	13.5	30	26	4.1	6.2	50	
	635-063	M16	5/8"	17.5	36	32	5	7.5	50	
	635-064	M20	3/4"	22	44	40	6.1	9.2	50	
	635-065	M22	7/8"	24	50	44	6.5	10	25	
	635-066	M24	1"	26	56	56	6.9	10.8	25	
	635-067	M27	-	30	56	56	6.9	10.8	25	
	*635-068	M30	-	1-1/8"	33	62	62	7.5	11.7	10

DIN 6918 8% Slope for "U" Beams Countersunk – Steel, Plain	SPAENAUR No.	For BOLT DIAMETER		Hole Dia. d (mm)	Dimensions in Millimetres				PKG QTY.
		Metric	Inch		a	b	e	f	
	657-208	M12	1/2"	13	30	26	3.7	4.9	50
	657-209	M16	5/8"	17	36	32	4.45	5.9	50
	657-267	M20	3/4"	21	44	40	5.25	7	50
	657-268	M22	7/8"	23	50	44	6	8	25
	657-271	M27	-	28	56	56	6.26	8.5	25


DIN 6917 14% Slope for "I" Beams Countersunk – Steel, Plain	SPAENAUR No.	For BOLT DIAMETER		Hole Dia. d (mm)	Dimensions in Millimetres				PKG QTY.
		Metric	Inch		a	b	e	f	
	657-201	M12	1/2"	13	30	26	4.1	6.2	50
	657-202	M16	5/8"	17	36	32	5	7.5	50
	657-203	M20	3/4"	21	44	40	6.1	9.2	50
	657-205	M24	1"	25	56	56	6.9	10.8	25

DIN 6917 and DIN 6918 are for use with DIN 6914 Hex Cap Screws

SPAENAUR CATALOG 14

MALLEABLE IRON BEVELED WASHERS

16-2/3% Slope




Plain Finish

SPAENAUR No.	Bolt Dia.	Across Flats (Square)	Thickness		Hole Dia.	PKG QTY.
			at Large End	at Taper		
635-001	1/4"	11/16"	7/32"	5/64"	5/16"	50
W-289	3/8"	1-1/4"	11/32"	5/32"	7/16"	50
W-290	1/2"	1-1/4"	11/32"	5/32"	9/16"	50
635-A01-1K	5/8"	1-1/2"	13/32"	5/32"	11/16"	25
W-292	3/4"	1-1/2"	13/32"	5/32"	13/16"	25
W-293	7/8"	2"	1/2"	7/32"	15/16"	10
W-294	1"	2"	9/16"	7/32"	1-3/32"	10

ALUMINUM (Alloy 319) BEVELED WASHERS

TYPE A - Plain Finish

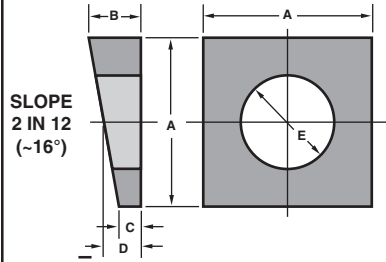

SPAENAUR No.	BOLT DIA.	A	B	C	D	HOLE DIA. E	PKG QTY.
635-300	1/4"	0.69"	0.22"	0.09"	0.16"	0.31"	100
635-301	5/16"	1.00"	0.31"	0.16"	0.23"	0.38"	100
635-302	3/8"	1.25"	0.34"	0.12"	0.23"	0.44"	50
635-303	1/2"	1.25"	0.34"	0.12"	0.23"	0.56"	50
635-304	5/8"	1.50"	0.38"	0.12"	0.25"	0.69"	25
635-305	3/4"	1.50"	0.44"	0.19"	0.31"	0.81"	25

Metric SHIM and SUPPORTING RINGS

Shim Washer Material - Steel St 2 K 60, Oil Dipped.
Supporting Ring Material - Spring Steel, Oil Dipped, HRC: 44-49.

DIN 988

Dimensions in Millimetres

SPAENAUR No.	I.D.	O.D.	Thickness	PKG QTY.	SPAENAUR No.	I.D.	O.D.	Thickness	PKG QTY.
SHIM RINGS					SUPPORTING RINGS				
657-179	10	16	0.1	100	657-164	63	80	0.3	50
657-180	10	16	0.2	100	657-223	63	80	0.5	50
657-181	10	16	0.3	100	657-224	63	80	1.0	50
657-182	10	16	0.5	100	657-225	70	90	0.1	50
657-165	10	16	1.5	100	657-226	70	90	0.3	50
657-163	10	16	2.0	100	657-315	75	95	0.1	50
657-158	12	18	0.5	100	657-146	75	95	0.3	50
657-210	13	19	0.3	100	657-227	75	95	0.5	50
657-213	25	35	0.5	100	657-228	80	100	0.1	25
657-214	32	45	0.1	100	657-252	80	100	0.15	25
657-215	32	45	0.15	100	657-229	80	100	0.3	25
657-216	32	45	0.3	100	657-230	80	100	0.5	25
657-217	32	45	0.5	100	657-231	80	100	1.5	25
657-168	40	50	0.1	50	657-232	120	150	0.1	1
657-160	40	50	0.15	50	657-233	120	150	0.3	1
657-159	40	50	0.20	50	657-167	120	150	0.5	1
657-161	40	50	0.5	50	SUPPORTING RINGS				
657-218	42	52	0.5	50	657-211	15	21	1.5	100
657-219	45	55	0.1	50	657-212	16	22	1.5	100
657-220	45	55	0.15	50	657-814	25	35	2.0	100
657-828	45	55	0.3	50	657-311	32	45	2.5	100
657-221	45	55	0.5	50	657-312	35	45	2.5	100
657-222	63	80	0.1	50	657-313	40	50	2.5	50
					657-314	45	55	3.0	50


SHIM RINGS

WITHOUT KEYWAY

STEEL Not Plated

(AISI 1010)

Shim it



Ready to use. Shim Rings provide a simple, fast, accurate means of spacing milling cutters, saws and knives for precision work. Wide selection. Hole diameters from 3/8" I.D. to 2" I.D.; in thicknesses from .001" to .125".

PKG QTY. - 10 Per Size

SIZE I.D. x O.D.	Thick-ness	SPAENAUR No.	SIZE I.D. x O.D.	Thick-ness	SPAENAUR No.	SIZE I.D. x O.D.	Thick-ness	SPAENAUR No.	
3/8" x 5/8"	.002"	656-150	3/4" x 1-1/8"	.015"	656-184	1-1/4" x 1-3/4"	.004"	656-206	
	.003"	656-151		.020"	656-185		.005"	656-207	
	.005"	656-152		.031"	656-186		.010"	656-208	
	.010"	656-153		.047"	656-187		.015"	656-238	
	.015"	656-154		.062"	656-188		.031"	656-209	
	.020"	656-155		.002"	656-236		.047"	656-210	
	.031"	656-156		.005"	656-237		1-3/8" x 1-7/8"	.003"	656-211
	.047"	656-157		.010"	656-189			.005"	656-212
	.062"	656-158		.015"	656-190			.010"	656-213
	1/2" x 3/4"	.002"		656-159	.020"			656-191	.020"
.003"		656-160	.031"	656-192	.031"	656-242			
.004"		656-161	.062"	656-248	.062"	656-243			
.005"		656-162	.002"	656-193	.093"	656-244			
.010"		656-163	.003"	656-194	.125"	656-245			
.015"		656-164	.004"	656-195	1-1/2" x 2-1/8"	.005"		656-214	
.020"		656-165	.005"	656-196		.007"		656-235	
.031"		656-166	.010"	656-197		.010"	656-215		
.047"		656-167	.015"	656-198		.015"	73857		
.062"		656-B61-1A	.020"	656-199		.020"	656-216		
5/8" x 1"	.002"	656-169	.031"	656-200		.025"	73858		
	.003"	656-170	.047"	656-201		.062"	656-246		
	.004"	656-171	.062"	656-202		.093"	656-247		
	.005"	656-172	.093"	656-241		1-3/4" x 2-3/4"	.005"	656-217	
	.010"	656-173	.125"	656-240			.010"	656-218	
	.015"	656-174	1" x 1-1/2"	.002"	656-249		.020"	656-219	
	.020"	656-175		.003"	656-203		2" x 2-3/4"	.005"	656-220
	.031"	656-176		.005"	656-204			.010"	656-221
	.047"	656-177		.010"	656-205			.020"	656-222
	.062"	656-178		1-1/8" x 1-5/8"	3/4" x 1-1/8"			(Cont'd.)	.062"
.002"	656-179	.093"							656-269
.003"	656-180	.125"							656-270
.004"	656-181								
.005"	656-182								
.010"	656-183								

ASSORTMENT ASSORTIMENT **805-629**

SHIM RINGS

Steel Not Plated
Without Keyway

73 SIZES - 730 PIECES



SHIM RING TOLERANCES

I.D. & O.D. Tolerances

I.D.	+0.011/-0.000"
O.D.	±.002"

Thicknesses Tolerances


.001, .0015, .002, .003"	± 10%
.004, .005, .006"	± .0005"
.007, .008, .010, .012, .015"	± .00075"
.020, .025"	± .001"
.031"	± .0015"
.047, .062"	± .002"
.093"	± .0025"
.125"	± .002"



Page **A83**

Contains many numbers listed on this page. Large size welded STEEL grey enamelled Drawer has "scooped" bins. Drawer fits Slide Racks on page A3
Shipping Wgt. **4.42 kg** (9.75 lbs)

CATALOG 14
SPAENAUR

<p>SHIM RINGS WITH KEYWAY STEEL Not Plated</p> <p>(AISI 1010)</p> <p>Inch Sizes</p> <p>Shim Rings are sold in:</p> <p>(a) PKG QTY. of 10 per size</p> <p>(b) Assorted Packs of 19, which contain one size only, in 19 thicknesses (see lower right)</p>	Size I.D. x O.D.	Thick-ness	SPAENAUR No.	Size I.D. x O.D.	Thick-ness	SPAENAUR No.
		3/8" x 5/8" with 1/8" Keyway	.004"	656-300	1" x 1-1/2" with 1/4" Keyway	.001"
.005"			656-301	.002"		656-332
.010"			656-302	.003"		656-333
.031"			656-303	.004"		656-334
.005"			656-305	.005"		656-335
.010"			656-306	.007"		656-336
1/2" x 3/4" with 1/8" Keyway		.004"	656-304	1-1/8" x 1-5/8" (1/4" Keyway)	.010"	656-337
		.005"	656-305		.012"	656-338
		.010"	656-306		.020"	656-339
		.031"	656-307		.025"	656-340
		.047"	656-308		.031"	656-341
5/8" x 1" with 3/16" Keyway		.062"	656-309	1-1/4" x 1-3/4" with 5/16" Keyway	.047"	656-342
		.125"	656-310		.062"	656-343
		.004"	656-311		.062"	656-343
		.005"	656-312		.093"	656-344
		.010"	656-313		.125"	656-345
3/4" x 1-1/8" with 3/16" Keyway		.015"	656-314	1-1/8" x 1-5/8" (1/4" Keyway)	.005"	656-346
		.031"	656-315		.010"	656-347
		.047"	656-316		.002"	656-348
	.002"	656-317	.003"		656-349	
	.003"	656-318	.004"		656-350	
7/8" x 1-3/8" with 3/16" Keyway	.005"	656-319	1-1/4" x 1-3/4" with 5/16" Keyway	.005"	656-351	
	.010"	656-320		.006"	656-352	
	.012"	656-321		.007"	656-353	
	.015"	656-322		.008"	656-354	
	.031"	656-323		.010"	656-355	
3/4" x 1-1/8" with 3/16" Keyway	.031"	656-324	1-1/4" x 1-3/4" with 5/16" Keyway	.012"	656-356	
	.047"	656-324		.015"	656-357	
	.003"	656-325		.020"	656-358	
	.004"	656-326		.025"	656-359	
	.005"	656-327		.031"	656-360	
7/8" x 1-3/8" with 3/16" Keyway	.010"	656-328	1-1/4" x 1-3/4" with 5/16" Keyway	.062"	656-361	
	.031"	656-329		.093"	656-362	
	.047"	656-330		.125"	656-363	

ASSORTMENT 805-630


ASSORTMENT

SHIM RINGS WITH KEYWAY

Steel, Not Plated

64 SIZES

490 PIECES

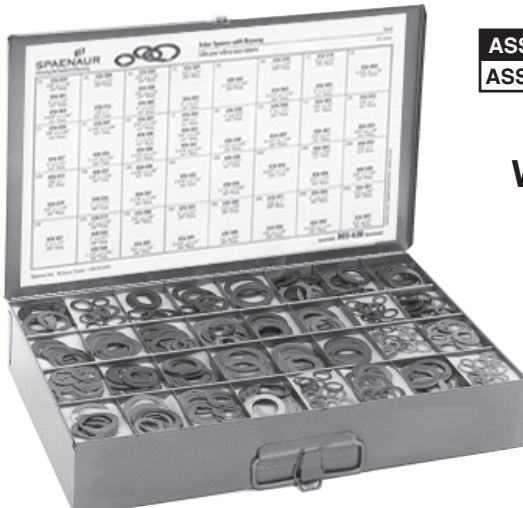

Large Size welded STEEL, grey enamelled
Drawer has "scooped" bins. Fits Slide Racks shown on page A3

Shipping weight **4.31 kg** (9.5 lbs.)

Assorted Packs
Priced Singly

SHIM RINGS

Contain thicknesses from .001" to .125" (19 to pack)

SPAENAUR No.	SPACER SIZE	KEYWAY SIZE
656-364	3/8" I.D. x 5/8" O.D.	1/8"
656-365	1/2" I.D. x 3/4" O.D.	1/8"
656-366	5/8" I.D. x 1" O.D.	3/16"
656-367	3/4" I.D. x 1-1/8" O.D.	3/16"
656-368	7/8" I.D. x 1-3/8" O.D.	3/16"
656-369	1" I.D. x 1-1/2" O.D.	1/4"
656-370	1-1/8" I.D. x 1-5/8" O.D.	1/4"
656-371	1-1/4" I.D. x 1-3/4" O.D.	5/16"
656-372	1-3/8" I.D. x 1-7/8" O.D.	5/16"
656-373	1-1/2" I.D. x 2-1/8" O.D.	3/8"
656-374	1-3/4" I.D. x 2-3/4" O.D.	7/16"
656-375	2" I.D. x 2-3/4" O.D.	1/2"

For SHIM STOCK
see pages D78 to D80.



STEEL Shim Stock

PKG QTY. 1
SINGLE ROLLS

SPAENAUR No.		Thickness in Inches	Equivalent Thickness in mm
6" x 100" ROLLS	12" x 120" ROLLS		
603-001	603-023	.001"	(.025)
603-002	603-024	.0015"	(.038)
603-003	603-025	.002"	(.051)
603-004		.0025"	(.064)
603-005	603-026	.003"	(.076)
603-006		.0035"	(.089)
603-007	603-028	.004"	(.102)
603-008	603-029	.005"	(.127)
603-009	603-030	.006"	(.152)
603-010	603-031	.007"	(.179)
603-011	603-032	.008"	(.203)
603-012	603-033	.009"	(.229)
603-013	603-B03-1W	.010"	(.254)
603-014	603-035	.012"	(.305)
603-015		.0135"	(.343)
603-016	603-036	.015"	(.381)
603-017		.0165"	(.419)
603-018	603-037	.018"	(.457)
603-019	603-038	.020"	(.508)
603-020		.022"	(.559)
603-021	603-039	.025"	(.635)
603-022	603-040	.031"	(.787)

WHEN ACCURACY COUNTS Specify PRECISION BRAND SHIM STOCK



The economical answer for more precise assembly and product reliability.

The machinist, tool and die maker, millwright, design engineer have found shim stock an economical answer for solving a variety of industrial and commercial shimming problems.

Precision Brand Steel Shim is a cold rolled, full hard bright finish, low carbon material with a maximum carbon content up to 0.15%, and a minimum hardness of RB80. Shim is versatile. It is universally used for tool and die alignment, arbor spacers, and all shim applications where combined hardness, flatness and accuracy is required. Save hours of costly machine and assembly work. This material is intended for flatwork and punching only, as it has not been annealed after final cold rolling, and is very stiff and springy. Precision Brand Steel Shim meets QQS-698 and AISI-1010. Also meets steel shim standards 16A and 16AA.

When accuracy counts, come to the people who know shim stock and the importance of close tolerances. You don't pay any more for the highest quality available. And you may pay less because of our volume.


ASSORTMENTS

SPAENAUR No.	Description	Thickness in Inches
603-041	6" x 12" sheets 1 sheet ea. thickness 12 sheets/set	.001, .0015, .002, .003, .004, .005, .006, .007, .008, .010, .012, .015
603-042	6" x 12" sheets 1 sheet ea. thickness 15 sheets/set	.001, .0015, .002, .003, .004, .005, .006, .007, .008, .010, .012, .015, .020, .025, .031
603-043	6" x 50" rolls 1 roll ea. thickness 4 rolls/box	.001, .002, .003, .005

LARGE SHEETS (6" x 25")

SPAENAUR No.	Description	Thickness
603-044	6" x 25" sheets	.012"
603-045	2 sheets/package	.015"
603-046		.020"
603-047	<i>Sold in full package</i>	.025"
603-048	<i>quantities only</i>	.031"

CHEMISTRY			
C	Mn	P. Max.	S. Max.
.08-.13	.30-.60	.040	.050
Mean Tensile 80,000 PSI			

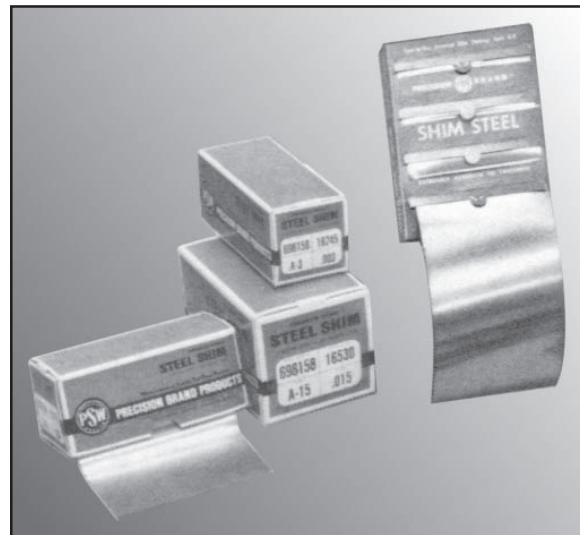

Thickness	THICKNESS TOLERANCE	
	Width	
	6"	12"
.001-.003"	± 10%	± 10%
.004-.006"	± .0005"	± .00075"
.007-.019"	± .00075"	± .001"
.020-.025"	± .001"	± .0015"
.026-.031"	± .0015"	± .002"

CATALOG 14
SPAENAUR

BLUE TEMPERED (STEEL) Shim Stock

SPECIFICATIONS AND USE

Precision Brand Blue Tempered Spring Steel Shim is a C1095 high carbon, hardened and tempered product to meet the most exacting requirements. This high quality spring steel has a Rockwell hardness range of C 48/51. This material is preferred by tool and die makers for low templates and shim applications where toughness and low fatigue values are required. The blue surface is ideal for scribing layouts. Recommended for various types of coiled and flat mechanical springs, such as those used in tuning devices, electrical assemblies, steel tapes and rules.

Precision Brand Blue Tempered Spring Steel Shim meets the following standards: MIL-S-7947, AMS 5122.

SINGLE ROLLS 50"

SPAENAUR No.	Thickness	Equivalent Thickness in mm	Width
603-101	.002"	(.051)	3"
603-102	.003"	(.076)	3"
603-103	.004"	(.102)	5"
603-104	.005"	(.127)	6"
603-105	.006"	(.152)	6"
603-106	.007"	(.179)	6"

LARGE SHEETS (6" x 25")

SPAENAUR No.	Thickness	Equivalent Thickness in mm
603-107	.008"	(.203)
603-108	6" x 25" sheets	.010" (.254)
603-109	2 sheets/package	.012" (.305)
603-110		.015" (.381)
603-111	<i>Sold in Full Package</i>	.020" (.508)
603-112	<i>Quantities only.</i>	.025" (.635)
603-113		.032" (.813)

ASSORTMENT

SPAENAUR No.	Description	Thickness
603-114	6" x 12" sheets 1 sheet ea. thickness <i>6 sheets/set</i>	.005", .010", .015" .020", .025", .032"

THICKNESS TOLERANCE

Thickness	Width Up to 6" Incl.
.004"	± 10%
.005-.009"	± .00075"
.010-.013"	± .001"
.014-.019"	± .0015"
.020-.032"	± .002"

CHEMISTRY

C	Mn	P Max.	S Max.
.90-1.03	.30-.50	.040	.050

Tensile: 230,000/250,000 PSI based on Rockwell Hardness C48/51

STAINLESS STEEL Shim Stock

SPECIFICATIONS AND USE

Precision Brand Stainless Steel Shim is a T302, cold rolled, full hard material with a hardness of RC-40/45. Because of its accurate thickness and temper, it is widely used for shimming applications where corrosion resistance is required. Also used extensively for spring clips, washers and retainers. Precision Brand Stainless Steel Shim has been recognized for shimming applications in nuclear and fossil-fueled generating stations, oil and gas refineries, and desalinization projects throughout the world. Material certifications available upon request. Precision Brand Stainless Steel Shim meets the following standards: AISI 302, SAE 30302, MIL-S-5059.

SINGLE ROLLS

SPAENAUR No.		Thickness	Equivalent Thickness in mm
6" x 50" ROLLS	12" x 50" ROLLS		
603-801	—	.0005"	(.013)
603-802	603-818	.001"	(.025)
603-803	—	.0015"	(.038)
603-804	603-819	.002"	(.051)
603-805	603-820	.003"	(.076)
603-806	603-821	.004"	(.102)
603-807	603-822	.005"	(.127)
603-808	603-823	.006"	(.152)
603-809	603-824	.007"	(.179)
603-810	603-825	.008"	(.203)
603-811	—	.009"	(.229)
603-812	603-826	.010"	(.254)
603-813	603-827	.012"	(.305)
603-814	603-828	.015"	(.381)
603-815	603-829	.020"	(.508)
603-816	—	.025"	(.635)
603-817	—	.031"	(.787)

LARGE SHEETS (12" x 24")

12" x 24" sheets 2 sheets/package	SPAENAUR No.	Thickness	Equivalent Thickness in mm
<i>Sold in Full Package</i>	603-116	.025"	(.635)
<i>Quantities only.</i>	603-115	.031"	(.787)

ASSORTMENT

SPAENAUR No.	Description	Thickness
603-832	6" x 12" sheets 1 sheet ea. thickness <i>8 sheets/set</i>	.001", .002", .003", .005", .008", .010", .015", .020"

THICKNESS TOLERANCE

Thickness	Width	
	6"	12"
.0005-.009"	± 10%	± 10%
.010-.019"	± .001"	± .0015"
.020-.028"	± .0015"	± .0015"
.029-.031"	± .002"	± .002"


CHEMISTRY

C Max.	Mn Max.	Si Max.	P Max.	S Max.	Cr	Ni
0.15	2.00	1.00	0.045	0.030	17.00/ 19.00	8.00/ 10.00

BRASS Shim Stock



Cut It

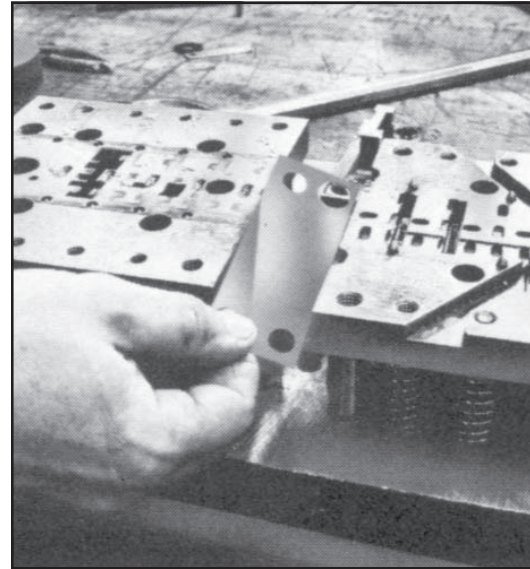

Shim It

SINGLE ROLLS

SPAENAUR No.		Thickness in Inches	Equivalent Thickness in mm
6" x 100" ROLLS	12" x 120" ROLLS		
603-B04-1M	603-516	.001"	(.025)
603-501	-	.0015"	(.038)
603-502	603-517	.002"	(.051)
603-503	603-518	.003"	(.076)
603-504	603-519	.004"	(.102)
603-B01-1T	603-520	.005"	(.127)
603-506	603-521	.006"	(.152)
603-507	-	.007"	(.179)
603-508	603-522	.008"	(.203)
603-509	-	.009"	(.229)
603-B02-1K	603-523	.010"	(.254)
603-511	-	.012"	(.305)
603-512	603-532	.015"	(.381)
603-513	603-533	.020"	(.508)
603-514	-	.025"	(.635)
603-515	-	.031"	(.787)

LARGE SHEETS (6" x 25")

SPAENAUR No.	Description	Thickness in Inches
603-527	6" x 25" sheets	.012
603-528	2 sheets/package	.015
603-529		.020
603-530	<i>Sold in Full Package</i>	.025
603-531	<i>Quantities only</i>	.031

ASSORTMENTS

SPAENAUR No.	Description	Thickness In Inches
603-524	6" x 12" sheets 1 sheet ea. thickness <i>12 sheets/set</i>	.001, .0015, .002, .003, .004, .005, .006, .007, .008, .010, .012, .015
603-525	6" x 12" sheets 1 sheet ea. thickness <i>15 sheets/set</i>	.001, .0015, .002, .003, .004, .005, .006, .007, .008, .010, .012, .015, .020, .025, .031
603-526	6" x 50" rolls 1 roll ea. thickness <i>4 rolls/box</i>	.001, .002, .003, .005

SPECIFICATIONS AND USE

Precision Brand Brass Shim is a cold rolled, half hard, 70% copper, 30% zinc alloy material with an R30T hardness range of 56/68. Because of its accurate thickness and temper, it is universally used for shimming applications in explosive atmospheres and where corrosion problems exist. Due to its excellent forming quality, it may be lightly drawn, blanked or stamped, and is used extensively in metal sculpture.

Precision Brand Brass Shim meets the following standards: SAE CA 260, ASTM-B36 #6, AMS 4507-C, QQ-B-613-b #2.

CHEMISTRY

Cu	Zn	Approximate Tensile 62,000 PSI
70	30	

THICKNESS TOLERANCES

Thickness in Inches	Width	
	6"	12"
.001" to .003"	±10%	±10%
.004"	±.0003	±.0006
.005" to .006"	±.0004	±.0008
.007" to .009"	±.0006	±.0010
.010" to .013"	±.0008	±.0013
.014" to .017"	±.0010	±.0015
.018" to .021"	±.0013	±.0018
.022" to .031"	±.002	±.002

Steel - Zinc Plated

Illustration	SPAENAUR No.	Thickness	PKG QTY.	Description and Application
	W-134SH	1/8"	25	<p><i>BALL-JOINT SHIMS</i> For Oldsmobile 1957-'73</p>
	W-300SH W-138SH W-140SH	1/64" 1/32" 1/8"	25 25 25	<p><i>BALL-JOINT SHIMS</i> For Ford, Meteor 1957-'73 Checker 1957-'73</p>
	602-A02-1Y 602-A03-1C W-8SH W-9SH	1/64" 1/32" 1/16" 1/8"	50 50 50 50	<p><i>BALL-JOINT SHIMS</i> For Ford Products Cars 1954-'79 and Universal use</p>
	*W-182SH W-184SH	1/32" 1/8"	25 25	<p><i>UNIVERSAL BODY SHIMS</i> For ALL Cars * Slot Depth .850" ± .015625"</p>






D

CATALOG 14

SPAENAUR

Continues on Next Page





Steel - Zinc Plated

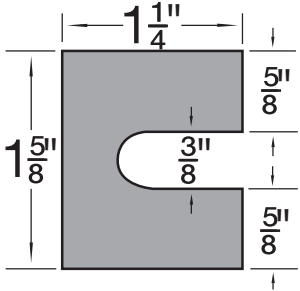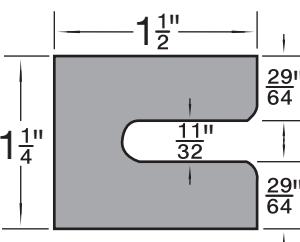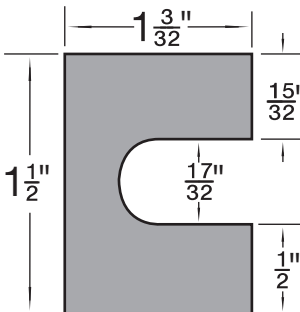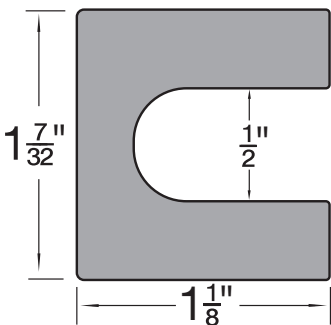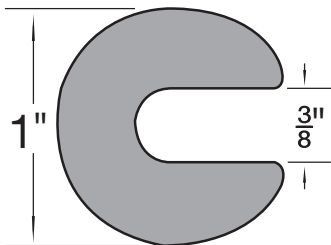Illustration	SPAENAUR No.	Thickness	PKG QTY.	Description and Application
	<p>602-431 W-164SH</p>	<p>1/16" 1/8"</p>	<p>25 50</p>	<p><i>BODY SHIM</i> <i>General Purpose</i></p>
	<p>B-1360</p>	<p>.080"</p>	<p>50</p>	<p><i>ALL PURPOSE SHIM</i></p>
	<p>W-301SH W-302SH W-303SH W-304SH</p>	<p>1/64" 1/32" 1/16" 1/8"</p>	<p>50 50 50 25</p>	<p><i>BALL-JOINT SHIMS</i> <i>Mustang 1965 - 1966</i></p>
	<p>602-412 602-413 602-414</p>	<p>1/32" 1/16" 1/8"</p>	<p>25 25 25</p>	<p><i>BALL-JOINT SHIMS</i> <i>Chevrolet 1971-'79</i></p>
	<p>W-148 602-A04-1N 602-A01-1P</p>	<p>1/32" 1/16" 1/8"</p>	<p>100 100 100</p>	<p><i>WASHER SHIM</i> <i>All Purpose Universal All cars</i> <i>1963-79</i></p> <p>Continues on Next Page</p>

D

SPAENAUR CATALOG 14.07

Steel - Zinc Plated

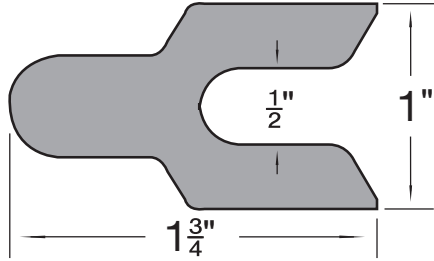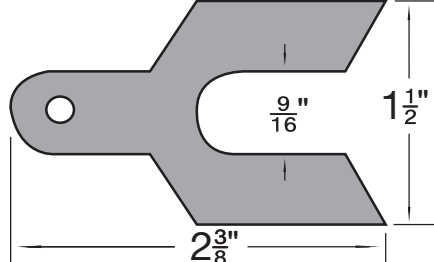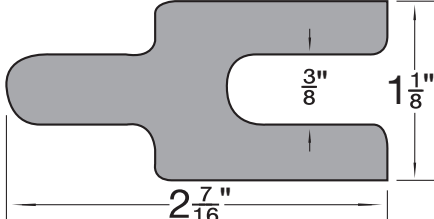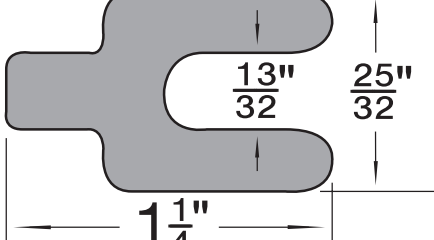Illustration	SPAENAUR No.	Thickness	PKG QTY.	Description and Application
	<p>602-396 602-397 602-398</p>	<p>1/32" 1/16" 1/8"</p>	<p>25 25 25</p>	<p><i>BALL-JOINT SHIMS Chev. & Chevelle Com. 1971-1979</i></p>
	<p>602-399 602-411</p>	<p>1/32" 1/8"</p>	<p>25 25</p>	<p><i>BALL-JOINT SHIMS Chev. & GMC Heavy Trucks 1963-1973</i></p>
	<p>602-415 602-416</p>	<p>1/16" 1/8"</p>	<p>25 25</p>	<p><i>FENDER TAB SHIMS Buick 1965-1973</i></p>
	<p>602-428 602-417</p>	<p>1/32" 1/16"</p>	<p>50 50</p>	<p><i>SHIMS Fiat & Small Foreign Cars 1970-1979</i></p>

D

CATALOG 14

SPAENAUR

Continues on Next Page

Continued from Previous Page

Steel - Zinc Plated

Illustration	SPAENAUR No.	Thickness	PKG QTY.	Description and Application
	<p>602-429 W-14SH *W-15SH W-17SH</p>	<p>1/64" 1/32" 1/16" 3/16"</p>	<p>25 50 50 25</p>	<p><i>CASTER-CAMBER SHIMS</i> For Chevrolet, Pontiac 1955-1970 Corvair '60-62</p> <p>*dashed line on drawing is the cut out for this part number.</p>
	<p>W-135SH W-136SH W-192SH</p>	<p>.060" .080" .164"</p>	<p>25 25 25</p>	<p><i>BALL-JOINT SHIMS</i> For Buick, Pontiac 1957-1973</p>
	<p>602-430</p>	<p>1/64"</p>	<p>25</p>	<p><i>UNIVERSAL BALL-JOINT SHIMS</i> Fit all bolt sizes</p>
	<p>W-217SH W-218SH W-219SH</p>	<p>1/32" 1/16" 1/8"</p>	<p>25 25 25</p>	<p><i>CASTER-CAMBER SHIMS</i> Corvair 1961 - 1968</p>
	<p>602-424</p>	<p>1/64"</p>	<p><i>REAR SUSPENSION SHIM</i> GM Cars 1963-1979</p> <p>Continues on Next Page</p>	


D

Inch

Pouce

BODY SHIM
STEEL—Zinc Plated

SPAENAUR No.	Thickness
602-422	1/16"
602-423	1/8"



Shim, Body at Hinge to Fender Reinforcement, Lower Fender Reinforcement to Body.


Chevrolet, Oldsmobile, Buick, Pontiac — 1977-1979.

PKG QTY. 25

ALIGNING SHIMS FOR STARTERS

CHEVROLET, OLDSMOBILE, BUICK, PONTIAC
ALL G.M. CARS 1970-1979


STEEL Zinc Plated	SPAENAUR No.	Thickness
	602-419	1/64"
PKG QTY. 25	602-420	1/32"
	602-421	1/16"

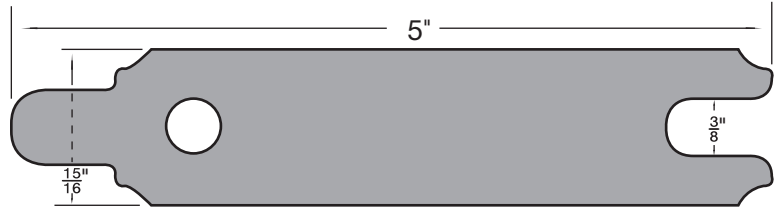

UNIVERSAL
"BREAK-OFF" SHIM

SPAENAUR No.
W-321SH

.065" Thick

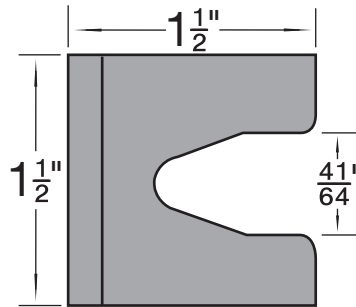


FOR ALL BOLT SIZES—
3/8", 7/16", 1/2", 9/16", 5/8" and 21/32"

Break-Off Feature For Added Application
in Hard-To-Shim Areas.

PKG QTY. 50

MALLEABLE IRON BEVELED WASHERS

16-2/3% Slope




Plain Finish

SPAENAUR No.	Bolt Dia.	Across Flats (Square)	Thickness at Large End	at Taper	Hole Dia.	PKG QTY.
635-001	1/4"	11/16"	7/32"	5/64"	5/16"	50
W-289	3/8"	1-1/4"	11/32"	5/32"	7/16"	50
W-290	1/2"	1-1/4"	11/32"	5/32"	9/16"	50
635-A01-1K	5/8"	1-1/2"	13/32"	5/32"	11/16"	25
W-292	3/4"	1-1/2"	13/32"	5/32"	13/16"	25
W-293	7/8"	2"	1/2"	7/32"	15/16"	10
W-294	1"	2"	9/16"	7/32"	1-3/32"	10

ALUMINUM (Alloy 319) BEVELED WASHERS

TYPE A - Plain Finish

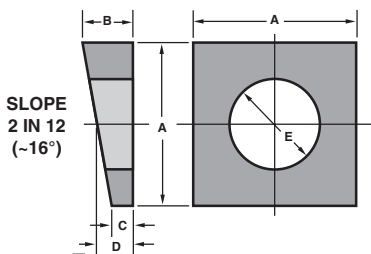

SPAENAUR No.	BOLT DIA.	A	B	C	D	HOLE DIA. E	PKG QTY.
635-300	1/4"	0.69"	0.22"	0.09"	0.16"	0.31"	100
635-301	5/16"	1.00"	0.31"	0.16"	0.23"	0.38"	100
635-302	3/8"	1.25"	0.34"	0.12"	0.23"	0.44"	50
635-303	1/2"	1.25"	0.34"	0.12"	0.23"	0.56"	50
635-304	5/8"	1.50"	0.38"	0.12"	0.25"	0.69"	25
635-305	3/4"	1.50"	0.44"	0.19"	0.31"	0.81"	25

CATALOG 14

SPAENAUR

Section Index / Index de section

Product	Inch	Metric	Product	Inch	Metric
English Index					
A					
Arbor Shims & Spacers	D76-77		Shim Rings	D76-77	D75
Automotive Shims	D84		Shim Stock	D78-81	
B					
Belleville Washers	D48-51		Shims, Arbor Washer	D75-77	
Bevel Washers	D75	D74	Shoulder Washer	D11, D73	
Bow Washers	D65	D66-67	Silicone Washers	D70	
Burrs	D9		Sleeves, Nyltite®	D71	
C					
Copper Sealing Rings		D20-21	Spacers, Arbor	D76-77	D75
Countersunk Washers	D68		Spring Tension Washers	D65	D65-67
D					
Disc Springs	D39-64		T		
Disc-Lock® Washers	D38		Teflon Washers	D10	
F					
Fibre Washers & Sheets	D11		Tension Washers	D65	D65-67
Finishing Washers	D68		Tooth Lock Washers	D30-31	D32-34
Flat Washers	D2-11	D12-19	W		
G					
Galvanized			Washers		
Lock Washers	D23		Belleville	D48-51	
Plate Washers	D3		Beveled, Square	D75	D74
I					
Insulators, Nylon	D71-73		Brass	D8	
L					
Lockwashers			Copper Sealing		D20-21
Nord-Lock®	D36-37	D36-37	Countersunk	D68	
Sherex TEC Series	D38.1-38.6		Cup	D68	
Split & Toothed	D22-24, D30-31	D25-29, D32-34	Disc Lock®	D38	
N					
Nord-Lock® Washers	D36-37	D36-37	Disc Spring	D39-64	
Nylon, Washers	D73	D15	Fibre	D11	
Nyltite®, Headed Washers & Sleeves	D71		Finishing	D68	
R					
Rings, Sealing Copper		D20-21	Flat	D2-11	D12-19
Rubber, Washers	D69-70	D69	Galvanized	D3	
S					
Screw Insulators, Nylon	D71-73		Leather	D11	
Sealing Washers	D71		Lock		D28-29
Seals, Aluminum, Copper & Fibre		D20-21	Nord-Lock®	D36-37	D36-37
Sherex TEC Series Washers	D38.1-38.6		Ribbed		D19
			Rubber	D69-70	D69
			Sealing	D71	D20-21
			Sherex TEC Series	D38.1-38.6	
			Shim	D75-77, D82-85	
			Shoulder	D11, D73	
			Silicone	D70	
			Split	D22-24	D25-27
			Spring Tension	D65	D65-67
			Stainless	D6-7	
			Structural	D3	D18
			Tab		D13, D28-29
			Teflon	D10	
			Tooth Lockwasher	D30-31	D32-34

Index français

A					
Anneaux de calage	D76-77	D75	E		
Anneaux d'étanchéité en cuivre		D20-21	Entretoises, arbre	D76-77	D75
Anneaux, étanchéité, cuivre		D20-21	G		
C					
Cales Automotive	D84		Galvanisé		
Cales, Rondelles d'arbre	D75-77		Rondelles freins	D23	
Caoutchouc, Rondelles	D69-70	D69	Rondelles plates	D3	
I					
			Isolateurs de vis, nylon	D71-73	

D86

P: 1-800-265-8772 F: 1-888-252-6380 service@spaenaur.com

© 2018 Spaenaur Inc. All rights reserved. Catalog may not be reproduced, in whole or in part, without the written permission of Spaenaur Inc. Subject to Catalog Terms and Conditions of Use available at Spaenaur.com and on page TC2 and TC3 at the back of this catalog. © 2018 Spaenaur Inc. Tous droits réservés. Le catalogue ne peut être reproduit, en tout ou en partie, sans l'autorisation écrite de Spaenaur Inc. L'utilisation est soumise aux Conditions d'utilisation du Catalogue disponibles sur Spaenaur.com et à la page TC4 et TC5 à la fin de ce catalogue.

Product	Inch	Metric	Product	Inch	Metric
Index français (suite)					
J			Rondelles (Suite)		
Joint d'étanchéité – aluminium, cuivre et fibre		D20-21	D'étanchéité	D71	D20-21
M			Disc-Lock®	D38	
Manchons, Nylite ^{MD}	D71		Étanchéité, cuivre		D20-21
N			Fente	D22-24	D25-27
Nylite ^{MD} , Rondelles et manchons	D71		Fibre	D11	
P			Finition	D68	
Plaquettes obliques	D75	D74	Fraisées	D68	
R			Freinés		D28-29
Rondelles d'ajustage	D78-81		Freinés, dentés	D30-31	D32-34
Rondelles			Galvanisées	D3	
À ressort	D39-64		Laiton	D8	
Acier inoxydable trempé	D6-7		Nervurées		D19
Belleville	D48-51		Nord-Lock ^{MD} ,	D36-37	D36-37
Bombées	D68		Obliques, carrées	D75	D74
Cale	D75-77, D82-85		Onglet		D13, D28-29
Caoutchouc	D69-70	D69	Plates	D2-11	D12-19
Cuir	D11		Ressort de tension	D65	D65-67
D'épaulement	D11, D73		Sherex TEC Series	D38.1- 38.6	
			Silicone	D70	
			Structurelles	D3	D18
			Téflon	D10	

D