T-Series Readers

The Gallagher T-Series Reader and Terminal range provides contactless card functionality for access control management in your business.

Fast and secure access control

Utilizing the high speed RS485 HBUS protocol, Gallagher readers can offer an access decision response time of 200 milliseconds. IT grade authentication and encryption between the reader and controller keep your information protected

Features and benefits:

- Support for multiple card technologies including: Mifare DESFire EV1, Plus and Classic, as well as 125 kHz proximity technology (T11,T12 and T20 multi technology readers only)
- Unrivalled reader durability and water/dust protection
- Environmentally friendly RoHS compliant and designed for minimal power consumption
- Backwards compatibility the readers are compatible with Cardax IV enabled Gallagher Controller and GBUS URI hardware
- Support for custom site encryption keys
- Heartbeat monitoring to ensure reader status can be monitored in real-time
- Extensive range of reader mounting and protection accessories







Gallagher T20 Terminal

With a contemporary and intuitive user interface, 3.5" color LED screen and large backlit keys, Gallagher's T20 access terminal is very easy to use. Crafted from high grade polymer material, the terminal has IP66 rated environmental protection, and IK08 rated impact protection. The T20 is both an access reader and a management tool, able to read cards, accept PIN's and has the ability to interface directly with the security system to make control decisions.

Features and benefits

- Card Only and Card + PIN access modes (including duress access support, and dual cardholder authentication)
- Enforce cardholder compliance with entry regulations through competency message display
- Control Outputs to manage building facilities
- Arm and disarm up to 50 alarm zones distributed across any system controllers, with optional automated input isolation, and automated alarms acknowledgment.
- Display up to 200 unacknowledged alarms and 100 acknowledged alarms, and manage up to 100 inputs. An alarms only variant is available (The T20 AT C300463) when reader capability is not required.
- Maintain system integrity with scheduled or manual tests
- Extensive perimeter management functions, including arming and disarming zones, acknowledging alarms, fence zone lockout for maintenance, and displaying fence voltage, battery voltage and fence controller temperature.
- Multiple language support
- Integrated rear tamper
- Custom background images when in idle mode
- Fully configurable Mimic Panel reflecting the status of up to 8 inputs, outputs, or alarm zones
- Upgrade software in situ to keep your system up to date with latest technology developments (via HBUS)

T20


Gallagher T-Series Readers

Available in several thin-form shapes, black or white, Mifare or multi tech, the contactless readers of the T-Series range provide a reader option for anywhere on site.

Features and benefits

- IP68 environmental protection and IK07 for impact protection
- Contemporary design classic black and white, with both mullion or flushbox mounting variants
- Configurable illumination and sound; where visual or audible indications may cause distraction
- Lifetime warranty



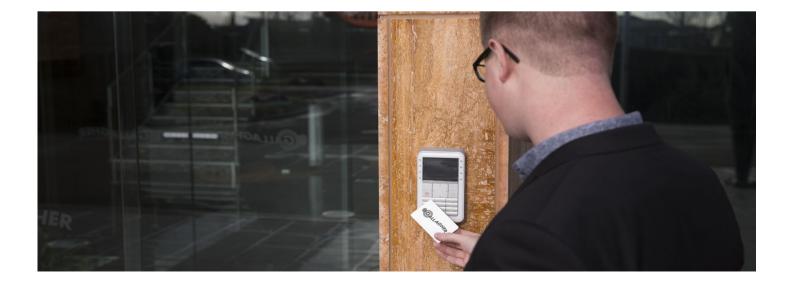

Gallagher also provide a number of accessories for the T-Series range including:

- Protective covers IKO8 rating protects readers against vandal attacks and harsh environments
- Dress plates cover up holes left by previously installed readers, ensuring a clean finish for sites upgrading their reader and terminal hardware
- ■Bezels surrounds available in a variety of colours to suit décor
- Spacers enforces a space between the reader and the mounting surface, allowing installations on metal surfaces whilst preserving credential read range
- Mounting blocks allow the T20's wiring to be terminated in a tamper protected environment.

















T-SERIES PROD	DUCTS		
T-Series Readers			
C300461	T20 Multi Tech Reader, White	C300421	T12 Mifare Reader, White Rev1
C300460	T20 Multi Tech Reader, Black	C300420	T12 Mifare Reader, Black Rev1
C300451	T20 Mifare Reader, White	C300431	T11 Multi Tech Reader, White, Rev1
C300450	T20 Mifare Reader,	C300430	T11 Multi Tech Reader, Black Rev1
C300441	T12 Multi Tech Reader, White, Rev1	C300411	T11 Mifare Reader, White Rev1
C300440	T12 Multi Tech Reader, Black Rev1	C300410	T11 Mifare Reader, Black Rev1
C300421	T12 Mifare Reader, White Rev1	C300401	T10 Mifare Reader, White Rev1
C300420	T12 Mifare Reader, Black Rev1	C300400	T10 Mifare Reader, Black Rev1
T-Series Dress Plat	es		
C300323	T20 Dress Plate, Black, Pk 5	C300321	T11 Dress Plate, Black, Pk 10
C300322	T12 Dress Plate, Black, Pk 10	C300320	T10 Dress Plate, Black, Pk 10
T-Series Bezels			
C300292	T20 Bezel, Black, Pk 5	C300284	T11 Bezel, Black Pk 10
C300293	T20 Bezel, White, Pk 5	C300285	T11 Bezel, White, Pk 10
C300294	T20 Bezel, Silver, Pk 5	C300286	T11 Bezel, Silver, Pk 10
C300295	T20 Bezel, Gold, Pk 5	C300287	T11 Bezel, Gold, Pk 10
C300288	T12 Bezel, Black, Pk 10	C300280	T10 Bezel, Black, Pk 10
C300289	T12 Bezel, White, Pk 10	C300281	T10 Bezel, White, Pk 10
C300290	T12 Bezel, Silver, Pk 10	C300282	T10 Bezel, Silver, Pk 10
C300291	T12 Bezel, Gold, Pk 10	C300283	T10 Bezel, Gold, Pk 10
T-Series Spacers			
C300306	T20 Spacer, Black, Pk 5	C300300	T10 Spacer, Black, Pk 10
C300307	T20 Spacer, White, Pk 5	C300300	T10 Spacer, Black, Pk 10
C300304	T12 Spacer, Black, Pk 10	C300301	T10 Spacer, White, Pk 10
C300305	T12 Spacer, White, Pk 10	C300312	Protective Cover Spacer
C300302	T11 Spacer, Black, Pk 10	C300311	T11/T12 Protective Cover Spacer
C300303	T11 Spacer, White, Pk 10	C300310	T10 Protective Cover Spacer
T-Series Protective	Covers		
C300271	T11/T12 Protective Cover	C300270	T10 Protective Cover
C300272	T20 Protective Cover		
T20 Mounting Bloc	ks		
C303931	Side Cable Entry	C303930	Rear Cable Entry
T20 Alarm Only Ter			_
C300463	T20 Alarms Terminal, Black	C300464	T20 Alarms Terminal, White

Technical Specifications	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\)		
T-Series Readers	T10	T11	T12	T20
Read distance - Mifare Classic	55mm	55mm	55mm	80mm
Read distance - Mifare Plus, DESFire	30mm	30mm	30mm	40mm
Read distance - 125kHz	-	85mm	85mm	95mm
Dimensions mm (H x W x D)	115 x 35 x 12	115 x 70 x 12	86 x 86 x 12	179.5 x 95.7 x23
Dimensions inches (H x W x D)	4.5 x 1.4 x 0.5	4.5 x 2.8 x 0.5	3.4 x 3.4 x 0.5	7.1 x 3.8 x 0.9
Environmental protection	IP68			IP66
Impact rating	IK07		IK09	
UV Stability	Nil structural degradation for the life of the reader [†]			
Voltage	9-16Vdc	9-16Vdc	9-16Vdc	9-16Vdc
Idle current @ 13.6Vdc - Mifare	74mA	84mA	84mA	130mA
Idle current @ 13.6Vdc - Multi	-	100mA	100mA	160mA
Operational Temperature Range °C	-35° to + 70°C		-30° to + 70°C	
Operational Temperature Range °F	-31°F to +158°F			-22°F to +158°F
Humidity	95% non-condensing			
Cable length - Cat5e (data and power)**	up to 50m			
Cable length - Cat5e (data only)**	up to 500m			
Cable length - HBUS Cable (data and power)**	up to 200m			
Standards Compliance	All equipment complies with FCC, CE, UL, and C-Tick approvals. Please contact Gallagher for the latest list of approvals.			

 $^{^{\}star}\,$ Read range may be reduced when reader is mounted on metal surfaces

⁺⁺ For further cable specifications please refer to the Gallagher Security System Technical Reference Manual

Protective Covers	T10	T11	T12	T20
Dimensions mm (H X W X D)	132 x 63 x 18	131 x 111 x 18	131 x 111 x 18	193 x 123 x 32
Dimensions inches (H X W X D)	5.2 x 2.5 x 0.7	5.2 x 4.4 x 0.7	5.2 x 4.4 x 0.7	7.6 x 4.8 x 1.3

©2013 Gallagher Group Ltd. Gallagher is an ISO 9001:2008 certified supplier. All rights reserved. The products described in this document are subject to continuous development and improvement so specifications and information may change without notice. System configuration, network capacities and the volume of system activity affect performance.

GALLAGHER WORLD HEADQUARTERS

Kahikatea Drive, Hamilton 3206 Private Bag 3026, Hamilton 3240 New Zealand

TEL: +64 7 838 9800 EMAIL: security@gallagher.com







REGIONAL OFFICES

New Zealand	+64 7 838 9800
Americas	+1 877 560 6308
Asia	+852 3468 5175
Australia	+61 3 9308 7722
India	+91 80 2676 2084
Middle East	+971 4 2602145
South Africa	+27 11 974 4740
United Kingdom / Europe	+44 2476 64 1234

DISCLAIMER: This document gives certain information about products and/or services provided by Gallagher Group Limited or its related companies (referred to as "Gallagher Group"). The information is indicative only and is subject to change without notice meaning it may be out of date at any given time. Although every commercially reasonable effort has been taken to ensure the quality and accuracy of the information, Gallagher Group makes no representation as to its accuracy or completeness and it should not be relied on as such. To the extent permitted by law, all express or implied, or other representations or warranties in relation to the information are expressly excluded. Neither Gallagher Group nor any of its directors, employees or other representatives shall be responsible for any loss that you may incur, either directly or indirectly, arising from any use or decisions based on the information is subject to copyright owned by Gallagher Group is the you may not sell it without permission. Gallagher Group is the owner of all trademarks reproduced in this information. All 47 trademarks which are not the property of Gallagher Group, are acknowledged. Copyright © Gallagher Group Ltd 2015. All rights of



[†] Prolonged exposure to high UV light environments can cause plastics to discolor