

**PRO DVX**  
THE ART OF DIGITAL VIEWING



## PRODUCT CATALOGUE 2020

**sys com tec**

distributed by

Distribution AG

Raiffeisenallee 8  
D-82041 Oberhaching

Tel.: +49 (89) 666 109 330  
Fax: +49 (89) 666 109 339

Mail: [post@syscomtec.com](mailto:post@syscomtec.com)  
[www.syscomtec.com](http://www.syscomtec.com)

## WE ARE PRODVX

Thank you for your interest in our company. We are pleased to present to you our 2020 product catalogue with our newest products and features.

Since 2004, we have been making the difference for our clients with valuable solutions. We do this by leading the way in product development and through our diverse and innovative product portfolio.


We provide high quality, state-of-the-art Android and Intel SOC displays, touchscreens and related accessories for numerous markets and applications. Our products are globally renown for their reliability, affordability and ease-of-use.

We value direct and short lines of communication with our supply chain partners. This way, we are able to keep prices down but also deliver tailored service and support to end-users. Our customers know they can rely on us, our resellers and distributors.





Would you like to know more about us and our products? Please feel free to contact us. You can visit our website at [www.prodvx.com](http://www.prodvx.com) or send an e-mail to [sales@prodvx.com](mailto:sales@prodvx.com).

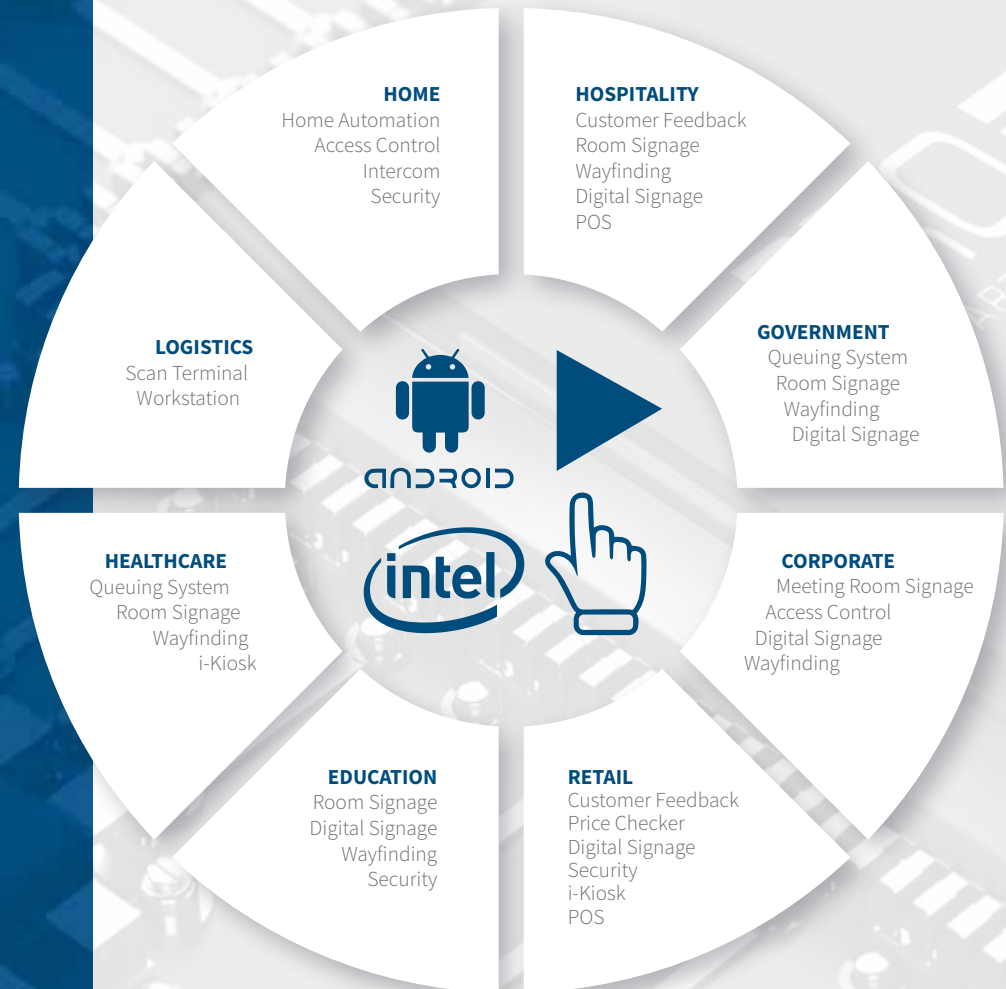We are looking forward doing business with you.

Best regards,  
ProDVX



## OUR PRODUCTS

<b>X-SERIES – PREMIUM INTEGRATED ANDROID SOC TOUCH DISPLAYS</b>		<b>4</b>
<b>SLB SERIES – SURROUND LED BAR SOC TOUCH DISPLAYS</b>	 	<b>6</b>
<b>INTEGRATED ANDROID SOC TOUCH DISPLAYS</b>		<b>8</b>
<b>INTEGRATED INTEL SOC TOUCH DISPLAYS</b>		<b>10</b>
<b>ULTRAWIDE SIGNAGE DISPLAYS</b>		<b>12</b>
<b>SIGNAGE DISPLAYS</b>		<b>14</b>
<b>TOUCH MONITOR DISPLAYS</b>		<b>16</b>
<b>BOX PCS</b>		<b>18</b>
<b>ACCESSORIES</b>		<b>19</b>







## Premium Integrated Android SOC Touch Displays

### X-Series

The brand new, state-of-the-art X-Series consists of four Premium Integrated Android SOC Touch Displays. All displays come with Android 8, Power over Ethernet (PoE) and 16 GB Internal Storage. The X-Series are available in 7, 10, 15 and 22 inch. These displays are professionally designed and manufactured All-in-One Touch Displays with Embedded ARM processor. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



### FEATURES

-  Android 8, Linux Ubuntu (optional)
-  High quality and durable PCAP touch
-  Available sizes: 7, 10, 15 and 22 inch
-  Integrated LED status lights (RGB)
-  Commercial grade continuous usage (24/7)
-  Several connectivity options such as LAN, Power over Ethernet, Wi-Fi, Bluetooth and POGO ports for accessories

### MARKETS

The X-Series is ideal for applications in Retail, Corporate, Industrial, Hospitality, Healthcare, Government, Education and many more markets.

### APPLICATIONS

- i-Kiosk
- Interactive Digital Signage
- Room Booking
- Wayfinding
- POS/POP
- Queuing
- Security
- Access Control
- Feedback Terminals
- Price Checker

		APPC-7XPL	APPC-10X/P/L	APPC-15XP	APPC-22X/P
<b>Panel</b>	<b>Size</b>	7"	10.1"	15.6"	21.5"
	<b>Type</b>	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS
	<b>Resolution</b>	1024 x 600	1280 x 800	1920 x 1080	1920 x 1080
	<b>Aspect Ratio</b>	17:10 wide	16:10 wide	16:9 wide	16:9 wide
	<b>Backlight</b>	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type
	<b>Brightness</b>	450 cd/m2	500 cd/m2	300 cd/m2	250 cd/m2
	<b>Viewing Angle</b>	H 170° / V 170°	H 160° / V 160°	H 170° / V 170°	H 178° / V 178°
	<b>Contrast Ratio</b>	800 : 1	800:1	800 : 1	800:1
	<b>Touch Type</b>	5 point touch projected capacitive	5 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive
<b>System (SOC)</b>	<b>CPU</b>	Cortex A53, Octa Core, RK3368H	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288
	<b>GPU</b>	GC6110	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)
	<b>System Memory</b>	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM
	<b>Internal Storage</b>	16GB eMMC Flash	16 GB eMMC Flash	16 GB eMMC Flash	16 GB eMMC Flash
	<b>External Storage</b>	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot (hidden)
	<b>OS</b>	Android 8	Android 8 / Linux Ubuntu	Android 8 / Linux Ubuntu	Android 8 / Linux Ubuntu
	<b>LED Light Bar</b>	2 side led bar (RGB)	2 side led bar (RGB)	N/A	2 side led bar (optional)
	<b>I/O Ports</b>	Micro-USB / USB / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / HDMI / SPDIF/GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / HDMI / SPDIF/ 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN
	<b>Network LAN RJ45</b>	10/100 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN
	<b>WiFi / Bluetooth</b>	802.11 b/g/n/ac / BT4.2	802.11 a/b/g/n/ac / BT 4.2	802.11 a/b/g/n/ac / BT 4.2	802.11 a/b/g/n/ac / BT 4.2
<b>(PoE) Power over Ethernet</b>	IEE 802.3 af/at	IEE 802.3 af / at (XP/L)	IEE 802.3 af/at	IEE 802.3 bt Type 3 (XP)	
<b>Physical</b>	<b>Housing</b>	Plastic	Plastic	Plastic	Plastic
	<b>Color</b>	Black	Black	Black	Black
	<b>Weight</b>	500 g	650 g	1300 g	4200g
	<b>Dimensions</b>	188 x 120 x 24 mm	255 x 181 x 25 mm	388 x 242 x 28 mm	531 x 322 x 35 mm
	<b>Mounting / VESA</b>	VESA unique pattern	VESA 75	VESA 100	VESA 100
	<b>Power Supply</b>	12V / 2A (EU, UK, US)	12V / 2A (EU, UK, US)	12V / 2A (EU, UK, US)	12 V / 5 A
	<b>Power Usage</b>	4 ~ 11 Watt	10 ~ 20 Watt	10 ~ 20 Watt	30 ~ 45 Watt
	<b>Other</b>	<b>Working Temp</b>	0 ~ 40 degrees C	0 ~ 40 degrees C	0 ~ 40 degrees C
<b>Standard Warranty</b>	2 years	2 years	2 years	2 years	
<b>Certifications</b>	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	
<b>Optional Vesa Glass Mount</b>	GM-75	GM-75	-	-	
<b>Optional Wall Mount</b>	WM-25	WM-25	WM-25	WM-25	








## Surround LED Bar SOC Touch Displays

### Android & Intel Panel PCs

The prize-winning SLB Series consists of three 10 inch SOC Touch Displays with Surround LED Bar. Having won a COMPUTEX Design & Innovation Award and Stevie® Innovation of the Year Award for its outstanding design and cutting-edge technology, the SLB Series is the ultimate solution for Room Booking, Room Signage and Customer Feedback Systems. ProDVX offers an one-of-a-kind unique Integrated Intel SOC Touch Display with Surround LED Bar.



### FEATURES

-  Android 6, 8, Linux Ubuntu (optional)
-  Windows 10, Linux (optional)
-  High quality and durable PCAP touch
-  Available size: 10 inch
-  Surround LED Bar (RGB)
-  Commercial grade continuous usage (24/7)
-  Several connectivity options such as LAN, Power over Ethernet, Wi-Fi, Bluetooth and POGO ports for accessories

### MARKETS

The SLB-Series is ideal for applications in Retail, Corporate, Industrial, Hospitality, Healthcare, Government, Education and many more markets.

### APPLICATIONS

- Room Booking
- Queuing
- Feedback Terminals
- Access Control
- Price Checker
- i-Kiosk
- Interactive Digital Signage
- POS/POP
- Security
- Wayfinding

### AWARDS



		APPC-10SLB	APPC-10SLBW
<b>Panel</b>	<b>Size</b>	10.1"	10.1"
	<b>Type</b>	TFT LCD IPS	TFT LCD IPS
	<b>Resolution</b>	1280 x 800	1280 x 800
	<b>Aspect Ratio</b>	16:10 wide	16:10 wide
	<b>Backlight</b>	LED Side-light type	LED Side-light type
	<b>Brightness</b>	500 cd/m2	500 cd/m2
	<b>Viewing Angle</b>	H 160° / V 160°	H 160° / V 160°
	<b>Contrast Ratio</b>	600 : 1	600 : 1
	<b>Touch Type</b>	5 point touch projected capacitive	5 point touch projected capacitive
<b>System (SOC)</b>	<b>CPU</b>	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288
	<b>GPU</b>	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)
	<b>System Memory</b>	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM
	<b>Internal Storage</b>	16 GB eMMC Flash	16 GB eMMC Flash
	<b>External Storage</b>	SD-Card Slot (hidden)	SD-Card Slot (hidden)
	<b>OS</b>	Android 8 / Linux Ubuntu	Android 8 / Linux Ubuntu
	<b>LED Light Bar</b>	RED / GREEN / BLUE (Full RGB)	RED / GREEN / BLUE (Full RGB)
	<b>I/O Ports</b>	Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN
	<b>Network LAN RJ45</b>	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN
	<b>WiFi / Bluetooth</b>	802.11 a/b/g/n / BT 4.2	802.11 a/b/g/n / BT 4.2
<b>(PoE) Power over Ethernet</b>	IEE 802.3 af / at	IEE 802.3 af / at	
<b>Physical</b>	<b>Housing</b>	Plastic	Plastic
	<b>Color</b>	Black	White
	<b>Weight</b>	650 g	650 g
	<b>Dimensions</b>	255 x 181 x 25 mm	255 x 181 x 25 mm
	<b>Mounting / VESA</b>	VESA 75	VESA 75
	<b>Power Supply</b>	12 V / 2 A	12 V / 2 A
	<b>Power Usage</b>	10 ~ 20 Watt	10 ~ 20 Watt
	<b>Other</b>	<b>Working Temp</b>	0 ~ 40 degrees C
	<b>Standard Warranty</b>	2 years	2 years
	<b>Certifications</b>	FCC, CE, & RoHS	FCC, CE, & RoHS
	<b>Optional Vesa Glass Mount</b>	GM-75	GM-75
	<b>Optional Wall Mount</b>	WM-25	WM-25

		IPPC-10 SLB
<b>Panel</b>	<b>Size</b>	10.1"
	<b>Type</b>	TFT LCD IPS
	<b>Resolution</b>	1280 x 800
	<b>Aspect Ratio</b>	16:10 wide
	<b>Backlight</b>	LED Side-light type
	<b>Brightness</b>	500 cd/m2
	<b>Viewing Angle</b>	H 160° / V 160°
	<b>Contrast Ratio</b>	600 : 1
	<b>Touch Type</b>	5 point touch projected capacitive
<b>System (SOC)</b>	<b>CPU</b>	Intel Atom x5-Z8350 Quad Core
	<b>GPU</b>	Intel HD Graphics
	<b>Cooling</b>	Fanless
	<b>System Memory</b>	4 GB DDR3 1600
	<b>Internal Storage</b>	64 GB eMMC
	<b>Storage Socket 2</b>	SD Card Slot (internal)
	<b>OS</b>	Windows 8 / 10 / Linux
	<b>I/O Ports</b>	USB 3.0 / USB 2.0 / 3.5 mm audio out / RJ45 / POGO-Connector / 12V DC-IN
	<b>Network LAN RJ45</b>	10/100/1000 Mbps LAN
	<b>WiFi / Bluetooth</b>	802.11 a/c wireless module
<b>Power over Ethernet (PoE)</b>	IEE 802.3 af / at	
<b>Physical</b>	<b>Housing</b>	Plastic
	<b>Color</b>	Black
	<b>Speakers</b>	2 x 2W
	<b>Audio Jack Output 3.5 mm</b>	YES
	<b>Weight</b>	640 g
	<b>Dimensions</b>	252 x 178 x 24 mm
	<b>Mounting / VESA</b>	VESA 75
	<b>Power Supply</b>	12 V / 3.3 A
<b>Power Usage</b>	11 ~ 26 Watt	
<b>Other</b>	<b>Working Temp</b>	-10 ~ 50 degrees C
	<b>Standard Warranty</b>	2 years
	<b>Certifications</b>	FCC, CE, & RoHS







# Integrated Android SOC Touch Displays

## Android Panel PC (APPC)

The Integrated Android SOC Touch Displays by ProDVX are professionally designed and manufactured All-in-One Touch Displays with Embedded ARM processor for commercial continuous (24/7) use. With over 8 years of experience manufacturing Android powered All-in-One devices, ProDVX offers a wide variety of sizes, from 7 inch up to 32 inch. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



### FEATURES

-  Android 6, 8, Linux Ubuntu (optional)
-  High quality and durable PCAP touch
-  Available sizes: 7, 10, 12, 13, 15, 17, 22, 24, 27 and 32 inch
-  Integrated LED status lights
-  Commercial grade continuous usage (24/7)
-  Several connectivity options such as LAN, Power over Ethernet, Wi-Fi, Bluetooth and POGO ports for accessories

### MARKETS

ProDVX's cost-effective Integrated Android Touch Displays are ideal for applications in Retail, Corporate, Industrial, Hospitality, Healthcare, Government, Education and many more markets.

### APPLICATIONS

- i-Kiosk
- Interactive Digital Signage
- Room Booking
- Wayfinding
- POS/POP
- Queuing
- Security
- Access Control
- Feedback Terminals
- Price Checker



		APPC-10DSK/P/L	APPC-12DSKP	APPC-13DSKP	APPC-15DSKP	APPC-17EL	APPC-22DSK	APPC-24DSK	APPC-27DSK	APPC-32EL	APPC-32DSK	
<b>Panel</b>	<b>Size</b>	10.1"	11.6"	13.3"	15.6"	17.3"	21.5"	23.6"	27"	32"	31.5"	
	<b>Type</b>	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	
	<b>Resolution</b>	1280 x 800	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	
	<b>Aspect Ratio</b>	16:10 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide	
	<b>Backlight</b>	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	
	<b>Brightness</b>	500 cd/m2	350 cd/m2	300 cd/m2	300 cd/m2	250 cd/m2	250 cd/m2	250 cd/m2	300 cd/m2	250 cd/m2	400 cd/m2	
	<b>Viewing Angle</b>	H 160° / V 160°	H 160° / V 160°	H 170° / V 170°	H 170° / V 170°	H 170° / V 170°	H 170° / V 170°	H 178° / V 178°	H 178° / V 178°	H 170° / V 160°	H 178° / V 178°	H 178° / V 178°
	<b>Contrast Ratio</b>	600 : 1	800 : 1	800 : 1	800 : 1	800 : 1	800 : 1	3000 : 1	1000 : 1	3000 : 1	3000 : 1	1200 : 1
	<b>Touch Type</b>	5 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive
<b>System (SOC)</b>	<b>CPU</b>	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	Cortex A17, Quad Core, RK3288	
	<b>GPU</b>	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	
	<b>System Memory</b>	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	
	<b>Internal Storage</b>	8 GB eMMC Flash	16 GB eMMC Flash	16 GB eMMC Flash	8 GB eMMC Flash	16 GB eMMC Flash	8 GB eMMC Flash	8 GB eMMC Flash	8 GB eMMC Flash	16 GB eMMC Flash	8 GB eMMC Flash	
	<b>External Storage</b>	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot	SD-Card Slot (hidden)	
	<b>OS</b>	Android 6 / 8 / Linux Ubuntu	Android 6 / 8 / Linux Ubuntu	Android 6 / 8 / Linux Ubuntu	Android 6 / 8 / Linux Ubuntu	Android 6	Android 6 / 8 / Linux Ubuntu	Android 6 / 8 / Linux Ubuntu	Android 6 / 8 / Linux Ubuntu	Android 6 / 8 / Linux Ubuntu	Android 6	Android 6 / 8 / Linux Ubuntu
	<b>LED Light Bar</b>	DSKPL (RED / GREEN)	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	<b>I/O Ports</b>	Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / HDMI / GPIO Port / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	Micro-USB / USB / 3.5 mm audio-out / RJ45 / 12V DC-IN	Micro-USB / USB / GPIO Port / 3.5 mm audio-out / RJ45 / 12V DC-IN	Micro-USB / USB / GPIO Port / 3.5 mm audio-out / RJ45 / 12V DC-IN	Micro-USB / USB / GPIO Port / 3.5 mm audio-out / RJ45 / 12V DC-IN	Micro-USB / USB / GPIO Port / 3.5 mm audio-out / RJ45 / 12V DC-IN	Micro-USB / USB / 3.5 mm audio-out / RJ45 / 12V DC-IN	Micro-USB / USB / GPIO Port / 3.5 mm audio-out / RJ45 / 12V DC-IN
	<b>Network LAN RJ45</b>	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100 Mbps LAN	10/100/1000 Mbps LAN
	<b>WiFi / Bluetooth</b>	802.11 a/b/g/n / BT 4.2	802.11 a/b/g/n / BT 4.2	802.11 a/b/g/n / BT 4.2	802.11 a/b/g/n / BT 4.2	802.11 b/g/n / BT 4.0	802.11 a/b/g/n / BT 4.2	802.11 a/b/g/n / BT 4.2	802.11 a/b/g/n / BT 4.2	802.11 a/b/g/n / BT 4.2	802.11 b/g/n / BT 4.0	802.11 a/b/g/n / BT 4.2
	<b>(PoE) Power over Ethernet</b>	IEE 802.3 af/at (DSKP/L)	IEE 802.3 af/at	IEE 802.3 af/at	IEE 802.3 af/at	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>Physical</b>	<b>Housing</b>	Plastic	Plastic	Plastic	Plastic	Plastic	Metal	Metal	Metal	Plastic	Metal	
	<b>Color</b>	Black	Black	Black	Black	Black	Black	Black	Black	Black	Black	
	<b>Weight</b>	610 g	900 g	1040 g	1300 g	1610 g	6365 g	7210 g	8300 g	8500 g	10540 g	
	<b>Dimensions</b>	252 x 178 x 24 mm	296 x 192 x 26 mm	338 x 215 x 26 mm	388 x 242 x 28 mm	418 x 263 x 27 mm	536 x 329 x 43 mm	576 x 345 x 43 mm	650 x 390 x 43 mm	751 x 450 x 42 mm	769 x 471 x 49 mm	
	<b>Mounting / VESA</b>	VESA 75	VESA 75	VESA 75	VESA 100	VESA 100	VESA 100	VESA 100	VESA 100	VESA 100	VESA 200	
	<b>Power Supply</b>	12 V / 2 A	12 V / 2 A	12 V / 2 A	12 V / 2 A	12 V / 3 A	12 V / 5 A	12 V / 5 A	12 V / 5 A	12 V / 5 A	AC 110 V - 240 V	
	<b>Power Usage</b>	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt	10 ~ 20 Watt
	<b>Other</b>	<b>Working Temp</b>	-10 ~ 50 degrees C	0 ~ 40 degrees C	0 ~ 40 degrees C	-10 ~ 50 degrees C	0 ~ 40 degrees C	-10 ~ 50 degrees C	-10 ~ 50 degrees C	-10 ~ 50 degrees C	0 ~ 40 degrees C	-10 ~ 50 degrees C
<b>Standard Warranty</b>	2 years	2 years	2 years	2 years	2 years	2 years	2 years	2 years	2 years	2 years	2 years	
<b>Certifications</b>	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	FCC, CE, & RoHS	
<b>Optional Vesa Glass Mount</b>	GM-75	GM-75	GM-75	-	-	-	-	-	-	-	-	
<b>Optional Wall Mount</b>	WM-25	WM-25	WM-25	WM-25	WM-25	WM-25	WM-25	WM-25	WM-25	WM-25	-	






## Integrated Intel SOC Touch Displays

### Intel Panel PC (IPPC)

The Integrated Intel SOC Touch Displays by ProDVX are professionally designed and manufactured All-in-One Touch Displays with Integrated Intel x86 processor for commercial continuous (24/7) use. With over 14 years of experience manufacturing Intel x86 powered All-in-One devices, ProDVX offers a wide variety of sizes, from 7 inch up to 32 inch. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



### FEATURES

-  Windows 10, Linux Ubuntu (optional)
-  High quality and durable PCAP touch
-  Available sizes: 7, 10, 15, 22, 24, 27 and 32 inch
-  Commercial grade continuous usage (24/7)
-  Several connectivity options such as LAN, Wi-Fi, Bluetooth and POGO ports for accessories

### MARKETS

ProDVX's cost-effective Integrated Intel x86 Touch Displays are ideal for applications in Retail, Corporate, Industrial, Hospitality, Healthcare, Government, Education and many more markets.

### APPLICATIONS

- i-Kiosk
- Interactive Digital Signage
- Room Booking
- Wayfinding
- POS/POP
- Queuing
- Security
- Access Control
- Office
- Home Automation

		IPPC-07	IPPC-10 HD	IPPC-15	IPPC-22	IPPC-24	IPPC-27	IPPC-32
<b>Panel</b>	<b>Size</b>	7"	10.1"	15.6"	21.5"	23.6"	27"	31.5"
	<b>Type</b>	TFT LCD	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS
	<b>Resolution</b>	1024 x 600	1280 x 800	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
	<b>Aspect Ratio</b>	17:10 wide	16:10 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide
	<b>Backlight</b>	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type
	<b>Brightness</b>	240 cd/m <sup>2</sup>	500 cd/m <sup>2</sup>	300 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>	300 cd/m <sup>2</sup>	400 cd/m <sup>2</sup>
	<b>Viewing Angle</b>	H 140° / V 130°	H 160° / V 160°	H 170° / V 170°	H 178° / V 178°	H 178° / V 178°	H 170° / V 160°	H 178° / V 178°
	<b>Contrast Ratio</b>	600 : 1	600 : 1	800 : 1	3000 : 1	1000 : 1	3000 : 1	1200 : 1
	<b>Touch Type</b>	5 point touch projected capacitive	5 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive
<b>System (SOC)</b>	<b>CPU</b>	Intel Braswell N3160 Quad Core	Intel Braswell N3160 Quad Core	Intel Braswell N3160 Quad Core	Intel Braswell N3160 Quad Core	Intel Braswell N3160 Quad Core	Intel Braswell N3160 Quad Core	Intel Braswell N3160 Quad Core
	<b>GPU</b>	Intel HD Graphics	Intel HD Graphics	Intel HD Graphics	Intel HD Graphics	Intel HD Graphics	Intel HD Graphics	Intel HD Graphics
	<b>Cooling</b>	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless	Fanless
	<b>System Memory</b>	4 GB DDR3L 1600	4 GB DDR3L 1600	4 GB DDR3L 1600	4 GB DDR3L 1600	4 GB DDR3L 1600	4 GB DDR3L 1600	4 GB DDR3L 1600
	<b>Internal Storage</b>	64 GB M.2 SSD	64 GB M.2 SSD	64 GB M.2 SSD	64 GB M.2 SSD	64 GB M.2 SSD	64 GB M.2 SSD	64 GB M.2 SSD
	<b>Storage Socket 2</b>	SD Card Slot (internal)	SD Card Slot (internal)	SD-Card Slot (door)	SD Card Slot (internal)	SD Card Slot (internal)	SD Card Slot (internal)	SD Card Slot (internal)
	<b>OS</b>	Windows 10 / Linux	Windows 10 / Linux	Windows 10 / Linux	Windows 10 / Linux	Windows 10 / Linux	Windows 10 / Linux	Windows 10 / Linux
	<b>I/O Ports</b>	Micro-USB / USB / Mini-HDMI / 3.5 mm audio-out / RJ45 / POGO-Connector / 12V DC-IN	USB 3.0 / USB 2.0 / 3.5 mm audio out / RJ45 / POGO-Connector / 12V DC-IN	Micro USB 2.0 / USB 3.0 / USB 2.0 / HDMI / Combo Jack / SPDIF / RJ45 / POGO-Connector / 12V DC-IN	Micro USB 2.0 / USB 3.0 / USB 2.0 / Combo Jack / SPDIF / RJ45 / 12V DC-IN	Micro USB 2.0 / USB 3.0 / USB 2.0 / Combo Jack / SPDIF / RJ45 / 12V DC-IN	Micro USB 2.0 / USB 3.0 / USB 2.0 / Combo Jack / SPDIF / RJ45 / 12V DC-IN	Micro USB 2.0 / USB 3.0 / USB 2.0 / Combo Jack / SPDIF / RJ45 / 12V DC-IN
	<b>Network LAN RJ45</b>	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN	10/100/1000 Mbps LAN
	<b>WiFi / Bluetooth</b>	802.11 b/g/n SiP wireless module	802.11 b/g/n SiP wireless module	802.11 b/g/n SiP wireless module	802.11 b/g/n SiP wireless module	802.11 b/g/n SiP wireless module	802.11 b/g/n SiP wireless module	802.11 b/g/n SiP wireless module
	<b>(PoE) Power over Ethernet</b>	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>Physical</b>	<b>Housing</b>	Plastic Front / Metal Backside	Plastic Front / Metal Backside	Plastic	Metal	Metal	Metal	Metal
	<b>Color</b>	Black	Black	Black	Black	Black	Black	Black
	<b>Speakers</b>	2 x 2 W	2 x 2 W	2 x 2 W	2 x 2 W	2 x 2 W	2 x 2 W	2 x 2 W
	<b>Audio Jack Output 3.5mm</b>	N/A	YES	YES	YES	YES	YES	YES
	<b>Weight</b>	500 g	610 g	1400 g	7000 g	7500 g	8300 g	10450 g
	<b>Dimensions</b>	188 x 120 x 25 mm	252 x 178 x 24 mm	388 x 242 x 28 mm	536 x 329 x 43 mm	576 x 345 x 43 mm	650 x 390 x 43 mm	769 x 471 x 49 mm
	<b>Mounting / VESA</b>	VESA unique pattern	VESA 75	VESA 100	VESA 100	VESA 100	VESA 100	VESA 200
	<b>Power Supply</b>	12 V / 2 A	12 V / 3.3 A	12 V / 5 A	12 V / 5 A	12 V / 5 A	12 V / 5 A	AC 110 V - 240 V
	<b>Power Usage</b>	4 ~ 11 Watt	11 ~ 26 Watt	11 ~ 26 Watt	11 ~ 26 Watt	11 ~ 26 Watt	11 ~ 26 Watt	11 ~ 26 Watt
<b>Other</b>	<b>Working Temp</b>	-10 ~ 50 degrees C	-10 ~ 50 degrees C	0 ~ 40 degrees C	0 ~ 40 degrees C	0 ~ 40 degrees C	0 ~ 40 degrees C	0 ~ 40 degrees C
	<b>Standard Warranty</b>	2 years	2 years	2 years	2 years	2 years	2 years	2 years
	<b>Certifications</b>	FCC, CE & RoHS	FCC, CE & RoHS	FCC, CE & RoHS	FCC, CE & RoHS	FCC, CE & RoHS	FCC, CE & RoHS	FCC, CE & RoHS

# UltraWide Signage Displays





## Integrated Android PC

The UltraWide Signage Displays by ProDVX are custom designed and manufactured All-in-One Displays with Embedded ARM processor (SOC) for commercial continuous (24/7) use.

These UltraWide displays offer a unique slim form factor and come in three sizes: 24, 28 and 37 inch. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



### FEATURES

-  Available sizes: 24, 28 and 37 inch
-  Commercial grade continuous usage (24/7)
-  Several connectivity options such as LAN, Wi-Fi and Bluetooth
-  Long-life-availability of products and parts (3 to 5 years)

### MARKETS

ProDVX's unique UltraWide Signage Displays are ideal for applications in Retail, Corporate, Hospitality, Healthcare, Government, Education and many more markets.

### APPLICATIONS

- Menu Boards
- Queuing
- Digital Signage
- Wayfinding

		UW-24	UW-28	UW-37
<b>Panel</b>	<b>Size</b>	24"	28"	37"
	<b>Type</b>	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS
	<b>Resolution</b>	1920 x 360	1920 x 360	1920 x 540
	<b>Aspect Ratio</b>	16:3 wide	16:3 wide	32:3 wide
	<b>Backlight</b>	LED Side-light type	LED Side-light type	LED Side-light type
	<b>Brightness</b>	300 cd/m <sup>2</sup>	700 cd/m <sup>2</sup>	700 cd/m <sup>2</sup>
	<b>Viewing Angle</b>	H 178° / V 178°	H 178° / V 178°	H 178° / V 178°
	<b>Contrast Ratio</b>	1200 : 1	1200 : 1	4000 : 1
<b>System (SOC)</b>	<b>CPU</b>	Cortex A17, 1.6GHz, 4-Core, RK3288	Cortex A17, 1.6GHz, 4-Core, RK3288	Cortex A17, 1.6GHz, 4-Core, RK3288
	<b>GPU</b>	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)	MALI T764 / 3D Graphic Engine (4K)
	<b>System Memory</b>	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM
	<b>Internal Storage</b>	16 GB eMMC Flash	16 GB eMMC Flash	16 GB eMMC Flash
	<b>External Storage</b>	SD-Card Slot (hidden)	SD-Card Slot (hidden)	SD-Card Slot (hidden)
	<b>OS</b>	Android 6	Android 6	Android 6
	<b>I/O Ports</b>	Micro-USB / USB / 3.5 mm audio-out / RJ45 / HDMI	Micro-USB / USB / 3.5 mm audio-out / RJ45 / HDMI out	Micro-USB / USB / 3.5 mm audio-out / RJ45 / HDMI out
	<b>Network LAN RJ45</b>	10/100 Mbps LAN	10/100 Mbps LAN	10/100 Mbps LAN
	<b>WiFi / Bluetooth</b>	802.11 b/g/n / BT 4.0	802.11 b/g/n / BT 4.0	802.11 b/g/n / BT 4.0
<b>Video / Audio</b>	<b>Video Support</b>	MKV, TS, FLV, AVI, VOB, MPG, DAT, ASF, RM, MOV, 3GP, MP4, WMV	MKV, TS, FLV, AVI, VOB, MPG, DAT, ASF, RM, MOV, 3GP, MP4, WMV	MKV, TS, FLV, AVI, VOB, MPG, DAT, ASF, RM, MOV, 3GP, MP4, WMV
	<b>Audio Support</b>	MP2, WMA, WAV, AAC, OGG, ASF	MP2, WMA, WAV, AAC, OGG, ASF	MP2, WMA, WAV, AAC, OGG, ASF
	<b>Speakers</b>	N/A	N/A	N/A
<b>Physical</b>	<b>Housing</b>	Metal	Metal	Metal
	<b>Color</b>	Black	Black	Black
	<b>Weight</b>	2750 g	4550 g	9500 g
	<b>Dimensions</b>	616 x 140 x 29 mm	736 x 168 x 30 mm	902 x 285 x 39 mm
	<b>Mounting / VESA</b>	VESA unique pattern	VESA unique pattern	VESA unique pattern
	<b>Power Supply</b>	12 V / 3 A	12 V / 4 A	AC 100 V - 240 V
	<b>Power Usage</b>	10 ~ 18 Watt	11 ~ 19 Watt	12 ~ 26 Watt
<b>Other</b>	<b>Working Temp</b>	-10 ~ 50 degrees C	-10 ~ 50 degrees C	-10 ~ 50 degrees C
	<b>Standard Warranty</b>	2 years	2 years	2 years
	<b>Certifications</b>	FCC, CE & RoHS	FCC, CE, CCC & RoHS	FCC, CE & RoHS





## Signage Displays

### HDMI / Media Player

The Signage Displays by ProDVX are professionally designed displays and manufactured with HDMI input and Embedded FHD Media Player for commercial continuous (24/7) use. With over 10 years of experience manufacturing Signage Displays, ProDVX offers a wide variety of sizes, from 10 inch up to 22 inches. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



### FEATURES

-  Available sizes: 10, 14, 15, 18 and 22 inch
-  Commercial grade continuous usage (24/7)
-  HDMI-in and Integrated Full HD Media Player
-  Long-life-availability of products and parts (3 to 5 years)

### MARKETS

ProDVX's cost-effective Signage Displays are ideal for applications in Retail, Corporate, Hospitality, Healthcare, Government, Education and many more markets.

### APPLICATIONS

- Digital Signage
- Customer Display
- Wayfinding
- Queuing
- Office

		SD-10	SD-14	SD-15	SD-18	SD-22
<b>Panel</b>	<b>Size</b>	10.1"	14"	15.6"	18.5"	21.5"
	<b>Type</b>	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS
	<b>Resolution</b>	1280 x 800	1920 x 1080	1920 x 1080	1366 x 768	1920 x 1080
	<b>Aspect Ratio</b>	16:9 wide	16:9 wide	16:9 wide	16:9 wide	16:9 wide
	<b>Backlight</b>	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type
	<b>Brightness</b>	300 cd/m <sup>2</sup>	300 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>	250 cd/m <sup>2</sup>
	<b>Viewing Angle</b>	H 140° / V 130°	H 160° / V 160°	H 160° / V 160°	H 160° / V 160°	H 160° / V 160°
	<b>Contrast Ratio</b>	600 : 1	700 : 1	800 : 1	800 : 1	600 : 1
<b>System</b>	<b>Internal Media Player</b>	YES	YES	YES	YES	YES
	<b>Video Input</b>	HDMI	HDMI	HDMI	HDMI	HDMI
	<b>Card Slot</b>	SD / MMC / MS	SD / MMC / MS	SD / MMC / MS	SD / MMC / MS	SD / MMC / MS
	<b>USB Host</b>	1 x	1 x	1 x	1 x	1 x
	<b>Auto Video Play &amp; Loop</b>	YES	YES	YES	YES	YES
<b>Video / Audio</b>	<b>Video Support</b>	MPEG2, MPEG4, H.264, RM, RMVB, MPG, MOV, AVI, MKV, TS etc.	MPEG2, MPEG4, H.264, RM, RMVB, MPG, MOV, AVI, MKV, TS etc.	MPEG2, MPEG4, H.264, RM, RMVB, MPG, MOV, AVI, MKV, TS etc.	MPEG2, MPEG4, H.264, RM, RMVB, MPG, MOV, AVI, MKV, TS etc.	MPEG2, MPEG4, H.264, RM, RMVB, MPG, MOV, AVI, MKV, TS etc.
	<b>Video Resolution</b>	1280 x 800	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
	<b>Audio Support</b>	MP3, AAC	MP3, AAC	MP3, AAC	MP3, AAC	MP3, AAC
	<b>Photo Support</b>	JPEG, BMP	JPEG, BMP	JPEG, BMP	JPEG, BMP	JPEG, BMP
	<b>Speakers</b>	2 x 1 W	2 x 2 W	2 x 2 W	2 x 2 W	2 x 3 W
	<b>Audio Jack Output 3.5mm</b>	YES	YES	YES	YES	YES
<b>Physical</b>	<b>Housing</b>	Plastic	Plastic	Plastic	Plastic	Plastic
	<b>Color</b>	Black	Black	Black	Black	Black
	<b>Weight</b>	850 g	1000 g	1700 g	3000 g	3600 g
	<b>Dimensions</b>	247 x 170 x 21 mm	343 x 220 x 25 mm	388 x 245 x 27 mm	468 x 288 x 38 mm	538 x 331 x 37 mm
	<b>Mounting / VESA</b>	VESA 75 (half)	VESA 100	VESA 100	VESA 100	VESA 100
	<b>Power Supply</b>	5 V / 2 A	12 V / 2 A	12 V / 2 A	12 V / 2 A	12 V / 3 A
	<b>Power Usage</b>	9 Watt	11 Watt	12 Watt	12 Watt	14 Watt
<b>Other</b>	<b>Remote control</b>	YES	YES	YES	YES	YES
	<b>Working Temp</b>	0 ~ 50 degrees C	0 ~ 50 degrees C	0 ~ 50 degrees C	0 ~ 50 degrees C	0 ~ 50 degrees C
	<b>Standard Warranty</b>	2 years	2 years	2 years	2 years	2 years
	<b>Certifications</b>	FCC, CE & RoHS	FCC, CE, CCC & RoHS	FCC, CE, CCC & RoHS	FCC, CE, CCC & RoHS	FCC, CE & RoHS






## Touch Monitor Displays

### Projected Capacitive Multi-Touch Monitors

The Touch Monitor Displays by ProDVX are specially designed and manufactured touchscreens for professional and continuous (24/7) use. With many years of experience manufacturing touchscreen solutions ProDVX offers a growing range of sizes. The current line-up consists of 7, 10, 15 and 22-inch displays. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



### FEATURES

-  High quality and durable PCAP touch
-  Available sizes: 7, 10, 15 and 22 inch
-  Commercial grade continuous usage (24/7)
-  Several connectivity options such as LAN, Wi-Fi, Bluetooth and POGO ports for accessories
-  Long-life-availability of products and parts (3 to 5 years)

### MARKETS

ProDVX's cost-effective Touch Displays are ideal for applications in Retail, Corporate, Industrial, Hospitality, Healthcare, Government, Education and many more markets.

### APPLICATIONS

- i-Kiosk
- Interactive Digital Signage
- Room Booking
- Wayfinding
- POS/POP
- Security
- Access Control
- Feedback Terminals
- Price Checker



		TMP-07	TMP-10	TMP-10X *	TMP-15	TMP-22X *
<b>Panel</b>	<b>Size</b>	7"	10.1"	10.1"	15.6"	21.5"
	<b>Type</b>	TFT LCD	TFT LCD	TFT LCD IPS	TFT LCD IPS	TFT LCD IPS
	<b>Resolution</b>	1024 x 600	1024 x 600	1280 x 800	1920 x 1080	1920 x 1080
	<b>Aspect Ratio</b>	17:10 wide	17:10 wide	16:10 wide	16:9 wide	16:9 wide
	<b>Backlight</b>	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type	LED Side-light type
	<b>Brightness</b>	240 cd/m2	450 cd/m2	500 cd/m2	300 cd/m2	250 cd/m2
	<b>Viewing Angle</b>	H 140° / V 130°	H 140° / V 130°	H 160° / V 160°	H 170° / V 170°	H 178° / V 178°
	<b>Contrast Ratio</b>	600 : 1	600 : 1	800:1	800 : 1	3000 : 1
	<b>Touch Type</b>	5 point touch projected capacitive	5 point touch projected capacitive	5 point touch projected capacitive	10 point touch projected capacitive	10 point touch projected capacitive
<b>System</b>	<b>Monitor</b>	YES	YES	YES	YES	YES
	<b>Internal Media Player</b>	N/A	N/A	N/A	N/A	N/A
	<b>Video Input</b>	HDMI / VGA	USB 2.0 DisplayLink	HDMI	HDMI	HDMI
	<b>USB (Host)</b>	1 x	1 x	1 x	1 x	1 x
<b>Video / Audio</b>	<b>Video Resolution</b>	1024 x 600	1024 x 600	1280 x 800	1920 x 1080	1920 x 1080
	<b>Speakers</b>	N/A	N/A	2 x 2W	2 x 2W	2 x 3 W
	<b>Audio Jack Output 3.5mm</b>	N/A	N/A	YES	YES	YES
<b>Physical</b>	<b>Housing</b>	Plastic / Metal	Plastic / Metal	Plastic	Plastic	Metal
	<b>Color</b>	Black	Black	Black	Black	Black
	<b>Weight</b>	450 g	550 g	650 g	1200 g	6365 g
	<b>Dimensions</b>	188 x 120 x 24 mm	260 x 163 x 24 mm	255 x 181 x 25 mm	388 x 242 x 28 mm	536 x 329 x 43 mm
	<b>Mounting / VESA</b>	VESA unique pattern	VESA 75	VESA 75	VESA 100	VESA 100
	<b>Power Supply</b>	12 V / 2 A	12 V / 2 A	12V / 2A (EU, UK, US)	12 V / 2 A	12 V / 5 A
	<b>Power Usage</b>	6 Watt	9 Watt	10 ~ 20 Watt	10 Watt	10 ~ 20 Watt
<b>Other</b>	<b>Working Temp</b>	0 ~ 50 degrees C	0 ~ 50 degrees C	0 ~ 40 degrees C	0 ~ 50 degrees C	-10 ~ 50 degrees C
	<b>Standard Warranty</b>	2 years	2 years	2 years	2 years	2 years
	<b>Certifications</b>	FCC, CE, & RoHS	FCC, CE,CCC & RoHS	FCC, CE, & RoHS	FCC, CE,CCC & RoHS	FCC, CE, & RoHS






## Box PCs

### Industrial Grade Box PCs

The Box PC solutions by ProDVX are specially designed and manufactured Industrial grade PC's for professional and continuous (24/7) use. With many years of experience manufacturing compact, fanless and robust PC systems ProDVX offers a reliable and growing product range with various chipsets and processors. Known for its innovations, ProDVX offers the latest cutting-edge technology to deliver the best customer experience.



### FEATURES

-  Android 5, 9
-  Linux (optional)
-  Commercial grade continuous usage (24/7)
-  Several connectivity options such as Power over Ethernet, Wi-Fi and RS232
-  Long-life-availability of products and parts (3 to 5 years)

### MARKETS

ProDVX's cost-effective Box PCs are ideal for applications in Retail, Corporate, Industrial, Hospitality, Healthcare, Government, Education and many more markets.

### APPLICATIONS


- i-Kiosk
- Interactive Digital Signage
- Industrial Automation
- POS/POP
- Security
- Access Control
- Office and Home Automation

		ABPC-543	ABPC-545
<b>System</b>	<b>Chipset</b>	Cortex A17, 1.6 GHz, 4-Core	Cortex A72 2 Core+A53 4-Core
	<b>Processor</b>	RK3288	RK3399
	<b>GPU</b>	MALI T764 / 3D Graphic Engine (4K)	MALI T860 / 3D Graphic Engine (4K)
	<b>Cooling</b>	Fanless	Fanless
	<b>System Memory</b>	2 GB DDR3 SDRAM	2 GB DDR3 SDRAM
	<b>Internal Storage</b>	8 GB eMMC Flash	16 GB eMMC Flash
	<b>Storage Socket 2</b>	SD-Card Slot (hidden)	Mirco SD Slot + SIM Card Slot
	<b>OS</b>	Android 5.1 / Linux Ubuntu	Android 9
	<b>I/O Ports</b>	USB (4x) / HDMI / RS232 (2x) / 3.5 mm audio-out / RJ45 / 12V DC-IN / SPDIF	USB (x2 / USB2.0 x1, USB3.0 x1), HDMI / RS232 / 3.5 mm (IR and PIR sensor in) / RJ45 / 12V DC-IN
	<b>Network LAN RJ45</b>	100/1000 Mbps LAN	100/1000 Mbps LAN
	<b>WiFi / Bluetooth</b>	802.11 b/g/n SiP wireless module	802.11 b/g/n/ac + Bluetooth 4.2, SiP wireless module
	<b>(PoE) Power over Ethernet</b>	OPTIONAL	OPTIONAL
	<b>Video out</b>	HDMI	HDMI
	<b>Physical</b>	<b>Housing</b>	Metal
<b>Color</b>		Black	Black
<b>Weight</b>		470 g	470 g
<b>Dimensions</b>		155 x 130 x 31 mm	155 x 130 x 31 mm
<b>Mounting / VESA</b>		OPTIONAL	OPTIONAL
<b>Power Supply</b>		12 V / 2 A	12 V / 2 A
<b>Power Usage</b>		5 ~ 9 Watt	10 ~15 Watt
<b>Other</b>		<b>MTBF</b>	45,000 hours demonstrated
	<b>Standard Warranty</b>	2 years	2 years
	<b>Certifications</b>	FCC, CE, & RoHS	FCC, CE, & RoHS
	<b>Optional Vesa Glass Mount</b>	GM-75	GM-75
	<b>Optional Wall Mount</b>	WM-25	WM-25

## ACCESSORIES



GM-75  
Glass Mount



COV-10 DSK  
Coverplate



BAR-10  
Barcode Scanner



NFC  
NFC Module



DS-75  
Desk Stand



WM-35  
Wall Mount




DS-10  
Desk Stand



DS-100  
Desk Stand



FS-10  
Floor Stand

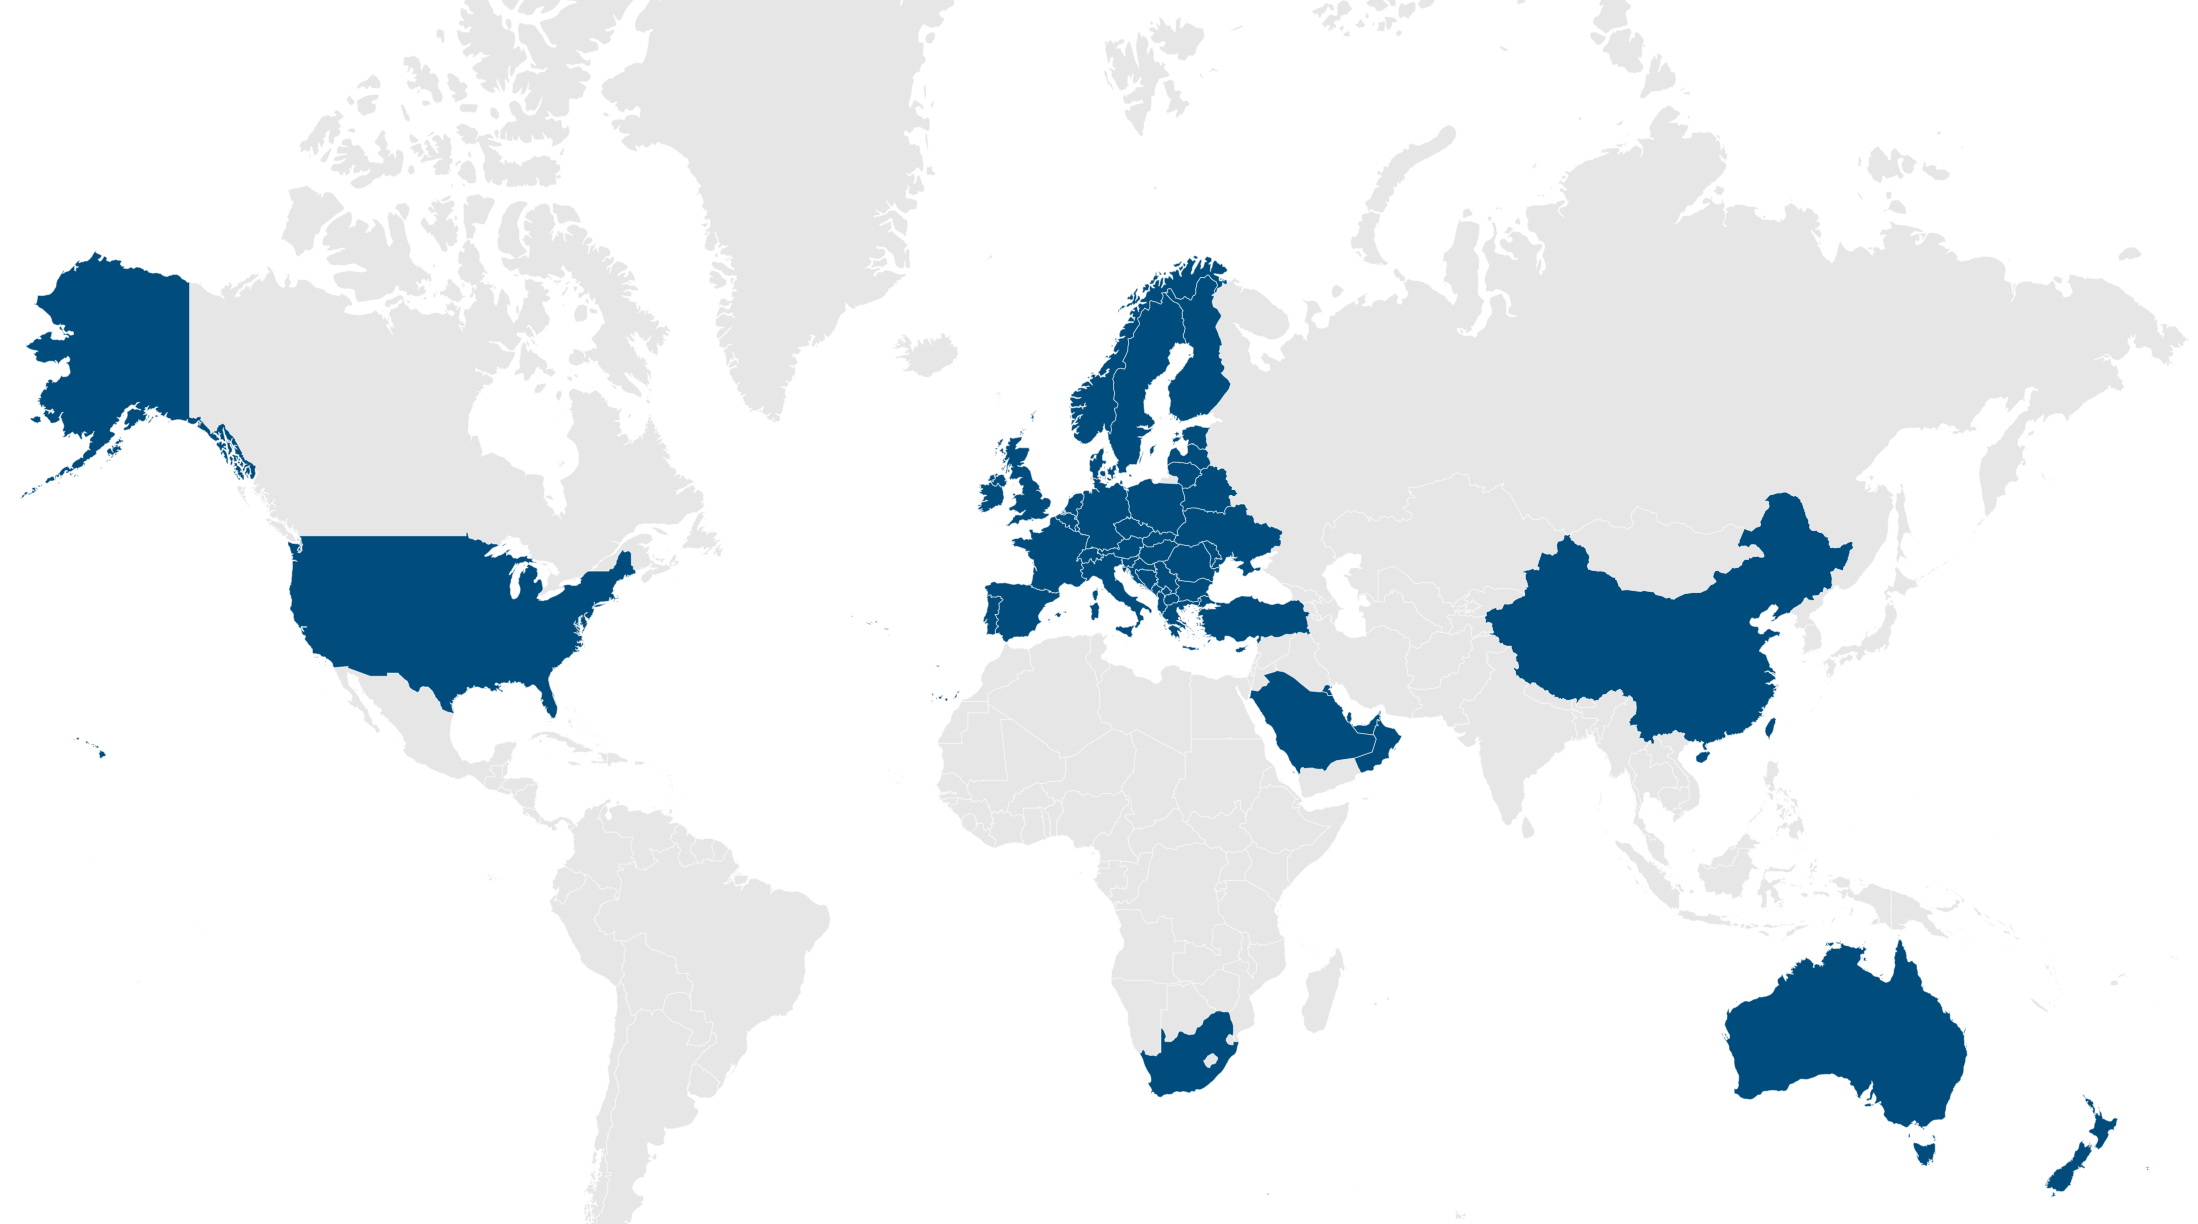

### ProDVX Europe

Europalaan 12F  
5232 BC Den Bosch  
The Netherlands  
+31 (0)73 737 0345  
info@prodvx.com  
www.prodvx.com

### ProDVX Europe Warehouse

Gerolsteinbaan 7-9  
5121 DN Rijen  
The Netherlands

For technical enquiries:  
support@prodvx.com

### ProDVX Asia

4F., No 57, Section 2, Yonghe Road, Yonghe District  
New Taipei City 23444  
Taiwan  
+886 277298548  
info@prodvx.com.tw  
www.prodvx.com.tw

**SUS COM LTD**  
distributed by Distribution AG

**syscomtec Distribution AG**  
Raiffeisenallee 8  
82041 Oberhaching bei München

phone +49 89 666 109 330  
fax +49 89 666 109 339

mail post@syscomtec.com

[www.syscomtec.com](http://www.syscomtec.com)