


SPECIFICATION CONTROL DRAWING

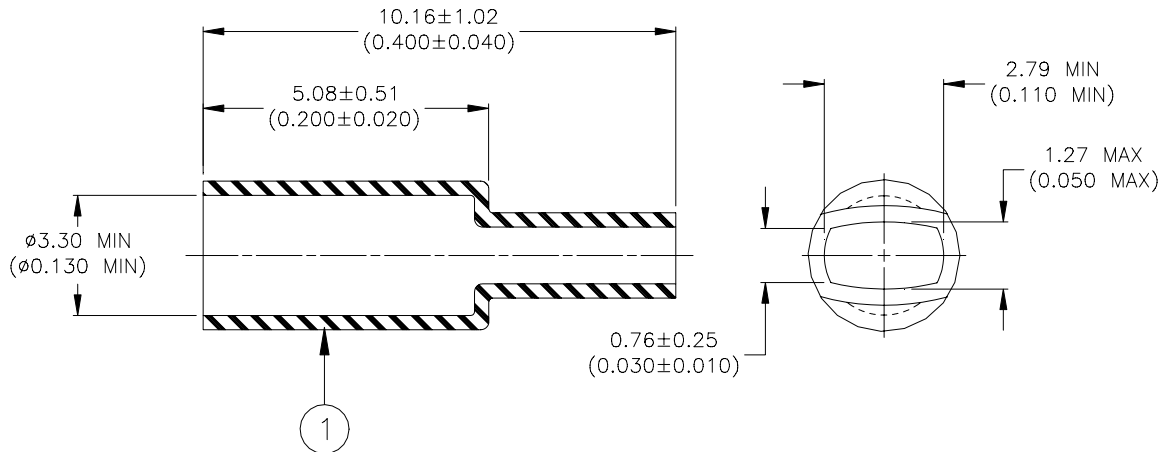

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.

APPLICATION

1. This part is designed for insulating unterminated ends of shielding on cables having 24 to 16 AWG conductors.
2. This part is installed by abutting inner shoulder against cable jacket and heating in excess of 200°C until sleeve has recovered onto the jacket and conductor.
3. Maximum weight: 0.08 lbs./Mpc.

tyco / Electronics / Raychem 307 Constitution Drive Menlo Park, CA 94025, USA		Wire and Harnessing Products		TITLE: PREFORM, FLOATING SHIELD INSULATOR					
Unless otherwise specified dimensions are in millimeters. Inches dimensions are in between brackets.				DOCUMENT NO.: D-306-38					
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D010120		REPLACES: N/A	
DRAWN BY: M. FORONDA		DATE: 11-Apr.-01		PROD. REV. E		DOC ISSUE: 1		SCALE: None	
						SIZE: A		SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.