Document Scanners

ScanSnap S1100





ON BOTH WINDOWS AND MAC OS OPERATING SYSTEMS • OPERATES ON BOT

Compact, easy to use "one touch" scanning!

Easily digitizes your documents!

Perfect for home or office use!

A must have for the paperless era!

Make your paper documents more mobile!

One of the smallest mobile A4 scanners in the world

The ScanSnap S1100 document scanner pushes the limits of size for extreme portability while delivering smooth A4 size document scanning¹. All you need is your laptop and one USB cable to scan and share your documents anywhere, anytime.



The S1100 delivers a snappy 7.5 seconds/page (approximately 8 ppm) scanning speed for color A4 documents at resolutions up to 300 dpi.²

- ¹ When using an optional carrier sheet it is possible to scan even A3 size documents and stitch the front and back side of the folded document together.
- $^{\rm 2}$ The time for scanning was measured from the time a page first enters to the time it fully exits the scanner.

Scans plastic cards and other various document types*

In addition to standard paper types, the S1100 can scan plastic cards like the ones used for membership IDs.

*Card type ISO 7810, ID-1 format = 86 x 54 mm (supports embossed cards)



Continuous Document Feeding (CDF Function)

Even though the S1100 is one of the world's smallest document-feed scanners, you can smoothly scan multiple page documents with remarkable speed. The Continuous Document Feeding function allows you to insert pages one after another without any extra button pressing by detecting when a sheet enters and exits the S1100.

Scanning a two-sided document using the CDF Function



Insert the page face up and press the Scan button. The S1100 proceeds to scan the front side. The page exits facing front side down. Reinsert the page without pressing the Scan button. The page is scanned. Press the Scan button to end the scanning process and create the PDF image file.

Seamless linking to Cloud services

The S1100 comes with a linking function to popular Cloud services including: Evernote¹, SugarSync and Salesforce CRM as well as linking to Salesforce Chatter. Now you can seamlessly access your scanned image data virtually anywhere, anytime, with ease!

¹ Evernote (Win/Mac) must be installed on the PC.

Two selectable paper paths

Switch the S1100's paper output guide to either the folded position for the straight path or the open position for the U-turn path to best suit the document you want to scan.

· Straight path



U-turn path



Generates Microsoft Word, Excel and PowerPoint Files

 Scan editable image data directly to Microsoft® Word, Excel and PowerPoint® files

*For Mac OS, Scanning to Microsoft® Word and Excel are available.
**Generated images and text may vary from the original.

Top-class OCR Engine

Bundled


ABBYY FineReader for ScanSnap™ 4.1

ScanSnap S1100 Deluxe comes with Rack2-Filer V5.0

- Directly file and organize your digitized documents in virtual binders
- Realistic page flip interface with useful editing functions
- A powerful tool for uniformly managing image data produced by the S1100 and other devices



OPERATES ON BOTH WINDOWS AND MAC OS OPERATING SYSTEMS . OPERATES ON BOTH WINDOWS AND MAC OS OPERATING SY

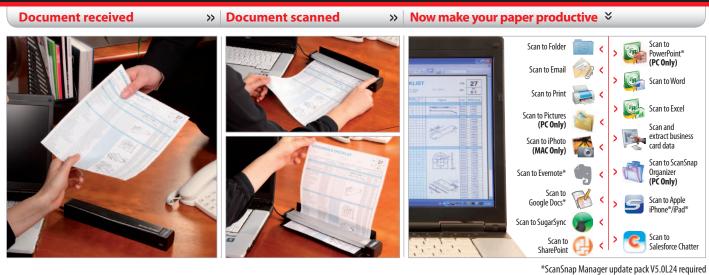

Fast and flexible application of scanned data with Quick Menu


After scanning is complete, the Quick Menu appears. Navigate through the Quick Menu's easy to use interface to smoothly send your digitized document to an application of your choice.

• Quick Menu for Windows® OS Users



• Quick Menu for Mac OS Users

Bundled

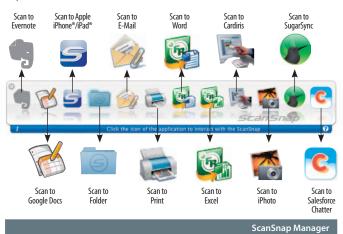

For PC Users: ScanSnap Manager V5.1 for Windows

For Mac Users: ScanSnap Manager V3.2 for MAC

Efficiently organizes data from scanned business card

- Scan your collection of business cards into easy to navigate digital business card holders
- Import the data from your scanned business cards into Excel, Outlook, Address Book, SalesForce and other database programs for fast referencing and application





Business card scanning software

For PC Users: CardMinder™ V4.1

Bundled For Mac Users: Cardiris™ 4.0 for ScanSnap

Scan documents to your iPhone® or iPad®



- Upload your documents fast, securely and easily
- View on screen via the downloadable ScanSnap Connect Application which is available for free from the Apple App store
- Instantly display and share
- * The ScanSnap connected PC must be running Windows® 2000 Professional or later.
- * This application must be installed on iPad®/iPhone® devices running iOS 4.2.1 or later.
- * Only one iPad®/iPhone® device at a time can sync to the ScanSnap connected PC.
- * Visit the ScanSnap product homepage for other requirements for this feature.



ScanSnap S1100 Specifications



Product name			ScanSnap S1100	Т	
Scanner type			CDF (Continuous Document Feeding), simplex sheetfed two way paper pass (Straight path, U turned path)	4	
Scanning modes			Colour, grayscale, monochrome, automatic (colour / grayscale / monochrome detection)	-	
Image sensor			CIS (Contact Image Sensor) x 1	4	
Light source			3 Colour LED (Red/Green/Blue)	4	
Optical resolution	I		600 dpi	4	
Scanning speed*1 (A4 portrait) USB bus powered		ered	7.5 seconds per page (Auto mode (default)*², Normal mode (150 dpi), Better mode (200 dpi), Best mode (300 dpi)) 35 seconds per page Excellent mode (600 dpi)		
Document size		Normal mode	A4, A5, A6, B5, B6, Business card, Post card, Letter, Legal and Custom sizes (Max : 216 x 360 mm , Min : 25.4 x 25.4 mm) / Automatically recognises document size		
Document Size		Normal mode with Carrier sheet Long paper scanning*3	Use of a carrier sheet permits the scanning of A3, B4, double letter and photographs as well as the document sizes that are listed above Max: 216 x 863 mm (300 dpi or less)	1	
Paper weight (Thickness)			52 to 209 g/m², or 14 to 56 lb (Straight path) / 52 to 80 g/m², or 14 to 20 lb (U turned path) Card can be used. (portrait/landscape), Non-Embossed : 0.76 mm or Less, Embossed : 0.76 + 0.48 mm (ISO7810 conforming)		
Paper setting			Front side up		
Interface*4			USB 2.0 (USB 1.1 compatible)		
Power requiremen			5V / 0.5A (x 1 port)	П	
Power consumption			During operation : 2.5W or less, During sleep mode : 1W or less, During power off: Less than 0.5W	П	
Operation environ			Temperature: 5 to 35°C (41 to 95°F) / Relative humidity: 20 to 80% (Non-condensing)	4	
Dimensions (W x D		e weight	273 x 47.5 x 34 mm, 350g	4	
Environmental con	npliance		ENERGY STAR® compliant / RoHS*6	4	
Driver			ScanSnap specific driver, Windows: Does not support TWAIN / ISIS™, Mac OS : Does not support TWAIN	Ц	
		·		ã	

Scanning speeds may vary due to the system
environment used. Scanning Speed means the
time from "Start feeding document" to "Finish
output document"after pre-pick and pushing
Scan button. In case of "From pushing Scan
button", Warm-up time is added. Warm-up time
from Ready status: Less than 2 seconds From
Chute Cover Closed Status: Less than 3 seconds.
2 Decuments measuring approximately

- 148 mm in length or less are scanned in "Best mode", while other documents are scanned in "Better mode". The S1100 is capable of scanning documents
- that exceed A4 size in length. This function is available for all modes except Excellent mode PC with USB 3.0 works as USB 2.0 It is
- guaranteed only attached USB cable.
- When the paper output guide is in the folded position.
- PFU LIMITED, a Fujitsu company, has determined that this product meets RoHS requirements (2002/95/EC).

Software	Windows®	Mac OS	
Driver*1	ScanSnap Manager V5.1	ScanSnap Manager V3.2	
	ScanSnap Organizer V4.1	=	
	CardMinder™ V4.1	Cardiris™ 4.0 for ScanSnap	
Software Applications	ABBYY FineRead	er for ScanSnap™ 4.1	
	Evernote for Windows 4.4	Evernote for Mac 2.2	
	Scan to Microsoft® SharePoint® 3.4	-	

TWAIN or ISIS™ applications cannot be used directly.

System requirements for Wind	lows	Windows® 7 (32bit / 64bit) Windows Vista™ (32bit / 64bit)		Windows® XP (32bit)			
	ScanSnap Manager V5.1	Supported	Supported*3	Supported*4			
	ScanSnap Organizer V4.1*5	Supported	Supported*3	Supported*4			
D-i / Aliti*1 *2	CardMinder™ V4.1	Supported	Supported*3	Supported*4			
Driver / Applications*1,*2	ABBYY FineReader for ScanSnap™ 4.1	Supported	Supported*3	Supported*4			
	Evernote for Windows 4.4	Supported	Supported*3	Supported*4			
	Scan to Microsoft® SharePoint 3.4	Supported	Supported*3	Supported*4			
	CPU*6	Intel® Pentium® 4 1.8 GHz or higher (recommended: Intel® Core™ 2 Duo 2.2 GHz or higher)					
	Memory capacity*6	64bit: 2 GB or more 32bit: 1 GB or more	512 MB or more (recommended: 1 GB or more)				
Hardware requirements	Display	800 x 600 pixels or more, High colour (16-bit) or more					
	Disk capacity*7	2,220 MB or more of free hard disk space, (2,470 MB or more of free hard disk space is required for using with Rack2-Filer)					
	DVD-ROM drive		Required for installation				
	IJSR nort*6,*8	IISR 3 n / IISR 2 n / IISR 1 1					

	IIIC	se p	louuc	LS UTILY :	suppoi	CIVIICI	USUIL	viiiuuv	1
*2	For	the	latest	suppor	t infor	matior	ı, visit	the	

- ScanSnap homepage. Service Pack 1 or later required.
- Service Pack 3 or later required.
- Adobe® Acrobat® 7.0 or later (not included) is required in order to use the Adobe® Acrobat® search feature. Please check the Adobe homepage to find out which version of Acrobat is supported by the OS you are using.
- Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met.
- Microsoft .NET Framework 3.5 SP1 will be installed (requires 500 MB of disk space) together with either ScanSnap Manager or ScanSnap Organizer for systems that do not have .NET Framework 3.5 SP1 installed.
- ScanSnap operates on both USB 2.0 and USB 3.0 $\,$ without any difference in performance.
- Mac OS X v10.6.6 or later recommended.
- ² Mac OS X v10.5.8 recommended. Mac OS X v10.4.11 recommended.
- These products only support Mac OS.
- ⁵ For the latest support information, visit the ScanSnap homepage
- Mac OS X v10.5.8 only.
- Scanning speeds may drop if recommended

	ScanSnap Manager v3.2	Supported	Supportea	Supported	Supported		
Driver / Applications*4,*5	Cardiris™ 4.0 for ScanSnap	Supported	Supported	Supported	Supported		
priver / Applications **	ABBYY FineReader for ScanSnap™ 4.1	Supported	Supported*5	Supported	Supported		
	Evernote for Mac 2.2	Not Supported	Supported	Supported*6	Not Supported		
	CPU*7	Intel® Core™ 2 Duo Processor (recommended: Intel® Core™ 2 Duo 2.4 GHz or higher)	Intel® Core™ Duo 1.83 GHz or higher (recommended: Intel® Core™ 2 Duo 2.4 GHz or higher)	Intel® Core™ Duo 1.83 GHz or higher (recommended: Intel® Core™ 2 Duo 2.4 GHz or higher) Power PC G5 1.6 GHz or higher			
Hardware requirements	Memory capacity*7	2 GB or more	1 GB or more	512 MB or more (recommended: 1 GB or more)			
, , , , , , , , , , , , , , , , , , , ,	Display		1024 x 768 pixe	ls or more			
	Disk capacity	1,555 MB free hard disc space for installation					
	DVD-ROM drive	Required for installation					
	USB port*7	rt* ⁷ USB 2.0 / USB 1.1					

Mac OS X v10.6*1

Mac OS X v10.7

Consumables and Options	Part number	Remarks
ScanSnap S1100 Case	PA03610-0001	Specially designed for ScanSnap S1100 and included items
ScanSnap Carrier Sheet	PA03360-0013A	5 Carrier Sheets for ScanSnap models
ScanSnap Cleaning Wipes	SC-CLE-SS	24 x Cleaning Fluid Impregnated Cleaning Wipes

CPU, memory capacity and USB1.1 requirement are not met.

Rack2-Filer V5.0 S	ystem requirements	Windows® 7 (32bit / 64bit)	Windows Vista™ (32bit / 64bit)	Windows® XP (32bit) Windows® 2000 Professional*1			
	CPU	Intel® Pentium® 4 1.8 GHz or higher		Intel® Pentium®III 600 MHz or higher			
Hardware	Memory capacity	64bit : 2GB / 32bit : 1GB	512MB (recommended: 1GB)	256MB or more (recommended: 512MB or more)			
requirements	Display		colour (16-bit) or more				
	Disk capacity	System drive: 10MB or more disc space, Installation drive: 450MB or more disc space. Additional space is required for the data created by Rack2-Filer					

*1 Service Pack 4.

ENERGY STAR® compliant

Included items





PFU Imaging Solutions Europe Limited

Getting started, Set-up DVD-ROM, USB cable (2.0m), Rack2-Filer (Exclusive to S1100 with Rack2-Filer)

Hayes Park Central Hayes End Road, Hayes Middlesex UB4 8FE England

(+44-(0)20) 8573 4444 (+44-(0)20) 8573 2643 Fax:

www.ScanSnapit.com

PFU Imaging Solutions GmbH

Frankfurter Ring 211 80807 Munich

Mac OS X v10.5*2

Mac OS X v10.4*3

(+49-(0)89) 32378-0 (+49-(0)89) 32378-100

PFU Imaging Solutions S.p.A. Via Nazario Sauro, 38

20099 Sesto San Giovanni (MI)

(+39) 0226294.1 Tel: (+39) 0226294.201

