



Disclosure and photocopying of this document, exploitation and communication of its contents are not permitted, unless permission is expressly granted. All rights are reserved.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwendung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Alle Rechte vorbehalten.



REAR VIEW

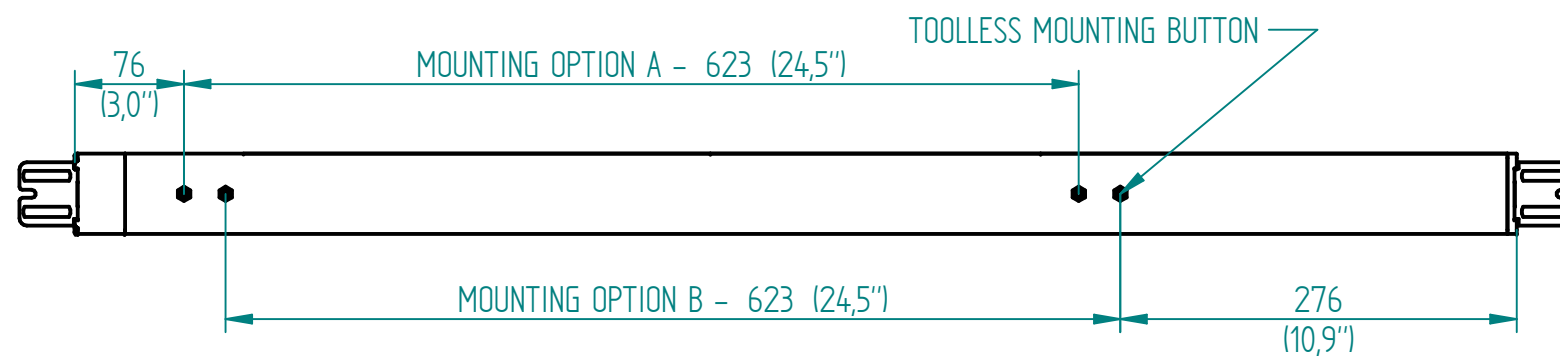

SIDE VIEW

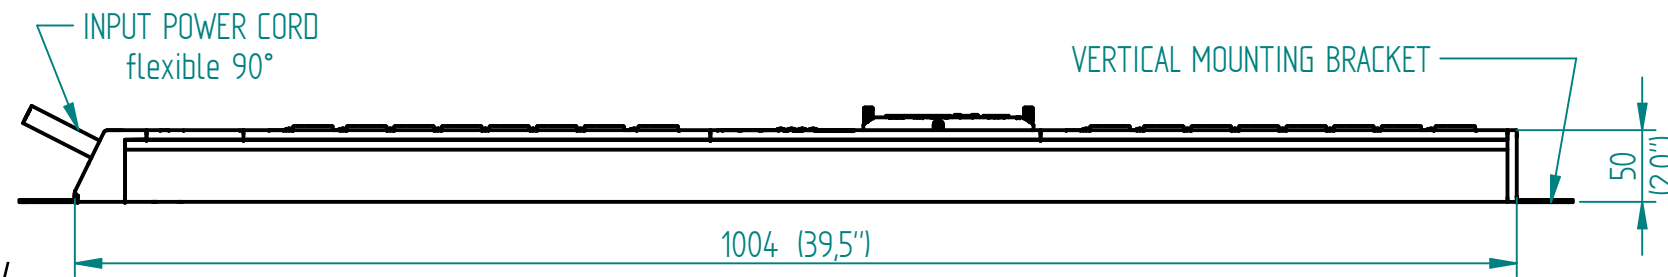

FRONT VIEW

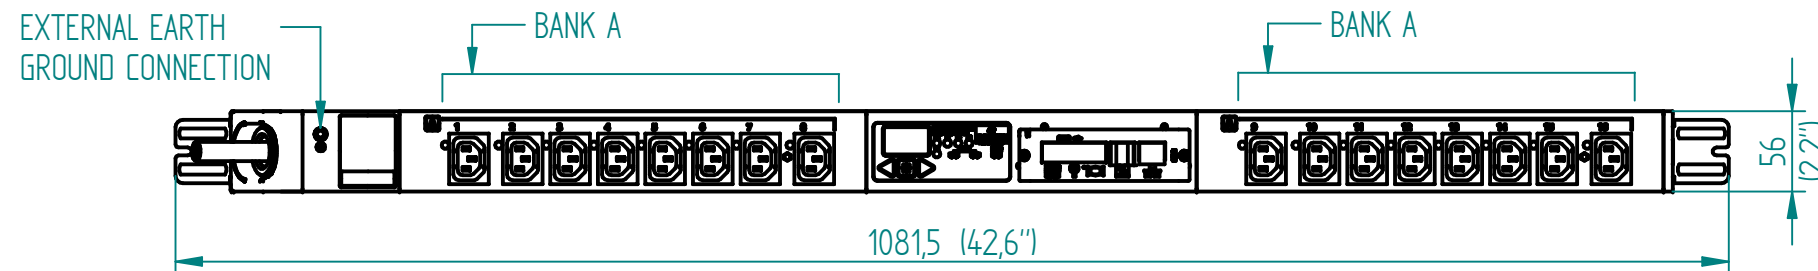

IEC 60309  
(16 A, 1/N/PE, 200-240 V, BLUE 6H)

AGENCY COMPLIANCE:

- CE-mark: LVD, EMC, RoHS (incl. harmonized standards hereunder)
- CB certification: IEC 60950-1 (2nd)
- BG certification: BV-BG (factory inspected)

ENVIRONMENTAL RATING:

OPERATING TEMPERATURE: 5 °C - 60 °C (41 °F - 140 °F) NON-CONDENSING, NON-CORROSIVE, 10 % - 90 % RH  
 STORAGE TEMPERATURE: -20 °C - 85 °C (-4 °F - 185 °F)  
 MAX. OPERATING ALTITUDE: 2000 m

NOTES:

1. UNIT DIMENSIONS: 1004,5 mm (39,5") H x 50 mm (2,0") D x 56 mm (2,2") W
2. UNIT WEIGHT: 2.28 kg / 5.0 lbs
3. SHIPPING DIMENSIONS: 1197,0 mm (47,1") H x 297 mm (11,7") D x 176 mm (7,0") W
4. SHIPPING WEIGHT: 4.3 kg / 9.47 lbs
5. (2) MOUNTING BUTTONS AND (2) MOUNTING BRACKETS SUPPLIED WITH EACH UNIT. EITHER OPTION CAN BE USED TO MOUNT THE PDU.

OUTPUT POWER

BANK	PHASE	RECEPTACLE TYPE (QUANTITY)	VOLTAGE (V)	MAX. CONTINUOUS AMPS (A)	
				PER RECEPTACLE	PER BANK
A	L1	16xC13	200-240	10	16

INPUT POWER

INPUT CORD	INPUT PLUG	WIRE COUNT	FREQUENCY (Hz)	VOLTAGE (V)	RATED AMPS (A)	MAX. CONT. AMPS (A)
10 ft / 3 m	IEC 60309	1/N/PE	50/60	200-240	16	16

METERING PARAMETER	MEASUREMENT ACCURACY
VOLTAGE	±1 % + 0.1 VAC
CURRENT	±1.5 % + 0.01 A FROM 1 % TO 10 % OF UNIT RATING; ±1 % FROM >10 % TO 125 % OF UNIT RATING

RoHS COMPLIANT

<p>Dimensions in mm</p>	Allgemeintoleranzen General tolerances		Oberfläche Finish	Werkstoff / Material	Gewicht: Weight: -
	-		-	-	-
Rev.	Change	Date	Name	Bezeichnung / Description	
				MPH2-ECV_2P3W-16A_16N	
				Input and Branch Metered + Outlet Switched	
				Zeichnungs-Nr. / Drawing no.	Maßstab Scale
				MPHC3142	1:5
				Verwendet in / Used in	Blatt/Sheet
				-	1/1

