

WESS Series

Tunable White Version

WELIGHTING

SHINE IN A BRIGHTER WAY

WESS TW Round Trim, Fixed Version

- 6mm die-cast aluminum trim
- Polycarbonate secondary anti-glare reflector, in 5 color options
- Tunable White 2700K-6500K COB LED applied
- Diffuser on secondary reflector available for IP54 version
- Remote driver, separate order



Standard


WE D31120 - Angle - CRI **90** CCT - **902765** - Color

Beam Angle		
1	5	15°
2	4	24°
3	6	36°
5	5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black



Ø68



98

Ø75

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm

Diffuser on Reflector

WE D31120C - Angle - CRI **90** CCT - **902765** - Color

Beam Angle		
1	5	15°
2	4	24°
3	6	36°
5	5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black



COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm

REFLECTOR COLOR



W D
Dark Chrome



W S
Silver



W G
Gold



W W
Matt White



W B
Matt Black

DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS+ TW Round Trim, Adjustable Version

- 6mm die-cast aluminum trim
- Polycarbonate secondary anti-glare reflector, in 5 color options
- Tunable White 2700K-6500K COB LED applied
- Diffuser on secondary reflector available for IP54 version
- Remote driver, separate order




Standard

WE D31124 - Angle - CRI CCT - **902765** - Color

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



Diffuser on Reflector

WE D31124C - Angle - CRI CCT - **902765** - Color

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



REFLECTOR COLOR



W D
Dark Chrome



W S
Silver



W G
Gold



W W
Matt White



W B
Matt Black

DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS Pin TW Round Trim, Fixed Pin Version

- 6mm die-cast aluminum trim
- Polycarbonate pin hole cover
- Tunable White 2700K-6500K COB LED applied
- Diffuser on pin hole cover available for IP54 version
- Remote driver, separate order



Standard

WE D31122 -

Angle	CRI	CCT
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


- 902765 - W

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



Ø68



Diffuser on Reflector

WE D31122C -

Angle	CRI	CCT
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

- 902765 - W

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS+ Pin TW / WESS+ Oval TW

Round Trim, Adjustable Pin/Oval Version

- 6mm die-cast aluminum trim
- Polycarbonate pin/oval hole cover
- Tunable White 2700K-6500K COB LED applied
- Diffuser on pin/oval hole cover available for IP54 version
- Remote driver, separate order



<p>Standard</p> <p>WE D31126 - [] - 902765 - W</p> <table border="1"> <thead> <tr> <th>Beam Angle</th> <th>Angle</th> <th>CRI</th> <th>CCT</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5</td> <td>15°</td> <td></td> </tr> <tr> <td>2</td> <td>4</td> <td>24°</td> <td></td> </tr> <tr> <td>3</td> <td>6</td> <td>36°</td> <td></td> </tr> <tr> <td>5</td> <td>5</td> <td>55°</td> <td></td> </tr> </tbody> </table> <p>COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm</p>	Beam Angle	Angle	CRI	CCT	1	5	15°		2	4	24°		3	6	36°		5	5	55°		<p>TUNABLE WHITE</p> <p>Ø68</p> <p>355°</p> <p>30°</p> <p>102</p> <p>Ø75</p>
Beam Angle	Angle	CRI	CCT																		
1	5	15°																			
2	4	24°																			
3	6	36°																			
5	5	55°																			
<p>Diffuser on Reflector</p> <p>WE D31126C - [] - 902765 - W</p> <table border="1"> <thead> <tr> <th>Beam Angle</th> <th>Angle</th> <th>CRI</th> <th>CCT</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5</td> <td>15°</td> <td></td> </tr> <tr> <td>2</td> <td>4</td> <td>24°</td> <td></td> </tr> <tr> <td>3</td> <td>6</td> <td>36°</td> <td></td> </tr> <tr> <td>5</td> <td>5</td> <td>55°</td> <td></td> </tr> </tbody> </table> <p>COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm</p>	Beam Angle	Angle	CRI	CCT	1	5	15°		2	4	24°		3	6	36°		5	5	55°		<p>TUNABLE WHITE</p> <p>DIFFUSER</p> <p>IP54</p> <p>Ø68</p> <p>355°</p> <p>30°</p> <p>102</p> <p>Ø75</p>
Beam Angle	Angle	CRI	CCT																		
1	5	15°																			
2	4	24°																			
3	6	36°																			
5	5	55°																			
<p>Standard</p> <p>WE D31127 - [] - 902765 - W</p> <table border="1"> <thead> <tr> <th>Beam Angle</th> <th>Angle</th> <th>CRI</th> <th>CCT</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5</td> <td>15°</td> <td></td> </tr> <tr> <td>2</td> <td>4</td> <td>24°</td> <td></td> </tr> <tr> <td>3</td> <td>6</td> <td>36°</td> <td></td> </tr> <tr> <td>5</td> <td>5</td> <td>55°</td> <td></td> </tr> </tbody> </table> <p>COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm</p>	Beam Angle	Angle	CRI	CCT	1	5	15°		2	4	24°		3	6	36°		5	5	55°		<p>TUNABLE WHITE</p> <p>Ø68</p> <p>355°</p> <p>30°</p> <p>102</p> <p>Ø75</p>
Beam Angle	Angle	CRI	CCT																		
1	5	15°																			
2	4	24°																			
3	6	36°																			
5	5	55°																			
<p>Diffuser on Reflector</p> <p>WE D31127C - [] - 902765 - W</p> <table border="1"> <thead> <tr> <th>Beam Angle</th> <th>Angle</th> <th>CRI</th> <th>CCT</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5</td> <td>15°</td> <td></td> </tr> <tr> <td>2</td> <td>4</td> <td>24°</td> <td></td> </tr> <tr> <td>3</td> <td>6</td> <td>36°</td> <td></td> </tr> <tr> <td>5</td> <td>5</td> <td>55°</td> <td></td> </tr> </tbody> </table> <p>COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm</p>	Beam Angle	Angle	CRI	CCT	1	5	15°		2	4	24°		3	6	36°		5	5	55°		<p>TUNABLE WHITE</p> <p>DIFFUSER</p> <p>IP54</p> <p>Ø68</p> <p>355°</p> <p>30°</p> <p>102</p> <p>Ø75</p>
Beam Angle	Angle	CRI	CCT																		
1	5	15°																			
2	4	24°																			
3	6	36°																			
5	5	55°																			

DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS TL TW Round, Trimless, Fixed Version

- Trimless fitting with a trimless installation kit
- Polycarbonate secondary anti-glare reflector, in 5 color options
- Tunable White 2700K-6500K COB LED applied
- Diffuser on secondary reflector available for IP54 version
- Remote driver, separate order



Standard

WE D31130 - Angle - CRI CCT - Color - **902765** - Reflector Color


Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



Ø68



Diffuser on Reflector

WE D31130C - Angle - CRI CCT - Color - **902765** - Reflector Color

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



REFLECTOR COLOR



W D
Dark Chrome



W S
Silver



W G
Gold



W W
Matt White



W B
Matt Black


DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS+ TL TW Round, Trimless, Adjustable Version

- Trimless fitting with a trimless installation kit
- Polycarbonate secondary anti-glare reflector, in 5 color options
- Tunable White 2700K-6500K COB LED applied
- Diffuser on secondary reflector available for IP54 version
- Remote driver, separate order

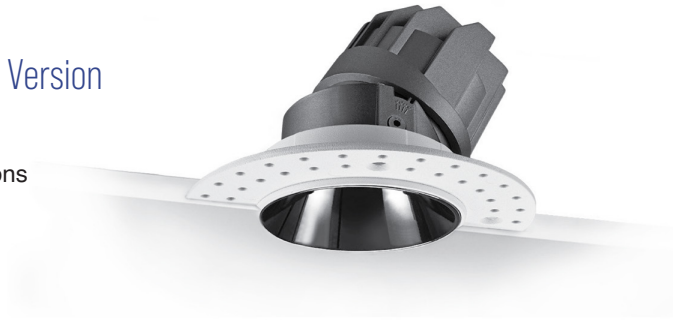

Standard


WE D31134 - Angle - CRI CCT - Color - Reflector Color

902765

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



Diffuser on Reflector

WE D31134C - Angle - CRI CCT - Color - Reflector Color

902765

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



REFLECTOR COLOR



W D
Dark Chrome



W S
Silver



W G
Gold



W W
Matt White



W B
Matt Black

DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS TL Pin TW Round, Trimless, Fixed Pin Version

- Trimless fitting with a trimless installation kit
- Polycarbonate pin hole cover
- Tunable White 2700K-6500K COB LED applied
- Diffuser on pin hole cover available for IP54 version
- Remote driver, separate order



Standard


WE D31132 - Angle CRI CCT - **902765 - W**

Beam Angle	
1	5° 15°
2	4° 24°
3	6° 36°
5	5° 55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



Ø68



Diffuser on Reflector

WE D31132C - Angle CRI CCT - **902765 - W**

Beam Angle	
1	5° 15°
2	4° 24°
3	6° 36°
5	5° 55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS+ TL Pin TW / WESS+ TL Oval TW

Round, Trimless, Adjustable Pin/Oval Version

- Trimless fitting with a trimless installation kit
- Polycarbonate pin/oval hole cover
- Tunable White 2700K-6500K COB LED applied
- Diffuser on pin/oval hole cover available for IP54 version
- Remote driver, separate order




Standard

WE D31136 - [] - 902765 - W

Angle	CRI	CCT
15°	90+	2700-6500K

Beam Angle	
1	5 15°
2	4 24°
3	6 36°
5	5 55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



Ø66
Ø110(kit)


Diffuser on Reflector

WE D31136C - [] - 902765 - W

Angle	CRI	CCT
15°	90+	2700-6500K

Beam Angle	
1	5 15°
2	4 24°
3	6 36°
5	5 55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



Ø66
Ø110(kit)


Standard

WE D31137 - [] - 902765 - W

Angle	CRI	CCT
15°	90+	2700-6500K

Beam Angle	
1	5 15°
2	4 24°
3	6 36°
5	5 55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



Ø66
Ø110(kit)


Diffuser on Reflector

WE D31137C - [] - 902765 - W

Angle	CRI	CCT
15°	90+	2700-6500K

Beam Angle	
1	5 15°
2	4 24°
3	6 36°
5	5 55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



Ø66
Ø110(kit)

DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS S TW Square Trim, Fixed Version

- 6mm die-cast aluminum trim
- Polycarbonate secondary anti-glare reflector, in 5 color options
- Tunable White 2700K-6500K COB LED applied
- Diffuser on secondary reflector available for IP54 version
- Remote driver, separate order



Standard


WE D31140 - Angle - CRI CCT - **902765** - Color

Beam Angle		Reflector Color
1 5	15°	W D Dark Chrome
2 4	24°	W S Silver
3 6	36°	W G Gold
W W		Matt White
W B		Matt Black

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



75x75



Diffuser on Reflector

WE D31140C - Angle - CRI CCT - **902765** - Color

Beam Angle		Reflector Color
1 5	15°	W D Dark Chrome
2 4	24°	W S Silver
3 6	36°	W G Gold
W W		Matt White
W B		Matt Black

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



REFLECTOR COLOR



W D
Dark Chrome



W S
Silver



W G
Gold



W W
Matt White



W B
Matt Black

DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS+ S TW Square Trim, Adjustable Version

- 6mm die-cast aluminum trim
- Polycarbonate secondary anti-glare reflector, in 5 color options
- Tunable White 2700K-6500K COB LED applied
- Diffuser on secondary reflector available for IP54 version
- Remote driver, separate order



Standard


WE D31144 - Angle - CRI CCT - Color - Reflector Color

902765

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



Diffuser on Reflector

WE D31144C - Angle - CRI CCT - Color - Reflector Color

902765

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



REFLECTOR COLOR



W D
Dark Chrome



W S
Silver



W G
Gold



W W
Matt White



W B
Matt Black

DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS S Pin TW Square Trim, Fixed Pin Version

- 6mm die-cast aluminum trim
- Polycarbonate pin hole cover
- Tunable White 2700K-6500K COB LED applied
- Diffuser on pin hole cover available for IP54 version
- Remote driver, separate order



Standard

WE D31142 -

Angle	CRI	CCT
15°	90+	2700-6500K


- 902765 - W

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



75x75



111

82x82

Diffuser on Reflector

WE D31142C -

Angle	CRI	CCT
15°	90+	2700-6500K

- 902765 - W

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS+ S Pin TW Square Trim, Adjustable Pin Version

- 6mm die-cast aluminum trim
- Polycarbonate pin hole cover
- Tunable White 2700K-6500K COB LED applied
- Diffuser on pin hole cover available for IP54 version
- Remote driver, separate order



Standard


WE D31146 -

Angle	CRI	CCT
15°	90+	2700-6500K

- 902765 - W

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



Diffuser on Reflector

WE D31146C -

Angle	CRI	CCT
15°	90+	2700-6500K

- 902765 - W

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS S TL TW Square, Trimless, Fixed Version

- Trimless fitting with a trimless installation kit
- Polycarbonate secondary anti-glare reflector, in 5 color options
- Tunable White 2700K-6500K COB LED applied
- Diffuser on secondary reflector available for IP54 version
- Remote driver, separate order




Standard

WE D31150 - Angle - CRI CCT - Color - Reflector Color

902765

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black



COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm

Diffuser on Reflector

WE D31150C - Angle - CRI CCT - Color - Reflector Color

902765

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black



COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm

REFLECTOR COLOR



W D
Dark Chrome



W S
Silver



W G
Gold



W W
Matt White



W B
Matt Black

DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS+ S TL TW Square, Trimless, Adjustable Version

- Trimless fitting with a trimless installation kit
- Polycarbonate secondary anti-glare reflector, in 5 color options
- Tunable White 2700K-6500K COB LED applied
- Diffuser on secondary reflector available for IP54 version
- Remote driver, separate order




Standard

WE D31154 - Angle CRI CCT - **902765** - Color

Beam Angle		Reflector Color
1	5	15°
2	4	24°
3	6	36°
5	5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



71x71
110x110(kit)

Diffuser on Reflector

WE D31154C - Angle CRI CCT - **902765** - Color

Beam Angle		Reflector Color
1	5	15°
2	4	24°
3	6	36°
5	5	55°

Reflector Color	
W D	Dark Chrome
W S	Silver
W G	Gold
W W	Matt White
W B	Matt Black

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



REFLECTOR COLOR



W D
Dark Chrome



W S
Silver



W G
Gold



W W
Matt White



W B
Matt Black

DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS S TL Pin TW Square, Trimless, Fixed Pin Version

- Trimless fitting with a trimless installation kit
- Polycarbonate pin hole cover
- Tunable White 2700K-6500K COB LED applied
- Diffuser on pin hole cover available for IP54 version
- Remote driver, separate order



Standard

WE D31152 -

Angle	CRI	CCT


 - **902765** - W

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



75x75



111

71x71
110x110(kit)

Diffuser on Reflector

WE D31152C -

Angle	CRI	CCT

 - **902765** - W

Beam Angle	
1 5	15°
2 4	24°
3 6	36°
5 5	55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm




DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail

WESS+ S TL Pin TW Square, Trimless, Adjustable Pin

- Trimless fitting with a trimless installation kit
- Polycarbonate pin hole cover
- Tunable White 2700K-6500K COB LED applied
- Diffuser on pin hole cover available for IP54 version
- Remote driver, separate order

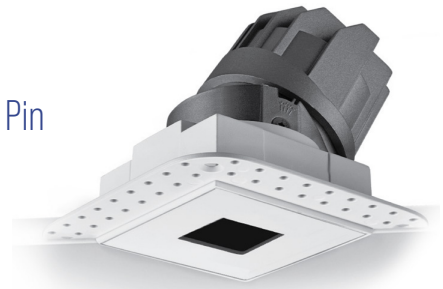


Standard

WE D31156 - - 902765 - W

Angle		CRI	CCT
Beam Angle			
1	5		15°
2	4		24°
3	6		36°
5	5		55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



Diffuser on Reflector

WE D31156C - - 902765 - W

Angle		CRI	CCT
Beam Angle			
1	5		15°
2	4		24°
3	6		36°
5	5		55°

COB / CRI 90+ / CCT 2700-6500K / max. 12.2W / 350mA / 1430lm



DRIVER AND ACCESSORIES



Please refer to the appendix page on P.17 for more detail


Appendix Page WESS TW SERIES

ACCESSORIES


WE D91040
Honey Comb Louver



WE D91041
Spread Lens







WE D91042
Linear Spread Lens




WE D91043
Vertical Tube



PHOTOMETRICS DATA 12.2W 350mA

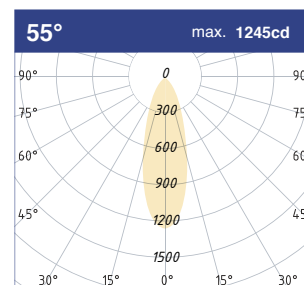

CONSTANT CURRENT DRIVER

Order Code	Driving Power	Output	Wiring Box Dimensions L * W * H (mm)	Required Cut Hole (mm)
TD LT-SETmA-20TWA-SE1(16A)	6 - 18W	350mA 1-10V dimmable	 260*54*41	Ø63
TD LT-SETmA-20TWD-SE5(16A)		350mA DALI		
TD LT-SETmA-20TWY-SE6(16A)		350mA TUYA enabled		



www.welighting.com



WELIGHTING



+852 2359 9866



mail@welighting.com



Unit 01-07, 22/F, CEO Tower,
77 Wing Hong Street, Lai Chi Kok, Hong Kong

WELIGHTING
www.welighting.com

© 2022 We Lighting Ltd. All rights reserved.