

FIELD NOTES
PUBLIC SURVEY

VOL. 468
~~4443~~ - 4451
1920 - 1922

I N D E X

VOL. 468

Tran-
script No.

4443	Sur. Priv. Claims; Ind. Res. Subs. T.	53 N., R.	77 W.
4444	Rem. cors. 11th G. M. W.	T.	13 N., R.
	Sur. Priv. Claims; Ind. Res. Subs. T.	13 N., R.	88 W.
4445	Sur. Priv. Claims; Ind. Res. Subs T.	14 N., R.	88 W.
4446	Sur. Priv. Claims; Ind. Res. Subs. T.	12 N., R.	88 W.
4447	Dep. Res. Wyo-Colo Bdy.	155-158 M. P.	
	11th G. M. W.	T.	12 N., R. 88 & 89 W.
	E. Bdy.	T.	12 N., R. 86 W.
	Ind. Res. 3rd Stan. Par. N.		R. 88 W.
	E. & W. Bdys.	T.	12 N., R. 87 W.
4448	Dep. Res. 4th Stan. Par. N.	T.	R. 88 W.
	E. Bdy.	Ts. 15 & 16	N., R. 88 W.
	Ind. Res. ~. Bdy.	Ts. 14 - 16	N. R. 88 W.
	Ang. Pts. Reest. 11th G. M. W.	Ts. 14- 16 N. Bet. Ts.	88 & 89 W.
4449	Trans. N. Bdy. Colo.	158 - 174 M. P.	
4450	Sur. Priv. Claims; Ind. Res. Subs. T.	15 N., R.	88 W.
4451	Sur. Priv. Claims; Ind. Res. Subs. T.	16 N., R.	88 W.

FIELD NOTES

OF THE SURVEY OF THE

PRIVATE LAND CLAIM LINES

AND THE

INDEPENDENT RESURVEY OF THE

SUBDIVISION LINES

OF

TOWNSHIP NO. 12 NORTH, RANGE NO. 88 WEST

INDEXED

4446

Of the SIXTH PRINCIPAL Meridian,

In the State of WYOMING

EXECUTED BY

ROY E. CHASE AND ALEX DOUGLAS

Cadastral Engineers

In the capacity of U. S. ~~Surveyors~~, under Special Instructions dated April 1, 1920,

issued by the United States Surveyor General to govern surveys included in Group

No. 50, which were approved by the Commissioner of the General Land

Office, April 28, 1920, and Assignment Instructions dated August 4, 1921.

Survey commenced October 4, 1921.

Survey completed October 28, 1921.

Accepted Apr. 24, 1923

INDEX DIAGRAM.

Township 12 NORTH, Range 88 WEST

63	6	60	5	52	4	44	3	37	2	30	1
	62		61		53		46		38		31
67	7	64	8	54	9	47	10	39	11	32	12
	66		65		55		48		40		33
71	18	68	17	56	16	49	15	41	14	34	13
	70		69		57		50		42		35
	19	72	20	59	21	51	22	43	23	37	24
	30		29		28		27		26		25
	31		32		33		34		35		36

Transcriber KGO

O.D.
10.9
T.K.
9.8

INDEX TO PRIVATE LAND CLAIMS.

<u>Tract No.</u>	<u>Page.</u>
37	1
38	2
39	4
40	5
41	7
42	9
43	10
44	10
45	12
46	13
47	15
48	16
49	18
50	20
51	21
74	22
77	26
78	27
79	28

DIAGRAM

SHOWING LINES RUN BY EACH SURVEYOR.

T. 12 N., R. 88 W.

6	5	4	3	2	1
7	8	9	10	11	12
18	17	16	15	14	13
19	20	21	22	23	24

_____ Lines run by Roy E. Chase.

_____ Lines run by Alex Douglas.

Survey of Private Land Claims in Resurvey T. 12 N., R. 88 W.

Chains

Survey commenced October 4, 1921.

For description and test of instruments see field notes of exterior lines Group 50.

Survey of private land claims as originally located in accordance with the survey executed by G. W. Baker, U. S. Deputy Surveyor, in 1880.

Tract No. 37


Sante Fe Pacific Railroad F.R.L.L. 05961, Patented.

SW $\frac{1}{2}$ SW $\frac{1}{2}$, Sec. 5.

This claim is surveyed according to its proper position when referred to the cor. of secs. 5, 6, 31 and 32, on original Third Standard Parallel North.

At NE. cor. of claim,


Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 1/37, with brass cap, mkd.



Thence

West, on line 1-2, Tract 37.

20.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 2/37, with brass cap, mkd.




Thence

South, on line 2-3, Tract 37.

20.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/37 and 2/39, with brass cap, mkd.

Survey of Private Land Claims, in Resurvey, T. 12 N., R. 88 W.


Chains



Thence

East, on line 3-4, Tract 37; bet. Tracts 37 and 39.

20.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/37, on line 1-2, Tract 39, with brass cap, mkd.



Thence

North, on line 4-1, Tract 37.

20.00 Cor. No. 1/37, the place of beginning.

Tract No. 38.

George B. Pierson, H.E. 5473, Patented.


SE $\frac{1}{2}$ SW $\frac{1}{2}$, Sec. 7

N $\frac{1}{2}$ NE $\frac{1}{2}$, NE $\frac{1}{2}$ NW $\frac{1}{2}$, Sec. 18.

This claim is surveyed in accordance with its proper position when referred to the original cor. of secs. 7, 12, 13 and 18, on the W. bdy. of the Tp.

The improvements made on this claim are practically obliterated. The place has been used by the cattle association as a watering place for stock and no attempt has been made to cultivate any part of it for several years. At NE. cor. of claim

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 1/38, with brass cap, mkd.




Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains

Thence

West, on line 1-2, Tract 38.


20.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 2/38, with brass cap, mkd.



Thence

South, on line 2-3, Tract 38.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/38, with brass cap, mkd.



Thence

East, on line 3-4, Tract 38.

60.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/38, with brass cap, mkd.



Thence

North, on line 4-5, Tract 38.

20.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 5/38, with brass cap, mkd.




Thence

West, on line 5-6, Tract 38.

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 6/38, with brass cap, mkd.



Thence

North, on line 6-1, Tract 38.

20.00 Cor. No. 1/38, the place of beginning.

Tract No. 39

Edwin Morgan, H.E. 017341, Patented.

1/2 Sec. 8.

This claim is surveyed in accordance with its proper position when referred to the cor. of secs. 5, 6, 31 and 32, on the original Third Standard Parallel North. Fences are irregular, but the improvements are embraced within the tract as surveyed.

From cor. No. 2/39 and 3/37, described in field notes of Tract 37

Thence

South, on line 2-3, Tract 39.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/39, with brass cap, mkd.




Thence

East, on line 3-4, Tract 39.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/39, with brass cap, mkd.

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains



Thence

North, on line 4-1, Tract 39.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 1/39 and 3/79, with brass cap, mkd.



Thence

West, on line 1-2, Tract 39.

20.00 Cor. No. 4/37.

Thence bet. Tracts 39 and 37.

40.00 Cor. No. 2/39 and 3/37, the place of beginning.

Tract No. 40

Conrad M. Beeler, Cash 698, Patented.

SW $\frac{1}{2}$ SE $\frac{1}{2}$, Sec. 12.

W $\frac{1}{2}$ NE $\frac{1}{2}$, NW $\frac{1}{2}$ SE $\frac{1}{2}$, Sec. 13.

This claim is surveyed in conformity with property lines, the lines of adjoining claims, and in accordance with its proper relation when referred to the original $\frac{1}{2}$ sec. cor. bet. secs. 13 and 14, and the restored standard cor. of Ts. 12 and 13 N., Rs. 87 and 88 W.

At NE. cor. of the claim,

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 1/40, on line 2-3, Tract 41, with brass cap, mkd.



Thence

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains

West, on line 1-2, Tract 40.

20.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 2/40, with brass cap, mkd.



Thence

S. 0° 15' W., on line 2-3, Tract 40.


20.20 Cor. No. 1/44.

Thence bet. Tracts 40 and 44.

40.20 Cor. No. 4/44 and 1/45.

Thence bet. Tracts 40 and 45.

80.65 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/40 and 2/43, on line 1-4, Tract 45, with brass cap, mkd.



Thence

East, on line 3-4, Tract 40; bet. Tracts 40 and 43.

20.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/40 and 3/42, on line 1-2, Tract 43, with brass cap, mkd.



Thence

N. 0° 21' E., on line 4-1, Tract 40; bet. Tracts 40 and 42.

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W

Chains

40.08 Cor. No. 3/41 and 2/42.

Thence

North, on line 4-1, Tract 40; bet. Tracts 40 and 41.

40.64 Cor. No. 1/40, the place of beginning.

Tract No. 41.

George W. Reed, H.E. 3301, Patented.

Lot 3, Sec. 7, T. 12 N., R. 87 W.

E $\frac{1}{2}$ SE $\frac{1}{4}$, Sec. 12, and

NE $\frac{1}{2}$ NE $\frac{1}{4}$, Sec. 13, T. 12 N., R. 88 W.

The N. and E. bdys. of this tract, are marked by property lines which are in accordance with their proper position when referred to the original $\frac{1}{2}$ sec. cor., bet. secs. 13 and 14, T. 12 N., R. 88 W. The fence along the N. bdy. of the claim is somewhat irregular, and a mean position was taken for this line.

At NE. cor. of claim,

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 1/41, on line 3-4, Tract 45, with brass cap, mkd.




Thence

West, on line 1-2, Tract 41; bet. Tracts 41 and 45.

20.00 Cor. No. 3/45.

Continue on line 1-2, Tract 41.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 2/41, with brass cap, mkd.



Thence

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains


S. 1° 22' W., on line 2-3, Tract 41.

20.00 Cor. No. 1/40.

Thence

South, on line 2-3, Tract 41; bet. Tracts 41 and 40.


40.64 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/41 and 2/42, on line 1-4, Tract 40, with brass cap, mkd.



Thence

N. 89° 02' E., on line 3-4, Tract 41; bet. Tracts 41 and 42.

19.05 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/41 and 1/42, with brass cap, mkd.



Thence

N. 1° 22' E., on line 4-5, Tract 41.

40.33 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 5/41, with brass cap, mkd.




Thence

East, on line 5-6, Tract 41.

20.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 6/41, with brass cap, mkd.

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains



Thence

N. 1° 22' E., on line 6-1, Tract 41.

20.00 Cor. No. 1/41, the place of beginning.

Tract No. 42.

James Hoggatt, H.E. 3800, Patented.

SE $\frac{1}{4}$ NE $\frac{1}{4}$, NE $\frac{1}{4}$ SE $\frac{1}{4}$, Sec. 13

This claim was surveyed in accordance with its proper position when referred to the original $\frac{1}{4}$ sec. cor., bet. secs. 13 and 14.

From cor. No. 1/42 and 4/41, described in the field notes of Tract 41.

Thence

S. 89° 02' W., on line 1-2, Tract 42; bet. Tracts 42 and 41.

19.05 Cor. No. 2/42 and 3/41, described in the field notes of Tract 41.

Thence

S. 0° 21' W., on line 2-3, Tract 42; bet. Tracts 42 and 40.

40.08 Cor. No. 3/42 and 4/40, described in the field notes of Tract 40.

Thence

N. 89° 28' E., on line 3-4, Tract 42; bet. Tracts 42 and 43.

18.67 At cor. of fences, extending N. and W.

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/42 and 5/58, line 1-2, Tract 43 with brass cap, mkd.

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains



Thence

N. 0° 45' E., on line 4-1, Tract 42; bet. Tracts 42 and 58.

20.16 Cor. No. 4/58.

Continue on line 4-1, Tract 42.

40.32 Cor. No. 1/42 and 4/41, the place of beginning.

Tract No. 43.Oscar Y. Ames, H.E. 2511, Patented.Lots 4, 5, 6, Sec. 18, T. 12 N., R. 87 W.Lots 3, 4, Sec. 13, T. 12 N., R. 88 W.

(For description of the survey of this claim, see the field notes of T. 12 N., R. 87 W.)

Tract No. 44.Jennie Leahy, H.E. 2635, Patented.N $\frac{1}{2}$ NW $\frac{1}{4}$, Sec. 13.N $\frac{1}{2}$ NE $\frac{1}{4}$, Sec. 14.

This claim is surveyed in accordance with property lines, the lines of adjoining claims and in proper position when referred to the original $\frac{1}{4}$ cor. bet. secs. 13 and 14. At NE. cor. of the claim, Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 1/44, on line 2-3, Tract 40, with brass cap, mkd.



Thence

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains

S. 89° 39' W., on line 1-2, Tract 44.

80.66 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 2/44, with brass cap, mkd.



Thence

South, on line 2-3, Tract 44.

20.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/44, with brass cap, mkd.



Thence

East, on line 3-4, Tract 44.

20.00 Cor. No. 2/46.

Thence


N. 89° 33' E., on line 3-4, Tract 44; bet. Tracts 44 and 46.

40.07 Cor. No. 2/45 and 1/46.

Thence

East, on line 3-4, Tract 44; bet. Tracts 44 and 45.

20.40 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/44 and 1/45, on line 2-3, Tract 40, with brass cap, mkd.



Thence

Survey of Private Land Claims in Resurvey T. 12 N., R. 88 W.

Chains

N. 0° 15' E., on line 4-1, Tract 44; bet. Tracts 44 and 40.

20.00 Cor. No. 1/44, the place of beginning.

Tract No. 45.

Conrad M. Beeler, H.E. 2136, Patented.

SE $\frac{1}{4}$ NW $\frac{1}{4}$, NE $\frac{1}{4}$ SW $\frac{1}{4}$, Lot 2, Sec. 13.

This tract is surveyed in accordance with its proper position when referred to the Wyoming-Colorado Boundary Line, and original $\frac{1}{4}$ cor. bet. secs. 13 and 14. From cor. No. 1/45 and 4/44, described in the field notes of Tract 44.

Thence

West, on line 1-2, Tract 45; bet. Tracts 45 and 44.

20.40 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 2/45 and 1/46, on line 3-4, Tract 44, with brass cap, mkd.

T12N R88W

TR4

AP1 AP2
TR46 TR45
1921

Thence

S. 0° 15' W., on line 2-3, Tract 45; bet. Tracts 45 and 46.

20.49 Cor. No. 4/46 and 1/47.

Thence bet. Tracts 45 and 47.

40.56 Cor. No. 4/47.

Continue on line 2-3, Tract 45.

59.23 At intersection of line with Wyoming-Colorado Boundary Line.

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/45, on the Wyoming-Colorado Boundary Line, with brass cap, mkd.

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.


Chains



Thence

S. 89° 55' E., on line 3-4, Tract 45, on State line.

20.49 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/45 and 3/43, with brass cap, mkd.



Thence

N. 0° 15' E., on line 4-1, Tract 45; bet. Tracts 45 and 43.

18.80 Cor. No. 3/40 and 2/43.

Thence bet. Tracts 45 and 40.

59.25 Cor. No. 1/45 and 4/44, the place of beginning.

Tract No. 46.State of Wyoming, SS. I.S. 554. Approved.SW $\frac{1}{2}$ NW $\frac{1}{2}$, Sec. 13.SE $\frac{1}{2}$ NE $\frac{1}{2}$, Sec. 14.

This claim is surveyed in accordance with its proper position when referred to the original $\frac{1}{4}$ sec. cor. bet. secs. 13 and 14.

From cor. No. 1/46 and 2/45, described in the field notes of Tract 45.

Thence


S. 89° 33' W., on line 1-2, Tract 46; bet. Tracts 46 and 44.

40.07 Property cor., fences extending S., E. and W. therefrom. N. and alongside.

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains.

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 2/46, on line 3-4, Tract 44, with brass cap, mkd.




Thence

S. 0° 34' W., on line 2-3, Tract 46.

20.00 Property cor., fences extending N., S. and E. E. and alongside

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/46, with brass cap, mkd.



Thence


S. 89° 36' E., on line 3-4, Tract 46.

20.28 Cor. No. 2/47, at original $\frac{1}{4}$ cor., bet. secs. 13 and 14.

Thence

S. 89° 40' E., on line 3-4, Tract 46; bet. Tracts 46 and 47.

19.79 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/46 and 1/47, on line 2-3, Tract 45, with brass cap, mkd.



Thence

N. 0° 15' E., on line 4-1, Tract 46; bet. Tracts 46 and 45.

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains

20.49 Cor. No. 1/46 and 2/45, the place of beginning.

Tract No. 47.

State of Wyoming, S.S.I.S. 04528, Approved.

NW $\frac{1}{4}$ SW $\frac{1}{4}$, Sec. 13.

This tract is surveyed in accordance with its proper position when referred to the original $\frac{1}{4}$ cor., bet. secs. 13 and 14, with property lines and the boundaries of adjoining tracts.

From cor. No. 1/47 and 4/46, described in the field notes of Tract 46.

Thence

N. 89° 40' W., on line 1-2, Tract 47; bet. Tracts 47 and 46.

19.79 The original $\frac{1}{4}$ sec. cor., bet. secs. 13 and 14, a lava stone, 5x5x10 ins., firmly set in a mound of stone, and dimly marked $\frac{1}{4}$ on W. face, $\frac{1}{4}$ lk. SW., and alongside

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 2/47, on line 3-4, Tract 46, with brass cap, mkd.



Thence

S. 0° 13' W., on line 2-3, Tract 47.

20.07 Property cor., fences extending N. and E. therefrom . $\frac{1}{4}$ lk. E. and alongside of which

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/47, with brass cap, mkd.



Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains.

Thence

S. 89° 40' E., on line 3-4, Tract 47.

19.78 Property cor., fences extending N., S. and W. therefrom.
1/4 lk. E. and alongside of which,

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/47, on line 2-3, Tract 45, with brass cap, mkd.



Thence

N. 0° 15' E., on line 4-1, Tract 47; bet. Tracts 47 and 45.

20.07 Cor. No. 1/47 and 4/46, the place of beginning.

Tract No. 48.


Martin Geer, H.E. 06901, Patented.

Lot 1, Sec. 14.

Lot 4, Sec. 15.

This claim is surveyed in accordance with its proper position when referred to the original 1/4 sec. cor., bet. secs. 13 and 14 and the Wyoming-Colorado Boundary Line. At NE. cor. of claim,

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 1/48, with brass cap, mkd.




Thence

N. 89° 54' W., on line 1-2, Tract 48.

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 2/48, with brass cap, mkd.



Thence

South, on line 2-3, Tract 48.

19.10 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/48, on the Wyoming-Colorado Boundary Line, with brass cap, mkd.



Thence

S. 89° 55' E., on line 3-4, Tract 48, on S. bdy. of Wyoming.

18.96 The reestablished 169th mile cor., on the Wyoming-Colorado Boundary Line, a 3 in. iron post, with brass cap mkd.



This corner established in Colorado survey.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/48, on the Wyoming-Colorado Boundary Line, with brass cap, mkd.



Thence

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains.

North, on line 4-1, Tract 48.

19.10 Cor. No. 1/48, the place of beginning.


Tract No. 49.

State of Wyoming, School Section, Grant.

N $\frac{1}{2}$, N $\frac{1}{2}$ SW $\frac{1}{4}$, N $\frac{1}{2}$ SE $\frac{1}{4}$, Lots 1,2,3 and 4, Sec. 16.

This tract is surveyed in accordance with its proper position when referred to the Wyoming-Colorado Boundary Line, and the original closing cor. of secs. 15 and 16. Fences are irregular owing to the topography but are intended to conform with the location as surveyed. At NE. cor. of claim,

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 1/49, with brass cap, mkd.



Thence

N. 89° 58' W., on line 1-2, Tract 49.

80.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 2/49, with brass cap, mkd.



Thence

South, on line 2-3, Tract 49.

61.11 Cor. No. 1/51.

Thence bet. Tracts 49 and 51.

78.11 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/49 and 4/51, on the Wyoming-Colorado Boundary Line, with brass cap, mkd.

Survey of Private Land Claims in Resurvey T. 12 N., R. 88 W.

Chains

T12N	R88W
TR51	TR49
AP4	AP3

COLO
1921

Thence

S. 89° 53' E., on line 3-4, Tract 49.

0.50 Resurvey closing cor. of secs. 20 and 21.

1.60 The reestablished 171st mile cor., on the Wyoming-Colo-
rado Boundary Line, a 3 in. iron post, with brass cap,
mkd.

171M
WYO

COLO
1911

This cor. established in a Colorado survey.

79.57 The restored 170th mile cor. on the Wyoming-Colorado
Boundary Line, a 3 in. iron post, with brass cap, mkd.

170M
WYO

COLO
1911

This cor. established in a Colorado survey.

Thence

S. 89° 55' E., on line 3-4, Tract 49.

0.58 The original closing cor., for secs. 15 and 16, which is
a lava stone, 6x8x12 ins., firmly set in a mound of
stone, and marked CC on N., 3 grooves on E., and 3
grooves on W. face. $\frac{1}{2}$ lk. N. and alongside of which
Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the
ground, for cor. No. 4/49, on the Wyoming-Colorado
Boundary Line, with brass cap, mkd.

T12N	R88W
TR49	
AP4	S21

COLO
1921

Survey of Private Land Claims in Resurvey T. 12 N., R. 88 W.

Chains

Thence

North, on line 4-1, Tract 49.

78.00 Cor. No. 1/49, the place of beginning.

Tract No. 50.Oliver P. Morgan, H.E. 014568. Patented.N $\frac{1}{2}$ SW $\frac{1}{2}$, NW $\frac{1}{2}$ SE $\frac{1}{2}$, Sec. 17.


This claim is surveyed in accordance with its proper position when referred to the Wyoming-Colorado Boundary Line and the original closing corner of secs. 15 and 16. At NE. cor. of claim, Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 1/50, with brass cap, mkd.



Thence

N. 89° 19' W., on line 1-2, Tract 50.

59.96 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 2/50, on resurvey line, bet. secs. 17 and 18, with brass cap, mkd.




Thence

S. 0° 04' E., on line 2-3, Tract 50, on resurvey line bet. secs. 17 and 18.

20.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/50 and 2/51, with brass cap, mkd.

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.


Chains



Thence

S. 89° 19' E., on line 3-4, Tract 50; bet. Tracts 50 and 51.

59.94 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/50, on line 1-2, Tract 51, with brass cap, mkd.



Thence

North, on line 4-1, Tract 50.

20.00 Cor. No. 1/50, the place of beginning.


Tract No. 51.

Oliver P. Morgan, H.E. 03937, Patented.

Lots 1, 2, 3 and 4, Sec. 17.

This claim is surveyed in accordance with its proper position when referred to the Wyoming-Colorado Boundary Line, and the original closing corner of secs. 15 and 16. At NE. cor. of claim,

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 1/51, on line 2-3, Tract 49, with brass cap, mkd.



Thence

N. 89° 19' W., on line 1-2, Tract 51.

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains

- 20.00 Cor. No. 4/50.
Thence bet. Tracts 51 and 50.
- 79.94 Cor. No. 2/51 and 3/50, described in the field notes of Tract 50.
Thence
S. 0° 04' E., on line 2-3, Tract 51, on resurvey line, bet. secs. 17 and 18.
- 15.66 The resurvey cor. of secs. 17, 18, 19 and 20.
Thence bet. secs. 19 and 20.
- 17.80 Cor. No. 3/51, identical with the closing cor. of secs. 19 and 20, hereinafter described.
Thence
S. 89° 53' E., on line 3-4, Tract 51, on S. bdy. of the State of Wyoming.
- 2.57 The reestablished 172nd mile cor., a 3 in. iron post, with brass cap, mkd.



This cor. established in a Colorado survey.

- 79.94 Cor. No. 4/51 and 3/49, described in the field notes of Tract 49.
Thence
North, on line 4-1, Tract 51; bet. Tracts 51 and 49.
- 17.00 Cor. No. 1/51, the place of beginning.

Tract No. 74.

Lawrence B. Young, H.E. 023664, Patented.

N $\frac{1}{2}$ SW $\frac{1}{2}$, SE $\frac{1}{2}$ SW $\frac{1}{2}$, Sec. 32, T. 13 N., R. 88 W.

Lots 3 and 4, S $\frac{1}{2}$ NW $\frac{1}{2}$, Sec. 5 and

SE $\frac{1}{2}$ NE $\frac{1}{2}$, Sec. 6, T. 12 N., R. 88 W.

This claim is surveyed in accordance with its proper position when referred to the cor. of secs. 5, 6, 31

Survey of Private Land Claims in Resurvey T. 12 N., R. 88 W.

Chains

and 32, on the original Third Standard Parallel North, and in harmony with adjoining tracts.

Note: Cors. 1, 2, 3, 4, 5, 6, and 11, of Tract 74, were established by Riley and Millrick, under Group 50, in 1920.

In completing the survey of Tract 74, in resurvey of T. 12 N., R. 88 W., in 1921, cors. 3, 4, 5, 6 and 11, set in 1920, were moved to their present position, in order to place them normal to the cor. of secs. 5, 6, 31 and 32, on the Third Standard Parallel North.

From cor. No. 2/74, 3/67 and 4/65, described in the field notes of Tract 65, resurvey T. 13 N., R. 88 W., S. 6° 22' E., on line 2-3, Tract 74.


20.30 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/74, with brass cap, mkd.



Thence

S. 89° 53' E., on line 3-4, Tract 74.

20.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/74, with brass cap, mkd.




Thence

S. 6° 23' E., on line 4-5, Tract 74.

19.56 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 5/74, with brass cap, mkd.

Survey of Private Land Claims in Resurvey T. 12 N., R. 88 W.

Chains.




Thence

N. 89° 53' W., on line 5-6, Tract 74.

20.03 The original standard cor. of secs. 5, 6, 31 and 32. which is a volcanic stone, 16x14x9 ins., above ground, marked with 5 notches on E. edge, and 1 notch on W. edge, SC on N. face, set firmly in the ground, surrounded by a mound of stone.

Alongside this stone,


Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 6/74, with brass cap, mkd.



Thence

South, on line 6-7, Tract 74.

20.20 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 7/74, with brass cap, mkd.



Thence

West, on line 7-8, Tract 74.

Survey of Private Land Claims in Resurvey T. 12 N., R. 88 W.

Chains.


20.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 8/74, with brass cap, mkd.



Thence

South, on line 8-9, Tract 74.

20.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 9/74, with brass cap, mkd.



Thence

S. 89° 56' E., on line 9-10, Tract 74.

60.03 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 10/74, on line 2-3, Tract 79, with brass cap, mkd.



Thence

North, on line 10-11, Tract 74; bet. Tracts 74 and 79.

40.15 Cor. No. 11/74, 3/69 and 2/79, described in field notes of Tract 69, resurvey T. 13 N., R. 88 W.

Thence

N. 6° 11' W., on line 11-1, Tract 74; bet. Tracts 74 and 69.

39.63 Cor. No. 1/74 and 2/69, described in field notes of Tract 69, resurvey T. 13 N., R. 88 W.

Survey of Private Land Claims in Resurvey T. 12 N., R. 88 W.

Chains

Thence

N. 89° 37' W., on line 1-2, Tract 74; bet. Tracts 74 and 67.

40.04 Cor. No. 2/74, 3/67 and 4/65, the place of beginning.

Tract No. 77.Edward Brown, H.E. 5351, Patented.Lot No. 4, SW $\frac{1}{2}$ NW $\frac{1}{2}$, W $\frac{1}{2}$ SW $\frac{1}{2}$, Sec. 1

This tract is surveyed in accordance with its proper position when referred to corners on the original Third Standard Parallel North, and the original $\frac{1}{2}$ sec. cor., bet. secs. 13 and 14. At NE. cor. of the claim, which is the west 1/16 cor., bet. original secs. 1 and 36. Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 1/77, on line 3-4, Tract 75, T. 13 N., R. 88 W., with brass cap, mkd.



Thence

N. 89° 50' W., on line 1-2, Tract 77; bet. Tracts 77 and 75.

19.09 Cor. No. 2/77, 3/75, 4/73 and 1/78, described in the field notes of Tract 73, resurvey T. 13 N., R. 88 W.

Thence

South, on line 2-3, Tract 77; bet. Tracts 77 and 78.

40.98 Cor. No. 4/78.

Continue on line 2-3, Tract 77.

81.96 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/77, with brass cap, mkd.

Survey of Private Land Claims in Resurvey T. 12 N., R. 88 W.

Chains



Thence

East, on line 3-4, Tract 77.

19.09 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/77, with brass cap, mkd.



Thence

North, on line 4-1, Tract 77.

81.90 Cor. No. 1/77, the place of beginning.

Tract No. 78

State of Wyoming, S.S. 9, Approved.

Lots 1 and 2, S $\frac{1}{2}$ NE $\frac{1}{4}$, Sec. 2.

This claim is surveyed in accordance with its proper position when referred to cors. on the original Third Standard Parallel North, and the original $\frac{1}{4}$ sec. cor. bet. secs. 13 and 14.

From cor. No. 1/78, 4/73, 3/75, 2/77, described in the field notes of Tract 73, resurvey T. 13 N., R. 88 W.

Thence

N. 89° 50' W., on line 1-2, Tract 78; bet. Tracts 78 and 73.

38.17 Cor. No. 2/78 and 3/73, described in field notes of Tract 73, resurvey T. 13 N., R. 88 W.

Thence

South, on line 2-3, Tract 78.

40.98 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 3/78, with brass cap, mkd.

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W

Chains



Thence

S. 89° 50' E., on line 3-4, Tract 78.

38.17 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/78, on line 2-3, Tract 77, with brass cap, mkd.



Thence

North, on line 4-1, Tract 78; bet. Tracts 78 and 77.

40.98 Cor. No. 1/78, 4/73, 3/75 and 2/77, the place of beginning.

Tract No. 79.State of Wyoming, S.S.9, Approved.Lots 1 and 2, S $\frac{1}{2}$ NE $\frac{1}{4}$, SE $\frac{1}{4}$, Sec. 5

This claim is surveyed in accordance with its proper position when referred to corners on the original Third Standard Parallel North.

From cor. No. 1/79 and 4/69, described in field notes of Tract 69, resurvey T. 13 N., R. 88 W.,

Thence

N. 89° 53' W., on line 1-2, Tract 79; bet. Tracts 79 and 69.

40.06 Cor. No. 2/79, 3/69 and 11/74, described in field notes of Tract 74.

Thence

South, on line 2-3, Tract 79; bet. Tracts 79 and 74

40.15 Cor. No. 10/74.

Survey of Private Land Claims in Resurvey of T. 12 N., R. 88 W.

Chains.


Continue on line 2-3, Tract 79.

80.15 Cor. No. 3/79 and 1/39, described in the field notes of Tract 39.

Thence

East, on line 3-4, Tract 79.

40.06 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for cor. No. 4/79, with brass cap, mkd.



Thence

North, on line 4-1, Tract 79.

80.10 Cor. No. 1/79 and 4/69, the place of beginning.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains


Independent Resurvey superseding the survey executed by G. W. Baker, U. S. Deputy Surveyor in 1880.

From the resurvey cor. of secs. 1 and 2, on the Third Standard Parallel North, established and described under Group 50.

S. 0° 01' E., bet. secs. 1 and 2.

Over mountainous land; ascend 25 ft. over NE. slope; through sage and buckbrush.

- 4.10 Dim road, bears NE. and SW.
- 8.00 Low spur, falls E., descend 50 ft. over S. slope; enter aspen and oak.
- 10.06 Fence, bears nearly E. and W.
- 16.50 Cabin, bears E., about 6.00 chs. dist.
- 18.40 Fence, bears nearly E. and W.
- 21.60 Stream, 3 lks. wide, 1 in. deep, course E.; ascend 100 ft. over NE. slope.
- 21.90 Dim road, bears E. and W.
- 29.40 Spur, falls E.; descend 50 ft. over SE. slope.
- 39.50 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for witness cor. to resurvey $\frac{1}{2}$ sec. cor., with brass cap, mkd.



from which

An aspen, 6 ins. dia., bears N. 59° E., 23 lks. dist., mkd. $\frac{1}{2}$ S 1 W C B T


An aspen, 8 ins. dia., bears S. 50 $\frac{1}{2}$ ° W., 40 lks. dist., mkd. $\frac{1}{2}$ S 2 W C B T

- 40.00 True point for resurvey $\frac{1}{2}$ sec. cor., falls in spring, course E.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

- 40.87 Intersect line 3-4, Tract 78, at a point, 3.66 chs.,
N. 89° 50' W., from cor. No. 4.
- 55.50 Draw, course E.; ascend 40 ft. over NE. slope.
- 60.00 Spur, falls E.; descend 90 ft. over SE. slope.
- 72.00 Drain, course E.; ascend 100 ft. over N. slope; leave
aspens.
- 76.00 Spur, falls E.; descend over gentle SE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the
ground, for resurvey cor. of secs. 1, 2, 11 and 12,
with brass cap, mkd.



raise a mound of stone, 2 ft. base, 1½ ft. high, W.
of cor.

Land, rolling mountainous; slopes E.

Soil, sandy loam; 1st and 2nd rate.

Undergrowth, sage, oak and buck brush.

Timber, aspen.

East, on a random line, bet. secs. 1 and 12.

- 40.00 Set temp. ¼ sec. cor.

- 80.00 Intersect the E. bdy. of the Tp., at the resurvey cor.
of secs. 1, 6, 7 and 12, established and described
under Group 50.

Thence

West, on a true line, bet. secs. 1 and 12.

Over mountainous land; ascend 450 ft. over broken E.
slope; through sage, service, oak and buck brush.


- 23.00 Fence, bears NW. and SE.

- 35.00 Enter aspen, bears N. and S.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.



from which

An aspen, 6 ins. dia., bears N. 36° E., 15 lks. dist., mkd. $\frac{1}{4}$ S 1 B T

An aspen, 8 ins. dia., bears S. 54° E., 25 lks. dist., mkd. $\frac{1}{4}$ S 12 B T

52.60 Spur, falls N.; descend 60 ft. over NW. slope.

57.25 Intersect line 4-1, Tract 77, at a point, 1.74 chs., N. of cor. No. 4.

58.20 Draw, course NE.; ascend NE. slope.

70.50 Dim road, bears NW. and SE.; leave aspen.

76.34 Intersect line 2-3, Tract 77, at a point, 1.74 chs., North of cor. No. 3.

80.00 The cor. of secs. 1, 2, 11 and 12.

Land, rolling mountainous.

Soil, sandy loam and rocky; 1st and 3rd rate.

Undergrowth, sage, service, oak and buck brush.

Timber, aspen.


S. $0^{\circ} 01'$ E., bet. secs. 11 and 12.

Over mountainous land; descend 175 ft. over broken SE.

slope; through sage, service, oak and buck brush, with patches of aspen.

36.50 Draw, course E.; ascend 70 ft. over NE. slope.


40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.



Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

- raise a mound of stone 2 ft. base, 1½ ft. high, W. of cor.
- 44.80 Spur, falls E.; descend SE. slope.
- 47.00 Draw, course E.; ascend NE. slope.
- 58.25 Spur, falls E.; descend 275 ft. over SW. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for resurvey cor. of secs. 11, 12, 13 and 14, with brass cap, mkd.



raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling mountainous.

Soil, sandy loam and rocky; 1st and 3rd rate.

Undergrowth, sage, service, oak and buck brush.

East, on a random line, bet. secs. 12 and 13.

- 40.00 Set temp. ¼ sec. cor.
- 79.94 Intersect the E. bdy. of the Tp., 2 lks. S. of the resurvey cor. of secs. 7, 12, 13 and 18, established and described under Group 50.

Thence

S. 89° 59' W., on a true line, bet. secs. 12 and 13.


Over rolling land; descend 150 ft. over W. slope through sage, service and buck brush.

- 0.93 Intersect line 4-5, Tract 41, at a point, 17.39 chs., S. 1° 22' W., of cor. No. 5.
- 10.00 Enter bottom land, bears N. and S.
- 12.50 Battle Creek, 60 lks. wide, 12 ins. deep, course S.; enter cultivated land.
- 20.45 Dim road, bears N. 20° E. and S. 20° W.

Independent Resurvey of the Subdivision T. 12 N., R. 88 W.

Chains

- 24.00 Ditch, 3 lks. wide, 3 ins. deep, course S. 20° W.; leave cultivated land; enter sage and buck brush.
- 25.50 Fence, bears N. 20° E. and S. 20° W.
- 37.00 Ditch, dry, course S. 20° W.
- 39.97 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.




- dig pits 18x18x12 ins., E. and W. of post, 3 ft. dist., and scatter the earth.
- 40.54 Intersect line 2-3, Tract 40, at a point, 2.90 chs., N. 0° 15' E., of cor. No. 1/44
- 48.15 Fence, bears N. 10° E. and S. 10° W.
- 66.40 Road, bears NE. and SW.
- 66.50 Spur, falls S.; descend SW. slope.
- 79.94 The cor. of secs. 11, 12, 13 and 14.
- Land, rolling.
- Soil, sandy loam rocky on slopes; 1st and 3rd rate.
- Undergrowth, sage, service and buck brush.
- No timber.
-
- S. 0° 01' E., bet. secs. 13 and 14.
- Over rolling land.
- Descend over SW. slope; through sage and scattering service.
- 3.20 Intersect line 1-2, Tract 44, at a point, 39.40 chs., S. 89° 39' W., from cor. No. 1.
- 16.20 Ditch, 3 lks. wide, 4 ins. deep, course E.
- 20.00 Saddle, 4.00 chs., E. of line, bears E. and W.
- 21.35 Fence, bears E. and W.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains.

- 31.80 Spur, falls W.; descend gradually over S. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.




raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

- 63.44 Intersect line 3-4, Tract 47, at a point, 97 lks. S. 89° 40' E., from cor. No. 3.

Fence, bears E. and W.

- 75.50 Descend abruptly over S. slope.

- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 6 ins. in the ground, supported in a mound of stone, 3 ft. base, 2 ft. high, for resurvey cor. of secs. 13, 14, 23 and 24, with brass cap, mkd.



Land, rolling, sandy loam, rocky on slopes; 1st and 3rd rate.

Undergrowth, sage and service.

No timber.

N. 89° 59' E., on a random line, bet. secs. 13 and 24.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.06 Intersect E. bdy. of Tp., 16 lks. S. of the resurvey cor. of secs. 13, 18, 19 and 24, established and described under Group 50.

Thence

S. 89° 52' W., on a true line, bet. secs. 13 and 24.

Independent Resurvey of the Subdivision T. 12 N., R. 88 W.

Chains

- Over rolling bottom land; through cultivated field.
- 14.75 Fence and telephone line, bears about N. 60° E., and S. 60° W.
- 15.00 Road, Slater to Columbine, bears S. 60° W. and N. 60° E.
- 15.30 Fence, bears S. 60° W. and N. 60° E.
- 31.50 Battle Creek, 30 lks. wide, 3 ft. deep, course S.
- 38.40 Leave cultivated land, bears N. and S.; ascend over rolling SE. slope; through sage and scattering service.
- 40.03 Set an iron post, 3 ft. long, 1 in. dia., 15 ins. in the ground, supported in a mound of stone, 2 ft. base, 1½ ft. high, for resurvey ¼ sec. cor., with brass cap, mkd.
- T12N R88W

¼ — S13 —

S24

1921
- 41.20 Fence, bears N. and S.
- 41.50 Dim road, bears N. and S.
- 43.26 Modern house, with cement basement, bears N., about 2.00 chs. dist., numerous outbuildings around house.
- 44.75 Modern barn, with cement foundation on line; corrals and sheds adjoining barn.
- 50.10 Enter grain field, bears N. and S.
- 52.10 Ditch, 2 lks. wide, 3 ins. deep, course S.; leave grain field; follow ditch.
- 61.29 Intersect line 2-3, Tract 45, at a point, 2.26 chs., N. 0° 15' E., of cor. No. 3.
- Fence, bears N. and S.; descend along SW. to S. slope.
- 80.06 The cor. to secs. 13, 14, 23 and 24.
- Land, rolling.
- Soil, sandy loam and rocky; 1st and 3rd rate.
- Undergrowth, sage and service.
- No timber.


Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains.

S. 0° 01' E., on a true line, bet. secs. 23 and 24.


Over mountainous land; descend 100 ft. over steep S. slope; through sage.

- 2.19 Intersect the Wyoming-Colorado Boundary Line, at a point 2.42 chs., S. 89° 55' E., of the reestablished 168th mile cor., which is a 3 in. iron post, with brass cap, 12 ins. above ground, firmly set, and marked



witnessed by a mound of stone, 3 ft. base, 1½ ft. high E. of cor. This mile post established in Colorado survey. At point of intersection,

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for closing cor. of secs. 23 and 24, with brass cap, mkd.



raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.

Land, rough mountainous, slopes S.

Soil, sandy loam; 2nd rate.

Undergrowth, sage.

No timber.


From the resurvey cor. of secs. 2 and 3, on the Third Standard Parallel North, established and described under Group 50.

S. 0° 02' E., bet. secs. 2 and 3.

Ascend 200 ft. over broken NE. slope of Battle Mountain, through aspen and scattering pine, with undergrowth of oak, laurel, service and buckbrush.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

- Chains
 12.00 Spur, falls N. 70° E.; over very broken E. to SE. slope.
 39.00 Spring, in gulch, flows a stream 2 lks. wide, 2 ins. deep, course NE.; ascend 600 ft. over broken NE. slope; enter dense pine, spruce and aspen.
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.



from which

- A pine, 10 ins. dia., bears N. 67 $\frac{1}{2}$ ° E., 24 lks. dist., mkd. $\frac{1}{4}$ S 2 B T
 A pine, 8 ins. dia., bears S. 41° W., 10 lks. dist., mkd. $\frac{1}{4}$ S 3 B T
 65.00 Leave timber, ascend over rocky cliffs of rim.
 68.00 Rim of Battle Mountain, a lava capping about 200 ft. thick, bears NW. and SE.; over rolling mountain top; enter sage and buck brush.
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for resurvey cor. of secs. 2, 3, 10 and 11, with brass cap, mkd.



raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, W. of cor.
 Land, rough mountainous.
 Soil, sandy loam; 1st and 4th rate.
 Undergrowth, sage, service, oak, laurel and buck brush.
 Timber, aspen, spruce and pine.

East, on a random line, bet. secs. 2 and 11.


- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
 80.04 Intersect N. and S. line, 14 lks. N. of the cor. of secs. 1, 2, 11 and 12.
 Thence

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains N. 89° 54' W., on a true line bet. secs. 2 and 11.
Ascend 350 ft. over broken SE. slope of Battle Mountain,
through sage, service, oak and laurel, with patches of
aspen.

29.50 Small knoll on spur, sloping SE., bears S., about 50 lks.
dist.

40.02 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the
ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of
cor.

Continue to ascend 800 ft. over SE. slope.

71.00 Rim of Battle Mountain, bears NE. and SW.

80.04 The cor. of secs. 2, 3, 10 and 11.

Land, rough mountainous, SE. exposure.

Soil, sandy loam and rocky; 1st, 3rd and 4th rate.

Undergrowth, sage, service, oak and laurel.

Timber, aspen.

S. 0° 02' E., bet. secs. 10 and 11.

Descend 40 ft. over gentle SE. slope, on top of mountain,
through sage and buck brush.

7.35 Rim of Battle Mountain, bears NE. and SW.; descend 750
ft. over broken SE. slope.


32.75 Draw, course SE.; ascend 40 ft. over NE. slope.

36.00 Low spur, falls SE.; descend 350 ft. over SE. slope to
sec. cor.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 10 ins. in the
ground, supported in a mound of stone, 3 ft. base, $1\frac{1}{2}$
ft. high, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.


Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains.



72.00 Drain, course SE.; enter aspen, follows drain.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for resurvey cor. of secs. 10, 11, 14 and 15, with brass cap, mkd.



from which

An aspen, 6 ins. dia., bears N. $29\frac{1}{2}^{\circ}$ E., 10 lks. dist., mkd. T 12 N R 88 W S 11 B TAn aspen, 6 ins. dia., bears S. 60° E., 13 lks. dist., mkd. T 12 N R 88 W S 14 B TAn aspen, 6 ins. dia., bears S. $43\frac{1}{2}^{\circ}$ W., 13 lks. dist., mkd. T 12 N R 88 W S 15 B TAn aspen, 6 ins. dia., bears N. $44\frac{1}{2}^{\circ}$ W., 20 lks. dist., mkd. T 12 N R 88 W S 10 B T

Land, rolling and rough mountainous; southern exposure.

Soil, sandy loam and rocky; 1st and 3rd rate.

Undergrowth, sage, service, oak and buck brush.

Timber, aspen.

S. $89^{\circ} 54'$ E., on a random line, bet. secs. 11 and 14.40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.14 Intersect the N. and S. line, at the cor. of secs. 11, 12, 13 and 14.

Thence

N. $89^{\circ} 54'$ W., on a true line, bet. secs. 11 and 14.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

Over mountainous land; descend 125 ft. over SW. slope; through sage and service.

11.25 Stream, 4 lks. wide, 3 ins. deep, course S.; ascend gradually along SE. slope.

40.07 Set an iron post, 3 ft. long, 1 in. dia., 18 ins. in the ground, supported in a mound of stone, 2 ft. base, 1 1/2 ft. high, for resurvey 1/4 sec. cor., with brass cap, mkd.



43.00 Ascend 250 ft. over steep NE. slope; enter dense service and buck brush.

54.00 Spur, falls SE.; descend slightly over SW. slope.

66.00 Draw, course SE.; ascend 150 ft. over E. slope.

79.50 Enter aspen, bears NE. and SW.

80.14 The cor. of secs. 10, 11, 14 and 15.

Land, rolling mountainous.

Soil, sandy loam and rocky; 1st and 3rd rate.

Undergrowth, sage, service and buck brush.

Timber, aspen.

S. 0° 02' E., bet. secs. 14 and 15.

Over mountainous land; descend 50 ft. over SE. slope; through sage, service and buck brush with aspen.

1.00 Leave aspen, bears NE. and SW.


6.00 Draw, course SE.; ascend 60 ft. over NE. slope.

13.00 Spur, falls SE.; descend 260 ft. over S. slope.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey 1/4 sec. cor., with brass cap, mkd.


. Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains.



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

- 42.00 Descend 580 ft. over steep S. slope.
 56.35 Fence, bears E. and W.
 63.31 Intersect line 1-2, Tract 48, at a point, 19.24 chs.,
 N. $89^{\circ} 54'$ W., from cor. No. 1.
 78.00 Enter cultivated land, bears E. and W.
 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in
 the ground, for resurvey cor. of secs. 14, 15, 22 and
 23, with brass cap, mkd.



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
 of cor.

Land, rolling mountainous, southern exposure.

Soil, sandy loam and rocky; 1st and 3rd rate.

Undergrowth, sage, service and buckbrush.

Timber, aspen.

- S. $89^{\circ} 54'$ E., on a random line, bet. secs. 14 and 23.
 40.00 Set temp. $\frac{3}{4}$ sec. cor.
 79.98 Intersect N. and S. line, 9 lks. N. of cor. to secs. 13,
 14, 23 and 24.

Thence


N. $89^{\circ} 50'$ W., on a true line, bet. secs. 14 and 23.

Over rolling land; along steep S. slope; through sage
 and service.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

- 16.80 Enter aspen, bears N. and S.
- 17.30 Stream, 3 lks. wide, 3 ins. deep, course S.; ascend 120 ft. over steep SE. slope.
- 17.80 Leave aspen, bears N. and S.
- 21.40 Fence, bears N. and S.
- 25.00 Spur, falls S.; descend 30 ft. over SW. slope.
- 37.40 Stream, 3 lks. wide, 1 in. deep, course S.; ascend 40 ft. over SE. slope.
- 39.99 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.


- 45.00 Broad low spur, fall S.; descend gradually over SW. slope.
- 58.60 Fence, bears N. and S.
- 60.74 Intersect line 4-1, Tract 48, at a point, 2.35 chs., North from cor. No. 4.
- 69.05 Fence, bears N. and S., joins fence on N. side of lane, about 1.50 chs., S. of line.
- 79.98 The cor. of secs. 14, 15, 22 and 23.
Land, rolling.
Soil, sandy loam; 1st and 2nd rate.
Undergrowth, sage and service.
Timber, aspen.

S. $0^{\circ} 02'$ E., on a true line, bet. secs. 22 and 23.
Over rolling land; descend gradually over S. slope;
through cultivated field.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

- 1.40 Fence, bears E. and W.; leave field; enter sage.
 1.90 Road, Columbine to Slater, bears E. and W.
 2.40 Intersect the Wyoming-Colorado Boundary Line, at a point
 1.79 chs., S. 89° 55' E., from the reestablished 169th
 mile cor., which is a 3 in. iron post, with brass cap,
 12 ins. above ground, firmly set and marked



witnessed by a mound of stone, 3 ft. base, 1½ ft. high.
 E. of cor. This cor. reestablished in Colorado survey.

At point of intersection,

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the
 ground, for closing cor. of secs. 22 and 23, with brass
 cap, mkd.



raise a mound of stone, 2 ft. base, 1½ ft. high, N. of
 cor.

Land, rolling, slopes S.

Soil, sandy loam; 1st rate.

Undergrowth, sage.

No timber.

From the resurvey cor. of secs. 3 and 4, on the Third
 Standard Parallel North, established and described
 under Group 50.

S. 0° 02' E., bet. secs. 3 and 4.

Over mountainous land; ascend 1100 ft., over broken NW.
 slope of Battle Mountain to rim; through sage, service.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.


Chains

laurel, oak and buck brush.

16.00 Draw, course NW.

27.00 Spur, falls NW.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 6 ins. in the ground, supported in a mound of stone, 3 ft. base, 2 ft. high, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.




50.00 Enter dense pine, spruce and aspen.

59.00 Rim of Battle Mountain, bears E. and W.; ascend gradually over rolling top of mountain.

69.50 Leave timber; enter sage and buck brush, bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for resurvey cor. of secs. 3, 4, 9 and 10, with brass cap, mkd.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rough mountainous.

Soil, sandy loam and rocky; 1st, 3rd and 4th rate.


Undergrowth, sage, service, laurel, oak and buck brush.

Timber, pine, aspen and spruce.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

- East, on a random line, bet. secs. 3 and 10.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.08 Intersect N. and S. line, 14 lks. S. of the cor. of secs. 2, 3, 10 and 11.
- Thence
- S. $89^{\circ} 54'$ W., on a true line, bet. secs. 3 and 10.
- Ascend over rolling top of mountain; through sage and buck brush.
- 14.50 Enter timber, pine, spruce and aspen; bears NE. and SW.; descend 200 ft. over very rough NW. slope.
- 24.00 Draw, course N.; ascend 300 ft. over NE. slope.
- 40.04 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.



from which

- An aspen, 6 ins. dia., bears N. $29\frac{1}{2}^{\circ}$ E., 15 lks. dist., mkd. $\frac{1}{4}$ S 3 B T
- A pine, 10 ins. dia., bears S. $22\frac{1}{2}^{\circ}$ E., 23 lks. dist., mkd. $\frac{1}{4}$ S 10 B T

- 52.40 Spur, from knoll, slopes N.; descend 8° NW. slope.
- 72.40 Draw, course N.; ascend 6° NE. slope.
- 74.75 Leave timber; enter sage, bears N. and S.
- 80.08 The cor. of secs. 3, 4, 9 and 10.

Land, rolling mountainous.

Soil, sandy loam and rocky; 1st, 3rd and 4th rate.

Undergrowth, sage, buckbrush and young aspen, spruce and pine.

Timber, aspen, spruce and pine.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains


S. 0°-02' E., bet. secs. 9 and 10.

Over mountainous land; ascend 3° slope over rolling top of mountain; through sage.

18.50 Rim of Battle Mountain, 200 ft. high, bears NW. and SE.; descend 1250 ft. over very broken SW. slope of mountain to sec. cor.

30.00 Enter aspen, bears NW. and SE.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.



from which

An aspen, 4 ins. dia., bears N. 48 $\frac{1}{2}$ ° E., 13 lks. dist., mkd. $\frac{1}{4}$ S 10 B T

An aspen, 4 ins. dia., bears S. 32° W., 4 lks. dist., mkd. $\frac{1}{4}$ S 9 B T

40.50 Leave aspen, enter sage, service and buck brush, bears E. and W.

40.55 Draw, course SW.

42.45 Small saddle in spur, saddle bears N. and S.; spur, slopes SW.

67.00 Draw, course SW.

73.00 Spur, slopes SW.

78.50 Fence, bears E. and W.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for resurvey cor. of secs. 9, 10, 15 and 16, with brass cap, mkd.



Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Land, rough mountainous.

Soil, sandy loam and rocky; 1st, 3rd and 4th rate.

Undergrowth, sage, service and buck brush.

Timber, aspen.

N. 89° 54' E., on a random line, bet. secs. 10 and 15.

40.00 Set temp. 1/2 sec. cor.

80.28 Intersect N. and S. line, 18 lks. S. of the cor. of secs. 10, 11, 14 and 15.

Thence


S. 89° 46' W., on a true line, bet. secs. 10 and 15; over mountainous land; ascend 200 ft. over E. slope; through aspen.

10.70 Leave aspen; enter sage, service, laurel, oak and buck brush, bears N. and S.

12.50 Spur, falls S.; descend 300 ft. over SW. slope.

39.70 Stream, 4 lks. wide, 3 ins. deep, course S.; ascend 375 ft. over SE. slope, strip of aspen along stream.

40.14 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey 1/2 sec. cor., with brass cap, mkd.



from which

An aspen, 6 ins. dia., bears N. 23 3/4° E., 66 lks. dist., mkd. 1/2 S 10 B T

An aspen, 5 ins. dia., bears S. 59 1/4° E., 85 lks. dist., mkd. 1/2 S 15 B T

56.80 Spur, slopes SW.; descend 170 ft. over W. slope.

64.70 Drain, course S.; ascend 30 ft. over SE. slope.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

67.70 Spur, falls SW.; descend 125 ft. over SW. slope.

76.80 Draw, course SW.

79.50 Fence, bears N. and S.

80.28 The cor. of secs. 9, 10, 15 and 16.

Land, rough mountainous, southern exposure.

Soil, rocky; 3rd and 4th rate.

Undergrowth, sage, service, laurel, oak and buck brush.

Timber, aspen.


S. 0° 02' E., bet. secs. 15 and 16.

Over mountainous land; descend 700 ft. over broken SW. slope to closing cor.; through sage and buck brush with scattering service.

20.60 Draw, course SW.

39.30 Fence, bears E. of N., and W. of S.


40.00 Set an iron post, 3 ft. long, 1 in. dia., 12 ins. in the ground, supported in a mound of stone, 3 ft. base, 1 1/2 ft. high, for resurvey 1/4 sec. cor., with brass cap, mkd.



66.75 Stream, 3 lks. wide, 2 ins. deep, course SW.

72.00 Cor. of fences, bearing N. and W., bears W., about 50 lks. dist.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for resurvey cor. of secs. 15, 16, 21 and 22, with brass cap, mkd.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, W. of cor.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

Land, rough mountainous.

Soil, rocky; 3rd and 4th rate.

Undergrowth, sage and service.

No timber.

N. 89° 46' E., on a random line, bet. secs. 15 and 22.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.12 Intersect N. and S. line, 25 lks. N. of the cor. of secs.
14, 15, 22 and 23.

Thence

S. 89° 57' W., on a true line, bet. secs. 15 and 22.

Over mountainous land; along rolling S. slope, through
cultivated field.

6.20 Fence, bears N. and S.; leave field; enter sage and ser-
vice.


13.60 Point of slope, falls S.

20.75 Intersect line 2-3, Tract 48, at a point, 2.35 chs.,
North, from cor. No. 3.

33.70 Fence, bears nearly N. and S.

38.60 Gulch, course S.; ascend 100 ft. over SE. slope.

40.06 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the
ground, for resurvey $\frac{1}{2}$ sec. cor., with brass cap, mkd.



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N.
of cor.

44.10 Low point of slope, falls SE.; descend 40 ft. over SW.
slope.

46.00 Gulch, course SE.; ascend 100 ft. over SE. slope.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

54.50 Spur, falls S.; descend 115 ft. over SW. slope.

80.12 The cor. of secs. 15, 16, 21 and 22.

Land, rolling mountainous.

Soil, sandy loam and rocky; 1st and 3rd rate.

Undergrowth, sage, service.

No timber.

S. 0° 02' E., bet. secs. 21 and 22.


Over rolling land; descend over W. slope; through sage.

2.21 Intersect the Wyoming-Colorado Boundary Line, at a point,

1.15 chs., S. 89° 55' E.; from the restored 170th

mile cor., which is a 3 in. iron post, with brass cap,

12 ins. above ground, firmly set and marked



witnessed by a mound of stone, 3 ft. base, 2 ft. high,

E. of cor. This cor. restored in Colorado survey.

At point of intersection

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the

ground, for closing cor. of secs. 21 and 22, with brass

cap, mkd.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, N. of

cor.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

Land, rolling.

Soil, sandy loam with scattering rock; 1st and 3rd rate.

Undergrowth, sage.

No timber.

From the resurvey cor. of secs. 4 and 5, on the Third Standard Parallel North, established and described under Group 50,

S. 0° 03' E., bet. secs. 4 and 5.

Over mountainous land; ascend 420 ft. over broken NW. slope; through sage, service, oak and buckbrush.

- 1.33 Fence, bears E. and W.
 20.20 Enter aspen, bears E. and W.
 23.00 Leave aspen, head of draw, course SW.
 26.00 Spur, falls SW.; descend 175 ft. over S. slope.
 37.30 Stream, 2 lks. wide, 1 in. deep, course W.; ascend 30 ft. over NW. slope.
 38.50 Enter aspen, bears E. and W.
 40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{2}$ sec. cor., with brass cap, mkd.



from which

An aspen, 6 ins. dia., bears N. 6 $\frac{1}{2}$ ° E., 2 lks. dist., mkd. $\frac{1}{2}$ S 4 B. T.


An aspen, 6 ins. dia., bears S. 53° W., 5 lks. dist., mkd. $\frac{1}{2}$ S 5 B. T.

- 41.75 Leave aspen, bears E. and W.
 46.00 N. edge of broad spur, falls W.; over spur.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains.

- 76.00 S. edge of broad spur, falls W.; descend 75 ft. over SW. slope.
- 79.31 Intersect line 3-4, Tract 79, at a point, 11.17 chs., W. of cor. No. 4.
- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 10 ins. in the ground, supported in a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, for resurvey cor. of secs. 4, 5, 8 and 9, with brass cap, mkd.



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.

Land, rolling mountainous.

Soil, sandy loam and rocky; 1st and 3rd rate.

Undergrowth, sage, service, oak and buck brush.


Timber, aspen.

East, on a random line, bet. secs. 4 and 9.

- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.10 Intersect N. and S. line, 7 lks. S. of the cor. of secs. 3, 4, 9 and 10.
- Thence
- S. $89^{\circ} 57'$ W., on a true line, bet. secs. 4 and 9.
- Descend over rolling W. slope of mountain, through sage.
- 9.50 Rim of Battle Mountain, bears N. and S.; descend 1200 ft., over broken W. slope to sec. cor.
- 21.00 Spur, falls S. 60° W.
- 37.00 Stream, 2 lks. wide, 1 in. deep, course SW.
- 40.05 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.

58.00 Spur, falls S. 60° W.; descend steep W. slope.

68.93 Draw, course SW., turns to W. and follow line.

80.10 The cor. of secs. 4, 5, 8 and 9.

Land, rough mountainous.

Soil, sandy loam and rocky; 1st and 3rd rate.

Undergrowth, sage, service and buck brush.

No timber.


S. $0^\circ 03'$ E., bet. secs. 8 and 9.

Over mountainous land; descend 20 ft. over S. slope; through sage, service and buck brush.

7.30 Spur, falls W.; descend 400 ft. over rocky S. slope.

26.60 Stream, 3 lks. wide, 2 ins. deep, course SW., ascend 60 ft. over NW. slope.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W. of cor.


46.00 Broad spur, falls W.; descend 125 ft. over S. slope.

70.00 Draw, course W., ascend 30 ft. over N. slope.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for resurvey cor. of secs. 8, 9, 16 and 17, with brass cap, mkd.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains



raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling mountainous.

Soil, sandy loam and rocky; 1st and 3rd rate.

Undergrowth, sage, service and buck brush.

No timber.

N. 89° 57' E., on a random line, bet. secs. 9 and 16.

40.00 Set temp. ¼ sec. cor.

80.20 Intersect N. and S. line at the cor. of secs. 9, 10, 15 and 16.

Thence

S. 89° 57' W., on a true line, bet. secs. 9 and 16.


Over mountainous land; ascend 10 ft. over broken SE. slope; through sage.

2.00 Spur, falls S.; descend 250 ft. over broken SW. slope.

15.00 Draw, course SW.; ascend 150 ft. over SE. slope.

40.00 Fence, bears N. of E. and S. of W.

40.10 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey ¼ sec. cor., with brass cap, mkd.




raise a mound of stone, 2 ft. base, 1½ ft. high, N. of cor.

42.00 Small knoll on spur; descend 200 ft. over broken SW. slope.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

- 45.00 Enter aspen, bears NE. and SW.
- 49.00 Leave aspen, bears N. and S.
- 50.50 Stream, 2 lks. wide, 1 in. deep, course SW.; ascend
75 ft. over SE. slope.
- 71.40 Stream, 2 lks. wide, 1 in. deep, course SW.
- 73.30 Corner of fences, extending E. and SW., bears S., about
1.00 ch. dist.
- 80.20 The cor. of secs. 8, 9, 16 and 17.
Land, rolling mountainous, SW. exposure.
Soil, sandy loam and rocky; 1st and 3rd rate.
Undergrowth, sage.
Timber, aspen.
-
- S. 0° 03' E., bet. secs. 16 and 17.
Over rolling land; descend 175 ft., over S. slope;
through sage and service.
- 4.10 Intersect line 1-2, Tract 49, at a point, 40 lks. S. 89°
58' E., of cor. No. 2.
- 6.10 Fence, bears NE. and SW.
- 13.30 Fence, bears NW. and SE.
- 14.30 Road, bears NW. and SE.
- 15.20 Stream, 5 lks. wide, 2 ins. deep, course SE.; ascend
170 ft. over broken NE. slope.
- 31.90 Spur, falls E.; descend along broken SE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the
ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.



raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, W.
of cor.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains.

- 61.80 Fence, bears NW. and SE.; 50 lks. SE. fence turns to S.
- 77.50 Enter cottonwood and willow, bears E. and W.
- 78.50 Little Snake River, 150 lks. wide, 2 ft. deep, course NW. turns to W.
- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for resurvey cor. of secs. 16, 17, 20 and 21, with brass cap, mkd.



from which

A cottonwood, 8 ins. dia., bears N. 82 $\frac{1}{4}$ ° E., 31 lks. dist., mkd. T 12 N R 88 W S 16 B T

A cottonwood, 7 ins. dia., bears S. 35 $\frac{1}{2}$ ° E., 47 lks. dist., mkd. T 12 N R 88 W S 21 B T

A cottonwood, 8 ins. dia., bears S. 50° W., 60 lks. dist., mkd. T 12 N R 88 W S 20 B T

A cottonwood, 7 ins. dia., bears N. 42 $\frac{1}{2}$ ° W., 45 lks. dist., mkd. T 12 N R 88 W S 17 B T

Land, rolling, slopes S. and W.

Soil, sandy loam, rocky in places; 1st and 3rd rate.

Undergrowth, sage and service.

Timber, cottonwood, and willow.

N. 89° 57' E., on a random line, bet. secs. 16 and 21.

40.00 Set temp. $\frac{1}{4}$ sec. cor.

80.12 Intersect N. and S. line, 14 lks. N. of the cor. of secs. 15, 16, 21 and 22.

Thence

N. 89° 57' W., on a true line, bet. secs. 16 and 21.


Over rolling land; descend 100 ft. over SW. slope; through sage and service.

0.57 Intersect line 4-1, Tract 49, at a point, 2.21 chs., North from cor. No. 4.

4.00 Telephone line, bears NW. and SE.

15.00 Stream, 3 lks. wide, 3 ins. deep, course S.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

- Chains.
- 20.00 Road, Columbine to Slater, bears SE. and NW.
- 20.90 Fence, bears SE. and W.
- 25.50 Fence, bears E. and S.
- 33.00 Right bank of Little Snake River, bears N. 70°W., and
S. 70° E.
- 38.00 Little Snake River, 2.00 chs. wide, 3 ft. deep, course
N. 70°W.
- 43.00 Left bank of Little Snake River, bears N. 70° W., and
S. 70° E.; enter cottonwood and willow.
- 40.06 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the
ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.
- 


T12N R88W
S16
 $\frac{1}{4}$
S21
1921
- from which
- A cottonwood, 8 ins. dia., bears N. 57° W.,
33 lks. dist., mkd. $\frac{1}{4}$ S 16 B T
- A cottonwood, 8 ins. dia., bears S. 88°W.,
18 lks. dist., mkd. $\frac{1}{4}$ S 21 B T
- 45.00 Little Snake River, 2.00 chs. wide, 3 ft. deep, course SW.
- 53.10 Stream, 6 lks. wide, 6 ins. deep, course S.
- 53.80 Leave timber; enter sage and service, bears NE. and SW.
- 59.00 Fence, bears NE. and SW.
- 62.00 Road, Columbine to Slater, bears NE. and SW.
- 63.30 Telephone line, bears NE. and SW.
- 66.80 Spur, falls S.; descend 60 ft. over SW. slope.
Fence, bears NW. and SE.; enter cottonwood and willow.
- 77.30 Right bank of Little Snake River, bears NW. and SE.
- 79.30 Left bank of Little Snake River, bears NW. and SE.;
course of river NW.; turns to W.
- 80.12 The cor. to secs. 16, 17, 20 and 21.
Land rolling.
Soil, sandy loam; 1st and 2nd rate.
Undergrowth, sage, service and willow.
Timber, cottonwood.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

S. 0° 03' E., on a true line, bet. secs. 20 and 21.
Over bottom land; through cottonwood and willow.


2.21 Intersect the Wyoming-Colorado Boundary Line, at a point
1.10 chs., N. 89° 53' W. of the reestablished 171st
mile cor., which is a 3 in. iron post, with brass cap,
12 ins. above ground, firmly set and mkd.



witnessed by bearing trees; this cor. reestablished
in Colorado survey.

At point of intersection,

Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the
ground, for closing cor. of secs. 20 and 21, with brass
cap, mkd.



from which

A cottonwood, 12 ins. dia., bears N. 60½° E.,
47 lks. dist., mkd. T 12 N R 88 W S 21 CCBT
A cottonwood, 7 ins. dia., bears N. 56° W.,
42 lks. dist., mkd. T 12 N R 88 W S 20 CCBT

Land, bottom land.

Soil, sandy loam and gravel; 1st and 3rd rate.

Undergrowth, willows.

Timber, cottonwood.

John Lane

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

- From the resurvey cor. of secs. 5 and 6, on the Third Standard Parallel North, established and described, under Group 50.
- S. $0^{\circ} 04'$ E., bet. secs. 5 and 6.
- Over mountainous land; descend 200 ft. over SE. slope; through sage and scattering service.
- 19.26 Intersect line 7-8, Tract 74, at a point, 8.97 chs., East from Cor. No. 8.
- 20.00 Fence, bears E. and W.
- 20.70 Road, bears E. and W.
- 22.00 Stream, 2 lks. wide, 1 in. deep, course E.; ascend 200 ft. over rolling N. slope.
- 38.00 Enter aspen, bears E. and W.
- 39.26 Intersect line 9-10, Tract 74, at a point, 8.99 chs., S. $89^{\circ} 56'$ E., from cor. No. 9.
- 40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.
- T12N R88W

$\frac{1}{4}$

S6 S5

1921
- from which
- An aspen, 6 ins. dia., bears S. $15\frac{1}{2}^{\circ}$ E.,
197 lks. dist., mkd. $\frac{1}{4}$ S 5 B T
- An aspen, 6 ins. dia., bears S. $12\frac{3}{4}^{\circ}$ W.,
191 lks. dist., mkd. $\frac{1}{4}$ S 6 B T
- 42.00 Leave aspen, bears E. and W.
- 42.50 Fence, bears E. and W.
- 44.70 Saddle, slopes N. and S.
- 60.70 Draw, course SE.; ascend 30 ft. over NE. slope.
- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for resurvey cor. of secs. 5, 6, 7 and 8,

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

with brass cap, mkd.



raise a mound of stone, 2 ft. base, 1½ ft. high, W. of cor.

Land, rolling mountainous.

Soil, sandy loam and rocky; 1st and 3rd rate.

Undergrowth, sage and service.

Timber, aspen.

East, on a random line, bet. secs. 5 and 8.

40.00 Set temp. ¼ sec. cor.

80.08 Intersect N. and S. line, 9 lks. S. of the cor. of secs. 4, 5, 8 and 9.

Thence

S. 89° 56' W., on a true line, bet. secs. 5 and 8.

Over mountainous land; descend 750 ft. over rolling W. slope to stream, through sage with scattering service.

9.00 Draw, course N. 70° W.

28.89 Intersect line 4-1, Tract 39, at a point, 71 lks. South of cor. No. 1.

34.35 Stream, 4 lks. wide, 3 ins. deep, course S.; ascend 300 ft. over SE. slope.

38.00 Road, bears N. and S. (county road).

40.04 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey ¼ sec. cor., with brass cap, mkd.



raise a mound of stone 2 ft. base, 1½ ft. high, N. of cor.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.


Chains

- 48.30 Spur, falls S.; descend 150 ft. over SW. slope.
- 58.00 House, in inclosed cultivated field, bears S. about 2.00 chs. dist.
- 60.00 Stream, 3 lks. wide, 3 ins. deep, course SE.; ascend 100 ft. over NE. slope.
- 68.89 Intersect line 2-3, Tract 39, at a point, 76 lks. South of cor. No. 2.
- 80.08 The cor. of secs. 5, 6, 7 and 8.
Land, rolling mountainous.
Soil, sandy loam; rocky on steep slopes; 1st and 3rd rate.
Undergrowth, sage and service.
No timber.

West, on a true line, bet. secs. 6 and 7.

Over mountainous land; ascend 875 ft. over broken E. slope; through sage, service and buck brush.

- 29.50 Rim of Little Horse Mountain, bears W. and NW., along S. edge of mountain top.
- 40.00 Set an iron post, 3 ft. long, 1 in. dia., 10 ins. in. the ground, supported in a mound of stone, 2 ft. base, 1½ ft. high, for resurvey ¼ sec. cor., with brass cap, mkd.




- 41.00 Head of draw, course S.; ascend slightly along SE. slope.
- 53.75 Spur, from top of mountain, falls SW.; descend 530 ft. over broken W. slope.
- 74.16 Intersect Eleventh Guide Meridian West, at a point, 54 lks. N. 0° 50' E., of the restored cor. of secs. 1 and 12, established under Group 50.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

Set an iron post, 3 ft. long, 2 ins. dia., 10 ins. in the ground, supported in a mound of stone, 3 ft. base, 1½ ft. high, for closing cor. of secs. 6 and 7, with brass cap, mkd.



Land, mountainous.

Soil, sandy loam, mostly rocky; 3rd and 4th rate.

Undergrowth, sage, service and buck brush.


No timber.

In order to establish the resurvey ¼ cor. on W. bdy. of sec. 6, midway between closing cor. of Ts. 12 and 13 N., R. 88 W., established in independent resurvey of Third Standard Parallel North, Group 50, and closing cor. of secs. 6 and 7, I proceed as follows:

From the closing cor. of secs. 6 and 7,

N. 0° 50' E., on W. bdy. of sec. 6.

- 39.98 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for resurvey ¼ cor. on W. bdy. sec. 6, with brass cap, mkd.



raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.


- 40.21 The reestablished ¼ cor. on E. bdy. sec. 1, T. 12 N., R. 89 W.

- 79.96 The closing cor. of Ts. 12 and 13 N., R. 88 W.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.


Chains

- From the cor. of secs. 5, 6, 7 and 8,
 S. 0° 04' E., bet. secs. 7 and 8.
 Over rolling land; ascend 60 ft. over SE. slope; through
 sage and service.
- 6.60 Spur, falls E., descend 450 ft. over rolling SE. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the
 ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.



raise a mound of stone 3 ft. base, $1\frac{1}{2}$ ft. high, W. of
 cor.

- 46.00 Draw, course SE.
- 56.00 NW. end of knoll; descend along W. side of knoll.
- 80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in
 the ground, for resurvey cor. of secs. 7, 8, 17 and 18,
 with brass cap, mkd.



raise a mound of stone, $\frac{3}{4}$ ft. base, $1\frac{1}{2}$ ft. high, W. of
 cor.

Land, rolling.

Soil, sandy loam; rocky on steep slopes; 1st, 2nd and
 3rd rate.


Undergrowth, sage and service.

No timber.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

- N. 89° 56' E., on a random line, bet. secs. 8 and 17.
- 40.00 Set temp. $\frac{1}{4}$ sec. cor.
- 80.24 Intersect N. and S. line, 3 lks. N. of the cor. of secs. 8, 9, 16 and 17.
- Thence
- S. 89° 57' W., on a true line, bet. secs. 8 and 17.
- Over rolling land; ascend 30 ft. over SE. slope; through sage and service.
- 7.00 Spur, falls SW.; descend 200 ft. over broken W. slope.
- 13.75 Stream, 3 lks. wide, 4 ins. deep, course S.; ascend over E. slope.
- 18.10 Fence, bears N. and S.
- 19.25 Barn, bears N., about 3.00 chs. dist.; corral, bears S., about 50 lks. dist.
- 20.25 House, bears N., about 3.00 chs. dist.
- 20.30 Fence, bears N. and S.
- 20.40 Road, bears NW. and SE.
- 26.10 Ditch, dry, course SE.; saddle, bears SE., about 8.00 chs. dist.
- 39.00 School house, bears N., about 20.00 chs. dist.
- 40.12 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.



- raise a mound of stone, 2 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 58.00 Spur, from sharp knoll, falls N.; descend 200 ft. over NW. slope.
- 69.40 Road, bears NE. and SW. (county road).

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

- 71.15 Stream, 5 lks. wide, 3 ins. deep, course SW.; ascend 30 ft. over SE. slope.
- 76.00 End of spur, falls S.; descend 10 ft. over SW. slope.
- 80.24 The cor. of secs. 7, 8, 17 and 18.
Land, rolling.
Soil, sandy loam; 1st and 2nd rate.
Undergrowth, sage and service.
No timber.
-
- West, on a true line, bet. secs. 7 and 18.
Over rolling land; descend 30 ft. over SW. slope, through sage.
- 0.80 Stream, 2 lks. wide, 1 in. deep, course S.; ascend 80 ft. over rolling S. to E. slope.
- 28.00 Draw, course S. 60° E.
- 30.00 Road, bears N. 60° W. and S. 60° E. (county road).
- 35.05 Intersect line 6-1, Tract 38, at a point, 2.06 chs., North of cor. No. 6.
- 37.50 Low spur, falls N. to saddle.
- 40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{4}$ sec. cor., with brass cap, mkd.
- T12N R88W

$\frac{1}{4}$ S7

S18

1921
- raise a mound of stone, 3 ft. base, $1\frac{1}{2}$ ft. high, N. of cor.
- 51.50 Road, bears NE. and SW.
- 55.05 Intersect line 2-3, Tract 38, at a point, 17.94 chs., South of cor. No. 2.
- 55.20 Fence, bears NE. and SW.; South cor. of cultivated field about 15 acres in extent, bears N., about 2.00 chs. dist.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.


Chains.

59.00 House, bears N., about 10 lks.

75.13 Intersect the Eleventh Guide Meridian West, at a point, 2.06 chs., N. 0° 50' E. from the restored cor. of secs. 12 and 13, T. 12 N., R. 89 W., established and described under Group 50.

At point of intersection,

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for closing cor. of secs. 7 and 18, with brass cap, mkd.



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

Land, rolling.

Soil, sandy loam; 1st and 2nd rate.

Undergrowth, sage.

No timber.


In order to establish the resurvey 1/2 cor. on W. bdy. of sec. 7, midway between closing cor. of secs. 6 and 7, and closing cor. of secs. 7 and 18, I proceed as follows:

From the closing cor. of secs. 7 and 18.

N. 0° 50' E., on W. bdy. of sec. 7.

38.69 The reestablished 1/2 cor. on E. bdy. sec. 12, T. 12 N., R. 88 W.

39.99 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey 1/2 cor. on W. bdy. of sec. 7, with brass cap, mkd.



Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains.

raise a mound of stone, 2 ft. base, 1½ ft. high, E. of cor.

79.44 The reestablished cor. of secs. 1 and 12, T. 12 N., R. 89 W.

79.98 The closing cor. of secs. 6 and 7.

From the cor. of secs. 7, 8, 17 and 18,

S. 0° 04' E., bet. secs. 17 and 18.

Over rolling land; descend 40 ft. over SE. slope; through sage and scattering service.

2.06 Intersect line 5-6, Tract 38, at a point, 4.98 chs., West of cor. No. 5.


4.20 Road, bears E. and W.

4.60 Stream, 3 lks. wide, 4 ins. deep, course SW.; ascend 20 ft. over NW. slope.

19.58 Cor. of fences, extending E. and W. of S., bears E., about 170 lks. dist.

22.06 Intersect the line 3-4, Tract 38, at a point, 4.96 chs. West from cor. No. 4.

40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey ¼ sec. cor., with brass cap, mkd.



dig pits 18x18x12 ins., N. and S. of post, 3 ft. dist. and scatter the earth.

44.34 Cor. No. 2/50, on line.

58.15 Fence, bears E. of N. and W. of S.

58.79 Cor. of fences, bearing E. of N., and W. of S. and E., bears W. about 5 lks. dist.

59.15 Low ridge, bears E. and W., descend 200 ft. over S. slope.


Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains.

64.34 Cor. No. 3/50 and 2/51 on line.

79.90 Draw, course SE.

80.00 Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for resurvey cor. of secs. 17, 18, 19 and 20, with brass cap, mkd.



raise a mound of stone, 3 ft. base, 1 1/2 ft. high, W. of cor.

Land, rolling, slopes S. and SW.

Soil, sandy loam and adobe, 1st and 2nd rate.

Undergrowth, sage and service.

No timber.

N. 89° 57' E., on a random line, bet. secs. 17 and 20.

40.00 Set temp. 1/4 sec. cor.

80.24 Intersect N. and W. line, 1 lk. S. of the cor. of secs. 16, 17, 20 and 21.

Thence

S. 89° 57' W., on a true line, bet. secs. 17 and 20.

Over bottom land; through cottonwood, willow and briars.

40.12 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey 1/4 sec. cor., with brass cap, mkd.



from which

A cottonwood, 8 ins. dia., bears N. 26 1/2° E.

22 lks. dist., mkd. 1/2 S 17 B T

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

- A cottonwood, 8 ins. dia., bears S. $65\frac{1}{2}^{\circ}$ E., 9 lks. dist., mkd. $\frac{1}{2}$ S 20 B T
- 43.70 Fence, bears N. and S.
- 45.00 Left bank of Little Snake River, bears N. 60° E., and S. 60° W.
- 49.00 Right bank of river, bears NE. and SW.
- 50.00 House, bears N., about 1.00 ch. dist.
- 51.00 Leave timber, bears N. and S.; enter sage and service; ascend 100 ft. over SE. slope.
- 53.60 House, bears S.; about 50 lks. dist.
Ditch, dry, course SW.
- 59.00 Secondary road, bears NE. and SW.; enter grain field, follows road, and extends N. about 30.00 chs. dist.
- 60.00 Leave grain field, bears NW. and SE.
- 76.00 Low spur, falls S.; descend 40 ft. over SW. slope.
- 80.15 Draw, course SE.
- 80.24 The cor. of secs. 17, 18, 19 and 20.
Land rolling, slopes S. and SW.
Soil, sandy loam; 1st, 2nd and 3rd rates.
Undergrowth, sage, service, willow and briars.
Timber, cottonwood.
-
- West, on a true line bet. secs. 18 and 19.
Over rolling land; ascend 175 ft. over SE. slope; through sage and service.
- 2.75 Fence, bears E. of N. and W. of S.
- 36.00 Spur, falls SW.; descend over NW. slope.
- 40.00 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground, for resurvey $\frac{1}{2}$ sec. cor., with brass cap, mkd.

T12N R88W

 $\frac{1}{2}$ S 18

S 19

1921

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains

raise a mound of stone, 3 ft. base, 1½ ft. high, N. of cor.


45.00 Descend 175 ft. over steep W. slope.

66.90 Stream, 4 lks. wide, 3 ins. deep, course SW.; ascend 200 ft. over SE. slope.

75.13 Intersect the Eleventh Guide Meridian West, at a point, 2.07 chs., North, from the closing cor. of Ts. 12 N., Rs. 88 and 89 W., established and described under Group 50.

At point of intersection,

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for closing cor. of secs. 18 and 19, with brass cap, mkd.



raise a mound of stone, 3 ft. base, 1½ ft. high, E. of cor.

Land, rolling; slopes SW.

Soil, sandy loam; 1st and 2nd rate.

Undergrowth, sage and service.

No timber.

In order to establish the resurvey ¼ cor. on W. bdy. of sec. 18, midway between the closing cor. of secs. 7 and 18, and closing cor. of secs. 18 and 19, I proceed as follows:


From the closing cor. of secs. 18 and 19,

North, on W. bdy. of sec. 18.

40.10 Set an iron post, 3 ft. long, 1 in. dia., 26 ins. in the ground for resurvey ¼ cor. on W. bdy. sec. 18, with brass cap mkd.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains



raise a mound of stone, 2 ft. base, 1 1/2 ft. high, E. of cor.

78.14 The restored cor. of secs. 12 and 13, T. 12 N., R. 89 W.

Thence

N. 0° 50' E., on W. bdy. sec. 18,

2.06 The closing cor. of secs. 7 and 18.


The whole length of this line is 80.20 chs.

From the cor. of secs. 17, 18, 19 and 20,

S. 0° 04' E., bet. secs. 19 and 20.

Over rolling land; descend along W. side of draw; through sage.

2.14 Intersect the Wyoming-Colorado Boundary Line, at a point, 2.57 chs., N. 89° 53' W., of the reestablished 172 mile cor., which is a 3 in. iron post, with brass cap, 12 ins. above ground, firmly set, with brass cap, mkd.




witnessed by a mound of stone, 3 ft. base, 2 ft. high, E. of cor. This cor. established in Colorado survey.

At point of intersection,

Set an iron post, 3 ft. long, 2 ins. dia., 24 ins. in the ground, for closing cor. of secs. 19 and 20, and cor. No. 3/51, with brass cap, mkd.

Independent Resurvey of the Subdivision of T. 12 N., R. 88 W.

Chains



raise a mound of stone, 2 ft. base, 1 $\frac{1}{2}$ ft. high, N. of cor.

Land, rolling.

Soil, sandy loam; 1st and 2nd rate.

Undergrowth, sage.

No timber.

Survey completed October 28, 1921.

Township 12 North, Range 88 West.


GENERAL DESCRIPTION.

This township lies on a rolling south slope which is broken by numerous small knolls and ridges, and by Battle and Horse Mountains. The drainage is south into Little Snake River, and east into Battle Creek. Water is fairly abundant, although the streams are small. Ample water is found for domestic and stock purposes, but is scarce for irrigation.

The soil is sandy loam of good quality, but many of the slopes are strewn with lava boulders.

The vegetation, is largely sage, with scattering service and a dense growth of aspen pine and spruce on the north slope of Battle Mountain.

Along Battle Creek and Snake River, the land is well settled, and hay and grain are raised abundantly; however, the bench land is mostly used as pastures, and in some places dry farming is practiced with fair success. Steamboat Springs is the nearest railway point that is reached by a wagon road, being some 50 miles to the southeast. This township lies partly within Hayden National Forest.

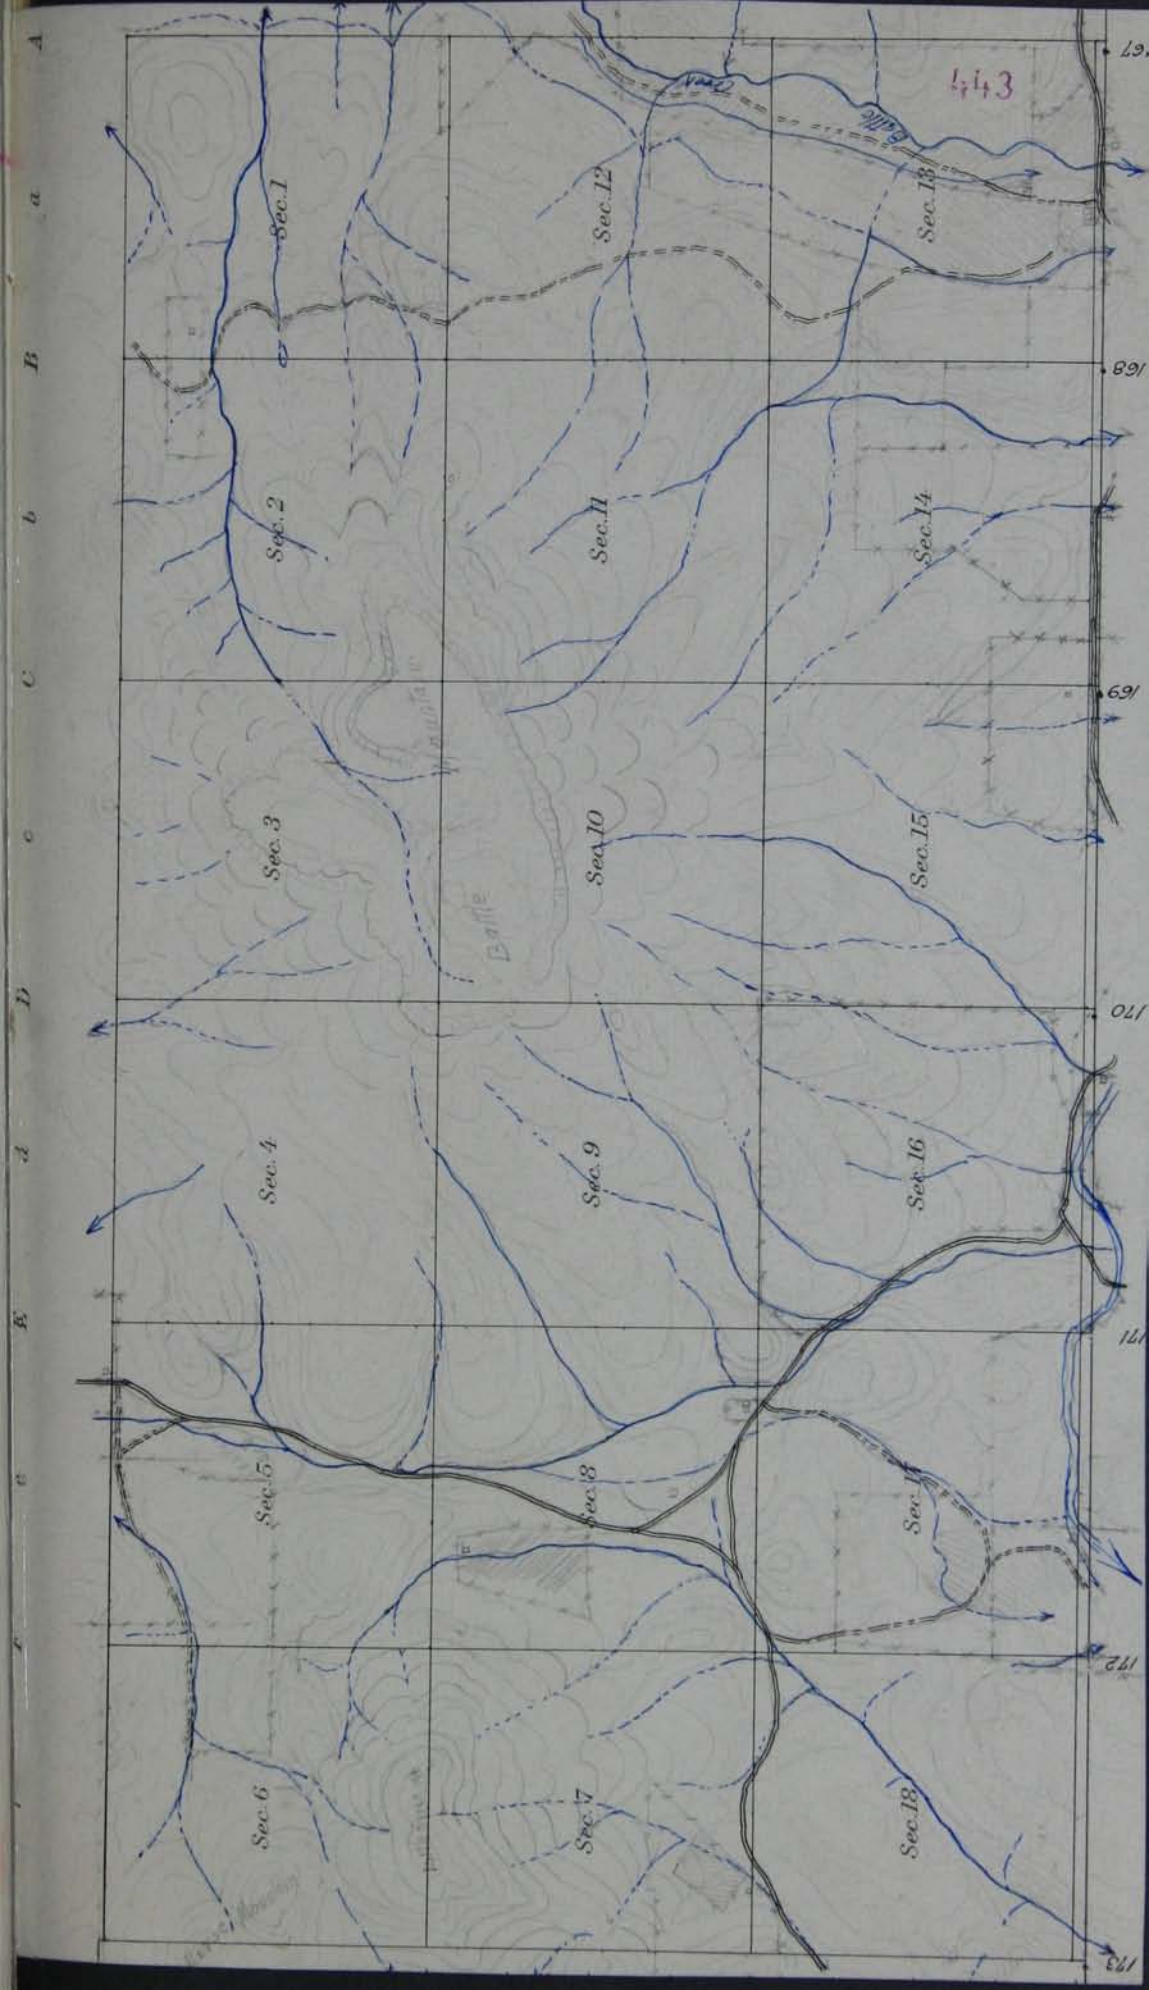

CERTIFICATE OF UNITED STATES SURVEYOR.

I, Alex Douglas, U. S. Surveyor, hereby certify upon honor that, in pursuance of special instructions received from the U. S. Surveyor General for Wyoming bearing date of the 1st day of April 1921, 191, I have well, faithfully, and truly in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instructions, and the laws of the United States, surveyed all those parts or portions of the boundaries of private land claims in resurvey Township No. 12 North, Range No. 88 West

of the Sixth Principal Meridian, in the State of Wyoming, which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instructions, and the special written instructions of the U. S. Surveyor General for Wyoming and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Place: Los Angeles, Cal. Alex. Douglas U.S. Cadastral Engineer.
Date: Feb. 12, 1922

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

191

The foregoing field notes of the survey of

executed by

under his special instructions dated, 191, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

U. S. Surveyor General.

I certify that the foregoing transcript of the field notes of the above-described surveys in, has been correctly copied from the original notes on file in this office.

FIELD ASSISTANTS.

NAMES.	CAPACITY.
Monroe Walcher	Chainman
Chas E. Hunter	Chainman
G. Harper Westlake	Chainman
Chas E. Leger	Cornerman
Donald S. Clinkenbeard	Cornerman
William M. Ellard	Cornerman
Donald S. Clinkenbeard	Flagman
Samuel E. Bridges	A xman

447

CERTIFICATE OF UNITED STATES SURVEYOR.

Cadastral Engineer

I, Roy E. Chase, U. S. Surveyor, hereby certify upon honor that, in pursuance

of special instructions received from the U. S. Surveyor General for Wyoming

bearing date of the First day of April 1920, I have well, faithfully, and truly

in my own proper person, and in strict conformity with said instructions, the Manual of Surveying Instruc-

tions, and the laws of the United States, surveyed all those parts or portions of the boundaries

of private land claims in Township No. 12 North, Range No. 88

West; and resurveyed the subdivision of Township No. 12 North,

Range No. 88 West

of the 6th

Principal Meridian, in the State of Wyoming

which are represented in the foregoing field notes as having been executed by me, and under my direction; and that all the corners of

said survey have been established and perpetuated in strict accordance with the Manual of Surveying Instruc-

tions, and the special written instructions of the U. S. Surveyor General for Wyoming

and in the specific manner described in the field notes, and that the foregoing are the original field notes of such survey.

Denver, Colorado.

Roy E. Chase

April 5, 1922.

U. S. Cadastral Engineer.

APPROVAL.

OFFICE OF THE UNITED STATES SURVEYOR GENERAL,

Cheyenne, Wyoming, January 30, 1923

The foregoing field notes of the survey of Private Land Claim Lines, and the

Independent Resurvey of the Subdivision Lines of Township No. 12

North, Range No. 88 West, of the Sixth Principal Meridian, State

of Wyoming.

executed by Roy E. Chase and Alex Douglas, U.S. Cadastral Engineers,

under his special instructions dated April 1, 1920, having been critically examined, and the necessary corrections and explanations made, the said field notes, and the surveys they describe, are hereby approved.

Clyde W. Arthur, U. S. Surveyor General

I certify that the foregoing transcript of the field notes of the above described surveys in the State of Wyoming has been correctly copied from the original notes on file in this office.