



## PG703W - 1280 x 800 Resolution, 4,000 ANSI Lumens, 1.55~1.70 Throw Ratio

The ViewSonic® PG703W projector features 4,000 lumens, WXGA 1280 x 800 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. An energy-saving SuperEco™ feature reduces power consumption and extends the lamp life by up to 15,000 hours. A 10W speaker delivers incredibly clear and audible sound, while a top lamp door enables easy access for lamp maintenance. The PG703W is the ideal high brightness projector for use in both classroom and corporate settings.

Find the right ViewSonic projector for your home theater, classroom, or enterprise solutions using our [Projector Distance Calculator](#).

0.0 No Reviews Write the First Review

Availability: In stock

**\$785.99**

[ADD TO CART](#)

[E-TAILERS](#)

DOWNLOADS 

[Comparison Sheet \(PRG\)](#) | [Datasheet](#) | [Media](#) 

### Compatible with your PG703W

All 11

Adapter Plates 1

Cases 1

Lamps 1

Mounts 1

Screens 1



**100" PROJECTION SCREEN**  
[PI-SCW-1001W](#)

**\$149.99**

[ADD TO CART](#)



**2ND AND 3RD YEAR EXPRESS EXCHANGE FOR PJD6, PJD7, PRO7, PG7, AND PX700HD PR...**  
[PRJ-EE-07-03](#)

**\$116.00**

[ADD TO CART](#)

Select your preferred Country/Region:

# OVERVIEW

The ViewSonic® PG703W projector features 4,000 lumens, WXGA 1280 x 800 native resolution, an intuitive, user-friendly design, and a sleek white chassis. Exclusive SuperColor™ technology offers a wide color gamut for beautiful image production in nearly any environment. An energy-saving SuperEco™ feature reduces power consumption and extends the lamp life by up to 15,000 hours. A 10W speaker delivers incredibly clear and audible sound, while a top lamp door enables easy access for lamp maintenance. The PG703W is the ideal high brightness projector for use in both classroom and corporate settings.



**SUPERCOLOR: AMAZING COLOR ACCURACY**  
ViewSonic's proprietary SuperColor™ Technology features an exclusive 6-segment color wheel and dynamic lamp control capabilities, providing a wide color range and stunningly beautiful images.

## **BRIGHT IMAGES IN ANY ENVIRONMENT**

Packed with 4,000 lumens and a high contrast ratio, this projector is guaranteed to produce bright images in nearly any environment – even in rooms with high ambient light.



Select your preferred Country/Region:





**ENERGY-EFFICIENT SUPERECO™**

SuperEco™ mode allows users to dim projection brightness by up to 70%, thereby reducing the lamp's power consumption while extending lamp life—a great energy-saving design that lowers the total cost of ownership (TCO).

**NETWORK MONITORING & CONTROL**

IT admin can monitor, schedule, and manage the projector remotely, as well as receive projector status alerts, with the integrated Crestron® e-Control™ system and RoomView Express™ management software. Because this projector is Crestron® and AMX® certified, IT admin can control and monitor the projector for any size campus or enterprise.

Name	Location	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
Chicago VTC1	550 Madison, 3rd Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
Chicago VTC2	550 Madison, 4th Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
Chicago VTC3	1400 Fullerton, 12th Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
Chicago VTC4	1400 Fullerton, 2nd Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
London Conf1	200 Orchard, 1st Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
London Conf2	300 Regent, 1st Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
London VTC1	200 Orchard, 3rd Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
London VTC2	300 Regent, 3rd Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
NYC Boardroom1	1450 Broadway, 50th Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
NYC Boardroom2	1300 5th Ave, 20th Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
NYC Conf1	1923 Broadway, 10th Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
NYC Conf2	1450 Broadway, 30th Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
NYC VTC1	1450 Broadway, 34th Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
NYC VTC2	1300 5th Ave, 10th Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
NYC VTC3	800 Broadway, 11th Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule
NYC VTC4	700 9th Ave, 2nd Floor	Online	Log	Help	Room Motion	System	Display Power	Display Usage	Schedule

### BALANCED COLOR AND BRIGHTNESS

A choice of 5 unique view modes provide the best possible viewing experience in any environment regardless of ambient light.

### DUAL 3D BLU-RAY READY HDMI INPUTS

Designed with two HDMI ports, this projector is perfect for connecting to any HDMI-enabled device, and can display 3D images directly from 3D Blu-ray players. 3D images can be viewed with optional ViewSonic PGD-350 Shutter Glasses, or any other compatible 3D glasses.

### PEACE OF MIND

ViewSonic offers one of the industry's best overall projector warranties with 3-year limited parts and labor, 1-year lamp, and first year free Express Exchange<sup>®</sup> service\* for an added value worth up to \$150\*\*.

\*One year Express Exchange<sup>®</sup> Service requires product registration. \*\*Up to \$150 added value over competitive models with 1-year warranty and based on extended warranties from manufacturers and not third party warranty providers.

### REDUCED INPUT LATENCY

This projector delivers smooth images without delay. Its ultra-low 16ms input latency provides faster frame-by-frame action.

## SPECS

<b>RESOLUTION</b> 1280 x 800	<b>THROW RATIO</b> 1.55~1.70	<b>THROW DISTANCE</b> 3.3 - 36.02 ft / 1 - 10.98 m	<b>BRIGHTNESS (LUMENS)</b> 4,000 ANSI
---------------------------------	---------------------------------	-------------------------------------------------------	------------------------------------------

DISPLAY		
<b>TYPE</b> DLP Lamp	<b>RESOLUTION TYPE</b> WXGA (1280x800)	<b>RESOLUTION</b> 1280 x 800
<b>BRIGHTNESS (LUMENS)</b> 4,000 ANSI	<b>DISPLAY SIZE (IN.)</b> 30 - 300 in. / 0.76 - 7.62 m	<b>THROW DISTANCE</b> 3.3 - 36.02 ft / 1 - 10.98 m
<b>THROW RATIO</b> 1.55~1.70	<b>KEystone</b> Vertical (+/- 40°)	<b>LENS</b> 1.1x optical zoom
<b>LIGHT SOURCE (WATT)</b> 240	<b>LIGHT SOURCE LIFE, NORMAL (HOURS)</b> 4000	<b>LIGHT SOURCE LIFE, DYNAMIC ECO-MODE (HOURS)</b> 15000
<b>COLOR DEPTH</b> 1.07B Color (R/G/B 10bit)	<b>DYNAMIC CONTRAST RATIO</b> 22,000:1	<b>ASPECT RATIO</b> 16:10

Select your preferred Country/Region:

VIDEO SIGNAL		
<b>FREQUENCY HORIZONTAL</b>	<b>FREQUENCY VERTICAL</b>	
15k~102kHz	23~120Hz	

COMPATIBILITY		
<b>PC RESOLUTION (MAX)</b>	<b>MAC® RESOLUTION (MAX)</b>	
1920 x 1080	1920 x 1080	

CONNECTOR		
<b>ETHERNET LAN (RJ45)</b>	<b>3.5MM AUDIO OUT</b>	<b>3.5MM AUDIO IN</b>
1	1	1
<b>CONTROL (RS232)</b>	<b>HDMI IN</b>	<b>HDMI MHL</b>
1	1	1
<b>VGA IN</b>	<b>VGA OUT</b>	<b>COMPOSITE RCA VIDEO IN</b>
1	1	1
<b>S-VIDEO IN</b>	<b>MINI USB</b>	<b>3D VESA</b>
1	1	1

AUDIO	
<b>INTERNAL SPEAKERS</b>	
10W (x1)	

POWER		
<b>VOLTAGE</b>	<b>CONSUMPTION (TYPICAL)</b>	<b>STAND-BY</b>
100-240 VAC, 50-60Hz	350W	<0.5W

OPERATING CONDITIONS	
<b>TEMPERATURE</b>	
32-104° F (0 - 40° C)	

WEIGHT (IMPERIAL)		
<b>NET (LBS)</b>	<b>GROSS (LBS)</b>	
5.3	7.5	

WEIGHT (METRIC)		
<b>NET (KG)</b>	<b>GROSS (KG)</b>	
2.4	3.4	

Select your preferred Country/Region:  


DIMENSIONS (IMPERIAL) (WXHxD)		
<b>PACKAGING (IN.)</b>	<b>PHYSICAL (IN.)</b>	
14.37 x 11.81 x 7.4	11.57 x 8.58 x 4.33	

DIMENSIONS (METRIC) (WXHxD)		
<b>PACKAGING (MM)</b>	<b>PHYSICAL (MM)</b>	
365 x 300 x 188	294 x 218 x 110	

GENERAL		
<b>AV CONTROL</b> AMX Certified, ATEN Certified, Crestron Certified, Extron Certified, PJ Link Certified	<b>REGULATIONS</b> FCC (including ICES003), cTUVus	<b>PACKAGE CONTENTS</b> PG703W projector, power cable, VGA cable, remote control, Quick Start Guide
<b>WARRANTY</b> Three-year limited warranty on parts and labor, 1-year limited warranty on lamp, 1st year free Express Exchange® service. (One year Express Exchange Service requires product registration).	<b>RECYCLE/DISPOSAL</b> Please dispose of in accordance with local, state or federal laws.	

## DIMENSIONS

11.57 x 8.58 x 4.33 in / 294 x 218 x 110 mm

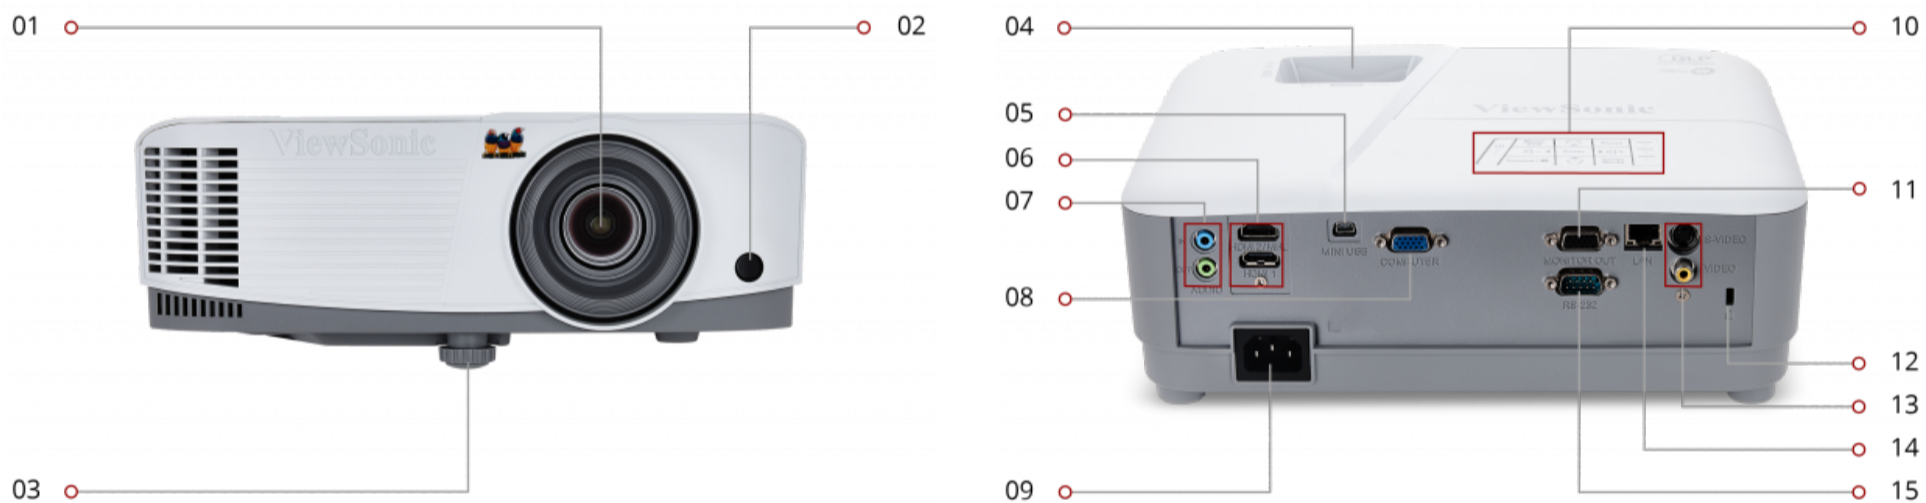

1. Projection lens 2. IR remote sensor 3. Elevation foot 4. Focus / zoom rings  
 5. USB type Mini B 6. HDMI x2 (x1 MHL) 7. Audio In/Out 8. VGA 9. AC In  
 10. Control Panel 11. Monitor Out 12. Kensington® Lock Slot  
 13. Video/S-Video In 14. LAN 15. RS232

## DOWNLOADS

### DATASHEETS

[Comparison Sheet \(PRG\)](#)

[PG703W Datasheet](#)

### GUIDES

[User Guide \(English\)](#)

[User Guide \(French\)](#)


Select your preferred Country/Region:

### DRIVERS & SOFTWARE


[ViewSplit Software & User Guide for Windows](#)


[vController](#)


[Datasheet \(Spanish\)](#) 

[User Guide \(Spanish\)](#) 

[vController User Guide \(English\)](#) 


[PG703W\\_2D\\_drawing\(pdf\)](#) 

[Lamp Swapping Instruction \(English\)](#) 

[PG703W\\_2D\\_drawing\(dwg\)](#) 

Other Languages  

[Extron Network Setting Notice](#) 

[PG703W\\_3D\\_drawing\(stp\)](#) 

Select your preferred Country/Region:  