# StarTechcom


Hard-to-find made easy®

# 10/100 Mbps Ethernet to Single Mode SC WDM Fiber Media Converter Kit - 20km

ET90110WDM2

DE: Bedienungsanleitung - de.startech.com FR: Guide de l'utilisateur - fr.startech.com ES: Guía del usuario - es.startech.com IT: Guida per l'uso - it.startech.com NL: Gebruiksaanwijzing - nl.startech.com PT: Guia do usuário - pt.startech.com

## **Front View**

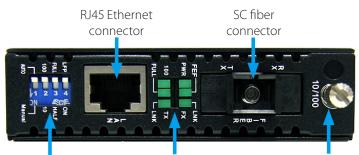

DIP Switches

LED indicators

Card Release Thumbscrew

\*actual product may vary from photos

## - --



• 6 x Power Adapter Plug (2 x NA/ UK/ EU)

**Packaging Contents** 

• 2 x Fiber Media Converter

• 1 x Instruction Manual

2 x Universal Power Adapter


- 10BASE-T or 100Base-TX compatible Ethernet network equipment
- RJ45 terminated UTP Cat5 or better Ethernet cable
- 100BASE-FX compatible fiber optic network equipment
- SC terminated single mode 9/125 micron (μm) fiber optic cable
- Available AC electrical outlet



Ground Point (optional)

## Installation

- 1. Make sure the DIP switches are set appropriately for your network configuration (see "DIP Switch Settings" section for details).
- 2. Setup the media converters at each of their respective end point locations.
- 3. Connect the fiber optic network cable from one media converter to the other media converter.
- 4. Connect a UTP Ethernet cable, from a computer/switch to the RJ45 jack on the media converters at each end point.
- 5. Connect the included power adapters to the media converters.
- 6. The following example illustrates the connection scheme when connecting from a 100BASE-TX Ethernet port on a hub/switch to a 100BASE-TX Ethernet Network Interface Card (NIC) in a computer through the fiber media converter:



Rear View

# DIP Switch Settings

#### LFP:

Link Fault Pass-through will pass a link failure to the Ethernet side, if a link failure is encountered on the fiber side and vice versa. Otherwise, the Ethernet side will continue to show no link failures, even if the fiber side has no link. (OFF = Not active, On = Active)

#### Full/ Half:

Ethernet Duplex mode will be configured for Full or Half.

#### 10/100:

Set the Ethernet side link speed to 10 or 100 Mbps.

#### Auto/Manual:

Auto negotiate Link Speed and Duplex mode or manually set via DIP switches.



Hard-to-find made easy®

## **Specifications**

ED Status				
LED	Name	Status	Description	Cor
PWR	Power	ON	Unit is powered	Ор
		OFF	Unit is not powered	Ma
FEF	Far End Fault	ON	Link Fault on far end device	Duj
		OFF	No Link Faults	Aut
LNK (FX)	Fiber Link	ON	Fiber link is detected	Pov
		OFF	Fiber link is not detected	Enc
		Blink	Data transmission	Ор
100	Ethernet Link Speed	ON	100 Mbps	Sto
		OFF	10 Mbps	Hui
Full	Ethernet Duplex Mode	ON	Full Duplex Mode	Din
		OFF	Half Duplex Mode	Wei
LNK (TX)	Ethernet Link	ON	Ethernet Link detected	
		OFF	Ethernet Link not detected	
		Blink	Data Transmission	

•	
Supported Standards	IEEE 802.3, IEEE 802.3u
Connectors	1 x RJ45 Ethernet female 1 x SC Fiber female 1 x DC Power
Compatible Fiber Type	Single Mode, 9/125 micron
Optical Wavelength	1310 nm
Maximum Distance	20 km (12.4 mi)
Duplex Modes	Full/Half
Auto MDIX	Yes (Ethernet)
Power Adapter	12V DC, 1000mA, center positive, type M plug
Enclosure Material	Metal
Operating Temperature	0°C ~ 60°C (32°F ~ 140°F)
Storage Temperature	-10°C ~ 70°C (14°F ~ 158°F)
Humidity	10% ~ 90% RH
Dimensions (LxWxH)	160.0mm x 95.0mm x 20.0mm
Weight	600g

#### **FCC Compliance Statement**

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

#### Technical Support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

#### Warranty Information

This product is backed by a two year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

#### Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

## LEC