


DATARAM DRL2400R

Accelerating Innovation

DDR4-2400, PC4-2400T, ECC, 1.2V, 288-pin DIMMs



Products in Family

DRL2400RS/8GB (1 x 8GB RDIMM)
 DRL2400R/16GB (1 x 16GB RDIMM)
 DRL2400R8/16GB (1 x 16GB RDIMM)
 DRL2400R/32GB (1 x 32GB RDIMM)
 DRL2400LR/32GB (1 x 32GB LRDIMM)
 DRL2400LR/64GB (1 x 64GB LRDIMM)

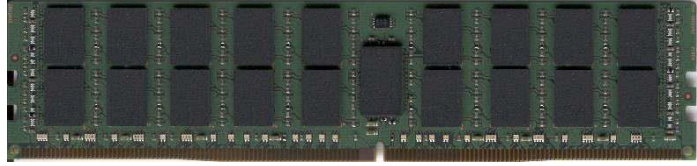

Features	Description
288-pin JEDEC-compliant DIMMs 133.35 mm wide by 31.25 mm high (5.25" x 1.23") Data Transfer Rate: 19.2 Gigabytes/sec Operating Voltage: 1.2V (1.14V~1.26V) Fully RoHS Compliant Thermal Sensor	The DRL2400R upgrades are registered memory modules, which conform to JEDEC's DDR4, PC4-2400T standard. The DRL2400LR is a load-reduced memory module (LRDIMM). One EEPROM is used for Serial Presence Detect and a combination register/PLL, with Address and Command Parity is also used.

Dataram Product	Dell Product	Product Description
DRL2400RS/8GB	SNP888JGC/8G	1 x 8GB 1Rx8 PC4-2400T-R17
DRL2400R/16GB	Not Offered by Dell	1 x 16GB 2Rx4 PC4-2400T-R17
DRL2400R8/16GB	SNPHNDJ7C/16G	1 x 16GB 2Rx8 PC4-2400T-R17
DRL2400R/32GB	SNPCPC7GC/32G	1 x 32GB 2Rx4 PC4-2400T-R17
DRL2400LR/32GB	SNP7FKKCC/32G	1 x 32GB 2Rx4 PC4-2400T-L17
DRL2400LR/64GB	SNP29GM8C/64G	1 x 64GB 4Rx4 PC4-2400T-L17

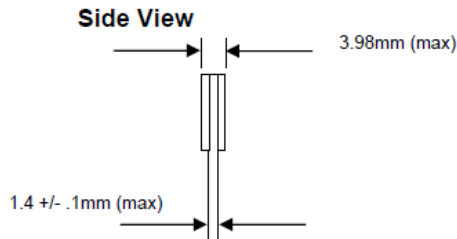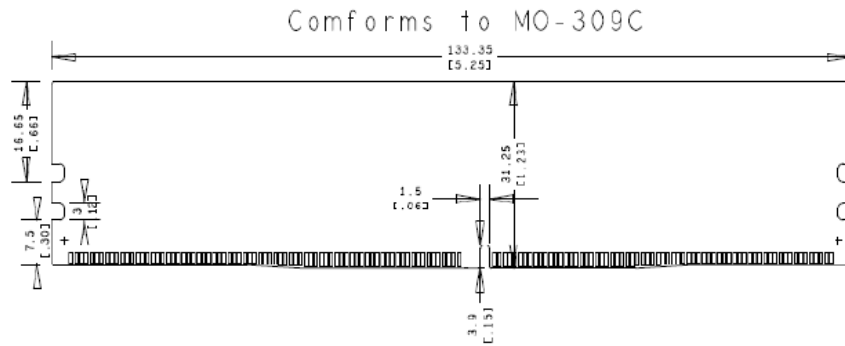

Notes:

1. Tolerances on all dimensions except where otherwise indicated are $\pm .13$. Reference JEDEC standard MO-309C.
2. All dimensions are expressed: millimeters [inches]

