

Husky Air (CS-CV310-A0-1B2WFR)

2 Megapixel 1/2.7" CMOS Wall-mounted 1080p IPC



Introduction

EZVIZ products have been designed for your entertainment, communication, security. When you install the EZVIZ APP on your smartphone or tablet, EZVIZ devices will be connected to the cloud via their QR code and will immediately be online. With EZVIZ you can talk to your loved ones, watch your child's progress when you are away, keep an eye on your home, interact with your four-legged friends, prevent household accidents.

Main Features



Active Defense



IR distance up to 30 meters



Wi-Fi signal more strong and stable with two antennas



High-decibel speakers



Audio pickup distance up to 5 meters



FHD 1080P




Support Micro SD card slot, up to 128GB



Dustproof and Waterproof IP66

Dimension

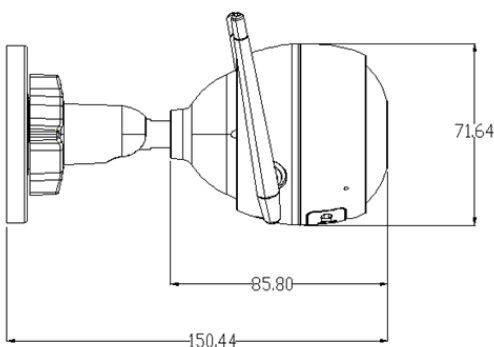

Specifications

| | |
|------------------------------|---|
| Model | CS-CV310-A0-1B2WFR |
| Camera | |
| Image sensor | 1/2.7" Progressive Scan CMOS |
| Minimum illumination | 0.02 lux @(F2.0,AGC ON) ,0 Lux with IR |
| Shutter Speed | Self-adaptive shutter |
| Lens | 2.8mm@ F2.2, Horizontal angle: 103° Diagonal angle: 118° 4mm@ F2.0, Horizontal angle: 87° Diagonal angle: 104° 6mm@ F2.0, Horizontal angle: 54° Diagonal angle: 62° |
| Lens Mount | M12 |
| Day & Night | IR cut filter |
| DNR | 3D DNR |
| WDR | Digital WDR |
| Compression | |
| Video Compression | H.264 |
| H.264 Type | Main Profile |
| Video Bit Rate | HD; balance; and fluency. Adaptive bit rate. |
| Image | |
| Max. Resolution | 1920 × 1080, support dual-stream |
| Frame Rate | 50Hz @ 25fps, 60Hz @ 30fps; adaptive frame rate of network transmission |
| Image setting | Brightness, contrast, saturation, etc. (Configure via EZVIZ Studio) |
| BLC | Support |
| Network | |
| Smart Alarm | Intelligent motion detection |
| One-key configuration | Smart Config (Wi-Fi One Push Configuration) |
| Protocol | EZVIZ Cloud Proprietary Protocol |
| Interface Protocol | EZVIZ Cloud Proprietary Protocol |
| General Function | Flicker filter, dual-stream, heart beat, mirror image, password protection, watermark |
| Interface | |
| Storage | Support Micro SD card (Max. 128GB) |
| Wired network | A RJ45 Ethernet Port, adaptive rate of 10/100M |
| Wi-Fi | |
| Standard | IEEE802.11 b/g/n |
| Frequency Range | 2.4GHz ~ 2.4835 GHz |
| Channel Bandwidth | Support 20MHz |
| Security | 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS |
| Transmission Rate | 11b: 11Mbps, 11g: 54Mbps, 11n: 150Mbps |
| General | |
| Operating Conditions | (-30°C ~ 60°C), humidity 95% or less (non-condensing) |
| Power Supply | DC 12V±10% |
| Power Consumption | Max. 6W |
| IP Grade | IP66 |
| IR Range | Max. 30 meters |
| Dimensions (mm) | 150.44 x 85.80 x 71.64 |
| Weight (g) | 326g |