



## XS3800-28

### 28-port 10GbE L2+ Managed Switch

Designed for SME with 10GBASE-T connectivity and advanced L2+/L3 lite features, the Zyxel 10-Gigabit L2+ managed switch XS3800-28 enables applications for aggregation or SME core switching and connection; and the XS3800-28 also comes with up to 12 Multi-Gigabit ports to help your preparation for network expansions with Multi-Gigabit capable devices such as servers, workstations and NAS. It is also the first 10-Gigabit cloud switch that can step up the cloud network bandwidth.

### Benefits

#### NebulaFlex Pro – simply manage it your way!

The NebulaFlex Pro provides extended flexibility, especially for those who hesitate to step up for cloud networking. You can easily switch network management modes between standalone, and our intuitive Nebula cloud platform. The NebulaFlex Pro even allows you to change your mind any time without additional cost while protecting previous investments on wired technology. You can have the privilege to use advanced features with professional pack for one year upon registration on Nebula; these features include advanced IGMP technology, comprehensive IPTV reports that provide insights to channel usage information, network analytics alert to optimize network performance along with more upcoming new features on NCC and its App.

\*Please refer to the following feature sets for the detail cloud support features.



NebulaFlex Pro allows users to switch between standalone management and intuitive Nebula cloud managed mode with 1-YEAR Pro Pack bundled



Unique port combination brings maximum flexibility to network diversity



Support Multi-Gigabit for 100M/1G/2.5G/5G/10G connections



Provides high-bandwidth with true physical stacking of up to 4 units



Design with "Restore to last custom default" button and redundant power supply to deliver high resiliency and availability

## Flexible port combination for all your needs

10GBASE-T and 10-Gigabit SFP+ are essential to a Layer-2 aggregation switch. The XS3800-28 offers a wide range of combo ports options to give you the greatest flexibility for any type of networks. With 16 x 10G SFP+, 8 combo ports (Multi-Gigabit RJ-45/SFP+) and 4 Multi-Gigabit RJ-45 ports, the XS3800-28 offers a maximum of 24 10G fiber ports or 12 10G copper ports that are well prepared for diversity of network requirement.

## Future-proof deployments with Multi-Gigabit capability

If you are currently connecting a 2.5G/5G device to a traditional 10-Gigabit switch without Multi-Gigabit capability, the connection automatically downgrades to 1 Gbps since the switch only supports 1G/10G capability. Instead, the XS3800-28 offers up to 12 Multi-Gigabit RJ-45 ports that support 10G, 5G, 2.5G and 1G speeds that allow the connection to operate at the maximum speed as fast as the connected devices allow.

The most commonly used CAT5e Ethernet cables support both 2.5G/5 Gbps Multi-Gigabit operations without the need to purchase expensive CAT6 cables. For the existing networks that need to be upgraded to the Multi-Gigabit specification, the XS3800-28 is the perfect solution without replacing the current cabling infrastructure.


## Layer-3 switching capacity

Designed with supports to the 4K L3 forwarding table and 1K static L3 routes, the XS3800-28 is suitable for aggregation and virtualization for SMB or campus networks that require low latency and high-density 10G backbone architectures with basic routing capability. Also, it allows creating a physical stack through the last four 10-Gigabit combo ports. Four units can be configured as a stack to provide high bandwidth on XS3800-28 for more flexible management. The stacking topology under the ring architecture provides high redundancy in case one of the stacking links fail. The system can quickly recover through another stacking connection.

## Resiliency and availability


The XS3800-28 comes with two PSUs supporting active-standby power redundancy that triggers backup power supply if the main unit fails. The one-touch "Restore" button on the front panel saves the last workable configuration as the custom default, which allows you to fall back anytime with a press in case of network misconfiguration.

## Front Panel

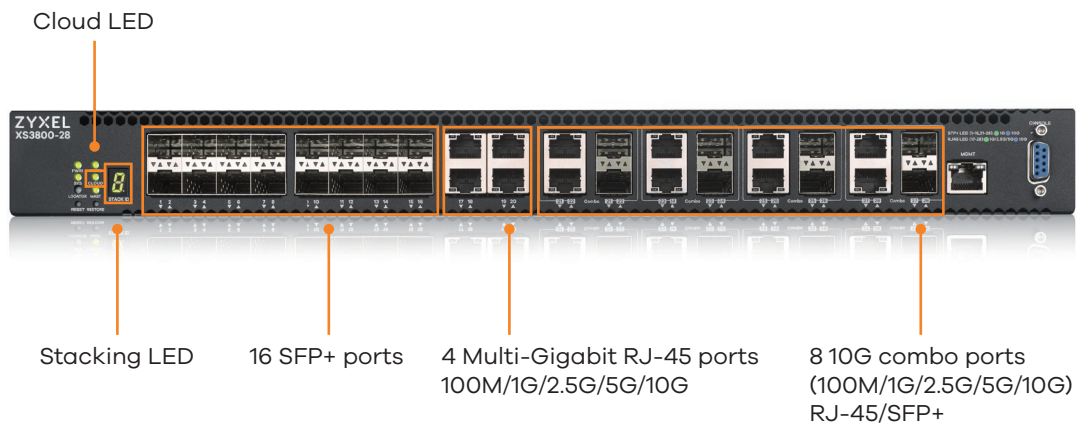


# Application Diagram


## Standalone Management

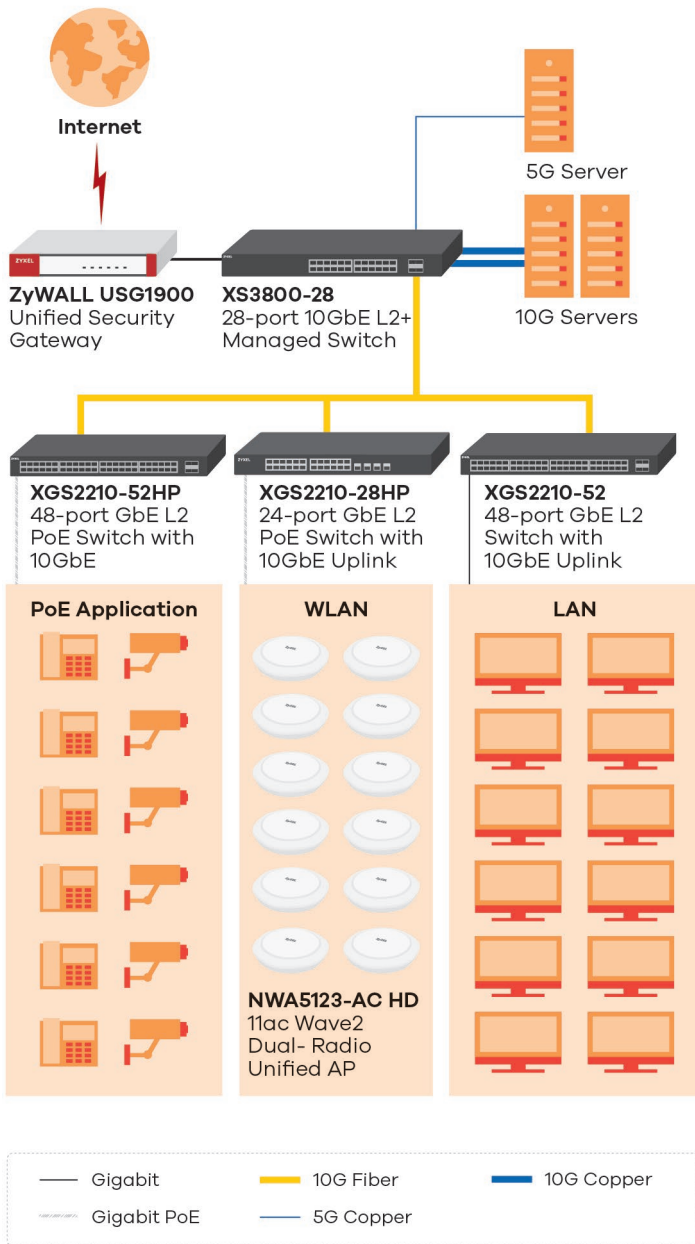

## Cloud Management

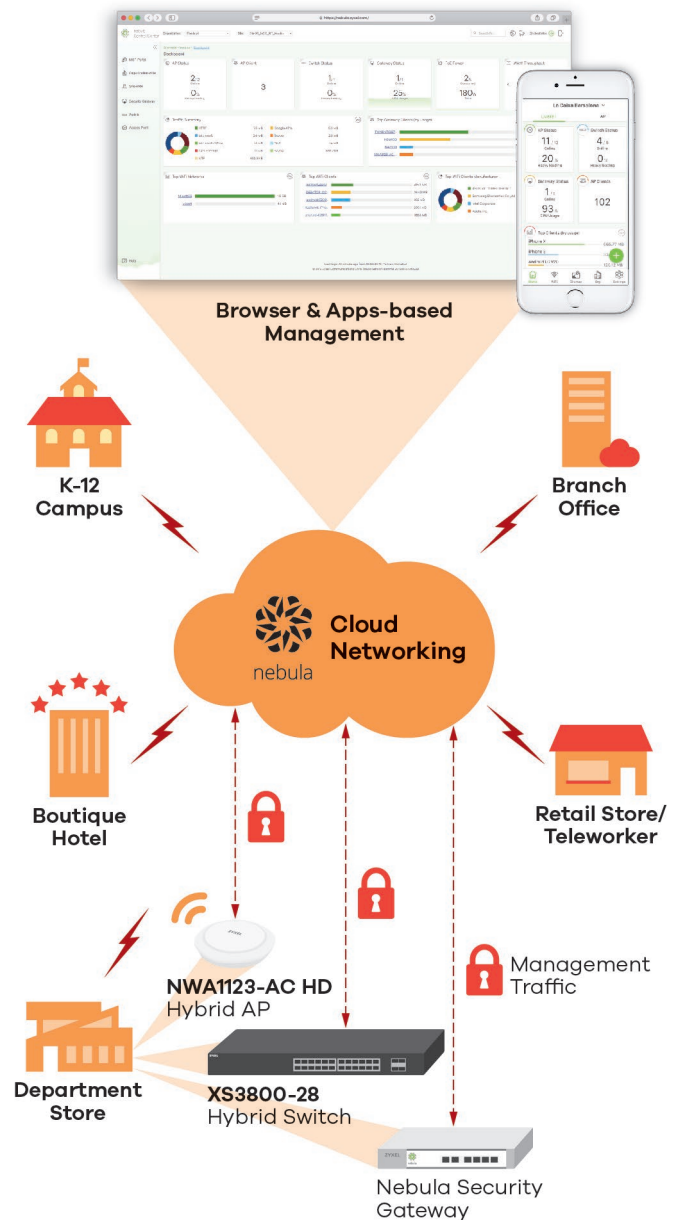

# Specifications

<b>Model</b>	<b>XS3800-28</b>	
<b>Product name</b>	28-port 10GbE L2+ Managed Switch	
		
<b>Switch class</b>	Layer 2 Plus	
<b>Port Density</b>		
<b>Total port count</b>	28	
<b>100M/1G/2.5G/5G/10G Ethernet (RJ-45)</b>	4	
<b>Multi-Gigabit combo (100M/1G/2.5G/5G/10G) RJ-45/SFP+</b>	8	
<b>10-Gigabit SFP+</b>	16	
<b>Performance</b>		
<b>Switching capacity (Gbps)</b>	560	
<b>Forwarding rate (Mpps)</b>	416	
<b>Packet buffer (byte)</b>	4 MB	
<b>MAC address table</b>	32 K	
<b>L3 forwarding table</b>	Max. 4 K IPv4 entries; Max. 2 K IPv6 entries	
<b>Routing table</b>	1K	
<b>IP interface</b>	128	
<b>Flash/RAM</b>	64 MB/8 GB	
<b>Power</b>		
<b>Input</b>	100 - 240 V AC, 50/60 Hz	
<b>Max. power consumption (watt)</b>	86.97	
<b>Physical Specifications</b>		
<b>Item</b>	<b>Dimensions (WxDxH)(mm/in.)</b>	441 x 360 x 44/17.36 x 14.17 x 1.73
	<b>Weight (kg/lb.)</b>	4.81/10.6
<b>Packing</b>	<b>Dimensions (WxDxH)(mm/in.)</b>	593 x 526 x 131/23.35 x 20.71 x 5.16
	<b>Weight (kg/lb.)</b>	6.41/14.13
<b>Included accessories</b>	<ul style="list-style-type: none"> <li>• Power cord</li> <li>• Rack mounting kit</li> </ul>	
<b>Environmental Specifications</b>		
<b>Operating</b>	<b>Temperature</b>	0°C to 50°C/32°F to 122°F
	<b>Humidity</b>	10% to 95% (non-condensing)
<b>Storage</b>	<b>Temperature</b>	-40°C to 70°C/-40°F to 185°F
	<b>Humidity</b>	10% to 95% (non-condensing)
<b>MTBF (hr)</b>	656,274.78	
<b>Heat dissipation (BTU/hr)</b>	296.57	
<b>Acoustic noise @ 25°C (dBA)</b>	58.2	

# Features

## Standard Compliance

- IEEE 802.3z 1000BASE-X\*
- IEEE 802.3ab 1000BASE-T Ethernet\*
- IEEE 802.3an 10G BASE-T Ethernet\*
- IEEE 802.3ae 10 Gbit/s Ethernet over fiber\*
- IEEE 802.3bz 2.5G/5GBase-T Ethernet\*
- IEEE 802.3az EEE support\*
- IEEE 802.3x flow control
- IEEE 802.1p CoS support\*
- IEEE 802.1AB LLDP/LLDP-MED
- IEEE 802.3ah OAM (Link Discovery, Loopback)
- Store and forward
- N-way auto-negotiation

## Resilience and Availability

- IEEE 802.1D Spanning Tree Protocol (STP)\*
- IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)\*
- IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
- IEEE 802.3ad LACP\*
- Equal Cost Multipath Routing (ECMP)
- Virtual Router Redundancy Protocol (VRRP)
- Loop guard\*
- CPU protection
- ErrDisable recovery
- MRSTP (Zyxel proprietary)
- Redundant power supply support
- Dual configuration files
- Dual images\*
- Physical stacking up to 4 units

## Traffic Control

- 802.1Q static VLANs\*/dynamic VLANs: 4 K/4 K
- Port-based VLAN\*
- Protocol-based VLAN
- IP subnet-based VLAN
- Private VLAN
- VLAN trunking
- VLAN translation
- VLAN ingress filtering

- 802.1ad VLAN stacking (Q-in-Q)
- LACP algorithm of source/destination IP
- GVRP
- Selected Q-in-Q
- L2PT

## Security

- 802.1x\*
- Port security\*
- MAC authentication\*
- Layer 2 MAC filtering
- Layer 3 IP filtering
- Layer 4 TCP/UDP socket filtering
- BPDU transparency
- Static MAC forwarding
- Multiple RADIUS servers\*
- Multiple TACACS+ servers
- 802.1x VLAN and bandwidth assignment by RADIUS\*
- Login authentication by RADIUS\*
- Login authentication by TACACS+
- TACACS+ accounting
- RADIUS accounting
- Authorization on TACACS+
- Authorization on console
- SSH v2
- SSL
- MAC freeze
- DHCP snooping
- ARP inspection
- ARP freeze
- Static ARP setting
- Static IP/MAC binding
- Policy-based security filtering
- Port isolation
- IP source guard
- Limit number of MAC per VLAN
- MAC search
- Guest VLAN\*
- ACL packet filtering (IPv4/IPv6)
- PPPoE relay agent
- PPPoE option82
- PPPoE IA
- CPU protection
- MAC pinning
- Interface related trap can be enable/disable by port

## Quality of Service (QoS)

- No. of hardware queues per Port: 8\*
- 802.1p queuing method: SPQ/WRR/WFQ\*
- Storm control: Broadcast, Multicast, Unknown Unicast (DLF)\*
- Port-based rate limiting (Ingress/Egress): \*/64 kbps
- Rate limiting, per IP/TCP/UDP per port
- Policy-based rate limiting
- Policy-based bandwidth control granularity
- Ingress CIR for bandwidth control
- 802.3x flow control
- Port-based egress traffic shaping CIR/PIR supported
- Policy based prioritization
- 802.1p Class of Service (SPQ, WFQ, SPQ/WFQ combination capable)
- DiffServ (DSCP)

## Layer 2 Multicast

- L2 multicast (Group)
- IGMP snooping (v1, v2, v3)\*
- IGMP snooping fast leave\*
- Configurable IGMP snooping timer and priority
- IGMP snooping statistics\*
- IGMP throttling\*
- MVR support
- IGMP filtering\*
- IGMP snooping immediate leave\*
- IGMP snooping and proxy\*
- IPv6 MLD snooping proxy

## Routing

- Static route
- Policy-based route
- IP port moving

## Manageability

- SNMP v1, v2c, v3
- SNMP trap group
- RMON (1, 2, 3, 9)
- ICMP echo/echo reply
- Syslog
- Support NebulaFlex Pro for Cloud Management



## IPv6 Management

- IPv6 over Ethernet (RFC 2464)
- IPv6 addressing architecture (RFC 4291)
- Dual stack (RFC4213)
- ICMPv6 (RFC4884)
- Path MTU (RFC 1981)
- Minimum path MTU size of 1280 (RFC 5905)
- Encapsulation for minimum MTU of 1500
- Neighbor discovery (RFC4861)
- DHCPv6 Relay

## Device Management

- Standalone management by Web interface
- Cloud management by Nebula Control Center\*
- iStacking
- Web interface
- Management through console, telnet, SNMP
- Firmware upgrade by FTP
- Remote firmware upgrade by FTP/ Web
- Configuration saving and retrieving
- Multiple login supported
- Configure Clone
- Multilevel CLI
- CLI (Cisco like)
- DHCP servers
- DHCP relay per VLAN
- DHCP option 82
- Daylight Saving\*
- NTP\*
- Port mirroring\*
- Policy-based port mirroring
- RJ-45 out-of-band management port
- RS-232 console port
- sFlow
- Remote port monitoring
- Restore to last custom default

## MIB

- Zyxel new private MIB
- RFC 1066 TCP/IP-based MIB
- RFC 1213, 1157 SNMPv2c/v3 MIB
- RFC 1493 bridge MIB
- RFC 1643 Ethernet MIB
- RFC 1757 RMON group 1, 2, 3, 9
- RFC 2011, 2012, 2013 SNMPv2 MIB
- RFC 2233 SMIv2 MIB
- RFC 2358 Ethernet-like MIB
- RFC 2674 bridge MIB extension
- RFC 2819, 2925 remote management MIB
- RFC 3621 Power Ethernet MIB
- RFC 4022 management information base for transmission control protocol
- RFC 4113 management information base for user datagram protocol
- RFC 4292 IP forwarding table MIB
- RFC 4293 management information base (MIB) for IP

## Certifications

- Safety:
  - LVD
  - BSMI
- EMC:
  - FCC Part 15 (Class A)
  - CE EMC (Class A)
  - BSMI ENC
- RoHS:
  - Level A

## Zyxel One Network

### ZON Utility\*

- Discovery of Zyxel switches, APs and gateways
- Centralized and batch configurations
  - IP configuration
  - IP renew
  - Device factory reset
  - Device reboot
  - Device locating
  - Web GUI access
  - Password configuration
  - One-click quick association with Zyxel AP Configurator (ZAC)
- Automatic detection of the latest firmware
- Displays device serial number and hardware version
- Cloud mode on/off option for Hybrid series devices

### Smart Connect

- Discover neighboring devices
- One-click remote management access to the neighboring Zyxel devices
- Reset neighboring devices remotely to factory defaults
- Power cycle neighboring powered devices (PoE switches only)

## Warranty

- Limited life-time warranty\*\*

\* Cloud and standalone modes supported features

\*\*Warranty terms, service availability, and service response times may vary from country or region to country or region

## Accessories

### Transceivers (optional)

Model	Speed	Connector	Wavelength	Max. Distance	DDMI
<b>SFP10G-SR</b>	10-Gigabit SFP+	Duplex LC	850 nm	0.3 km (328 yd)	Yes
<b>SFP10G-LR</b>	10-Gigabit SFP+	Duplex LC	1310 nm	10 km (10936 yd)	Yes
<b>SFP-1000T</b>	Gigabit	RJ-45	-	0.1 km (109 yd)	-
<b>SFP-BX1310-10-D</b>	Gigabit	LC	1310 nm (Tx) 1490 nm (Rx)	10 km (10936 yd)	Yes
<b>SFP-BX1490-10-D</b>	Gigabit	LC	1490 nm (Tx) 1310 nm (Rx)	10 km (10936 yd)	Yes
<b>SFP-LHX1310-40-D</b>	Gigabit	LC	1310 nm	40 km (43744 yd)	Yes
<b>SFP-LX-10-D</b>	Gigabit	LC	1310 nm	10 km (10936 yd)	Yes
<b>SFP-SX-D</b>	Gigabit	LC	850 nm	0.55 km (601 yd)	Yes
<b>SFP-ZX-80-D</b>	Gigabit	LC	1550 nm	80 km (87488 yd)	Yes

### Direct Attach Cables (optional)

Model	Connector	Cable Length
<b>DAC10G-1M</b>	SFP+ to SFP+	1 m (39.37 inch)
<b>DAC10G-3M</b>	SFP+ to SFP+	3 m (118.11 inch)

For more product information, visit us on the web at [www.zyxel.com](http://www.zyxel.com)

Copyright © 2019 Zyxel Communications Corp. All rights reserved. Zyxel, Zyxel logo are registered trademarks of Zyxel Communications Corp. All other brands, product names, or trademarks mentioned are the property of their respective owners. All specifications are subject to change without notice.

