



2019 Cable Catalog
Fiber Optic – Hybrid – Copper



Linden Photonics, Inc.

Harmonizing Opposing Goals:
Strength & Flexibility

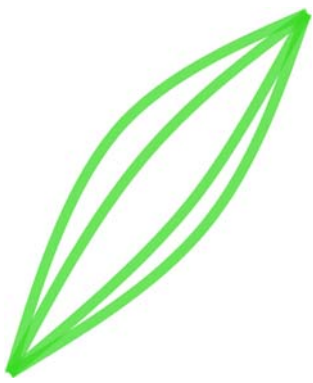


TABLE OF CONTENTS

<u>STFOC™ Optical Cables</u>	Page 3
<u>Buoyant Optical Cables</u>	Page 6
<u>High Strength Non-Buoyant Cables</u>	Page 9
<u>Hybrid Cables</u>	Page 12
<u>AVNOCT™ Avionic Cables</u>	Page 16
<u>RadHard Cables</u>	Page 19
<u>STFOC™ Patchcords</u>	Page 22
<u>Phase Stabilized STFOC™</u>	Page 25
<u>Precision Wound Spools</u>	Page 28
<u>MicroTethers</u>	Page 30
<u>Copper Cables</u>	Page 33



STFOC
Optical Cable

Non-Kink
Crush Proof




STFOC



Linden's STFOC™ cables are available for a variety of underwater uses from munitions tethers to ROV controls to littoral water sensing. STFOC uses our patented cable jacket construction designed to protect the fiber in the harsh subsea environment. Non-Kink™ STFOC has a patented design to protect your fiber from the dangers of hocking. Compact and rugged; flexible and strong. Custom configurations available.

Features

- Patented Liquid Crystal Polymer (LCP) jacketing (US Patent No. [7,570,853](#))
- Patented Non-Kink construction (US Patent No. [8,842,956](#))
- 100% thermoplastic jacket eliminates need for metal & Kevlar
- Non-Kink™ design prevents hocking
- Lightweight – LCP density: 1.4g/cm³ compared to Inconel 625: 8.4g/cm³
- Long continuous lengths >25km
- Hermetic coating protects fiber from moisture/hydrogen/helium
- Tight diameter tolerance
- Abrasion resistant

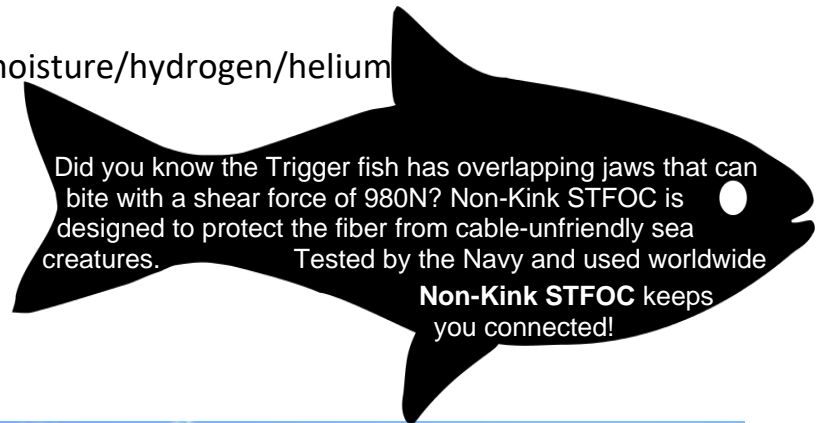

Advantages

- Crush proof
- Withstands high hydrostatic pressure
- Thin, lightweight, yet strong
- Non-corrosive
- No hydrogen outgassing
- Better moisture protection than carbon
- Precision windable
- Mid-Temp STFOC Available work working temp of 150C



Singlemode

Spec No.	Part No.	OD (mm)	Attenuation @ 1310nm (dB/km)	Attenuation @ 1550nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
LINDEN-SPE-7034	1-SM-A-27-B-30	0.762	0.45	0.35	50	0.6
LINDEN-SPE-7035	3-SM-A-35-B-38	0.965	0.45	0.35	50	0.9
LINDEN-SPE-7039	7-3-A-55-Q-125	3.2	0.45	0.35	60	9.0
LINDEN-SPE-7043	1-SM-A-35-Q-65	1.65	0.45	0.35	70	2.6
LINDEN-SPE-7196	1-SM-A-35-Q-79	2.0	0.45	0.35	70	3.7
LINDEN-SPE-7053	1-SM-A-21-B-24	0.600	0.45	0.35	30	0.4
LINDEN-SPE-7057	3-SM-A-35-Q-87	2.2	0.45	0.35	70	3.9
LINDEN-SPE-7063	1-SM-A-26-B-29	0.750	0.45	0.35	45	0.5
LINDEN-SPE-7090	1-SM-A-17-B-20	0.500	0.45	0.35	20	0.4
LINDEN-SPE-7092*	1-V-A-27-R-35	0.900	0.45	0.40	50	1.0


*Mid-Temp (150C) STFOC

Multimode (50/125)

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1300nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
LINDEN-SPE-7044	1-F-A-35-Q-65	1.65	2.5	3.5	70	2.6
LINDEN-SPE-7197	1-F-A-35-Q-79	2.0	2.5	3.5	70	3.7
LINDEN-SPE-7069	1-F-A-21-B-24	0.600	2.5	3.5	30	0.4
LINDEN-SPE-7070	1-F-A-27-B-30	0.762	2.5	3.5	45	0.6
LINDEN-SPE-7071	3-F-A-35-B-38	0.965	2.5	3.5	50	0.9
LINDEN-SPE-7182	1-W-A-27-J-35	0.890	2.5	3.5	50	0.9

Multimode (62.5/125)

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1300nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
LINDEN-SPE-7046	1-I-A-35-Q-65	1.65	2.5	3.5	70	2.6
LINDEN-SPE-7198	1-I-A-35-Q-79	2.0	2.5	3.5	70	3.7
LINDEN-SPE-7072	7-I-A-55-Q-125	3.2	2.5	3.5	60	9.0

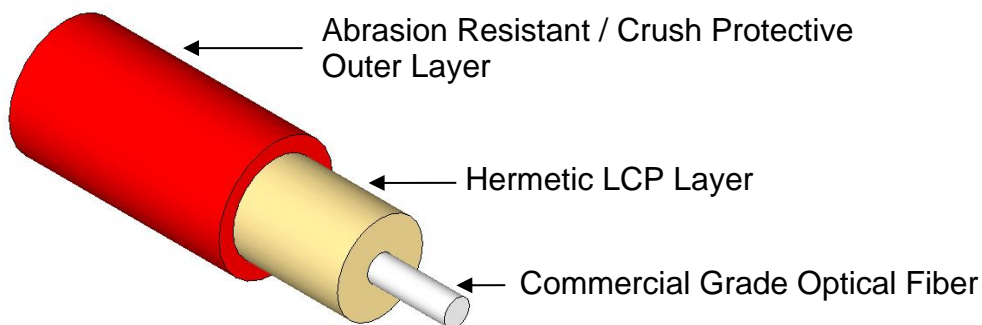

CONTACT LINDEN PHOTONICS FOR MORE DETAILED SPECIFICATIONS OR CUSTOM REQUIREMENTS



Buoyant Cable

Floats

Strong

Neutrally Buoyant



Buoyant Cable

Linden's buoyant STFOC™ fiber optic cables are available for a variety of underwater uses from munitions tethers to ROV controls to mooring buoys.

Our lightweight, buoyant designs are customized to your needs. From neutrally buoyant designs to cable that will float on water, we can customize your size, buoyancy and

strength. Using Linden's patented cable jacket construction designed to protect the fiber in the harsh subsea environment, our cables are compact and rugged; flexible and strong.

Features


- From the thinnest, lightest 290µm cable to 13mm+ cables with multi-ton break strength
- Precise density control for positive, neutral or negative buoyancy
- Designs with or without Kevlar
- Non-Kink™ design prevents hocking
- Continuous lengths >5km
- Hermetic coating protects fiber from moisture Hydrogen & Helium for increased operational life
- Abrasion resistant



GA Tech used a 3.5 mm Linden STFOC tether on a NASA funded project to deploy a 10 ft long ROV the under Ross Ice Shelf in Antarctica capturing never before seen footage.

Advantages

- Crush proof
- Non-corrosive
- No hydrogen outgassing
- Thin, lightweight, yet strong

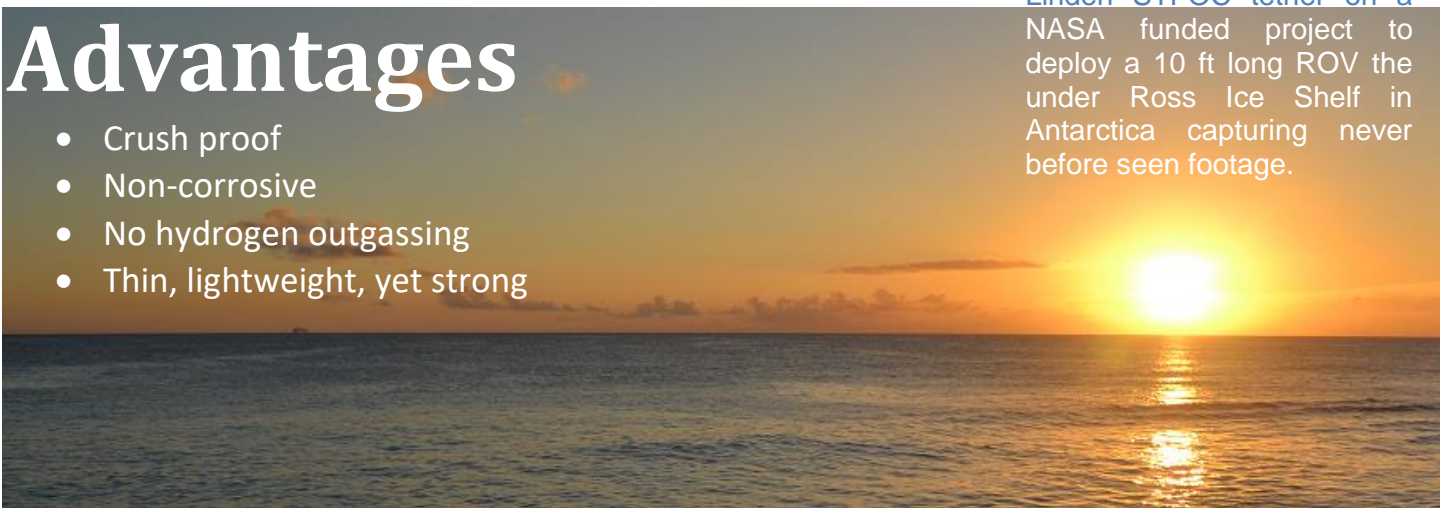



Singlemode


Spec No.	Part No.	OD (mm)	Attenuation @ 1310nm (dB/km)	Attenuation @ 1550nm (dB/km)	Tensile Strength (lbs)	Density (s.g.)
LINDEN-SPE-7089	1-FF-C-11-N1-11	0.290	1.0	1.0	10	1.13
LINDEN-SPE-7040	1-SM-C-20-N1-20	0.500	0.35	0.25	10	0.95
LINDEN-SPE-7096	1-H-A-21-R-35-YEL	0.900	0.40	0.30	40	1.03
LINDEN-SPE-7207	1-SM-A-27-R-46-YEL	1.1	0.45	0.35	50	1.027
LINDEN-SPE-7073	1-SM-A-27-L-67	1.7	0.35	0.25	50	1.02
LINDEN-SPE-7036	1-SM-A-27-O-47-L-75	1.9	0.35	0.25	250	1.01
LINDEN-SPE-7150	1-SM-A-27-O-47-L-100-ORN	2.5	0.45	0.35	250	1.01
LINDEN-SPE-7055	1-SM-A-27-O-67-L-137	3.5	0.35	0.25	450	0.99
LINDEN-SPE-7098	1-SM-A-27-O-55-X-137	3.5	0.35	0.25	750	0.99
LINDEN-SPE-7094	1-SM-A-27-R-46-O-101-X-169	4.3	0.45	0.35	1,200	0.97
LINDEN-SPE-7229	1-SM-A-21-R-35-O-175-X-232	5.9	0.45	0.35	1,700	0.98
LINDEN-SPE-7137	4-FO-L-183-O-242-L-370	9.4	0.45	0.35	2,750	0.97
LINDEN-SPE-7059	1-SM-A-27-L-160-T-230-L-440-Q-520	13.2	0.35	0.25	2,750	1.03
LINDEN-SPE-7060	3-SM-A-41-L-174-T-244-L-454-Q-534	13.6	0.35	0.25	2,750	1.03

Multimode (50/125)

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1300nm (dB/km)	Tensile Strength (lbs)	Density (s.g.)
LINDEN-SPE-7074	1-F-C-5-20-N1-20	0.500	2.5	3.5	10	0.95
LINDEN-SPE-7075	1-F-A-27-L-67	1.7	2.5	3.5	50	1.02
LINDEN-SPE-7076	1-F-A-27-O-47-L-75	1.9	2.5	3.5	250	1.01
LINDEN-SPE-7077	1-F-A-27-O-67-L-137	3.5	2.5	3.5	450	0.99
LINDEN-SPE-7078	1-F-A-27-L-160-T-230-L-440-Q-520	13.2	2.5	3.5	2,750	1.03

Multimode (62.5/125)

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1300nm (dB/km)	Tensile Strength (lbs)	Density (s.g.)
LINDEN-SPE-7093	1-I-A-27-O-47-L-75	1.9	2.5	3.5	250	1.01
LINDEN-SPE-7091	1-I-A-27-O-67-L-137	3.5	2.5	3.5	450	0.99

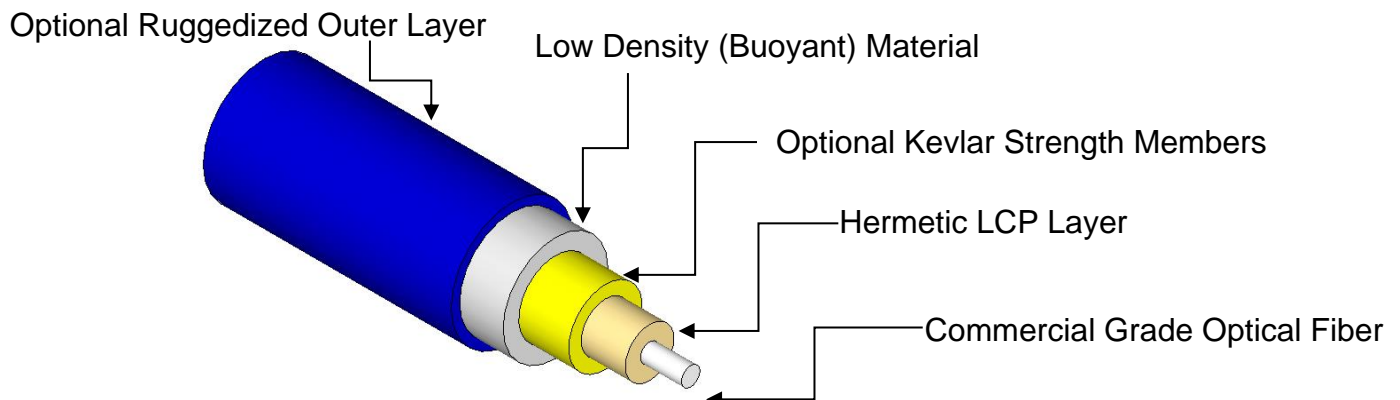

CONTACT LINDEN PHOTONICS FOR MORE DETAILED SPECIFICATIONS OR CUSTOM REQUIREMENTS



High Strength Cable


Thin

Lightweight

Rugged



High Strength Cable

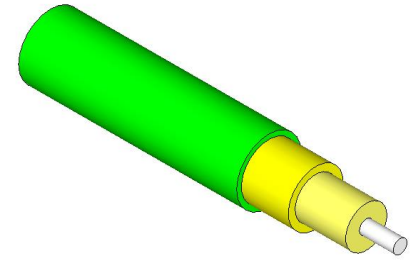

Linden's High Strength Cables are lightweight and flexible.

Rugged exterior, lightweight design and long continuous lengths give us an edge over competing cables. Using Linden's patented cable jacket construction designed to protect the fiber in the harsh subsea environment, our cables pull their weight.

Features

- Over 2,500lbs. breaking strength
- Lightweight – LCP density: $1.4\text{g}/\text{cm}^3$ compared to inconel 625: $8.4\text{g}/\text{cm}^3$
- Continuous lengths >5km
- Hermetic coating protects fiber from moisture/hydrogen/helium
- Abrasion resistant




Making a cable **strong** is more complex than it may seem. Things like strength member selection, denier, number of elements, picks per inch, **lay length**, to braid or contra-helically serve, are but some of the factors one must consider when designing a cable. Different uses may call for different designs. Putting an **optical fiber** in the middle of all those strength members only complicates things.

Talk with **Linden** about how to build a cable that works for you.

Advantages

- Long continuous lengths
- Corrosion Resistant
- No hydrogen Darkening
- Thin, lightweight, yet strong
- Crush proof

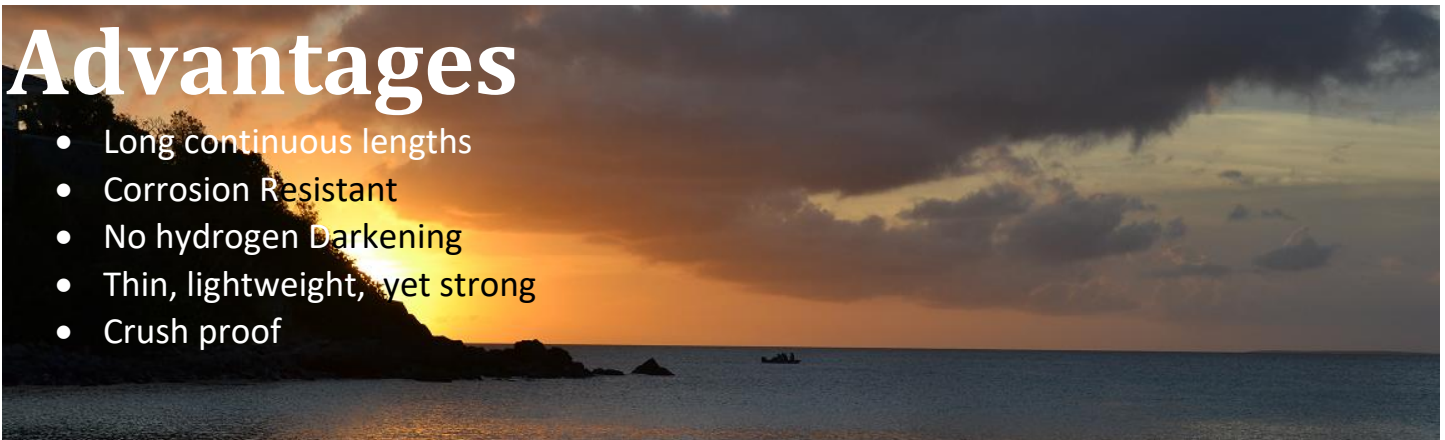



Singlemode


Spec No.	Part No.	OD (mm)	Attenuation @ 1310nm (dB/km)	Attenuation @ 1550nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
LINDEN-SPE-7052	1-H-A-27-O-45-Q-75	1.9	0.45	0.35	250	3.6
LINDEN-SPE-7050	1-SM-A-27-O-55-Q-95	2.4	0.45	0.35	450	6.8
LINDEN-SPE-7171	1-SM-A-27-B-30-O-45-Q-145	3.5	0.45	0.35	250	11
LINDEN-SPE-7097	1-SM-A-27-O-82-Q-147	3.7	0.45	0.35	1,200	27
LINDEN-SPE-7114	1-SM-A-27-O-67-GG-147	3.7	0.45	0.35	1,100	27.5
LINDEN-SPE-7082	1-SM-A-27-L-160-T-230-Q-310	7.9	0.45	0.35	2,750	41

Multimode (50/125)

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1310nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
LINDEN-SPE-7083	1-F-A-27-O-47-Q-75	1.9	2.5	3.5	250	3.6
LINDEN-SPE-7084	1-F-A-27-O-67-Q-95	2.4	2.5	3.5	450	6.8

Multimode (62.5/125)

Spec No.	Part No.	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1310nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
LINDEN-SPE-7085	1-I-A-27-O-47-Q-75	1.9	2.5	3.5	250	3.6
LINDEN-SPE-7086	1-I-A-27-O-67-Q-95	2.4	2.5	3.5	450	6.8
LINDEN-SPE-7159	1-I-J-35-O-45-Q-137	3.5	2.5	3.5	250	11
LINDEN-SPE-7087	1-I-A-27-L-160-T-230-Q-310	7.9	2.5	3.5	2,750	41

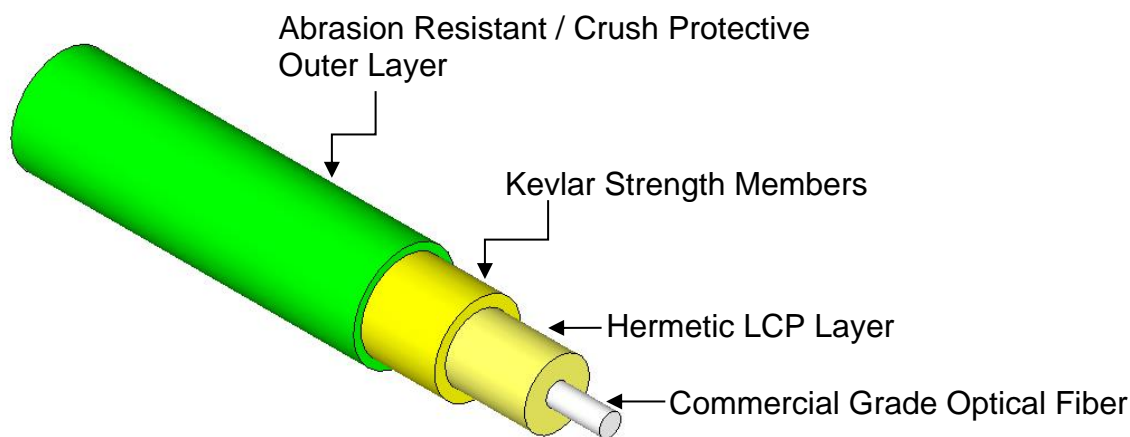

CONTACT LINDEN PHOTONICS FOR MORE DETAILED SPECIFICATIONS OR CUSTOM REQUIREMENTS




Hybrid Cables

Rugged & Durable

Buoyant

Thin & Lightweight

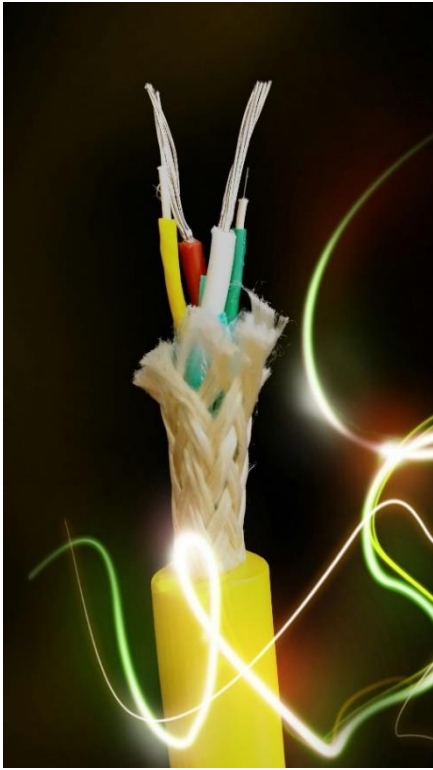

Hybrid Cables


Linden Photonics **hybrid cables** combine copper and fiber elements in a **lightweight**, yet strong and robust tether cable. Linden can customize your size, buoyancy and strength; from **neutrally buoyant** designs to extremely thin cables with various conductor offerings and fiber types available. Linden's patented cable jacket construction is designed to protect delicate fibers in the harsh subsea environment. Linden's hybrid cables are compact and rugged; flexible and strong.

Features

- Rugged, durable patented STFOC fiber optic elements
- Hermetic coating protects fiber from moisture
- Buoyant designs
- Thin wall insulation = thinner/lighter cables
- Fiber strength members = lighter cables
- Vectran strength members available offering less self-abrasion and longer service life
- 300V, 600V & 1,000V standard ratings


Our standard TPU is an **Ether grade** providing better hydrolysis performance in moisture rich environments.

Ester grades are available non-humid environments requiring improved abrasion resistance.

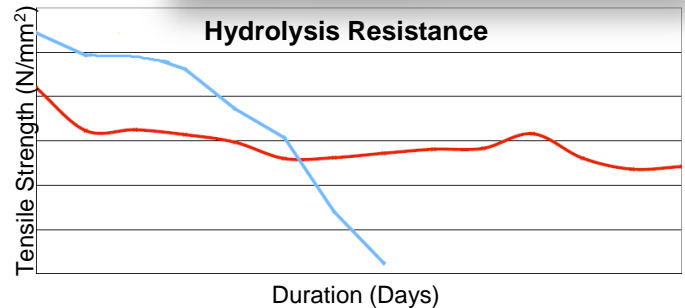

Advantages

- Virtually crush proof
- Non-corrosive
- Thin, lightweight, yet strong
- Withstands high hydrostatic pressure
- Synthetic strength members for higher strength and lower weight

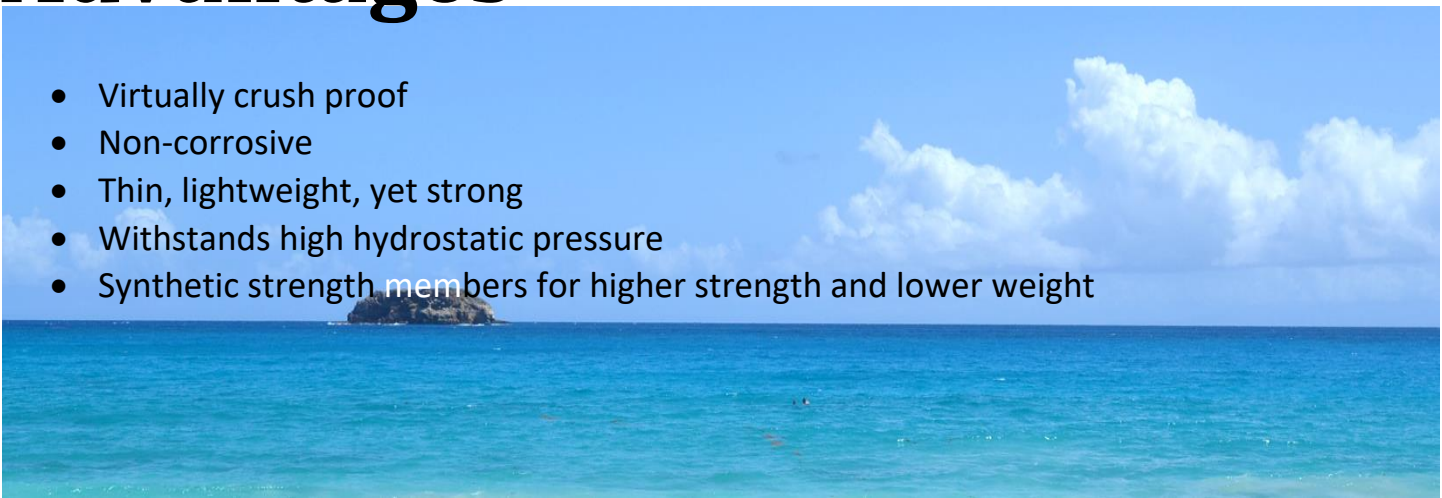



Specifications

Spec No.	Part No.	OD (mm)	Fiber Type	Conductor Type	Tensile Strength (lbs)
LINDEN-SPE-7136	2-CU-1-FO-BB-120-22759	3.0	1 x Singlemode	2 x #22	N/A
LINDEN-SPE-7148*	2-CU-1-FO-O-10-FQ-146-YEL	3.7	1 x Singlemode	2 x #28	450
LINDEN-SPE-7149*	2-CU-1-FO-O-10-FQ-192-YEL	4.9	1 x Singlemode	2 x #24	450
LINDEN-SPE-7218*	2-CU-1-FO-O-10-FQ-192-YEL	4.9	1 x Singlemode	2 x #24	450
LINDEN-SPE-7221*	2-CU-1-FO-O-10-FMM-192-YEL	4.9	1 x Singlemode	2 x #24	450
LINDEN-SPE-7152*	2-CU-2-FO-O-155-Q-195	5.0	2 x Singlemode	2 x #24	2,100
LINDEN-SPE-7170	4-CU-1-FO-S-138-O-168-L-228	5.8	1 x Singlemode	4 x #22	450
LINDEN-SPE-7107*	2-CU-2-FO-O-155-Q-235	6.0	2 x Singlemode	2 x #24	2,100
LINDEN-SPE-7104	2-CU-1-FO-O-155-Q-250	6.4	1 x Singlemode	2 x #20	880
LINDEN-SPE-7161*	3-CU-1-FO-O-150-FQ-250	6.4	1 x Singlemode	1 x #20 (TP) + #28	1,600
LINDEN-SPE-7195*	2-CU-1-FO-O-150-FQ-250	6.4	1 x Singlemode	2 x #20	1,600
LINDEN-SPE-7162*	1-CU-3-FO-O-175-FQ-275	7.0	3 x Singlemode	1 x #20 (TP)	1,600
LINDEN-SPE-7189*	2-CU-2-FO-O-150-FQ-250	7.1	2 x Singlemode	2 x #20	1,600
LINDEN-SPE-7250	4-CU-8-FO-O-236-Q-285	7.2	8 x Singlemode	4 x #20	450
LINDEN-SPE-7120	3-CU-2-FO-O-280-Q-320	8.1	2 x Singlemode	2 x #22	5,500
LINDEN-SPE-7141*	8-CU-1-FO-O-235-FQ-323	8.2	1 x Singlemode	8 x #26	1,500
LINDEN-SPE-7138*	2-CU-2-FO-O-225-FQ-330	8.4	2 x Singlemode	2 x #18	1,000
LINDEN-SPE-7164	2-SM-2-CU-O-207-Q-337	8.6	2 x Singlemode	2 x #20	2,400
LINDEN-SPE-7121	8-CU-12-FO-Q-350	8.9	12 x Singlemode	8 x #18	-
LINDEN-SPE-7153*	2-CU-1-FO-O-263-FQ-362	9.2	1 x Singlemode	2 x #24	1,600
LINDEN-SPE-7177	5-CU-1-FO-O-246-Q-366	9.3	2 x Singlemode LT	4 x #18 + #24STP	1,760
LINDEN-SPE-7142*	2-CU-3-FO-O-20-Q-367	9.3	3 x Singlemode	2 x #14	1,500
LINDEN-SPE-7122	2-CU-2-FO-O-155-Q-390	9.9	2 x Singlemode	2 x #16	2,200
LINDEN-SPE-7160*	2-CU-3-FO-O-263-FQ-393	10.0	3 x Singlemode	4 x #20	1,600
LINDEN-SPE-7123	2-FO-2-CU-T-320-Q-400	10.2	2 x Singlemode	2 x #14	800
LINDEN-SPE-7128*	1-SM-2-CU-O-312-FQ-412	10.5	1 x Singlemode	2 x #22	5,000
LINDEN-SPE-7166	2-CU-3-FO-O-325-Q-415-YEL	10.5	3 x Singlemode	2 x #12	1,200
LINDEN-SPE-7167	2-CU-4-FO-O-327-Q-417-YEL	10.6	4 x Singlemode	2 x #12	1,200
LINDEN-SPE-7103	4-CU-4-FO-O-155-Q-420	10.7	2 x Singlemode	4 x #13	1,300
LINDEN-SPE-7248*	6-CU-1-FO-O-197-FQ-338	10.7	1 x Singlemode	4 x #20, 2 x #24 TP	200
LINDEN-SPE-7206	4-SM-10-CU-Q-439	11.2	4 x Singlemode	10 x #18	-
LINDEN-SPE-7163	3-SM-4-CU-O-55-S-65-Q-457	11.5	3 x Singlemode	2 x #18	3,200
LINDEN-SPE-7131*	1-FO-5-CU-O-260-FQ-460	11.7	1 x Singlemode	5 x #18	1,100
LINDEN-SPE-7124*	3-SM-4-CU-O-55-FQ-454	11.5	2 x SM + 1 x MM	2 x #18	3,200
LINDEN-SPE-7199*	4-FO-4-CU-O-55-S-65-FQ-470	11.9	4 x Singlemode	2 x #18	3,200
LINDEN-SPE-7102	4-CU-4-FO-O-155-DD-470	11.9	4 x Singlemode	4 x #16	5,500
LINDEN-SPE-7227	6-CU-2-FO-O-155-DD-470-ORN	11.9	1 x Singlemode	4 x #16, 2 x #24 TP	5,000
LINDEN-SPE-7178*	5-CU-1-FO-O-246-M-405-Q-484	12.3	2 x Singlemode LT	4 x #18, #24STP	1,760



LINDEN-SPE-7100*	2-CU-2-FO-O-155-Q-500	12.7	2 x Singlemode	4 x #14	2,100
LINDEN-SPE-7110*	1-SM-3-CU-Q-328-R-500	12.7	1 x Singlemode	3 x #16	450
LINDEN-SPE-7241*	4-CU-2-SM-O-55-S-65-FQ-535	13.6	2 x Singlemode	4 x #16	3,200
LINDEN-SPE-7249*	5-CU-2-SM-O-55-S-65-FQ-535	13.6	2 x Singlemode	4 x #16, 1 x #28 TP	3,200
LINDEN-SPE-7151*	4-CU-4-FO-S-287-O-387-FQ-547	13.9	4 x Singlemode	4 x #20	5,500
LINDEN-SPE-7106*	4-CU-2-FO-O-155-Q-550	14.0	2 x Singlemode	4 x #13 + 2 x #19	1,573
LINDEN-SPE-7109	5-CU-2-FO-O-155-Q-550	14.0	2 x Singlemode	5 x #16	15,400
LINDEN-SPE-7143	4-CU-4-FO-S-280-O-450-S-550	14.0	4 x Singlemode	4 x #20	11,000
LINDEN-SPE-7222	4-CU-2-FO-S-280-O-450-S-550	14.0	2 x Singlemode	4 x #20	11,000
LINDEN-SPE-7125*	2-CU-2-FO-Q-557	14.1	2 x Singlemode	2 x #16	1,200
LINDEN-SPE-7228*	2-CU-2-FO-O-365-FQ-585	14.1	2 x Singlemode	2 x #16	1,200
LINDEN-SPE-7233*	2-CU-2-FO-O-397-FQ-617	15.7	2 x Singlemode	2 x #16	2,600
LINDEN-SPE-7139	4-CU-2-FO-S-377-T-525-GG-620	15.7	2 x Singlemode	4 x #16	12,320
LINDEN-SPE-7219*	4-SM-6-CU-O-113-S-133-FQ-625	15.9	4 x Singlemode	4 x #18, 1 x #22, 1 x #24	6,000
LINDEN-SPE-7101	4-CU-4-FO-O-175-Q-650	16.5	4 x Singlemode	4 x #16	23,100
LINDEN-SPE-7251	4-CU-3-FO-O-585-Q-685	17.4	3 x Singlemode	2 x #6, 2 x #9	3,500
LINDEN-SPE-7237	7-CU-3-FO-O-760-Q-858	17.8	2 x Singlemode	7 x #10	1,200
LINDEN-SPE-7126	2-FO-12-CU-T-535-FQ-709	18.0	2 x Singlemode	2 x #14 10 x #23 (TP)	3,600
LINDEN-SPE-7111*	3-CU-2-FO-S-730	18.5	2 x Singlemode	3 x #18	2,200
LINDEN-SPE-7127	3-SM-1-MM-6-CU-Q-410-Q-760	19.3	3 x SM + 1 x MM	2 x #20	15,400
LINDEN-SPE-7113	3-FO-3-CU-O-630-DD-770	19.6	3 x Singlemode	3 x #16	35,200
LINDEN-SPE-7108*	8-CU-4-FO-O-155-Q-910	23.1	4 x Singlemode	8 x #18	15,400
LINDEN-SPE-7231*	3-SM-4-CU-O-764-FQ-923	23.4	3 x Singlemode	2 x #11, 1 x #20 TP	15,500
LINDEN-SPE-7194*	2-CU-1-FO-O-420-FQ-1036	26.3	1 x Singlemode	2 x #8	1,250
LINDEN-SPE-7112*	4-CU-4-FO-S-1210	30.7	2 x SM + 2 x MM	4 x #15	3,934

*Denotes Buoyant Design



CONTACT LINDEN PHOTONICS FOR MORE DRAWINGS, DETAILED SPECIFICATIONS OR
CUSTOM REQUIREMENTS



AVNOC
Avionic Cable
Simple Design
Improved Performance

AVNOC


Linden's avionic grade fiber optic cables are designed for the most rigorous avionic environment. AVNOC™ is built to survive the perils of aircraft confines such as high temperature, large temperature variations, high vibration and extreme flexing. Using our patented cable jacket construction designed to protect the fiber from harsh mechanical conditions; our cables are stronger, lighter and smaller than existing flight qualified cables.



Features


- Meets AS5382
- Simple 3-layer extruded construction
- High temperature
- Lighter design
- Bend insensitive 9μm singlemode
- 50μm multimode version
- Eliminates need for carbon coated fiber

Aging Comparison, LCP v. Carbon (1" Mandrel)

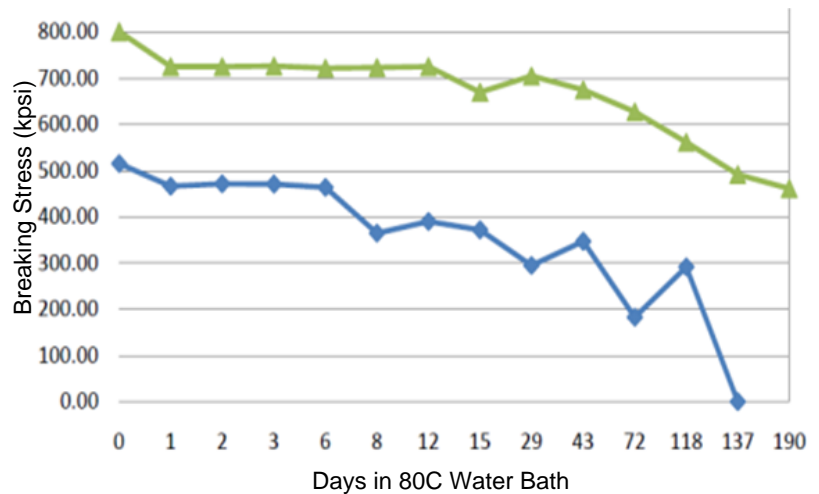

Advantages

- No Kevlar
- Non-Wicking
- Non-Crush
- Non-Kink
- Lower Cost
- Easier to terminate

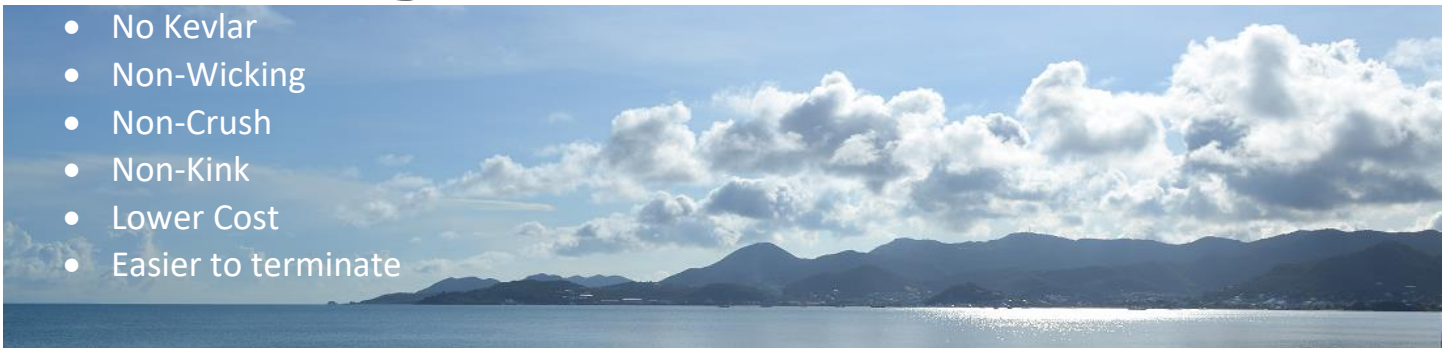




Singlemode

Spec No.	Part No.	Fiber Type	OD (mm)	Attenuation @ 1310nm (dB/km)	Attenuation @ 1550nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
LINDEN-SPE-7033	1-D-A-27-M-66	Draka BendBright Elite w/ silicone buffer	1.7	1.5	1.4	45	3.1

Multimode

Spec No.	Part No.	Fiber Type	OD (mm)	Attenuation @ 850nm (dB/km)	Attenuation @ 1310nm (dB/km)	Tensile Strength (lbs)	Weight (kg/km)
LINDEN-SPE-7041	1-E-A-27-M-66	Draka Graded Index 50/125/242 silicone buffer	1.7	6	4	45	3.1

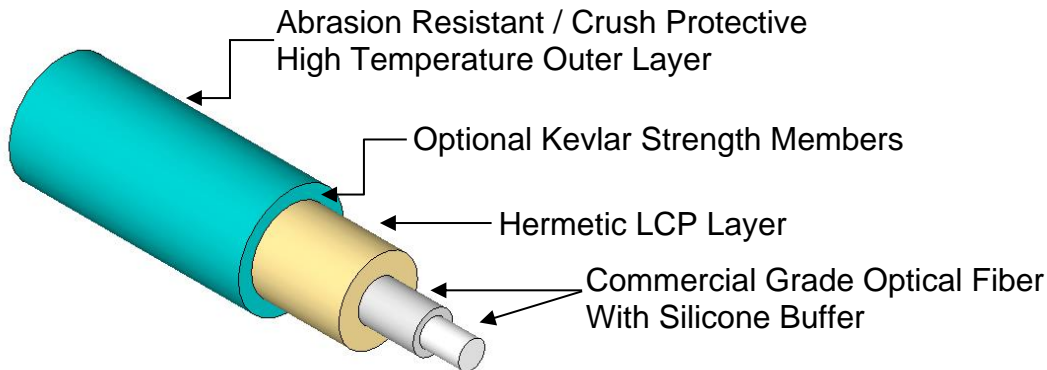

[CONTACT LINDEN PHOTONICS](#) FOR MORE DETAILED SPECIFICATIONS OR CUSTOM REQUIREMENTS



***Radiation Hardened
Optical Cable***

**Optical and Mechanical
Performance to 20MRad**



Radiation Hardened



Linden's RadHard fiber optic cables provide a complete solution where a robust fiber optic link is needed in a harsh, high radiation environment. A wide variety of cable constructions are available to meet your specific requirements including our patented Non-Kink™ cable.

Tested as per European Space Agency - ESCC Basic Specification No. 2263010



Features


- Maintain optical and mechanical performance to >20MRad
Tested to ESCC Spec No. 2263010
- Tested to NASA-STD-8739.5
- Tested to SAE AS5382
- No carbon layer needed

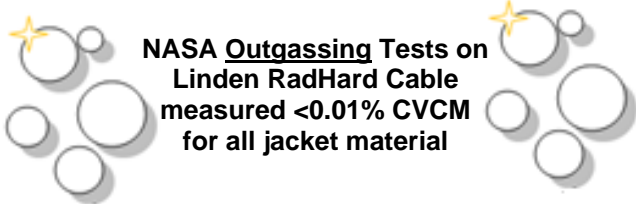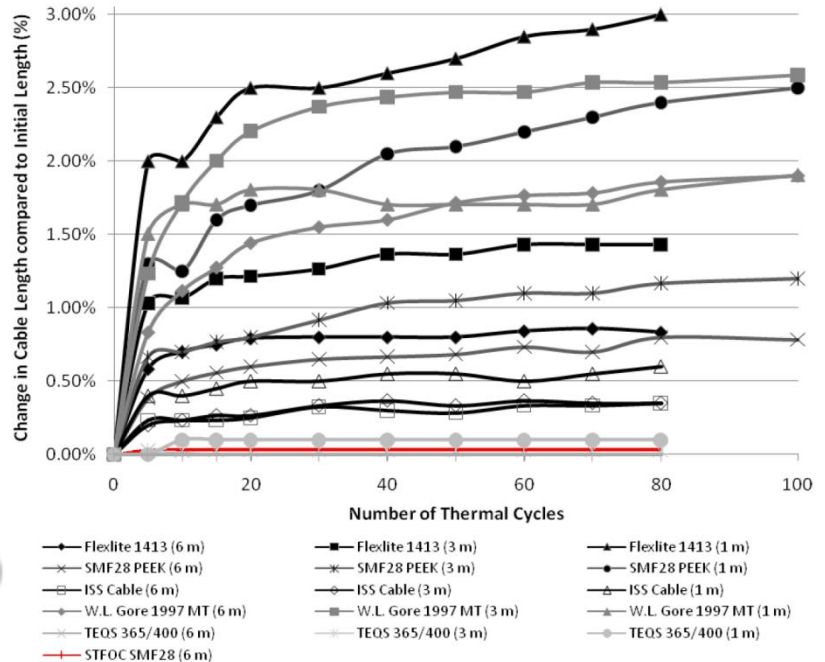

NASA Outgassing Tests on Linden RadHard Cable measured <0.01% CVCM for all jacket material

Advantages

- No Kevlar
- Thermally stable
- Preconditioning prevents jacket shrinkage
- Non-Crush
- Non-Kink

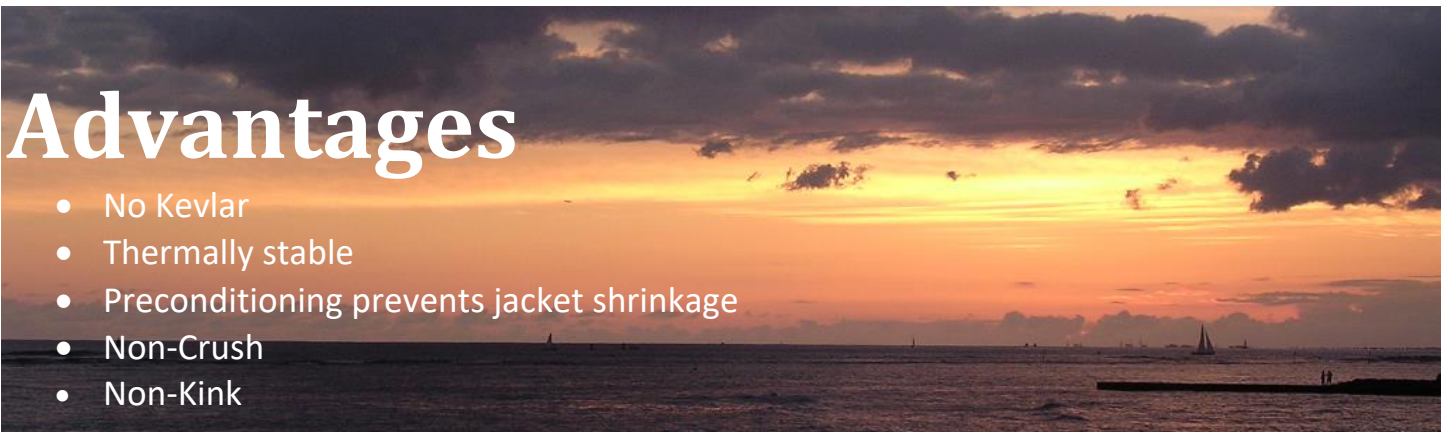




Singlemode

Spec No.	Part No.	Fiber Type	OD (mm)	Typical Connector Loss (dB)	Tensile Strength (lbs)
LINDEN-SPE-7079	1-M-A-27-J-65	RadHard Singlemode	1.65	<0.2dB	50
LINDEN-SPE-7208	1-M-A-27-J-79	RadHard Singlemode	2.0	<0.2dB	50
LINDEN-SPE-7209	1-M-A-27-J-87	RadHard Singlemode	2.2	<0.2dB	50
LINDEN-SPE-7068	1-EE-A-27-J-65	RadHard Polyimide	1.65	<0.2dB	50
LINDEN-SPE-7216	1-EE-A-27-J-79	RadHard Polyimide	2.0	<0.2dB	50
LINDEN-SPE-7217	1-EE-A-27-J-87	RadHard Polyimide	2.2	<0.2dB	50

Multimode

Spec No.	Part No.	Fiber Type	OD (mm)	Typical Connector Loss (dB)	Tensile Strength (lbs)
LINDEN-SPE-7088	1-N-A-27-J-35	RadHard MM (50/125)	.900	<0.2dB	50
LINDEN-SPE-7210	1-N-A-27-J-65	RadHard MM (50/125)	1.65	<0.2dB	50
LINDEN-SPE-7211	1-N-A-27-J-79	RadHard MM (50/125)	2.0	<0.2dB	50
LINDEN-SPE-7212	1-N-A-27-J-47	RadHard MM (50/125)	2.2	<0.2dB	50
LINDEN-SPE-7081	1-O-A-27-J-65	RadHard MM (62.5/125)	1.65	<0.2dB	50
LINDEN-SPE-7213	1-O-A-27-J-79	RadHard MM (62.5/125)	2.0	<0.2dB	50
LINDEN-SPE-7214	1-O-A-27-J-87	RadHard MM (62.5/125)	2.2	<0.2dB	50

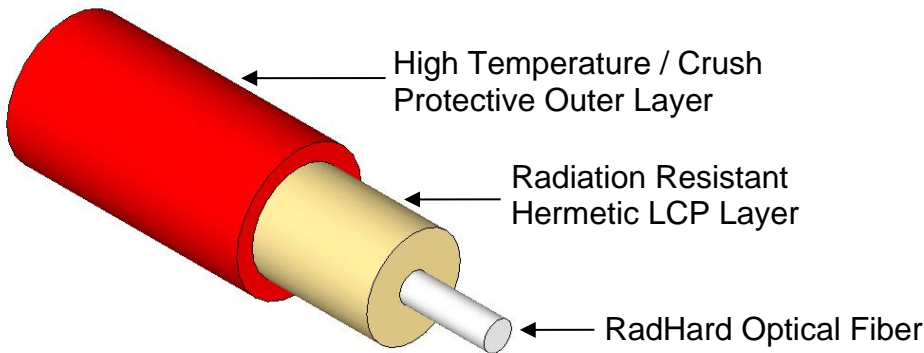

CONTACT LINDEN PHOTONICS FOR MORE DETAILED SPECIFICATIONS OR CUSTOM REQUIREMENTS



Patchcords

SubSea

Avionic

Space



Patchcords

Harsh environment fiber optic patchcords for applications demanding high performance. Whether deep beneath the ocean surface where crush resistance and fish bite protection is imperative, near the surface where buoyancy is needed, in the air, or outer space, Linden keeps you connected. A combination of Linden's patented cable constructions and industry leading interconnect solutions provide a top-notch solution for your connectivity needs.



Features

- Rugged, durable, patented STFOC™ fiber optic cables
- Hermetic coating protects fiber from moisture/hydrogen/helium
- Crush proof, non-kink cables
- Buoyant/Avionic/High Temperature/RadHard designs
- Thin wall insulation = thinner/lighter cables
- Various connector types available



Lancer DRY HP Series

Applications

- Subsea
- Surface
- Avionic
- Space





Ordering Information

AAAAA-BBB-CCC-DD A = Cable Type / B = Connector 1 / C = Connector 2 / D = Length (m)

SubSea – Fiber Type		
7043	Non-Kink Singlemode 1.65mm	LINDEN-SPE-7043
7196	Non-Kink Singlemode 2.00mm	LINDEN-SPE-7196
7044	Non-Kink Multimode (50/125) 1.65mm	LINDEN-SPE-7044
7197	Non-Kink Multimode (50/125) 2.00mm	LINDEN-SPE-7197
7046	Non-Kink Multimode (62.5/125) 1.65mm	LINDEN-SPE-7046
7198	Non-Kink Multimode (62.5/125) 2.00mm	LINDEN-SPE-7198
SubSea - Buoyant – Fiber Type		
7036	Buoyant High Strength Singlemode 1.9mm	LINDEN-SPE-7036
7076	Buoyant High Strength Multimode (50/125) 1.9mm	LINDEN-SPE-7076
7093	Buoyant High Strength Multimode (62.5/125) 1.9mm	LINDEN-SPE-7093
7055	Buoyant High Strength Singlemode 3.5mm	LINDEN-SPE-7055
7077	Buoyant High Strength Multimode (50/125) 3.5mm	LINDEN-SPE-7077
7091	Buoyant High Strength Multimode (62.5/125) 3.5mm	LINDEN-SPE-7091
7096	Buoyant Singlemode 900µm	LINDEN-SPE-7096
7207	Buoyant Singlmode 1.15mm	LINDEN-SPE-7207
Avionic – Fiber Type		
7033	AVNOC Singlemode 1.6mm	LINDEN-SPE-7033
7041	AVNOC Multimode (50/125) 1.6mm	LINDEN-SPE-7041
Space – Fiber Type		
7079	RadHard Singlemode 1.65mm	LINDEN-SPE-7079
7208	RadHard Singlemode 2.00mm	LINDEN-SPE-7208
7210	RadHard Multimode (50/125) 1.65mm	LINDEN-SPE-7210
7211	RadHard Multimode (50/125) 2.00mm	LINDEN-SPE-7211
7213	RadHard Multimode (62.5/125) 1.65mm	LINDEN-SPE-7213
7214	RadHard Multimode (62.5/125) 2.00mm	LINDEN-SPE-7214

Connector Type

SubSea		Surface	
LF1	Lancer FC-DRY HP Singlemode	TF1	FC/PC
LF2	Lancer FC-DRY HP Multimode (50/125)	TF2	FC/APC
LF3	Lancer FC-DRY HP Multimode (62.5/125)	SC1	SC/PC
LS1	Lancer ST-DRY HP Singlemode	SC2	SC/APC
LS2	Lancer ST-DRY HP Multimode (50/125)	TS3	ST
LS3	Lancer ST-DRY HP Multimode (62.5/125)	TL1	LC/PC
XXX	Other	TL2	LC/APC
Avionic/Space – Connector Type			
AV1	Diamond AVIM Singlemode	SF1	Space Qualified FC/PC
AV2	Diamond AVIM Multimode	SF2	Space Qualified FC/APC

Other Cable Types and Connectors available upon request



Phase Stabilized STFOC
Cost Effective





Phase Stabilized STFOC

Phase Stabilized STFOC is a specialty fiber which minimizes the temperature dependence of transmission delay time. It is used for transmitting base band signals in synchronized measurement systems. The fiber is buffered with Linden Photonics' patented Liquid Crystal Polymer jacketing, a material with negative thermal expansion coefficient. Kevlar strength members are also available.

Features

- Low cost
- Negative Thermal Coefficient of Delay (TCD) Available

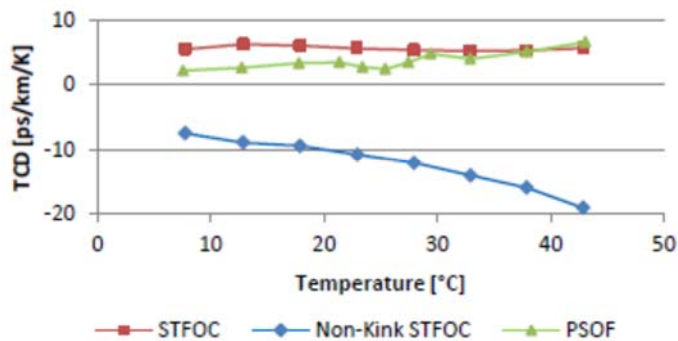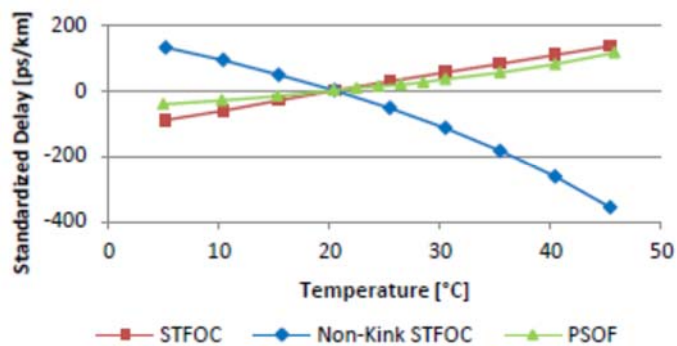


*NEW PHASE STABLE OPTICAL FIBER, M. Bousonville, et al, 2012

<http://accelconf.web.cern.ch/accelconf/B IW2012/papers/mopg033.pdf>

Advantages


The *STFOC* shows excellent thermal stability. The *Non-Kink STFOC* version is the first known cable which shows a negative *TCD*.

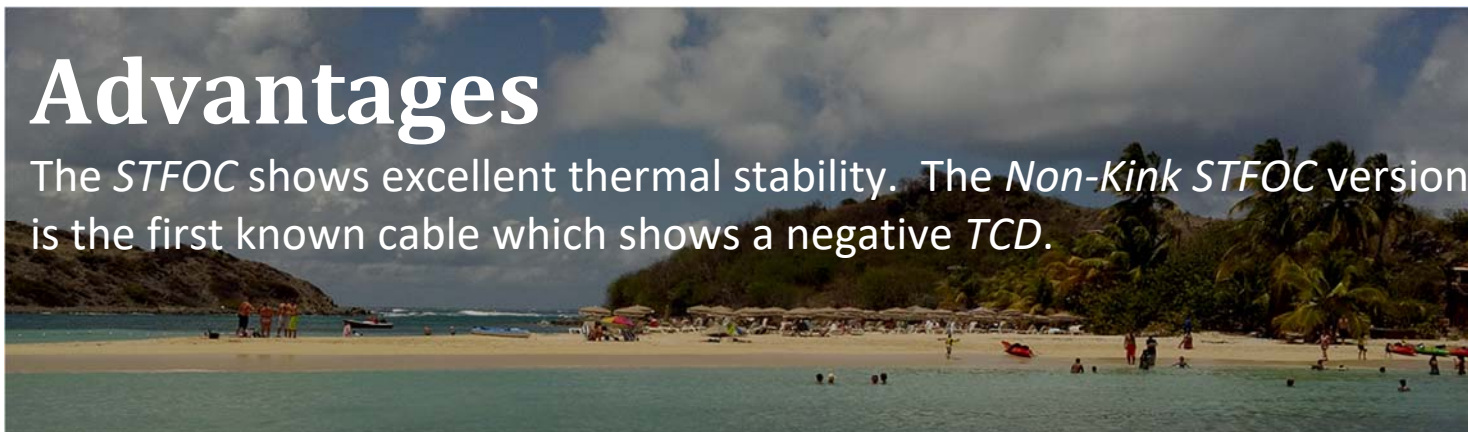



Singlemode

Description	Specification No. Part No.	Fiber Type	OD (mm)	Attenuation @ 1310nm (dB/km)	Attenuation @ 1550nm (dB/km)	Tensile Strength (lbs)	TCD Value (ps/K/km)
STFOC	LINDEN-SPE-7193 1-3-A-27-B-30-TCD	Singlemode	0.762	0.45	0.35	50	10
Non-kink STFOC	LINDEN-SPE-7192 1-3-A-27-O-45-L-75-TCD	Singlemode	1.9	0.45	0.35	250	-10

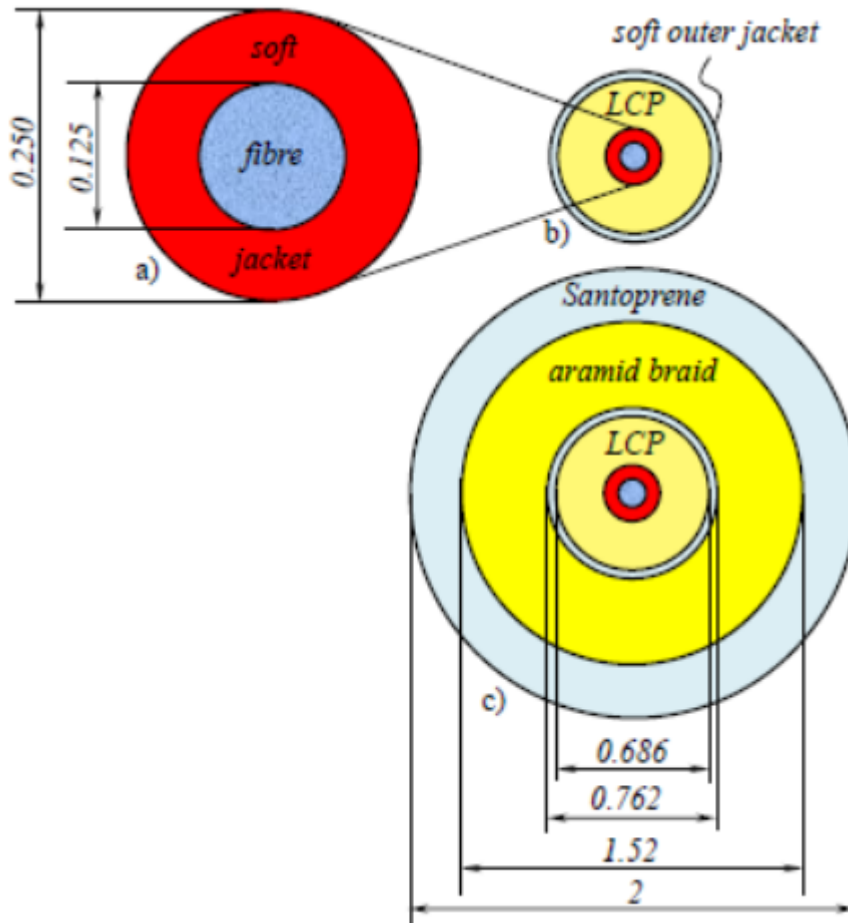

*NEW PHASE STABLE OPTICAL FIBER, M. Bousonville, et al, 2012
(<http://accelconf.web.cern.ch/accelconf/BIW2012/papers/mopg033.pdf>)

CONTACT LINDEN PHOTONICS FOR MORE DETAILED SPECIFICATIONS OR CUSTOM
REQUIREMENTS



Precision Wound Spools

Tangle Free

Internal Deployment



PRECISION WOUND SPOOLS

These precision-wound optical fiber packs are designed for use in such critical applications as submarine-launched buoys, underwater munitions and terrestrial robots to provide a capability for two-way, high-bandwidth communications.



Our standard spools are made from either Strong Tether Fiber Optic Cable (STFOC™) - with a >50 lbs breaking strength and slim 0.03" OD - or bare optical fiber. These spools are designed with one twist per turn of cable so no kinking issues develop as a result of rapid payout. Fiber pays out from the inside of the spool so spool remains stationary during deployment. Both come standard as singlemode or can be modified with multimode fiber.

STANDARD SPOOL SIZES – STFOC™ Cable

Spool ID	Spool OD	Spool Length	Cable Length	P/N
0.75"	3"	6"	800m	1-SM-A-27-B-30-0.75-3-6
1.5"	3.7"	10"	3km	1-SM-A-27-B-30-1.5-3.7-10
5"	10"	8"	14km	1-SM-A-27-B-30-5-10-8


STANDARD SPOOL SIZES – Bare Fiber

Spool ID	Spool OD	Spool Length	Cable Length	P/N
0.75"	3"	6"	10km	1-SM-N1-0.75-3-6
1.5"	3.7"	10"	22km	1-SM-N1-1.5-3.7-10

Custom Spools

In addition to our standard, cost efficient precision wound spools, we are able to leverage our quality team of engineers to design and build custom spools with specialty fiber or cable in custom sizes to meet your exacting requirements. Some of our custom design capabilities include;

- Externally deployable spools
- Buoyant cables
- High strength cables
- Specialty optics
- Custom Sizes
- Custom designed canisters

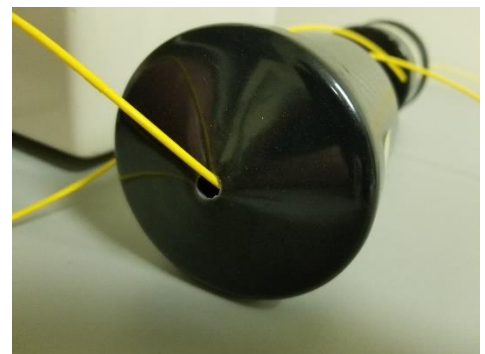

Contact your local Linden Photonics Representative for more information



MicroTethers

Thin & Lightweight

Flexible

Power & Optics



MicroTethers

Servicing the ever expanding security industry, Linden Photonics introduces a line of **MicroTethers** to its product line. Typically small gauge copper and fiber elements are enclosed in a **lightweight** cable designed to provide power and communications to airborne drones or aerostats. Linden can customize your size, weight and strength; from **high-strength** designs intended to provide anchoring for large aerostats in high winds to extremely thin tethers designed for the smallest of drones. Linden's expertise in low density cable jacketing is ideal for this environment. Our cables are compact and rugged; flexible and strong.

Features

- **Lightweight:** Designs from 0.006lbs/ft (9.0g/m)
- Designs from 100 to 10,000 lbs work load
- 3-channels in 3mm OD
- Designs with or without fiber
- Various power options
- MIL M22759 Tefzel coated wire – up to 1,000V rated
- Braided or extruded jackets

Advantages

- Highly Flexible
- Thin, lightweight, yet strong
- Reduced cable weight = maximum payload capacity





Specifications

Spec No.	Part No.	OD (mm)	Fiber Type*	Conductor Type	Weight (lbs/1kft)
LINDEN-SPE-7140	2-CU-1-FO-BB-115-22759	2.9	1 x LINDEN-SPE-7096	2 x 22 AWG	7.0
LINDEN-SPE-7156	2-CU-1-FO-BB-115	2.9	1 x LINDEN-SPE-7034	2 x 24 AWG	6.0
LINDEN-SPE-7157	2-CU-1-FO-BB-120-22759	3.0	1 x LINDEN-SPE-7043	2 x 22 AWG	8.5
LINDEN-SPE-7158	2-CU-1-FO-EE-120-22759-24	3.0	1 x LINDEN-SPE-7096	2 x 24 AWG	7.0
LINDEN-SPE-7185	3-CU-1-FO-O-116-BB-125-22759	3.2	1 x LINDEN-SPE-7096	2 x 22 AWG & 1 x 26 AWG	8.3
LINDEN-SPE-7186	3-CU-1-FO-O-R-116-BB-125-22759	3.2	1 x LINDEN-SPE-7096	2 x 22 AWG & 1 x 26 AWG	9.1
LINDEN-SPE-7187	3-CU-1-FO-O-120-BB-130-22759	3.3	1 x LINDEN-SPE-7096	2 x 20 AWG & 1 x 26 AWG	9.5
LINDEN-SPE-7215	3-CU-1-FO-O-120-O-125-BB-130-22759	3.3	1 x LINDEN-SPE-7096	2 x 20 AWG & 1 x 26 AWG	9.5
LINDEN-SPE-7155	2-CU-1-FO-BB-160-22759	4.0	1 x LINDEN-SPE-7096	2 x 20 AWG	12
LINDEN-SPE-7183	2-CU-2-FO-BB-160-22759	4.0	2 x LINDEN-SPE-7096	2 x 20 AWG	12
LINDEN-SPE-7188	6-CU-Q-168	4.3	None	4 x 26 AWG + 2 x 28 AWG	15
LINDEN-SPE-7181	2-CU-2-FO-EE-180-22759-24	4.6	2 x LINDEN-SPE-7034	2 x 24 AWG	7
LINDEN-SPE-7174	3-CU-1-FO-O-174-Q-254	6.5	1 x LINDEN-SPE-7034	2 x 24 AWG & 1 x 26 AWG	25
LINDEN-SPE-7179	3-CU-1-FO-S-130-O-174-Q-254	6.5	1 x LINDEN-SPE-7034	2 x 24 AWG & 1 x 26 AWG	25
LINDEN-SPE-7232	3-CU-2-FO-S-130-O-191-Q-257	6.5	2 x LINDEN-SPE-7034	2 x 24 AWG & 1 x 26 AWG	26
LINDEN-SPE-7109	5-CU-2-FO-O-155-Q-550	13.9	2 x LINDEN-SPE-7034	5 x 16 AWG	138

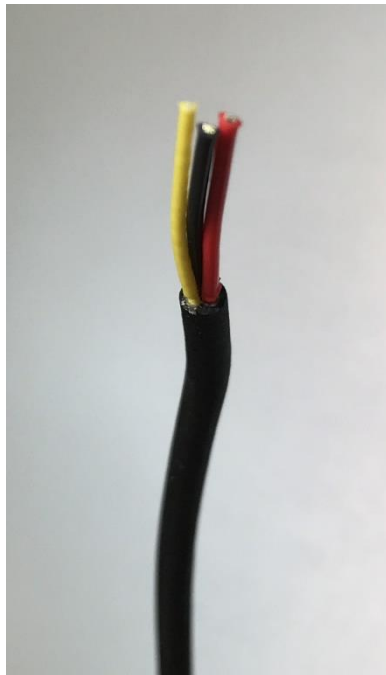


Photo Courtesy of Airborne Industries, Ltd.
www.airborne-industries.ltd.uk

Aerostat Using Linden Tether

CONTACT LINDEN PHOTONICS FOR MORE DRAWINGS, DETAILED SPECIFICATIONS OR
CUSTOM REQUIREMENTS

*Fiber types listed are Singlemode




Specialty Copper
Buoyant Designs
Built to Last





Specialty Copper

Using the technology we developed building more difficult fiber optic and hybrid cables, Linden Photonics now applies that materials and design knowledge to our line of specialty copper cables. Using specialty materials that make a cable light, temperature resistant, radiation hardened or **buoyant**, we draw from our years of expertise in specialty markets such as subsea, space and other harsh environments in between. Linden can customize your size, weight and strength; from **high-strength** designs to complex configurations incorporating mil-spec conductors. Our cables are compact and rugged; flexible and strong!

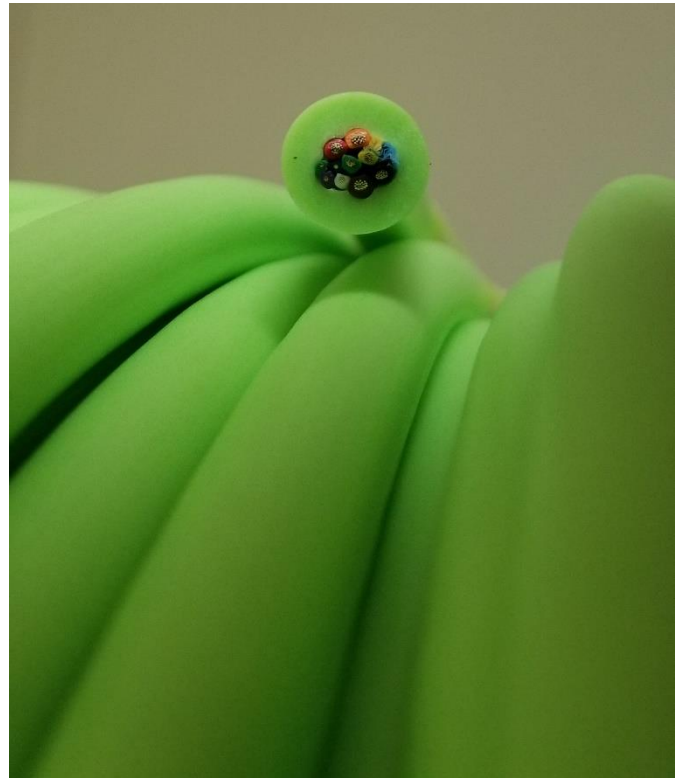

Features

- **Wide Range of Size Capabilities:** from 3mm to >20mm OD
- Designs from 100 to 5,000 lbs work load
- Twisted Pairs / Shielded Twisted Pairs
- High Voltage
- Various insulation options
- MIL M22759 Tefzel coated wire – up to 1,000V rated
- Braided or extruded jackets



Advantages

- Highly Flexible
- Thin, lightweight, yet strong
- Custom design services available





Specifications

Spec No.	Part No.	OD (mm)	Conductor Type	Tensile Strength (lbs)
LINDEN-SPE-7134	2-CU-O-80-FQ-120	3.0	2 x 28 AWG	100
LINDEN-SPE-7236	1-CO-O-130-Q-150-YEL	3.8	1 x 28 (Coax)	100
LINDEN-SPE-7165*	2-CU-O-62-FQ-156-YEL	4.0	2 x 26 AWG	300
LINDEN-SPE-7144	2-CU-I-157	4.0	2 x 30 AWG	800
LINDEN-SPE-7242	1-CU-FQ-160-YEL	4.1	1 x 26 AWG TP	300
LINDEN-SPE-7135*	2-CU-O-80-FQ-164	4.2	2 x 28 AWG	300
LINDEN-SPE-7244*	2-CU-O-80-FQ-164-Q-170	4.3	2 x 28 AWG	300
LINDEN-SPE-7133*	2-CU-FQ-182	4.6	2 x 26 AWG	300
LINDEN-SPE-7246*	2-CU-O-80-Q-100-FQ-170-Q-190-YEL	4.8	2 x 28AWG	300
LINDEN-SPE-7247*	2-CU-O-80-Q-100-FQ-170-Q-190-NWB-YEL	4.8	2 x 28 AWG	300
LINDEN-SPE-7224*	2-CU-O-110-FQ-210-YEL	5.3	2 x 24 AWG STP	400
LINDEN-SPE-7235	2-CU-O-138-Q-153-YEL	6.1	2 x 22 AWG TP	300
LINDEN-SPE-7115	2-CU-O-161-Q-241	6.1	2 x 26 AWG	1,800
LINDEN-SPE-7145*	5-CU-O-20-FQ-248	6.3	5 x 26 AWG	1,500
LINDEN-SPE-7116	2-CU-O-175-Q-255	6.5	2 x 26 AWG	2,200
LINDEN-SPE-7243	4-CU-O-150-FQ-300-YEL	7.6	4 x 24 TP	300
LINDEN-SPE-7105	4-CU-O-155-Q-340	8.6	4 x 22 AWG	440
LINDEN-SPE-7220	3-CU-O-279-U-350-BLK	8.9	2 x 22 AWG + 1 x 22 AWG TP	5,000
LINDEN-SPE-7230	4-CU-O-283-S-359-YEL	9.1	2 x 20 AWG	1,500
LINDEN-SPE-7117*	2-CU-O-283-Q-360	9.1	2 x 20 AWG	1,500
LINDEN-SPE-7147*	3-CU-O-20-FQ-360-GRA	9.1	2 x 20 AWG	1,500
LINDEN-SPE-7118*	2-CU-O-283-Q-363	9.2	2 x 20 AWG	3,000
LINDEN-SPE-7168	12-CU-O-324-Q-414-YEL	10.5	4 x 24 AWG; 2 x 18 AWG; 6 x 20 AWG	1,200
LINDEN-SPE-7172*	10-CU-O-260-FQ-420	10.7	4 x 20 AWG; 1 x 24 AWG TP; 2 x 28 AWG TP	200
LINDEN-SPE-7190*	8-CU-O-260-FQ-420	10.7	4 x 20 AWG; 1 x 24 AWG TP; 1 x 24 AWG TP	200
LINDEN-SPE-7239	18-CU-CAT6-Q-420	10.7	18 x 24 AWG + Cat 6	N/A
LINDEN-SPE-7240	7-CU-M-266-O-320-DD-420-ORN	10.7	4 x 16 AWG + 3 x 24 AWG TP	5,000
LINDEN-SPE-7225*	4-CU-O-316-FQ-422-YEL	10.7	1 x 18 AWG STP + 1 x 24 WG STP	400
LINDEN-SPE-7238	O-90-5-CU-FQ-425-ORN	10.8	4 x 22 AWG + 1 x 26 AWG TP	1,000
LINDEN-SPE-7173*	3-CU-O-240-FQ-350-Q-430	10.9	1x20 AWG TP; 1x28 AWG TP; 1x24 AWG TP	1,200
LINDEN-SPE-7169	6-CU-O-373-Q-461	11.7	2 x 16 AWG; 3 x 22 AWG TP; 1 x 20	100
LINDEN-SPE-7245	4-CU-O-362-FQ-451-YEL	13.5	4 x 20 WG TP	1,200
LINDEN-SPE-7119*	5-CU-Q-562	14.3	2 x 16 AWG; 1 x 22 AWG; 2 x 24 AWG	2,400
LINDEN-SPE-7184*	20-CU-CAT6-O-336-Q-566	14.4	20 x 24 AWG + CAT6	200
LINDEN-SPE-7175*	19-CU-CAT6-O-336-Q-586	14.9	19 x 24 AWG + CAT6	200
LINDEN-SPE-7176*	7-CU-T-287-X-523-Q-602	15.3	3 x #16, 1 x #18, 1 x #24TP, 1 x #24, Coax	1,100

*Denotes Buoyant Design

CONTACT LINDEN PHOTONICS FOR MORE DRAWINGS, DETAILED SPECIFICATIONS OR
CUSTOM REQUIREMENTS



Linden Photonics, Inc.

1 Park Drive, Unit 10, Westford MA 01886

Phone: 978-392-7985

Email: info@LindenPhotonics.com

Web: www.LindenPhotonics.com