20A Lighting Connectors -For 3 & 4 Core Flex NORSLO

Male Socket

Up to 2.5mm² flexible 3 core

cable can be used.




÷

÷

÷

+.

Easy lock & release sysyem

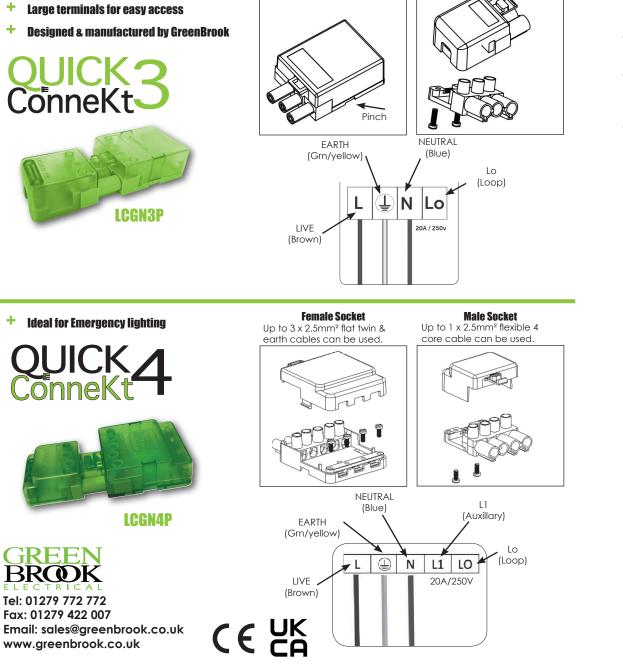

Female Socket

Up to 3 x 2.5mm² flat twin &

earth cables can be used.

Note:

- These couplers are suitable for installation in NON-READILY accessible areas.
- This system is NOT a replacement for a domestic plug and socket outlet system.
- Installation couplers are intended for connection and disconnection without load.
- Any dangerous compatibility between different manufacturer installation coupler system is not automatically prevented by compliance with IEC EN 61535.



Both the connectors come in **POS display box containing 50 connectors**

Т

Т

	LCGN3P	LCGN4P
Description	3 Way Connector	4 Way Connector
Pack Qty	50	50
Barcode	5012739 641404	5012739 645754
Max Voltage	400V	
Product Finish	Polycarbonate Enclosure, Nylon Connector	
Product Weight	55g	79g
Dimensions L x W x H	L 110 x W42 x H22.3mm	L 113 x W55 x H22.5mm
Guarantee	1 Year	
Conforms To	EN 61535	

Т