



UHD Signage 98UM3DG-H

# LG UHD Large Screen Signage



Large Screen Size



webOS Smart Platform




Clear View with Non-glare Coating



Superb Picture Quality

Meeting Room Solution


## SUPERB PICTURE QUALITY

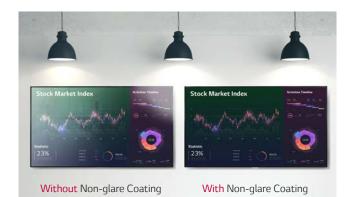

## Clear View with Non-glare Coating

Viewers can be annoyed by unnecessary reflections when watching a screen under brightly lit conditions. The UM3DG-H series has reduced such inconveniences by increasing the antireflective surface treatment ("haze"), which enhances visibility and text readability.

\* The images listed are for reference only and the actual reflection can be different.

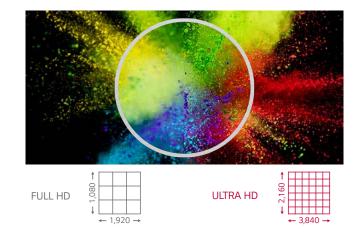

#### **ULTRA HD Resolution**

With the resolution that is 4 times higher than FHD, it makes the color and details of the contents more vivid and realistic. In addition, the wide viewing angle applied with an IPS panel provides a spectacular picture even when viewed from extreme angles.



## webOS SMART SIGNAGE PLATFORM



#### High-Performance with webOS

This display's built-in quad core system on chip design can execute several tasks at once while providing smooth content playback. Also, LG webOS smart signage platform enhances user convenience with an intuitive user interface and provides system integrators and developers with simple app development tools.

#### Sensor Connectivity

LG webOS smart signage platform helps to easily provide valueadded solutions by supporting simple connections with external sensors\* such as GPIO, NFC/RFID, temperature sensors, etc, via USB plug-in.

\* External sensors need to be purchased separately and tested for compatibility with webOS platform.

UHD Signage 98UM3DG-H

## **USER CONVENIENCE**

MEETING ROOM SOLUTION



## **Built-in Speakers**

Contents will be enriched with sound effects from built-in speakers, without the need for purchasing or installing external speakers.



## Wireless Access Point

The UM3DG-H series operates as a virtual router which can be a wireless access point for mobile devices.\*

\* Maximum 10 units of the mobile devices can be connected via softAP.



## Compatible with AV Control System

The UM3DG-H series supports Crestron Connected® for high compatibility with professional AV controls to achieve seamless integration and automated network-based control, boosting business management ease of use.



#### Compatible with Video Conference System

For the optimum visual meeting, the UM3DG-H series supports its compatibility with Cisco System that offers powerful and integrated control via HDMI connection for a smarter video conference.



## Mobile & Web Monitoring

Through the Control Manager, the embedded web monitoring solution, you can control and monitor the status of the UM3DG-H series displays in different locations in real-time.\* It is available on internet connected devices, allowing you to flexibly and rapidly respond to emergency situations.

\* One signage display can be controlled at a time by connecting to the display's IP address on the same LAN.

## EASY MANAGEMENT




## Real-time ConnectedCare Service


Maintenance is easy and fast with the optional ConnectedCare\* service, a cloud service solution provided by LG. It remotely manages the status of displays in client workplaces for fault diagnosis and remote-control services, supporting the stable operation of clients' businesses.

\* The availability of the 'LG ConnectedCare' service differs by region, and it needs to be purchased separately. Please contact the LG sales representative in your region for more details.

## DIMENSIONS

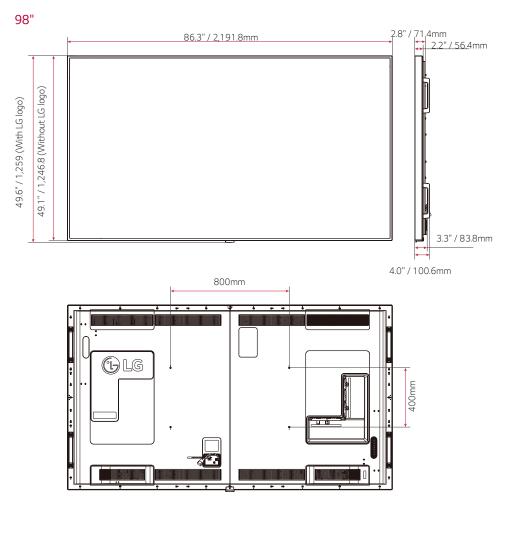

CONNECTIVITY

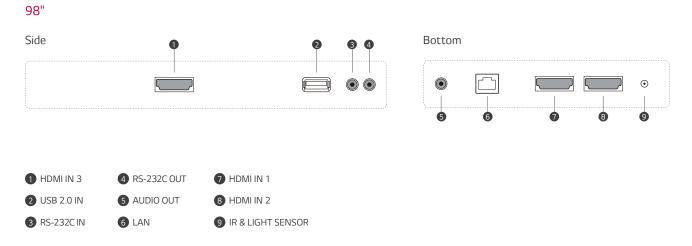

\* Dimensions & Jack Panels may differ from the above image, so please contact LG sales team to verify before ordering.

#### 

## **SPECIFICATION**

|              | MODEL NAME                                    | 98UM3DG-H                   |
|--------------|---|-----------------------------|
| PANEL        | Diagonal                                      | 98"                         |
|              | Panel Technology                              | IPS                         |
|              | Back Light Type                               | Direct                      |
|              | Aspect Ratio                                  | 16:9                        |
|              | Native Resolution                             | 3840 x 2160 (UHD)           |
|              | Refresh Rate                                  | 60 Hz                       |
|              | Brightness (Typ.)                             | 350 nits                    |
|              | Contrast Ratio                                | 1,200:1                     |
|              | Dynamic CR                                    | 1,000,000:1                 |
|              | -   | BT709 95%                   |
|              | Color gamut                                   | 178° x 178°                 |
|              | Viewing Angle (H x V)<br>Color Depth          | 10 bit, 1.06 Billion colors |
|              |   | ,                           |
|              | Response Time (G to G)                        | 8 ms                        |
|              | Surface Treatment (Haze)                      | 28%                         |
|              | Lifetime                                      | 50,000Hrs (Typ.)            |
|              | Operation Hours<br>(Hours/Day)                | 24/7                        |
|              | Portrait / Landscape                          | Yes / Yes                   |
|              | Built-in Speaker                              | Yes                         |
|              | HDMI  |                             |
|              | RS232C In                                     | Yes (3), HDCP2.2/1.4        |
|              |   | Yes (1), 4-pin 3.5 mm       |
|              | RJ45 (LAN)                                    | Yes (1)                     |
| CONNECTIVITY | IR In<br>USB                                  | Yes (1)                     |
|              |   | USB2.0 Type A (1)           |
|              | Audio Out                                     | Yes (1)                     |
|              | RS232C Out (External<br>Control)              | Yes (1), 4-pin 3.5 mm       |
|              | Bezel Color                                   | Black                       |
|              | Bezel Width                                   | Even bezel : 14.9mm         |
|              | Weight  | 178.8 lbs / 81.1 Kg         |
|              | Shipping Weight                               | 262.4 lbs / 119 Kg          |
|              |   | 86.3 x 49.1 x 3.3 in        |
| MECHANICAL   | Dimensions (W x H x D)<br>(including LG Logo) | 2191.8 x 1246.8 x 83.8 mm   |
| MECHANICAL   | (Including LG Logo)                           | (without Handle)            |
|              | Shipping Dimensions                           | 93.0 x 54.6 x 16.5 in       |
|              | (W x H x D)                                   | 2362 x 1386 x 420 mm        |
|              | Handle  | Yes                         |
|              | VESA <sup>™</sup> Standard Mount              | 800 x 400                   |
|              | Interface                                     | 800 x 400                   |
| FEATURES     | Internal Memory                               | 8GB                         |
|              | Built-in Wi-Fi                                | Yes                         |
|              | Temperature Sensor                            | Yes                         |
|              | Auto Brightness Sensor                        | Yes                         |
|              | Local Key Operation                           | Yes                         |
|              | webOS ver.                                    | webOS4.1                    |
|              | CMS - Local Contents                          | Yes                         |
|              | Scheduling                                    |                             |
|              | CMS - Group Manager                           | Yes                         |
|              | USB Plug & Play                               | Yes                         |
|              | Fail over                                     | Yes                         |
|              | Booting Logo Image                            | Yes                         |

|                              | MODEL NAME                      | 98UM3DG-H   |
|------------------------------|---------------------------------|---|
| FEATURES                     | No Signal Image                 | Yes   |
|                              | RS-232C Sync                    | Yes   |
|                              | Local Network Sync              | Yes   |
|                              | Screen Share                    | Yes   |
|                              | Video Tag                       | Yes (4, Max one HDMI input)   |
|                              | Play via URL                    | Yes   |
|                              | Screen Rotation                 | Yes   |
|                              | External Input Rotation         | Yes   |
|                              | Gapless Playback                | Yes   |
|                              | Tile Mode Setting               | Yes (Max. 15x15)  |
|                              | Setting Data Cloning            | Yes   |
|                              | SNMP                            | Yes   |
|                              | ISM Method                      | Yes   |
|                              | Auto Set ID                     | Yes   |
|                              | Status Mailing                  | Yes   |
|                              | Control Manager                 | Yes   |
|                              | Crestron Inside                 | Yes   |
|                              | Smart Energy Saving             | Yes   |
|                              | PM mode                         | Yes   |
|                              | Wake on LAN                     | Yes   |
|                              | Network Ready                   | Yes   |
|                              | Beacon                          | Yes   |
|                              | HDMI-CEC                        | Yes   |
|                              | SI Server Setting               | Yes   |
|                              | webRTC                          | Yes   |
|                              | Pro:Idiom                       | Yes   |
|                              | Operation Temperature           | 32 °F to 104 °F / 0 °C to 40 °C   |
|                              | Operation Humidity              | 10 % to 80 %  |
|                              | Power Supply                    | 100-240 Vac, 50/60 Hz   |
|                              | Power Type                      | Built-In Power  |
| ENVIRONMENT<br>& POWER       |                                 |   |
|                              | Power Consumption (Typ.)        | 420 W, 1433.25 BTU/Hr   |
|                              | Power Consumption (Max.)        | 560 W, 1911 BTU/Hr  |
|                              | Smart Enegy Saving              | 294 W   |
|                              | DPM                             | Less than 0.5 W   |
|                              | Power off                       | Less than 0.5 W   |
| lg software<br>Compatibility | SuperSign CMS                   | Yes   |
|                              | SuperSign Control /<br>Control+ | Yes / Yes   |
|                              | SuperSign WB                    | Yes   |
|                              | SuperSign Media Editor          | Yes   |
|                              | Signage 365 Care                | Yes   |
| WARRANTY<br>& OTHER          | Warranty                        | 3 Year Limited  |
|                              | FCC (Regulatory)                | CB / NRTL   |
|                              | CE (Regulatory                  | FCC Class "A" / CE / KC   |
|                              | ErP (Environmental)             | Yes   |
|                              | Basic Accessories               | Remote Control (x2 Batteries), Power<br>Cord, Quick Service Guide, Regulation<br>Book, Phone to RS-232C Adapter |

https://www.lg.com/us/business/commercial-display

https://www.twitter.com/LGCommDisplays
https://www.facebook.com/LGcommercialdisplays

- m https://www.linkedin.com/company/lg-commercial-displays-usa
- https://www.youtube.com/lgcommercialdisplayusa

Copyright 2021 <sup>®</sup>LG Electronics USA, Inc., 2000 Millbrook Drive Lincolnshire, IL 60069, USA. All rights reserved. LG and the LG logo are registered trademarks of LG Corp. All other products and brand names are trademarks or registered trademarks of their respective companies. Designs, features, and specifications are subject to change without notice. All screen images are simulated. SPEC\_98UM3DG-H\_042130\_LR

