

AD-A100 918

DAYTON UNIV OH RESEARCH INST

F/6 6/19

TECHNIQUES AND PROCEDURES APPLIED TO PHOTOMETRIC METHODS FOR TH--ETC(U)

OCT 80 P A GRAF, H T MOHLMAN

F33615-76-C-0525

UNCLASSIFIED


UDR-TR-79-115

AFAMRL-TR-80-61


NL

1 of 3

AD A
100918

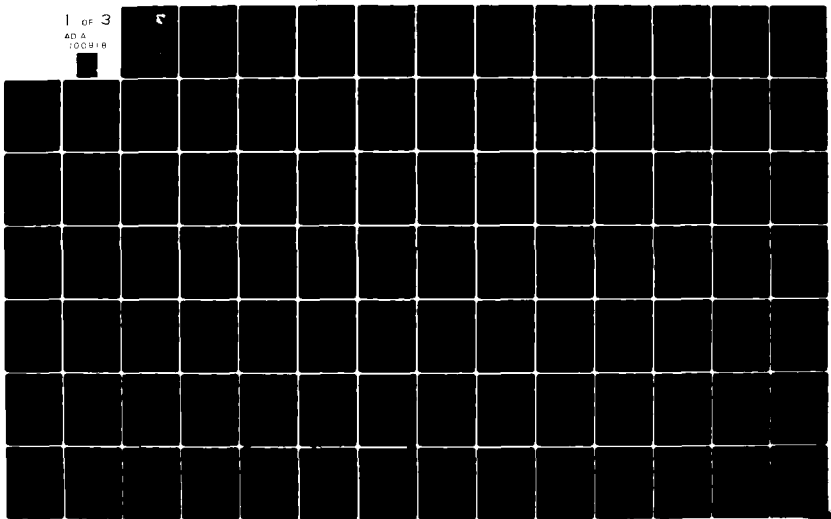

AFAMRL-TR-80-61

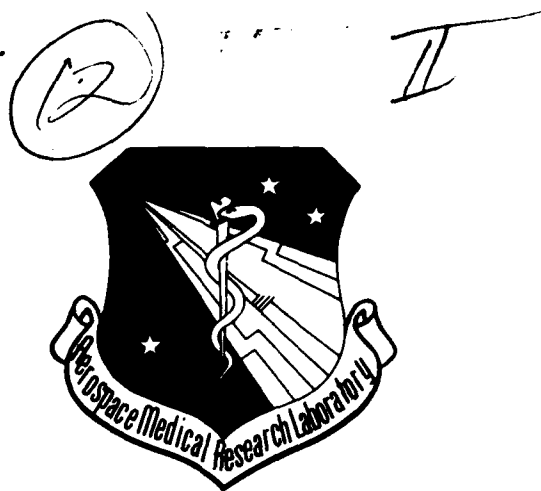

**TECHNIQUES AND PROCEDURES APPLIED TO
PHOTOMETRIC METHODS FOR THE ANALYSIS OF
HUMAN KINEMATIC RESPONSES TO
IMPACT ENVIRONMENTS**

*P. A. GRAF
H. T. MOHLMAN
UNIVERSITY OF DAYTON
RESEARCH INSTITUTE
300 COLLEGE PARK
DAYTON, OHIO 45469*

OCTOBER 1980

**DTIC
ELECTED
JUL 6 1981**
S D
A

Approved for public release; distribution unlimited.

AIR FORCE AEROSPACE MEDICAL RESEARCH LABORATORY
AEROSPACE MEDICAL DIVISION
AIR FORCE SYSTEMS COMMAND
WRIGHT-PATTERSON AIR FORCE BASE, OHIO 45433

81 7 02 123

DTIC FILE COPY

NOTICES

When US Government drawings, specifications, or other data are used for any purpose other than a definitely related Government procurement operation, the Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise, as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Please do not request copies of this report from Air Force Aerospace Medical Research Laboratory. Additional copies may be purchased from:

National Technical Information Service
5285 Port Royal Road
Springfield, Virginia 22161

Federal Government agencies and their contractors registered with Defense Documentation Center should direct requests for copies of this report to:

Defense Documentation Center
Cameron Station
Alexandria, Virginia 22314

TECHNICAL REVIEW AND APPROVAL

AFAMRL-TR-80-61


The experiments reported herein were conducted according to the "Guide for the Care and Use of Laboratory Animals," Institute of Laboratory Animal Resources, National Research Council.

The voluntary informed consent of the subjects used in this research was obtained as required by Air Force Regulation 169-3.

This report has been reviewed by the Office of Public Affairs (PA) and is releasable to the National Technical Information Service (NTIS). At NTIS, it will be available to the general public, including foreign nations.

This technical report has been reviewed and is approved for publication.

FOR THE COMMANDER

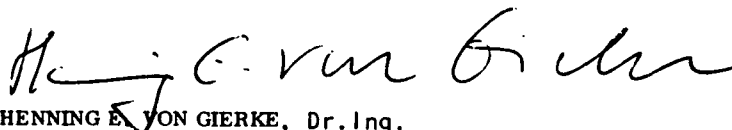

HENNING E. VON GIERKE, Dr. Ing.
Director
Biodynamics and Bioengineering Division
Air Force Aerospace Medical Research Laboratory

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM	
1. REPORT NUMBER AFAMRL TR-80-61	2. GOVT ACCESSION NO. LD-AICC 918	3. RECIPIENT'S CATALOG NUMBER	
4. TITLE (and Subtitle) TECHNIQUES AND PROCEDURES APPLIED TO PHOTOMETRIC METHODS FOR THE ANALYSIS OF HUMAN KINEMATIC RESPONSE TO IMPACT ENVIRONMENTS,		5. TYPE OF REPORT & PERIOD COVERED Final Report SEPT 1976-30, APRIL 1979	
7. AUTHOR(s) P. A. Graf and H. T. Mohlman		6. PERFORMING ORG. REPORT NUMBER UDR-TR-79-115	
9. PERFORMING ORGANIZATION NAME AND ADDRESS University of Dayton Research Institute 300 College Park Avenue Dayton, Ohio 45469		8. CONTRACT OR GRANT NUMBER(s) F33615-76-C-0525	
11. CONTROLLING OFFICE NAME AND ADDRESS Air Force Aerospace Medical Research Laboratory Aerospace Medical Division, Air Force Systems Command, Wright-Patterson AFB, OH 45433		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 62202F, 7231-16-08 16	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		12. REPORT DATE October 1980	
		13. NUMBER OF PAGES 209	
		15. SECURITY CLASS. (of this report) Unclassified	
		15a. DECLASSIFICATION DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited			
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)			
18. SUPPLEMENTARY NOTES			
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Biodynamic Data Analysis Photogrammetric Calibration Computer Program Photometric Data Reduction Impact Protection Impact Test			
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) This report presents the methods, techniques, and procedures developed and applied to photometrically evaluate the biodynamic responses of body segments to laboratory simulations of aircraft crash and escape system environments. These simulations were developed on the Horizontal Impulse Accelerator, the Hydraulic Decelerator, and the Body Positioning Retraction Device, all of which are facilities of the Biomechanical Protection Branch of the			


Block 20. Abstract (Continued)

Wright-Patterson Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio, by personnel of that organization.

Application of these methods and techniques resulted in time histories of coordinate positions, relative to the test seat, of anthropometric points during the impact and response periods.

The coordinate system defined for each of the experimental test programs is described. Coordinate positions of reference points and camera locations in the various coordinate systems are documented. The techniques used to locate and mark anthropometric points on the test subjects are described.

The tracks of the marked anthropometric points were recorded throughout each test event on 16 mm motion picture cameras operating at a nominal speed of 500 frames per second. Projected image coordinates of the tracked points were digitized semi-automatically from each of the frames during the event and were electronically processed to time-seat coordinate position histories for displacement, velocity, and acceleration analysis.

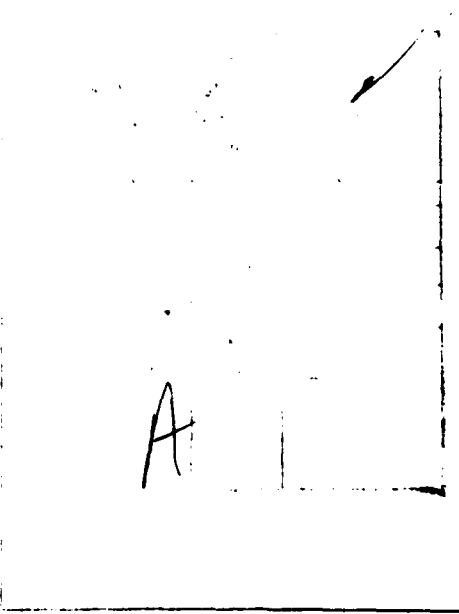

SUMMARY

The methods, techniques, and procedures employed to describe, from high speed motion picture records, the motions of body segments resulting from sudden application of external forces to specific areas of the body are outlined herein.

Processes were applied to two basic types of motions, planar and nonplanar. Planar motion generally resulted from two types of head on crash simulations, rearward acceleration of the test vehicle from a standing position by the Horizontal Impulse Accelerator, and deceleration of the test vehicle from forward motion by the Hydraulic Decelerator, and from the upper torso retraction environment simulated on the Body Positioning Retraction Device. Nonplanar motion resulted from head on crash simulations during which the subjects were asymmetrically restrained, and from side on crash simulations.

Prior to each experimental test program the photometric data requirements were specified. These specifications determined the number of cameras to be used and their locations and orientations. The specifications also determined the number of moving points to be tracked and identified them. Reference points in the field of view of each camera were marked with markers and their coordinates were measured and recorded.

The recorded test data were projected, frame by frame, on a viewing screen equipped with horizontal and vertical cursors, the relative positions of which were digitally encoded by two shaft angle encoders attached to the shafts of the traverse knobs. The encoders excited up-down counters which counted the horizontal and vertical displacement from the center of the projected image of each of the points recorded. The digital data were then computer processed to time histories of two dimensional positional coordinate positions and time histories of two dimensional acceleration were derived.

The techniques and procedures applied to reduce data from each of the major test programs are described in this report.

The coordinate solutions were adequate to use as comparisons with predicted trajectories of the various points. With the exception of the Injury Protection Comparison study and the elbow trajectory data from the $-G_x$ (6, 8, and 10G) study, errors in solution were less than one-eighth inch. Large errors in x-component of displacement were evident in the data from the Whole Body Restraint-Lateral test program. The indications are that the angle between the optical axes of the cameras (11 and 12) was too small.

Derived velocity and acceleration data are not sufficiently accurate to use for predictions. Improved filtering methods and greater accuracy in coordinate solutions would be required to improve the utility value of these data.

PREFACE

The work described herein was accomplished for the benefit of the Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio under Contract F33615-76-C-0525 during the period 1 September 1976 through 30 April 1979. This contract was monitored initially by Major John P. Kilian and later by CMSgt. Joseph M. Powers of the Biomechanical Protection Branch, Air Force Aerospace Medical Research Laboratory.

University of Dayton personnel who made major contributions to the program include William J. Hovey, Project Supervisor, Henry T. Mohlman and Ronald C. Reboulet, Research Mathematicians, and Philip A. Graf, Research Technician.

The authors gratefully acknowledge the cooperation and assistance provided by Mr. Jim Brinkley, Branch Chief, Maj. John Kilian and CMSgt. Joseph Powers, the Contract Monitors, the Project Engineers and Principal Investigators and all other personnel of the branch. Assistance and cooperation of personnel of the Technical Photographic Division, 4950th Test Wing, and of the Digital Computer Operations Division, Aeronautical Systems Division, are also gratefully acknowledged.

TABLE OF CONTENTS

<u>Section</u>	Page
1 INTRODUCTION	1
2 ANALYSIS OF PLANAR MOTION	1
2.1 THEORY	13
2.2 HORIZONTAL IMPACT FACILITY PHOTOMETRIC DATA ANALYSIS PROGRAM (HIFPD)	19
2.2.1 Main Routine	21
2.2.2 Subroutine CPLT (T, Y, Z, IP)	22
2.2.3 Subroutine SM(X, Y, XC, N, NP)	23
2.2.4 Subroutine DERIV1 (X, YP, N, NP, ID)	24
2.2.5 Subroutine QLSQ (X, Y, N1, N2, C)	25
2.2.6 Subroutine ROTATE (N, J1, IPR)	30
2.2.7 Subroutine MEAN1 (N, X, Z)	41
2.2.8 Subroutine MEAN2 (N1, N2, DI, DC, XD, ZD, SMX, SMX2, SMZ, SMZ2)	42
2.2.9 Data Preparation for Input to HIFPD	46
2.2.10 Description of Program HIFPD Input Data and Parameter Codes	47
2.3 RESTRAINT SYSTEM DYNAMICS NYLON OPERATIONAL RIGID COMPARISON	49
2.3.1 Requirements	57
2.3.2 Photometric Range	59
2.3.3 Data Acquisition	61
2.3.4 Photogrammetric Calibration	73
2.3.5 Data Reduction Process	74
2.3.5.1 Editing	74
2.3.5.2 Digitizing	75
2.3.5.3 Electronic Data Transfer	76
2.3.6 Results and Accuracy	77
2.4 -50G _X INJURY PROTECTION OPERATIONAL	79
2.4.1 Requirements	81
2.4.2 Photometric Range	81
2.4.3 Photogrammetric Calibration	82
2.4.4 Data Acquisition	83
2.4.5 Data Reduction Process	84
2.4.5.1 Editing	84
2.4.5.2 Digitizing	85
2.4.5.3 Electronic Data Transfer	86
2.4.6 Results and Accuracy	87
2.5 UPPER TORSO RETRACTION	89
2.5.1 Requirements	89
2.5.2 Photometric Range	90
2.5.3 Photogrammetric Calibration	91

TABLE OF CONTENTS (Continued)

Section

2.5.4	Data Reduction Process	
2.5.4.1	Editing	
2.5.4.2	Digitizing	
2.5.4.3	Electronic Data Processing	
2.5.5	Results and Accuracy	
3	ANALYSIS OF NONPLANAR MOTION	
3.1	DOT 6 YEAR OLD CHILD COMPARISON	
3.1.1	Photometric Data Acquisition	
3.1.2	Data Reduction	
3.2	WHOLE BODY RESTRAINT-LATERAL	
3.2.1	Seat Coordinate System	
3.2.2	Camera Locations	
3.2.3	Data Acquisition	
3.2.4	Data Reduction	
3.2.4.1	Film Editing	
3.2.4.2	Projected Image Display	
3.2.4.3	Electronic Data Processing	
4	PICTOGRAPHIC PRESENTATION	
4.1	PROGRAM RSD INPUT REQUIREMENTS	
4.2	FILM DIGITIZING PROCEDURE	
4.3	RESULTS	
	APPENDIX A: PROGRAM HIFPD	
	APPENDIX B: PROGRAM WERL	
	APPENDIX C: PROGRAM RSD	
	APPENDIX D: PROGRAM CHIFPD	

LIST OF ILLUSTRATIONS

<u>Figure</u>		<u>Page</u>
1	Observed Point and its Film Plane Image Relative to the Optical Axis.	14
2	Film Plane Image of Scene Coordinate Axes.	15
3	Relationship Existing Among Image Plane, Projected Image Plane and Object Plane.	16
4	Project Images of Observed Points Equidistant from Optical Axis but Lying in Different Planes Normal to the Optical Axis.	17
5	Relationship Between Projected Image Coordinate System and Scene Coordinate System.	18
6	HIFPD Flow Chart.	26
7	CPLT Flow Chart.	28
8	SM Flow Chart.	32
9	DERIV1 Flow Chart.	34
10	QLSQ Flow Chart.	37
11	ROTATE Flow Chart.	40
12	MEAN1 Flow Chart.	43
13	MEAN2 Flow Chart.	45
14	Typical Deck Setup for HIFPD Computer Run on Cyber System.	50
15	9TAP Assembly Orientation.	58
16	RSD(N/O/R) Seat Coordinate System and Onboard Camera Locations.	60
17	-50G _x Injury Protection Comparison Photometric Range and Seat Coordinate System.	83
18	Average and Modified -50G _x Readings Versus Grid Displacement.	85
19	BPRD Seat Coordinate System and Reference Fiducial Locations.	104
20	Camera Locations in BPRD Seat Coordinate System.	107
21	Frequency Response of 11-Point Smoothing as Applied in the HIFPD Program.	116
22	DOT Six-Year-Old Child Comparison Seat Coordinate System and Survey Data, Forward Impacts.	121
23	DOT Six-Year-Old Child Comparison Seat Coordinate System and Survey Date, Lateral Impacts.	122

LIST OF ILLUSTRATIONS (Continued)

<u>Figure</u>		<u>Page</u>
24	Typical Scene Prior to Forward Impact as Observed by Cameras 6 (Upper) and 7.	123
25	Typical Scene Prior to Lateral Impact as Observed by Camera 7 (Upper) and 8.	124
26	WBR-L Seat Coordinate System (SCS).	128
27	Schematic of Camera Locations and Orientations, WBR-L.	129
28	WBR-L Reference Fiducials Schematic.	134
29	Projected Film Frames From Cameras 12 (Upper) and 11 as Viewed by Operator, WBR-L.	138
30	Projected Film Frames From Cameras 13 (Left) and 14 as Viewed by Operator, WBR-L.	140
31	Pictograms of Displacements of Body Segments and Restraint Harness as a Function of Time.	152

LIST OF TABLES (Continued)

TABLE		PAGE
170	STANDARD DEVIATION OF DIFFERENCE BETWEEN UN- SMOOTHED AND SMOOTHED DISPLACEMENT DATA IN MILITARY BENTRAINT, MANIKIN SUBJECTS	137
171	STANDARD DEVIATION OF DIFFERENCE BETWEEN UN- SMOOTHED AND SMOOTHED DISPLACEMENT DATA IN PEEP	138
172	3-DIR. REPRESENT. FUNCTION OF BENTRAINT	139
173	3-DIR. REPRESENT. FUNCTION OF PEEPS DATA BY CAMERA ONLY BENTRAINT	140
174	DIFFERENCE FACTOR (DF) COMPUTED FROM MULTIPLE FREQUENCY SINE FUNCTIONS	141
175	STANDARD DEVIATION OF DIFFERENCE BETWEEN UN- SMOOTHED AND SMOOTHED DISPLACEMENT DATA IN PEEP	142
176	ANALYSIS OF MISS DISTANCE BETWEEN RAYS AT SOLUTION POINTS, HUMAN SUBJECTS	143
177	3-DIR. REPRESENT. FUNCTION OF BENTRAINT (M)	144
178	ANALYSIS OF MISS DISTANCE BETWEEN RAYS AT SOLUTION POINTS, HUMAN SUBJECTS	145
179	ANALYSIS OF MISS DISTANCE BETWEEN RAYS AT SOLUTION POINTS, MANIKIN SUBJECTS	146

SECTION 1
INTRODUCTION

The high injury and fatality rates associated with vehicular crashes and emergency escape from aircraft dictate the need for determination of impact exposure limits and the evaluation of the effectiveness of various protection system configurations and protection principles and techniques. In response to these needs, the Biomechanical Protection Branch of the Air Force Aerospace Medical Research Laboratory (AMRL/BBP) has rigorously conducted experimental test programs, developing in the laboratory simulations of the environments to which crewmen might be exposed. Data collected from these experimental programs provide the bases for verification and/or improvement of predictive biodynamic models.

This report describes and documents the photometric analysis procedures and processes developed and applied by the University of Dayton Research Institute (UDRI) during the period 1 September 1976 thru 30 April 1979, in support of AMRL/BBP research and development programs.

The photometric work accomplished is summarized as follows:

- DOT 6 Year Old Child Comparison. The reduction of photometric recordings of points on the heads of dummies and baboons to time histories of three dimensional coordinate positions was completed.
- Restraint System Dynamics. Preparation of test subjects by application and documentation of tracking fiducials was accomplished. Reduction of film data to two dimensional time histories of displacement, velocity, and **acceleration** of six points on the heads and extremities of nine human subjects and one manikin during ninety-one tests was completed.
- Whole Body Restraint-Lateral. Preparation of subjects by application and documentation of tracking fiducials was accomplished prior to each test. Reduction of film data

to time histories of three dimensional displacements, velocities, and accelerations of nine points on the heads and torsos of ten human subjects and three manikins acquired during fifty three of the tests was completed.

- Upper Torso Retraction. Preparation of subjects by application of fiducials and measurement of variable breadths was accomplished prior to each test. Film data collected during two tests were reduced to two dimensional time histories of displacements, velocities, and accelerations of nine points on the subject and one point on the retraction piston.
- Impact Protection Comparison, $-50 G_x$ Accelerator. Preparation of subjects by application and documentation of fiducials was accomplished prior to each of eighteen tests. Data were digitized from seventeen of the tests and were reduced to time histories of displacements, velocities, and accelerations of six points on each of the subjects.
- Impact Protection Comparison, $-50 G_x$ Decelerator. Preparation of subjects by application and documentation of fiducials was accomplished prior to each of twelve tests. Film data from eleven tests were digitized and reduced to time histories of displacements, velocities, and accelerations of six points on each of the subjects.
- F-111 Generic Study, $-G_x$. Preparation of subjects by application of fiducials and measurement of their relative locations was accomplished prior to each test. A process was developed to plot pictograms of the head and extremities of the subject and the projection of the harness geometry in the X-Z plane. The process was demonstrated with data digitized from film(s) or test(s).

The results of the photometric data reduction efforts were reported in tabular and graphic forms. The procedures and processes employed to derive the reported results were described in narrative texts to which the results were attached. The sections describe, in greater detail, these procedures and processes, to facilitate application of future photometric data problems.

SPECIMEN
ANALYSIS OF PLANAR MOTION

Exposure of symmetrically restrained and unrestrained $\pm G_z$ acceleration environments usually resulted in motion of all points on these subjects. While some lateral motion of the joints of the extremities is demonstrated, it is not generally of such magnitude as to warrant three dimensional analysis. Points, or points, of interest, or points, were described by data digitized from films recorded on a single motion picture camera and processed by the Horizontal Impact Facility Photometric Data Analysis Program (HIFPD). The test programs from which data were reduced using this process were:

- Restraint System Dynamics
- Upper Torso Retraction
- Impact Protection Comparisons, -50 g

The original version of HIFPD was developed during an earlier effort and was documented in AMRL-TP-78-94. The process has since been modified by the addition of three subroutines, rotate, mean 1, and mean 2, which were developed to improve accuracy by minimizing the effects of camera vibration and pin registration variations, and to provide statistical indications of reading accuracy and smoothing effects. The current version of this program is described in the following sections and listing of the program source statements is presented in Appendix A.

2.1 THEORY

When a camera photographs a scene, the film receives an image of an infinite number of rays of light emanating from an infinite number of points in the scene. If the lens through which the rays pass is such that it introduces no distortion, then the image of a given observed point will strike the film at a distance, r_1 , from the center of the image of the entire scene in direct relationship to the distance, r_0 , from the optical axis to the observed point in the plane normal to the optical axis, at a distance, s_0 , from the focal point in which the rays focus.

Figure 1 illustrates this relationship.

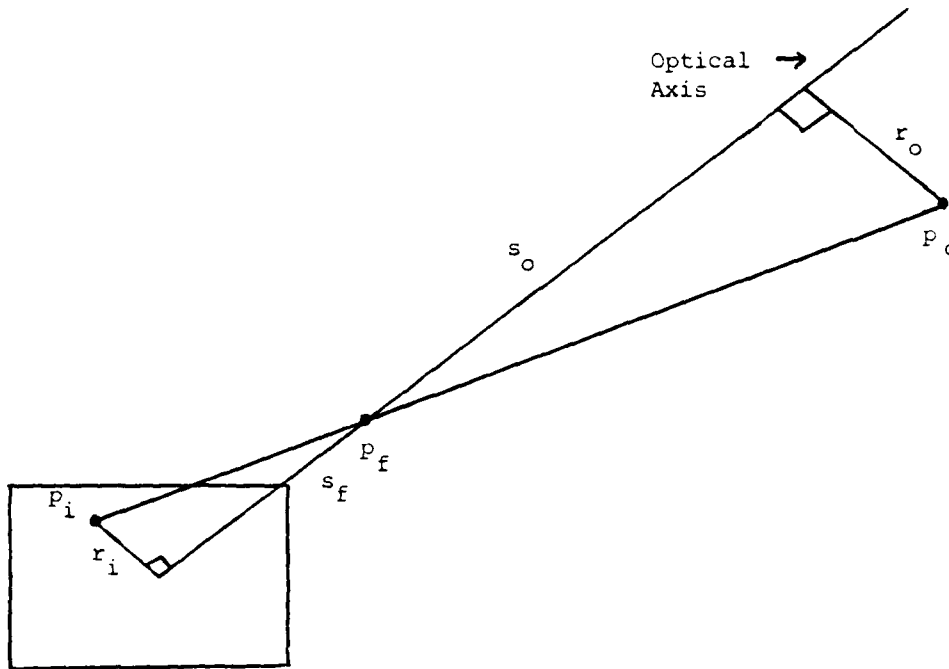


Figure 1. Observed Point and its Film Plane Image Relative to the Optical Axis.

Having the focal length of the lens, s_f , given by the manufacturer and the measured distance, r_i , the distance, r_o , can be calculated by similar triangles to be:

$$r_o = s_o \left(\frac{r_i}{s_f} \right).$$

This does not, however, permit the determination of the vector direction of r_o from the point at which the optical axis penetrates the object plane.

If one could construct a perpendicular set of axes, x and z , in the object plane, for instance a horizontal and a vertical line, intersecting at the optical axis, then the vector direction of the line segment, r_o , can be determined by measuring the angular displacement of its image, r_i , from the image of the x axis or by measuring the coordinates of the image point, p_i , and solving for

the angle:

$$\theta_i = \tan^{-1} \frac{Y_i}{x_i}$$

as in Figure 2. Construction of material axes in the observed scene is usually not practical so an alternate method will be offered later in the discussion.

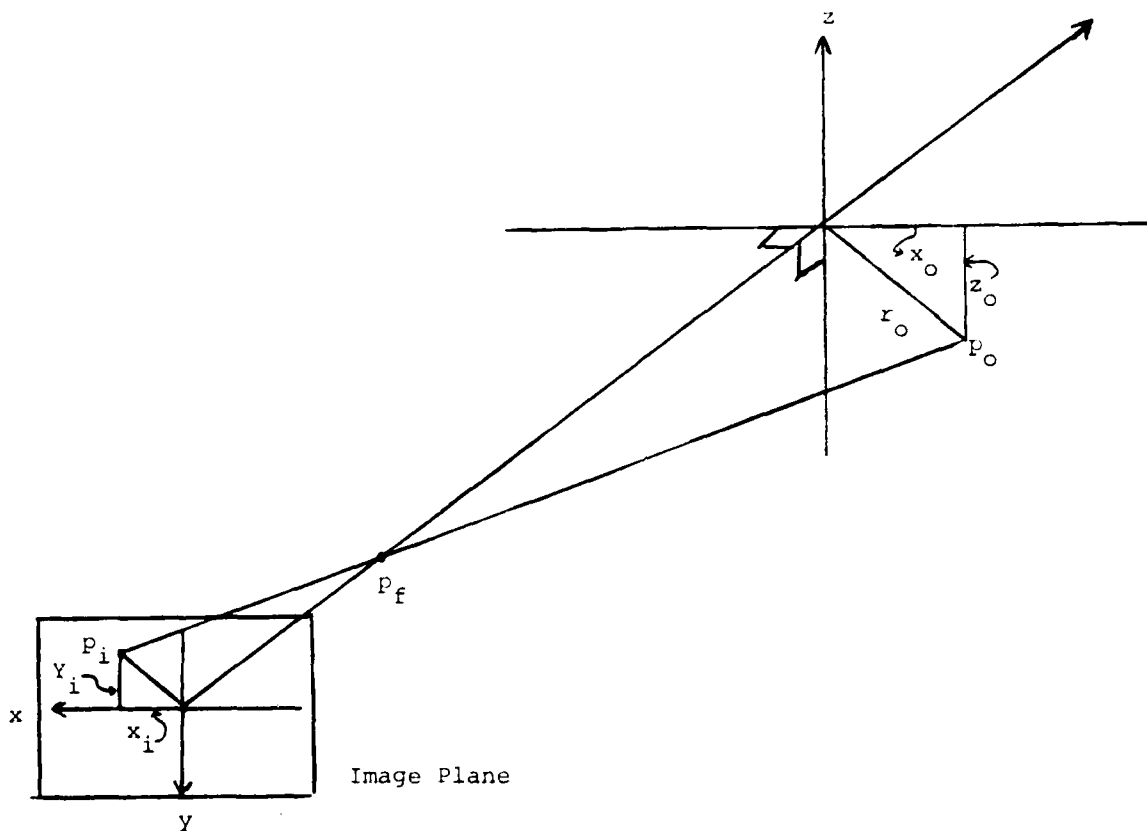


Figure 2. Film Plane Image of Scene Coordinate Axes.

Since the image recorded on the film is so small, it is impractical, if not impossible, to determine the coordinates of the image point without magnification. The required magnification is usually provided by a projector, although microscopes have also been used. If a projector is used, and its lens introduces no distortion, then the screen, or projected image plane, could be

considered the equivalent of a plane, normal to the optical axis, that existed between the focal point of the camera and the scene viewed by the camera at a distance, s_p , from the focal point (Figure 3). Now, again assuming no distortion, we have the relationship:

$$\frac{r_i}{s_f} = \frac{r_p}{s_p} = \frac{r_o}{s_o}$$

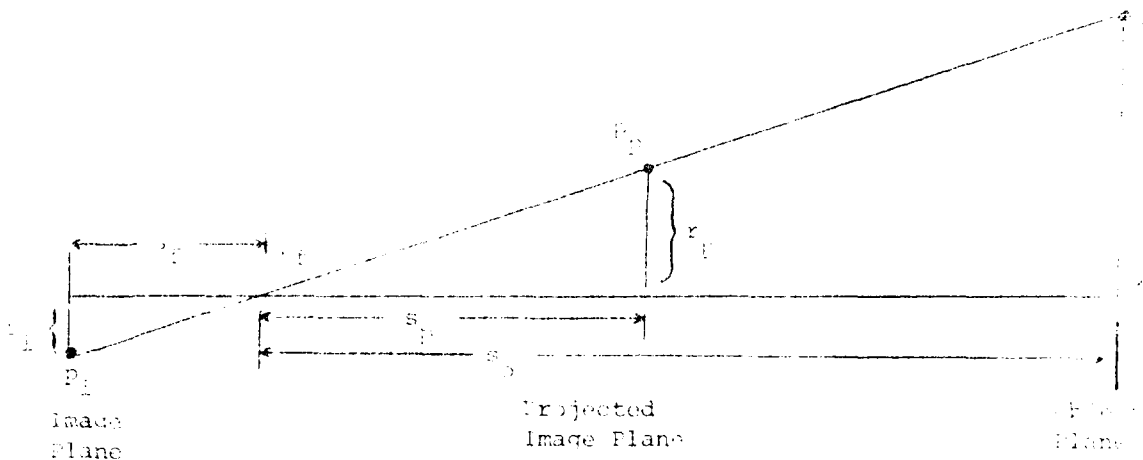


Figure 3. Relationship Existing Among Image Plane, Projected Image Plane and Object Plane.

If a second point, p_{o2} , on a line parallel to the optical axis and passing through the first object point (such that $r_{o2} = r_o$) is observed, the distance, r_{p2} , from the optical axis (or center of projected image) to the projected image point, p_{p2} , is related to the distance s_{o2} as the distance r_o is related to s_o , i.e.:

$$\frac{r_{p2}}{s_p} = \frac{r_o}{s_o}$$

This is illustrated in Figure 4.

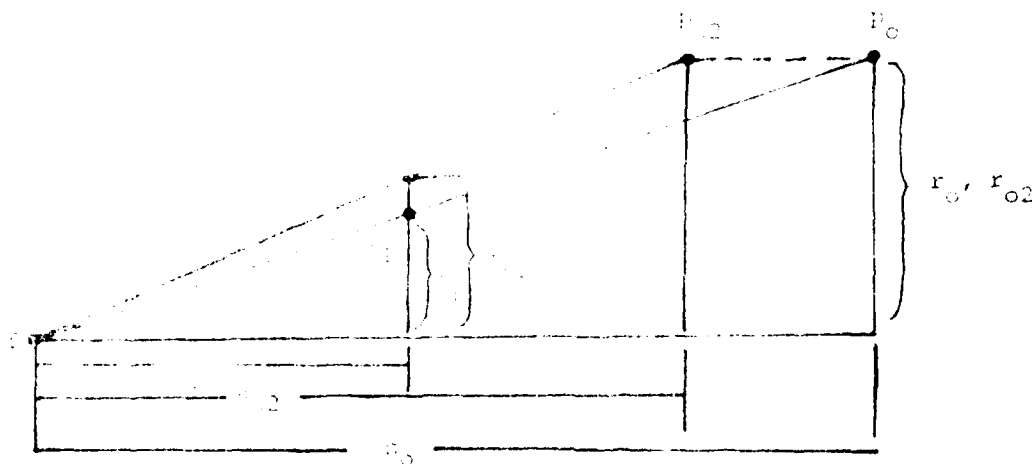


Figure 4. Projected Images of Observed Points Equidistant from Optical Axis but lying in Different Planes Normal to the Optical Axis.

Now let us return to the problem of relating the orientation of the film frame image to the observed scene. As has been stated, it is usually not practical to draw a set of axes on the observed scene. It is, however, practical to establish a coordinate system in the scene and survey the coordinates of several fixed points of reference in the established system. Figure 5 illustrates the projected image of the points p_0 , the origin of the scene coordinate system (SCS) and p_1 and p_2 which are surveyed reference points. For the sake of simplification, the three points are coplanar in a plane, $y=n$, normal to the optical axis although in practice this is not required. The images of these points are projected on a viewing screen on which a coordinate system is imposed, which we shall call the projected image coordinate system (PCS). Having the coordinates in the SCS of the two observed points P_{o1} and P_{o2} , the projected image can now be rotated relative to the PCS to satisfy the relationship:

$$\frac{y_{p_{p1}} - y_{p_{p2}}}{x_{p_{p1}} - x_{p_{p2}}} = \frac{z_{p_{o1}} - z_{p_{o2}}}{x_{p_{o1}} - x_{p_{o2}}}$$

this can be accomplished physically by rotating the axes of the digitizer. If the digitizer is not equipped with rotating axes, or with rotating film transport, the rotation can be accomplished mathematically by:

$$x' = x \cos \theta + y \sin \theta$$

$$y' = y \cos \theta - x \sin \theta$$

where θ is the angular displacement of the SCS from the ICI about the vertical axis.

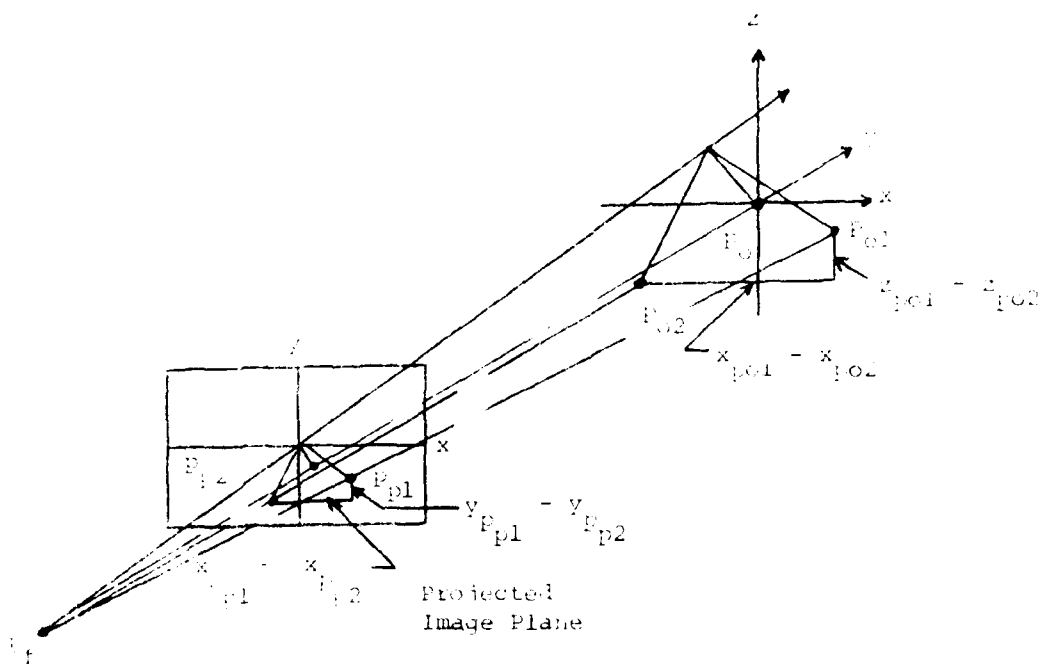


Figure 5. Relationship between Projected Image Coordinate System and Scene Coordinate System.

2.2 HORIZONTAL IMPACT FACILITY PHOTOMETRIC DATA ANALYSIS PROGRAM (HIFPD)

Horizontal Impact Facility Photometric Data Analysis Program (HIFPD) is a digital computer program developed to analyze the Hyge Impact Facility Photometric data for personnel in the Protection Branch of the Biodynamics Bioengineering Division at AFAMRL. The program was compiled and executed on the CDC computers at Wright-Patterson Air Force Base. The standard APL plot package is used to plot data and thus must be attached to load and execute the program.

This program inputs the code sheet data and program control parameters described in the section entitled "Description of Program HIFPD Input Data and Parameter Codes" and a maximum of 500 (MAXN) frames of x, z position data for the range, sled, hip, knee, shoulder, elbow, head point 1 and head point 2 for ITYPE=0 or range, sled, head point 1 and head point 2 for ITYPE=1. The data card format are also described.

The program computes the following four types of data as requested by the program control parameters:

(a) The input data versus frame number and the frame to frame differences are printed in counts. The range difference is subtracted from the frame to frame differences for each of the seven parameters. The only value of this difference data would be to spot errors in the data. When the input data are rotated and translated (ICAM=1), the resulting adjusted data are also printed versus frame number (still in counts).

(b) The displacements (x and z) of the hip, knee, shoulder, elbow, head point 1 and head point 2 relative to the sled are computed, and a moving eleven point (NF=11) quadratic least squares fit is used to smooth the data. These data are also plotted as requested on the test setup card.

(c) The angles in radians between the shoulder and hip and between the head point 1 and head point 2 are computed using the above smoothed data. The angular velocity is computed in

radians per second using a moving 11 point quadratic fit of the angle versus time data (computes derivative of least squares equation). The angular acceleration is computed using a moving eleven point quadratic fit of the velocity versus time data. These data are also plotted as requested on the test setup card.

(d) The linear velocity and acceleration data for any combination of the eight variables are computed as requested on the test setup card. For example, the linear velocity and acceleration of the head point 1 relative to the range, sled relative to the range or the head point 1 relative to the sled can all be computed. Note that range relative to some other parameter cannot be computed. To compute these linear velocity and acceleration data, the x and z displacements are computed for the variable of interest relative to the reference variable. A moving eleven point (NP=11) quadratic least square smoothing function is applied to both x and z time histories. A moving eleven point quadratic least square fit is then applied to these smoothed x and z-axis displacement data to obtain the x and z components of velocity. Next this same smoothing routine is applied to these x and z-axis velocity data to compute the x and z components of acceleration. The resultant displacement, velocity, and acceleration data are then computed using these smoothed x and z component data. These data are printed and plotted as requested on the test setup card.

The three external files used by this program are the input file (unit 5) used to read all code sheet and data cards. The output file (unit 6) used to print all output, and TAPE7 (unit 7) used to generate the plotter tape. A magnetic tape must be requested with TAPE7 as the local file name.

The following sections of this report present a general description of the main program and all subroutines except the CALCOMP plot routines. Flow charts are also included for each routine. Appendix C contains a complete listing of the program source code and Appendix D contains a sample run complete with all input and output data (including UNKAPP data).

2.2.1 Main Routine

This main routine controls all input, output and plotting routines requested by the test setup card. It also handles routines required to search the data, compute the statistics and results are calculated and printed. All errors and messages resulting from errors in setup or data card format are printed by this routine.

Method

The program reads the code of each test frame as described in the "Description of Program Input and Parameters Codes" section and initializes the program control and input parameters. The program reads the card input data (x, y, z and z axis data for each frame) and checks for input errors (index J) for each frame (index I) in the test data. Input card code are checked for input errors; errors in input cause diagnostics to be printed and the processing to be terminated. If more than MAXN frames are read, diagnostics are printed and all frames beyond MAXN are omitted from the analysis. The T(I) time values are computed from the frame number as follows:

$$T(I) = IFR(I) / DT$$

where IFR(I) is the frame number and DT is the number of frames per second. If setup card parameter IRX is greater than zero, the sign of all x axis data are changed. Also when code sheet parameter IADJ is greater than zero, adjustment factors IADJ and IZADJ are added to all x and z axis data. After all data are read, a summary page is printed listing all types of analysis to be computed, printed, and plotted for this test.

When program control parameter ICD=0, all data for x, y and z axis data are printed in counts. The time to frame rate for raw data are computed and printed for all frames. The program will print 2 test results as follows:

```

XD(1)=X(I,1) - X(I-1,1)
XD(J)=X(I,J) - X(I-1,J) - XD(1).

```

XD(1) is the range difference from the Ith frame and XD(J) is the variable minus range difference for the Jth variable and the Ith frame. The above are also computed and printed for the z axis data.

When code sheet parameter ICAM is greater than one (camera is on the sled) subroutine ROTATE is called to rotate, translate, and calibrate the x and z axis data. When ICAM is less than one, these x and z axis data are adjusted for shifts in the range reference reading and then converted from counts to feet (in the Main routine):

```

H1=X(I,1) - X(1,1)
H2=Z(I,1) - Z(1,1)
X(I,J) = (X(I,J) - H1) * CAL(J)
Z(I,J) = (Z(I,J) - H2) * CAL(J)

```

where CAL(J) is the calibration factor for the Jth variable (J=2 to 8). Next subroutine MEAN1 is called to compute and print the mean and standard deviation about the mean for the sled reference data. This provides an estimate of the film reading errors since the adjusted sled reference should be a constant.

When program control parameters IPC < 2 or IPA < 2, x and z axis motion relative to the sled are computed for variables 3 to 8 (or 7 and 8 for ITYPE=1):

```

XD(I)=X(I,J) - X(I,2)
ZD(I)=Z(I,J) - Z(I,2).

```

Subroutine SM is called to compute a moving eleven point (NP=11) quadratic least square fit to smooth the X and Z axis data. The smoothed data are stored in arrays XX(I,JJ) and ZZ(I,JJ) where JJ=J-2. As a result of the eleven point smoothing, five frames are lost at the beginning and end of the test data; this is true

each time the data are smoothed by subroutine SMOOTH. The derivatives are computed by subroutine DIFF. If parameter IP=1, the smoothed data relative to the sled are printed; if IP=2, subroutine DIFF is called to compute the derivatives of the data for all variables (I=1 to 6).

The angle between the shoulder and the hip is computed for each frame using the above smoothed data when parameter IP=2. The angle in radians is computed as follows:

$$\begin{aligned}
 H1 &= ZZ(I,3) - ZZ(I,1) \\
 H2 &= XX(I,3) - XX(I,1) \\
 XD(I) &= \arctan (H1/H2)
 \end{aligned}$$

where index 3 is shoulder data and index 1 is hip data in the XX and ZZ arrays. Angles XD(I) are adjusted by factors of 2π to make them continuous. Subroutine NEWVD is called to compute the angular velocity in radians per second from a least squares (NP=11) quadratic fit of the XD(I) data and angular acceleration in radians per second squared from an eleven point quadratic fit of the velocity data. The angular data are printed and, for IPA=0, subroutine CPLT is called to generate CALCOMP plots of the angular velocity and acceleration versus time (IF=2). All above angular data are computed in a similar manner for head point 1 minus head point 2 data (indices 5 and 6 in arrays XX and ZZ).

Parameter M contains the number of sets of linear velocity and acceleration data to be computed for one variable (array ID) relative to another (array IR). For example, if ID(1)=3, and IR(1)=2, then for set M=1 the hip motion relative to the sled is computed for all available frames.

If $M < 0$ and IPL=2, all data for variables J=2 to 3 are adjusted by subtracting the initial value as follows:

$$\begin{aligned}
 X(I,J) &= X(I,J) - X(1,J) \\
 Z(I,J) &= Z(I,J) - Z(1,J)
 \end{aligned}$$

where all x and z data have previously been converted from centimeters to feet. For each of the M sets the following are computed:

1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022

1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022

1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022

1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022

1942



Figure 6. HIPP Flow Chart.

(c) The angular velocity (W) in degrees per second.

(d) The angular acceleration (A) in degrees per second.

The variables are defined in terms of the array indices from indices 1 to N, where N is the number of data points to be plotted. The data are checked to be within the specified values; if not, they are set equal to the minimum or maximum values. Subroutines LINE and SYMBOL are called to plot the data and print the legend on the graph.

For parameter IP=1, CFLT generates one plot of time (T or X array) in seconds versus linear velocity (V) in feet per second and acceleration (A) in G's. The time scaling is determined by the parameter IP=2.

(a) the minimum time value (XMIN) is set equal to the initial time value, X(1), adjusted to the nearest 0.1 seconds times X(1);

(b) the time increment per inch, I=0.1/2,

(c) The time axis length (SX) is determined from SX and the total range X(N)-XMIN

```
SX=FLOAT(IFIX((X(N)-XMIN)/I)*2)/I
```

The angular velocity and acceleration (A) in degrees per inch scaling are set up by calling subroutine CSCALE which processes the data and sets values accordingly. The velocity scale is printed on the left side of the graph and the acceleration scale on the right side. Subroutines LINE and SYMBOL are called to plot the data and print the legend on the graph.

For parameter IP=3, CFLT generates one plot of time (T or X array) in seconds versus linear velocity (V) in feet per second and acceleration (A) in G's. The time scaling is determined as per IP=2 above. The velocity and acceleration are plotted using the same ordinate center. The ordinate center (Y) is always

<p>1. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p> <p>2. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p>	<p>1. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p> <p>2. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p>
<p>3. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p> <p>4. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p>	<p>3. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p> <p>4. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p>
<p>5. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p> <p>6. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p>	<p>5. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p> <p>6. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p>
<p>7. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p> <p>8. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p>	<p>7. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p> <p>8. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p>
<p>9. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p> <p>10. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p>	<p>9. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p> <p>10. The program is written in FORTRAN 77 and runs on a CDC 3600 computer.</p>

FIGURE 1. COMPUTER PROGRAMS.

NP - number of points used in least square fit

I1 - first point used in composite plot

I2 - last point used in composite plot

XX - array of x axis displacement data

ZZ - array of z axis displacement data

ICAL - flag array which identifies defined data

ICAL(J) = 0 - Jth variable undefined

ICAL(J) = 1 - Jth variable is defined

HEADL - array containing variable names used in legend

TEST - test identification used in legend

IRX - flag used to setup composite plot X axis scale

DYLP - y increment per inch for linear plots

Subroutine Length: 1612₈

Labeled Common Length: 24₈

Blank Common Length: 7066₈

2.2.3 Subroutine SM(X, Y, YC, N, NP)

Subroutine SM is a smoothing routine which computes a quadratic least square fit of NP dependent variable data points (Y) to compute each smoothed data point (YC). Since NP data points are used to compute each smoothed point, M data points are lost at the beginning and end of array YC, where

$$M = (NP - 1) / 2.$$

Method

The first (MM) and last (NN) array indices for which YC(I) are computed are determined as follows:

$$MM=M + 1$$

$$NN=N - M$$

where M is defined above and N is the number of original displacement points in array Y. Subroutine QLSQ is called to compute the C_1 , C_2 , and C_3 coefficients for each of the I smoothed points which are then computed as follows:

$$YC(I)=C_1 * X(I)^2 + C_2 * X(I) + C_3.$$

A flow chart for this routine is shown in Figure 8.

Error Diagnostics: NONE

Subroutines Required: QLSQ

Argument List: X = array of independent variable
Y = array of dependent variable
YC = array of smoothed dependent variable data
N = number of original displacement versus time data points
NP = number of points used to compute each smoothed data point

Subroutine Length: 75₈

2.2.4 Subroutine DERIV1 (X, Y, YP, N, NP, ID)

Subroutine DERIV1 computes the derivative (YP) of the dependent variable Y. A quadratic least square fit of NP points is used to compute each derivative point; thus K points are lost at the beginning and end of array UP:

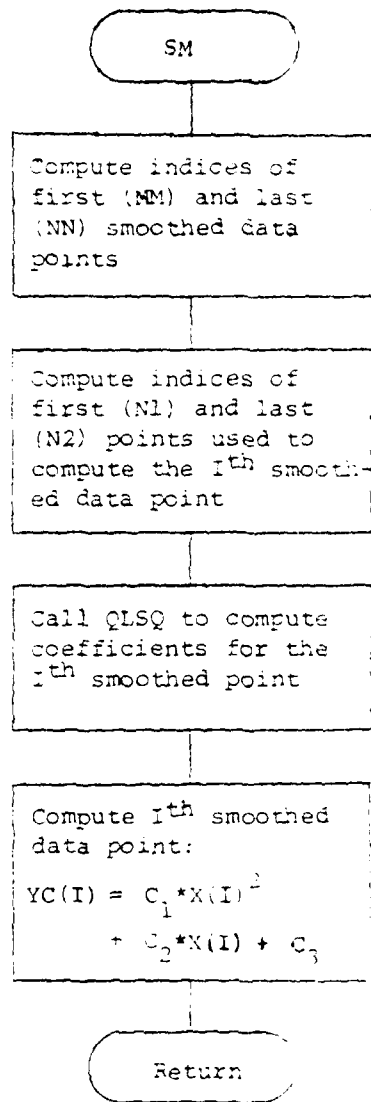


Figure 8. SM Flow Chart.

where

$$K = M + M * ID,$$

$$M = (NP - 1)/2,$$

ID = 1 for first derivative, and

ID = 2 for second derivative

Note that for ID = 1, array Y contains displacement data which have already been smoothed using a quadratic least square fit over NP points; thus, M points have already been lost from the original displacement data. For ID = 2, array Y contains first derivative (velocity) data which starts at array location Y(2*M + 1).

Method

The first (MM) and last (NN) array indices for which YP(I) are computed are determined as follows:

$$MM = K + 1$$

$$NN = N - K$$

where K and M are defined above and N is the number of original displacement data points. Subroutine QLSQ is called to compute the C_1 , C_2 , and C_3 coefficients for each of the I derivative points. The derivative YP(I) is then computed as follows:

$$YP(I) = 2 * C_1 * X(I) + C_2.$$

A flow chart for this routine is shown in Figure 9.

Error Diagnostics: NONE

Subroutine Required: QLSQ

Argument List: X = array of independent variables

Y = array of dependent variables
(displacement or velocity)

YP = array of derivative data

N = number of original displacement versus time data points

NP = number of points used to
compute each derivative point

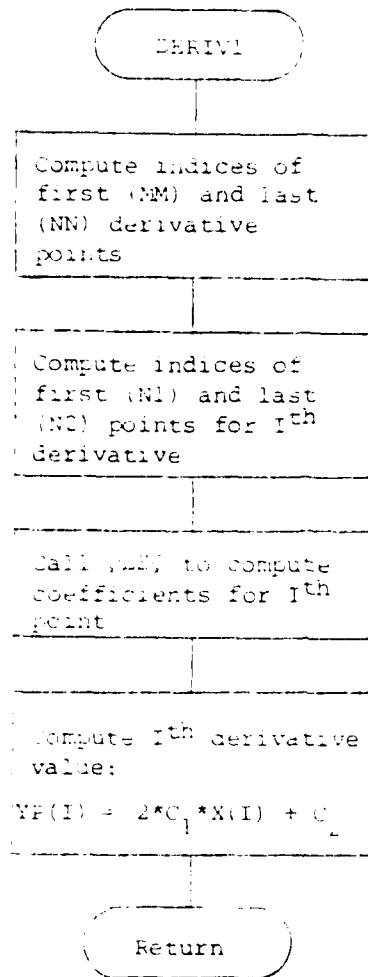


Figure 9. DERIV1 Flow Chart.

ID = 1 --array X contains element data and array Y will contain velocity data

ID = 2 --array X contains element data and array Y will contain acceleration data

Subroutine Length: 77_g

2.2.5 Subroutine QLS2 (X, Y, N1, N2, C)

Subroutine QLS2 uses the method of least squares to compute the quadratic coefficients (C₁, C₂, and C₃) for an equation of the form:

$$Y = C_1 * X^2 + C_2 * X + C_3$$

for FN data points (FN = N2 - N1 + 1) from X and Y array indices N1 to N2. FN must be an odd integer > 3.

Method

The independent variable X(I) is translated by a factor FF, where

$$FF = X(NN),$$
$$NN = \frac{N1 + N2}{2}$$

and $XP(I) = X(I) - FF$.

The quadratic equation in terms of the translated independent variable is

$$Y = A_1 * XP^2 + A_2 * XP + A_3$$

The least square residuals are a minimum when the following equations are satisfied:

$$A_1 * \sum XP^4 + A_2 * \sum XP^3 + A_3 * \sum XP^2 = \sum XP^2 * Y$$
$$A_1 * \sum XP^3 + A_2 * \sum XP^2 + A_3 * \sum XP = \sum XP * Y$$
$$A_1 * \sum XP^2 + A_2 * \sum XP + A_3 * FN = \sum Y$$

where summations of XP and Y are computed for index I equal N1 to N2. Determinants are used to solve the above system of equations for the coefficients A_1 , A_2 , and A_3 . The C_1 , C_2 , and C_3 coefficients are computed from A_1 , A_2 , and A_3 as follows:

$$C_1 = A_1$$

$$C_2 = A_2 - 2 * A_1 * FF$$

$$C_3 = A_3 + A_1 * FF^2 - A_2 * FF.$$

A flow chart for this routine is shown in Figure 10.

Error Diagnostics: NONE

Subroutines Required: NONE

Argument List: X=array of independent variables
 Y=array of dependent variables
 N1=index of first point used
 in fit
 N2=index of last point used
 in fit
 C=array containing quadratic
 coefficients.

Subroutine Length: 134₈

2.2.6 Subroutine ROTATE(N,J1,IPR)

Subroutine ROTATE translates, rotates, and calibrates the on-board camera data stored in arrays x and z. All data are translated to a coordinate system through the sled range reference point (first x, z point for each time). The axis is then rotated so that angle between the sled range reference and the sled reference (second x, z point for each time) is the same for all time statistics. i.e., all angles between the sled range reference and sled reference are the same as the angle at time zero. The data are then translated back to the initial coordinate system (at time zero).

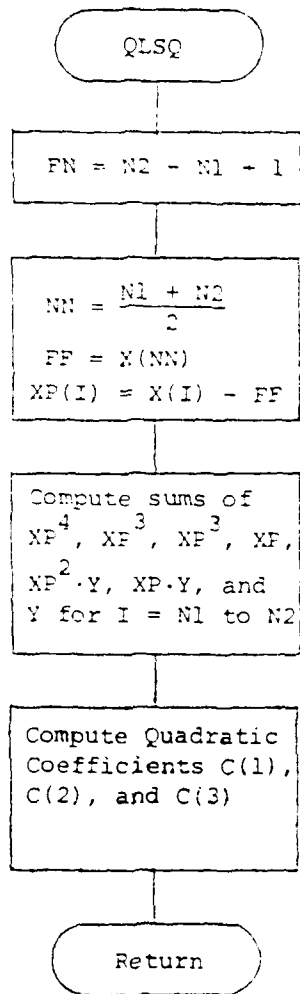


Figure 10. QLSQ Flow Chart.

Method

For the first time station, the range x and z data are subtracted from the sled reference x and z:

$$\begin{aligned}X1 &= X(1,2) - X(1,1) \\Z1 &= Z(1,2) - Z(1,1) .\end{aligned}$$

These differences are used to compute the reference angle θ_R :

$$\theta_R = \arctan (Z1/X1)$$

If θ_R is less than zero, then

$$\theta_R = \theta_R + 360.$$

This is the reference angle between the range and sled reference points. For all other time stations, the axis through the range reference is rotated to make the angle between the range and the sled reference points the same as θ_R . Note that for this first time station none of the x and z array data are rotated or translated.

For time stations I=2 to N, the following are computed:

- (a) All data (J=2 to 8) are translated to a coordinate system through the range reference as follows:

$$\begin{aligned}X(I,J) &= X(I,J) - X(I,1) \\Z(I,J) &= Z(I,J) - Z(I,1)\end{aligned}$$

- (b) Angle θ_i is computed from the sled reference difference:

$$\theta_i = \arctan [Z(I,2)/X(I,2)]$$

If θ_i is less than zero, then

$$\theta_i = \theta_i + 360.$$

- (c) Angle θ is the angle by which the I^{th} points have been rotated with respect to the initial x_p :

$$\theta = \arctan \frac{Z(I,1) - Z(I,0)}{X(I,1) - X(I,0)}$$

- (d) The inverse rotation (or rotation by $-\theta$) is computed as follows for parameters $J=2$ to 3:

$$\begin{aligned} X(I,J) &= X(I,J) * \cos\theta + Z(I,J) * \sin\theta \\ Z(I,J) &= -X(I,J) * \sin\theta + Z(I,J) * \cos\theta \end{aligned}$$

- (e) The data points are then translated back to the initial range coordinate system (at time zero):

$$\begin{aligned} X(I,J) &= X(I,J) + X(1,1) \\ Z(I,J) &= Z(I,J) + Z(1,1) \end{aligned}$$

- (f) All x and z data for parameters $J=2$ to 3 are converted from counts to feet:

$$\begin{aligned} X(I,J) &= X(I,J) * CAL(J) \\ Z(I,J) &= Z(I,J) * CAL(J) \end{aligned}$$

This subroutine also prints a listing of frame number versus parameter x , z data in counts when IPR is less than one.

A flow chart for this routine is shown in Figure 11.

Error Diagnostics: NONE

Subroutines Required: NONE

Argument List: N = number of displacement versus time data points
 J1 = index of first parameter listed reference. For ITYPE=0, J1=3; for ITYPE=1, J1=2.
 IPR = print control parameter.

Blank COMMON

Variables (used by this subroutine): IFR = array containing frame number
 X = array of x displacement data
 Z = array of z displacement data

CAL = array of calibration data
feet per count

XD = dummy array used to store
data for printing

ZD = dummy array used to store
data for printing

Subroutine Length: 250₈

Blank Common Length: 23434₈

2.2.7 Subroutine MEAN1 (N,X,Z)

Subroutine MEAN1 computes the mean and the standard deviation about the mean for x and z axis sled reference data.

Method

Compute the mean of the x and z axis data:

$$AVX = \frac{1}{N} \sum_{I=1}^N X(I)$$

$$AVZ = \frac{1}{N} \sum_{I=1}^N Z(I).$$

Then compute the standard deviation of the data about this mean x and z axis value:

$$SMX = \sqrt{\frac{\sum_{I=1}^N [X(I)-AVX]^2}{N-1}}$$

$$SMZ = \sqrt{\frac{\sum_{I=1}^N [Z(I)-AVZ]^2}{N-1}}$$

Finally, print the mean and standard deviation data on the standard output file.

A flow chart for this routine is given in Figure 12.

Error Diagnostics: NONE
Subroutines Required: NONE
Argument List: N = number of x and z axis data points
X = array of x axis data points
Z = array of z axis data points
Subroutine Length: 116₈

2.2.8 Subroutine MEAN2 (N1, N2, DI, DC, XD, ZD, SMX, SMX2, SMZ, SMZ2)

Subroutine MEAN2 computes the mean and standard deviation of unsmoothed minus smoothed x and z axis data.

Method

The sums and sums of squares of the unsmoothed minus smoothed data are computed as follows:

$$SMX = \sum_{I=N1}^{N2} DI(I) - XD(I)$$

$$SMX2 = \sum_{I=N1}^{N2} [DI(I) - XD(I)]^2$$

$$SMZ = \sum_{I=N1}^{N2} DC(I) - ZD(I)$$

$$SMZ2 = \sum_{I=N1}^{N2} [DC(I) - ZD(I)]^2$$

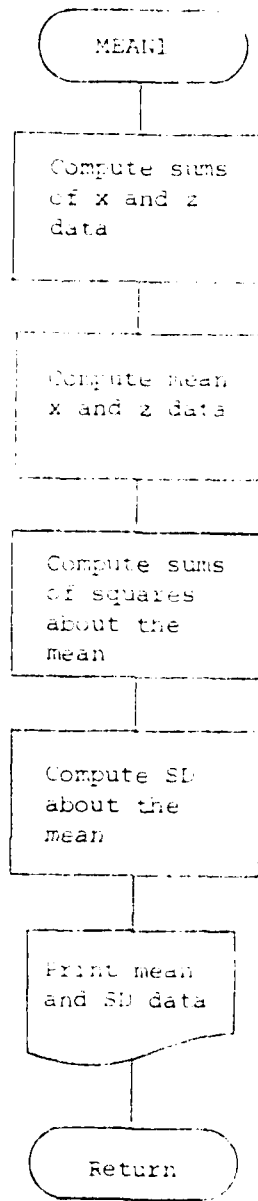


Figure 12. MEAN1 Flow Chart.

If variables used above are defined in the argument list below.
The means (SMX and SMZ) and standard deviations (SMX2 and SMZ2) are
then computed from these sums and sums of squares:

$$SMX = SMX / FNN$$

$$SMX2 = \frac{SMX2 - (SMX)^2 (FNN)}{FNN - 1}$$

$$SMZ = SMZ / FNN$$

$$SMZ2 = \frac{SMZ2 - (SMZ)^2 (FNN)}{FNN - 1}$$

$$FNN = N2 - N1 + 1.$$

A flow chart for this routine is shown in Figure 12.

Error Diagnostics: NONE

Subroutines Required: NONE

Argument List:

N1	= index of the first data point used in the summations
N2	= index of the last data point used in the summations
DI	= array of unsmoothed x axis data points
DC	= array of unsmoothed z axis data points
XD	= array of smoothed x axis data points
ZD	= array of smoothed z axis data points
SMX	= mean x axis data
SMX2	= standard deviation of x axis data
SMZ	= mean z axis data

SMZ2 = standard deviation of 2 axis
data

Subroutine length: 76₈.

2.2.9 Data Preparation for Input to HIFPD

Preparation of data for input to HIFPD consists of editing and digitizing. The editing function provides film frame-to-time conversion and PCS coordinates to plane of motion coordinates conversion factors. The digitizing function provides the frame-by-frame "reading" of the projected film frame coordinates. The references, or "standards," required to process the data are film time reference pulses and surveyed fiducials in two planes normal to the optical axis of the camera.

Timing of the film frames was accomplished by calculating the average film speed over a span of approximately 150 frames (300 msec).

The first frame in which the stroboscopic flash was observed was defined as $t=0$. The strobe, initiated by a time synchronizing pulse which was also recorded on the magnetic tape recordings, actually gives t_0 indication within 2.0 milliseconds accuracy at the nominal film speed of 500 frames per second with a 140° shutter. Since the flash is not observed in film frame -0001 and is observed in film frame 0000, it is apparent that it was initiated between the closing of the shutter on film frame -0001 and the closing of the shutter on film frame 0000. During most tests, the intensity of the first observed flash would indicate that it was initiated between the closing of the shutter on frame -0001 and the opening of the shutter on frame 000. If this is the case, the t_0 indication could be considered to be accurate to $-0, +1.2$ milliseconds, i.e.,:

$$\frac{360^\circ - 140^\circ}{360^\circ} \times 2 \text{ msec} = 1.22 \text{ msec.}$$

Determination of conversion constants to be applied to the digitized readings of the anthropometric points on the subject required that the following be known.

(a) The distance, normal to the plane of symmetry of the subject, from that plane to each of two planes, parallel to the plane of symmetry, in which reference fiducials were marked.

(b) The distances, normal to the plane of symmetry of the subject, from that plane to each of the anthropometric points to be tracked.

(c) That the optical axis of the primary camera was normal to the plane of symmetry of the subject.

(d) The distances, between centers, of the reference fiducials mounted in each of the reference planes.

The coordinates of the reference fiducials on the farther and the nearer reference planes were digitized five times. The readings of these coordinates were then averaged and the digital distance between the averaged coordinates of each pair was calculated. Dividing each of these digital distances by the corresponding measured dimension between fiducials yielded conversion constants, in terms of "counts per foot", in two planes normal to the optical axis. Having determined these conversion constants, and having measured the distance between the parallel planes in which the fiducials lay, the distance along the optical axis from the focal point of the lens to each of these planes and the planes of symmetry could then be calculated. (See Figure 4.)

Prior to each test run the breadth of the subject was measured at each tracking fiducial location with an anthropometer. Assuming that each subject was symmetrical, the distance from the plane of symmetry to each tracking fiducial was defined as one-half the measured breadth of the subject at each fiducial location. Conversion constants for each plane parallel to the plane of symmetry, thus normal to the optical axis in which a tracking fiducial lay, were then calculated by similar triangles.

The actual digitization of the photographs was performed on a Froeders Service Corporation model FFB film reader (FFR). The magnification factor of the projector was 11.5x at 60.0, giving a projected frame image of 5 x 3.8- inches. The film was mounted on the reading mechanism and the operator, by a number of displacements of the film, caused the associated optical encoder to increment the reading by one thousand counts.

The operator started the first scan when a light flash was observed and reset the frame counter. The optical center of the film frame was found by measuring the vertical and horizontal dimensions of the frame image. The operator then positioned the crosshairs over the reference fiducial and depressed the record switch causing frame number and coordinates of the fiducial to be punched on paper tape and typed on the carriage of the teletype terminal. He then proceeded to position the crosshairs over the seat reference fiducial. Again, depressing the record switch caused coordinates to be recorded on the listing and the paper tape. In this manner he would proceed to each of the other points shown in Diagram 2.1, recording their coordinates. The coordinates had been extracted from that frame.

After advancing the film to the next frame, the operator would check the coordinates of the range and seat fiducials. If the frame-to-frame variation of these coordinates exceeded 100 counts he would again locate the optical center of the film frame image before proceeding.

This procedure was repeated for each film frame until the subject appeared to have attained a static position after the impact.

The resulting paper tape was read into files on the computer. All data entered from the teletype terminal was checked for accuracy, quality lines, and the file was entered into the computer memory. At this time the operator would check

were added to the file. This file was then copied on the card punch and printer as a time saving measure in case the disk file should be accidentally purged.

At this point the program HIFPD could have been attached and executed; however, the normal procedure was to obtain the card files and submit them in the batch mode on an overnight schedule. This permitted the connect time to be used for read-in and editing of additional data files.

Descriptions of specific procedures are presented in later sections, and the composition of a deck assembled for a typical computer run is illustrated in Figure 14.

2.2.10 Description of Program HIFPD Input Data and Parameter Codes

I. Program Setup Cards

A) The first card in the setup deck must contain the date in columns 1 to 10; for example, 12 FEB 74 or FEB 11, 74 (only one date card per job).


B) The following four or five cards are required for each test in the computer job:

Card Number 1

<u>Column</u>	<u>Format</u>	<u>Data Description</u>
1-80	8A10	80 columns of alphanumeric information which will be printed at the top of each page.

Card Number 2

1- 5	A5	Test number
6	I1	IRX--flag controlling polarity of x-axis data - blank or 0---no change 1---change sign of x-axis data
7	I1	IPR--flag controlling input data and difference printout - blank or 0---print data 1---omit printout

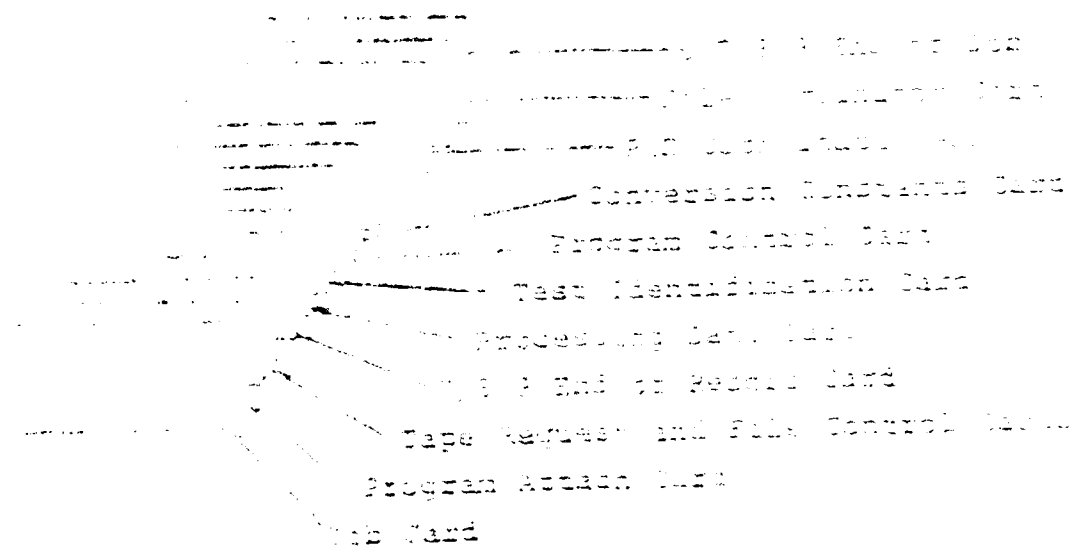

...

Card Number 2 (Continued)

<u>Column</u>	<u>Format</u>	<u>Data Description</u>
59-60	I2	NP--number of data points used in the quadratic fit. NP must be an odd number ≥ 3 ; default is NP=11.
61-65	F5.0	DYLP--velocity and acceleration linear plot scale increment per inch (see parameter IPL). Default is 2.5, 5, 10, 20, or 30 depending on the range of the data.

Card Number 2A -- required only when IADJ > 0.

1-10	F10.0	Time calibration--number of frames per second. May be left blank if film speed is 500 frames per second.
11-20	F10.0	SLED calibration in counts per foot
21-30	F10.0	HIP calibration in counts per foot*
31-40	F10.0	KNEE calibration in counts per foot*
41-50	F10.0	SHOULDER calibration in counts per foot*
51-60	F10.0	ELBOW calibration in counts per foot*
61-70	F10.0	HEAD POINT 1 calibration in counts per foot
71-80	F10.0	HEAD POINT 2 calibration in counts per foot

NOTE: The decimal must be punched in the above data fields unless the data are integer and are right justified.

Card Number 4

1 11 9 in column 1 to indicate the end of test input

NOTE: Cards 1, 2, and 3 are placed in front of the test deck and card 4 is placed after the last frame in the test.

C) The last card in the input deck (before the end of job card) contains the word "END" in columns 1 to 3.

*The calibration field for these variables must be zero or blank for ITYPE=1.

13. Variable Code Identification

The following code versus variable name list is the result of the program run on the data file:

<u>Code</u>	<u>Name</u>
1	Range
2	Sled
3	Hip
4	Knee
5	Shoulder
6	Elbow
7	Head Joint 1
8	Head Joint 2

14. Card Formats for the Test Input Data Cards for 17

Card Number 1

<u>Column</u>	<u>Format</u>	<u>Data Description</u>
1-5	14	Frame number
6-12	17	x reading in counts for Range data
13-19	17	z reading in counts for Range data
20-26	17	x for Sled
27-33	17	z for Sled
34-40	17	x for Hip
41-47	17	z for Hip
48-54	17	x for Knee
55-61	17	z for Knee

Card Number 2

1-5	14	Frame number
6-12	17	x reading in counts for Shoulder data
13-19	17	z reading in counts for Shoulder data
20-26	17	x for Elbow
27-33	17	z for Elbow
34-40	17	x for Head Joint 1

Card Number 2 (Continued)

<u>Column</u>	<u>Format</u>	<u>Data Description</u>
41-47	17	z for Head Point 1
48-54	17	x for Head Point 2
55-61	17	z for Head Point 2

IV. Card Formats for the Test Input Data Cards for ITYPE=1

Card Number 1

2- 5	14	Frame number
6-12	17	x reading in counts for Range data
13-19	17	z reading in counts for Range data
20-26	17	x for Sled
27-33	17	z for Sled
34-40	17	x for Head Point 1
41-47	17	z for Head Point 1
48-54	17	x for Head Point 2
55-61	17	z for Head Point 2

NOTE: For ITYPE=1, only 1 data card is read for each frame.

V. General Comments

A) If there are any errors in frame or card identification numbers, error statements will be printed at the top of the first output page for the test and all computations after the listing of the input data will be deleted.

B) A maximum of 300 frames (MAXN) will be read for each test. If the test input deck contains more than 300 frames, only the first 300 will be processed. This could be changed by changing MAXN and the array dimensions in the program.

C) If the calibration factor for a variable is missing flag ICAL(J) is set equal to zero and that variable will be deleted from the analysis.

D) An eleven point load is used in the program. The value of N on the graph is the value of N on the graph.

E) The program is used for the velocity and acceleration subroutine (PLT). The x-axis is the variable relative to the displacement ranges from -1.0 to 1.0 feet and the y-axis is 4.0 feet. Any displacement is limited to the limits.

F) Program for IADJ is used since June 1977. IADJ controls the input of the instrument factors. When IADJ is being used, the instrument is omitted from the test. When IADJ is not used, the instrument is from setup card number 23 and is used immediately after input of the instrument factors (change). Setup card number 23 is used when IADJ is 0.

G) The following items were added since December 1978:

- (1) The mean and standard deviation of the mean are computed for the data after all adjustments have been made. Data are not accepted.
- (2) The mean and standard deviation of the difference between the mean and the standard deviation of the data requested for the test are computed. The data are not accepted. When the data are accepted, the mean and standard deviation of the data are printed on the output.

(9) The Vel and Acc. (DY) measurement per inch (DY) has been set, may now be set on the scale of the DYIP measurement. The DY will be set equal to 1.0 or 30 depending on the range of DYLI is defined on the scale (Card #2, Col. 61-65), or will to DYIP even if zero.

2.1.1. RESTRAINT SYSTEM DYNAMICS NYLON HARNESS COMPARISON

This report describes and documents the test employed to collect and reduce data on the anthropometric points on human subjects who are exposed to laboratory simulations of -1 impact.

The primary objectives of the test were:

- To measure the inertial and dynamic responses of the human body to -1 impact.
- To determine the influence of restraint of restraint harnesses upon the inert responses of the human body.
- To compare the measured inertial and dynamic responses of the human body to those of Articulated Total Body Model.
- To provide data to improve the Articulated Total Body Model for use in -1 impact environments.

The data presented in this report are the results of measurements taken during the test.

Each of the volunteer subjects was exposed to each impact acceleration level three times; once with the rigid harness, once with an operational harness, and once with a nylon harness. The dummy tests which were evaluated consisted of three exposures to $-6 G_x$ impacts and three exposures to $-10 G_x$ impacts. The dummy was restrained by the operational harness during all six exposures.

The impact environments were developed on the Horizontal Impulse Accelerator Facility located in Building 824 at Wright-Patterson Air Force Base, Ohio. The tests were conducted by the Aerospace Medical Research Laboratory, Biomechanical Protection Branch (AMRL/BBP) (known at the time as Impact Branch, AMRL/IBI) during the period September 1976 - June 1977.

2.3.1 Requirements

The anthropometric points specified to be tracked were the head, the shoulder, the elbow, the hip, and the knee. A second point on the head was also specified for the purpose of tracking its angular displacement relative to the first.

In accordance with Recommended Practice SAE J118, SAE Handbook, 1975, the following points were specified to be marked with fiducials.

Head (Point 1)	The Trageon.
Head (Point 1) (Alternate)	A point approximately three (3) inches above the trageon.
Head (Point 2)	Outside corner of 9 Transducer Accelerometer Pack (9TAP) common to all three legs (Figure 15). ¹
Shoulder	The most lateral projection of the acromion process of the scapula.
Elbow	The most lateral projection of the humeral condyle.
Wrist	The most prominent projection of the stylien.

¹ Prior to Test 987 (23 Sept., 1976) a triaxial accelerometer was used in place of the 9TAP. The point marked was the geometric center of the accelerometer, which was marked with a fiducial.

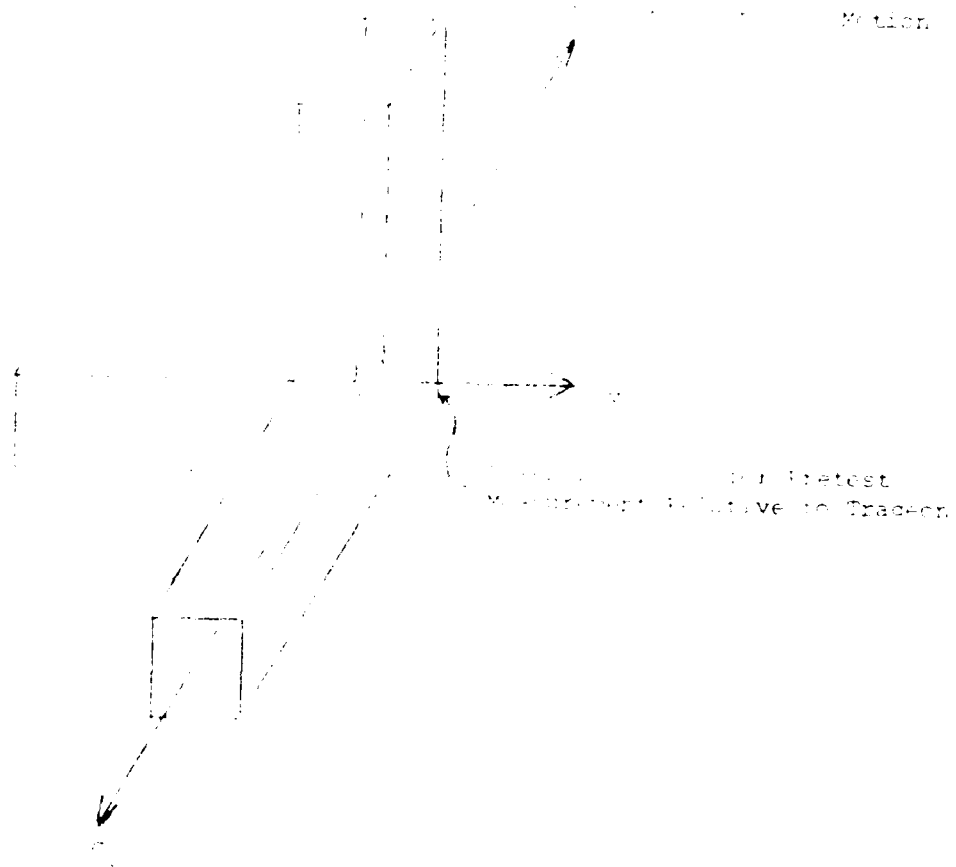


Figure 1. Diagram of Pretest Measurement Relative to Traceon

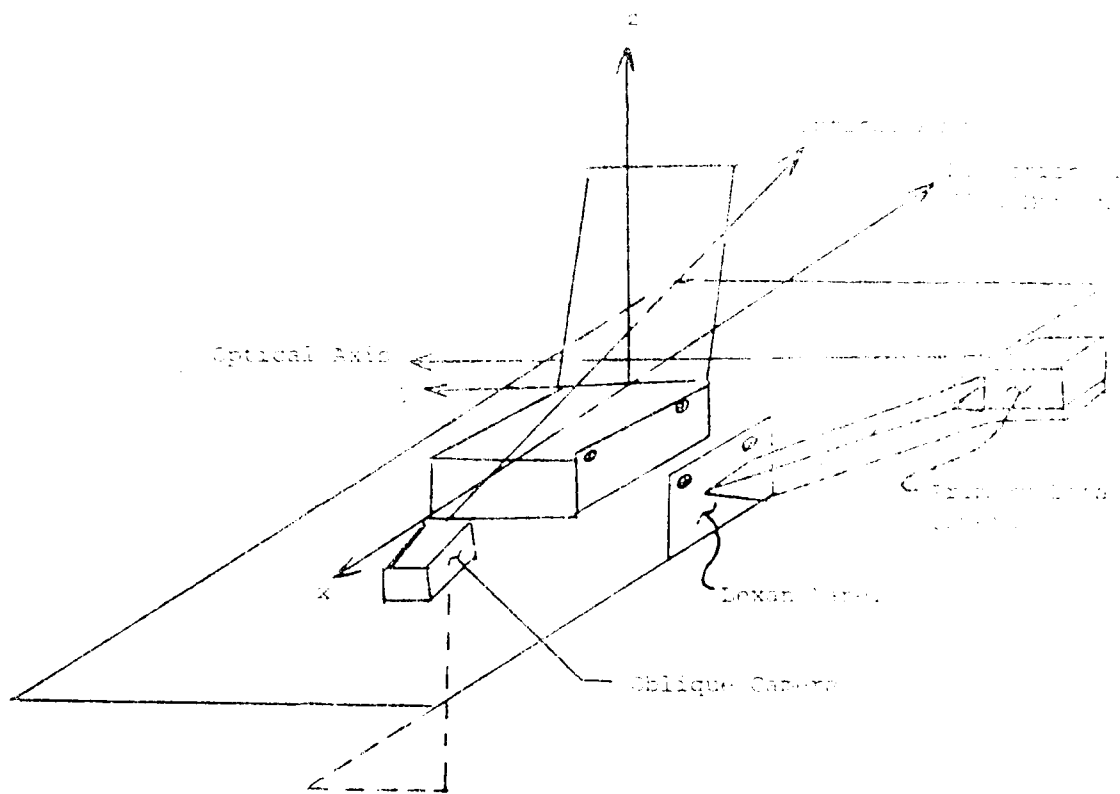


Figure 16. RSD(N/O/R) Seat Coordinate System and Camera Locations.

of the focal point at a distance of 1000 mm. The head camera was mounted suspended with a focal length of 1000 mm (48.30, 52.75). The camera body was suspended at an azimuth of 147 degrees 50 min. to the vertical above. The roll attitude of the camera was 20.5 degrees from optical axis.

Two additional cameras were mounted on the subject's head with this focal point at pretest accelerations in the coordinate system prior to initiation of the event: (-12.45, -115.4, 28.8). This camera backup device a malfunction of the primary data camera; night and offboard camera was mounted above the acceleration chair main track to provide a frontal view of the subject throughout the event. The third camera was mounted over head at 15.50 ft above the plane of the chair.

4. Apparatus

The apparatus mission consisted of three major parts:

1. Determination of anthropometric measurements on each subject.

2. Tracking fiducial application, measurement, and documentation.

3. Fine recording of the tracking video film during the impact and response events.

Anthropometry of each subject was measured and documented as follows:

Tracking fiducial application, measurement and documentation was finished prior to each test run by the EDRB representative. Tracking fiducials were located as follows:

The medial treatment room, prior to the pretest measurements, adhesion process of the scapula, lateral of the humeral condyle, stylium, and the lateral part of the humeral condyle, all on the left side of the subject were palpation. An each point was marked.

The first part of the report deals with the general situation of the country and the position of the various groups. It is followed by a detailed account of the events of the past few years, and a final chapter on the future of the country.

The second part of the report is devoted to a detailed account of the events of the past few years. It begins with a description of the political situation, and then goes on to describe the economic and social conditions. The author also discusses the role of the various groups in the country, and the impact of the various policies.

The third part of the report is devoted to a detailed account of the events of the past few years. It begins with a description of the political situation, and then goes on to describe the economic and social conditions. The author also discusses the role of the various groups in the country, and the impact of the various policies.

The fourth part of the report is devoted to a detailed account of the events of the past few years. It begins with a description of the political situation, and then goes on to describe the economic and social conditions. The author also discusses the role of the various groups in the country, and the impact of the various policies.

The fifth part of the report is devoted to a detailed account of the events of the past few years. It begins with a description of the political situation, and then goes on to describe the economic and social conditions. The author also discusses the role of the various groups in the country, and the impact of the various policies.

The sixth part of the report is devoted to a detailed account of the events of the past few years. It begins with a description of the political situation, and then goes on to describe the economic and social conditions. The author also discusses the role of the various groups in the country, and the impact of the various policies.

TABLE 1
DEFINITIONS OF PRETEST DATA ITEMS

<u>Item</u>	<u>Definitions</u>
RS	Restraint Harness Material
GN	Nominal Impact Acceleration (-G _X)
RN	Test Number
DT	Date of Test (Year, Month, Day)
1	Weight (Kg)
2	Height of head band fiducial above sled deck
3	Height of shoulder above sled deck
4	Height of iliac crest above sled deck
5	Trageon to 9TAP origin
6	Trageon to headband fiducial distance
7	Shoulder to elbow distance
8	Elbow to wrist distance
9	Hip to iliac crest distance
10	Hip to knee distance
11	Mid-thigh to knee distance
12	Knee to ankle distance
13	Breadth at trageons
14	Breadth at shoulders
15	Breadth at elbows
16	Breadth at hips
17	Breadth at knees
18	Breadth at ankles
19	Mid-shoulder height. Distance along seat back plane from line of intercept of seat pan plane and seat back plane to a line normal to the seat back and tangent to the upper surface of the shoulder at the centerline of the left shoulder strap.

Summary of English Study, 1900-1914

Year	1900	1901	1902	1903	1904	1905	1906	1907	1908	1909	1910	1911	1912	1913	1914	Total
1	76.87	76.19	75.28	74.97	74.15	73.00	72.19	71.19	70.25	69.14	67.84	66.47	65.24	64.14	63.24	76.24
2	105.94	105.39	104.34	103.34	102.34	101.34	100.34	99.34	98.34	97.34	96.34	95.34	94.34	93.34	92.34	106.34
3	80.64	79.74	78.84	77.94	77.04	76.14	75.24	74.34	73.44	72.54	71.64	70.74	69.84	68.94	68.04	79.82
4	64.34	64.04	63.74	63.44	63.14	62.84	62.54	62.24	61.94	61.64	61.34	61.04	60.74	60.44	60.14	45.46
5	12.50	12.50	12.50	12.50	12.50	12.50	12.50	12.50	12.50	12.50	12.50	12.50	12.50	12.50	12.50	15.00
6	7.94	6.35	6.67	8.23	9.89	6.19	6.19	6.19	6.19	6.19	6.19	6.19	6.19	6.19	6.19	7.35
7	30.16	29.21	28.26	27.31	26.36	25.41	24.46	23.51	22.56	21.61	20.66	19.71	18.76	17.81	16.86	29.17
8	25.72	25.40	25.08	24.76	24.44	24.12	23.80	23.48	23.16	22.84	22.52	22.20	21.88	21.56	21.24	25.35
9	12.70	12.26	11.75	12.70	12.70	12.70	12.70	12.70	12.70	12.70	12.70	12.70	12.70	12.70	12.70	12.50
10	41.91	42.74	42.86	41.28	40.64	45.50	45.50	41.59	42.54	42.54	42.54	42.54	42.54	42.54	42.54	42.00
11	25.40	25.40	25.40	25.40	25.24	22.86	25.40	25.40	25.40	25.40	25.40	25.40	25.40	25.40	25.40	25.14
12	46.45	42.54	42.86	45.18	42.54	43.82	43.82	43.18	42.86	42.86	42.86	42.86	42.86	42.86	42.86	43.25
13	14.80	15.30	14.90	14.90	14.90	14.80	14.80	14.80	14.80	14.80	14.80	14.80	14.80	14.80	14.80	15.20
14	42.50	43.80	44.30	44.30	44.30	44.30	44.30	44.30	44.30	44.30	44.30	44.30	44.30	44.30	44.30	45.39
15	55.90	56.30	56.10	55.10	55.10	52.60	52.60	56.70	56.40	56.40	56.40	56.40	56.40	56.40	56.40	55.92
16	39.00	38.40	38.80	38.30	39.20	38.60	38.60	37.40	37.40	37.40	37.40	37.40	37.40	37.40	37.40	38.39
17	27.90	34.70	29.40	31.00	27.50	32.10	32.10	31.20	31.20	31.20	31.20	31.20	31.20	31.20	31.20	31.26
18	18.80	33.00	21.20	20.60	20.10	24.50	24.50	28.70	28.70	28.70	28.70	28.70	28.70	28.70	28.70	25.53
19	60.96	61.91	61.84	62.25	62.25	62.25	62.25	60.52	61.28	61.28	61.28	61.28	61.28	61.28	61.28	61.52

TABLE 3

SUMMARY OF PRETEST DATA, SUBJECT A22

SUBJECT	A 22	N Y L O N				O P E R A T I O N A L				R I G I D				MEAN	STANDARD DEVIATION
		RS	b	6	10	6	8	10	10	6	8	10	8		
GN	1102	81.63	82.99	82.54	80.27	82.09	80.61	81.63	82.09	83.22	81.90	.99			
RH	770122	110.94	110.64	111.54	111.94	111.14	109.54	110.54	109.80	111.24	110.81	.78			
DT	1157	83.24	82.94	83.04	83.04	82.24	83.14	83.74	78.80	85.44	82.71	1.17			
	761210	44.64	44.54	46.24	43.84	45.14	45.54	44.44	40.50	45.24	44.46	1.64			
	1071	14.70	14.10	14.60	14.40	14.10	14.10	14.20	13.50	14.70	14.29	.41			
	761026	6.98	6.67	8.26	8.26	6.35	6.67	7.62	8.89	7.78	7.50	.88			
	761118	30.80	31.43	31.12	31.12	31.12	32.07	32.12	30.80	31.75	31.26	.42			
	760928	27.30	26.99	26.67	26.67	26.67	26.99	26.67	26.99	26.67	26.85	.23			
	1041	13.97	12.38	13.97	13.02	12.70	12.38	12.70	14.13	13.34	13.28	.70			
	995	44.77	46.36	46.36	43.50	44.13	44.45	43.82	44.77	42.23	44.49	1.31			
	1148	24.92	25.40	25.40	25.40	25.40	24.76	25.40	25.40	25.08	25.24	.25			
	1138	45.40	44.45	45.03	44.13	46.04	43.82	44.13	44.77	45.40	44.80	.75			
	770203	14.50	14.60	14.40	14.70	15.80	14.50	14.80	14.60	14.60	14.77	.42			
	770216	46.10	44.90	45.90	46.30	46.20	45.70	44.20	45.10	45.20	45.58	.58			
	760928	53.70	54.50	55.90	55.00	54.10	52.80	55.60	55.20	52.70	54.39	1.16			
	770106	39.20	38.70	39.60	36.60	38.60	38.00	38.50	39.20	39.30	38.86	.50			
		52.80	31.30	35.40	38.50	35.30	32.30	37.80	35.70	37.60	35.19	2.58			
		35.20	33.70	36.30	35.90	35.10	33.00	36.80	37.20	37.60	35.64	1.55			
		63.42	64.14	64.77	64.14	64.45	62.23	64.77	63.50	64.14	64.00	.78			

TABLE 5

SUMMARY OF PRETEST DATA, SUBJECT R4

STIMULUS	S Y N T A X				O P E R A T I O N A L				E L E M E N T A R Y				TOTAL REACTANCE	
	d	e	f	g	h	i	j	k	l	m	n	o		p
1	74.85	75.19	72.58	75.74	76.19	75.74	76.64	76.64	75.74	75.74	76.64	75.74	75.74	1.76
2	108.54	109.56	110.64	111.54	113.14	112.24	112.24	112.44	112.24	112.24	112.44	111.14	111.14	1.67
3	61.24	62.64	62.74	63.72	66.24	63.74	64.84	64.84	63.74	63.74	64.84	63.24	63.24	.96
4	42.74	42.64	44.64	44.64	44.64	44.54	42.74	42.74	44.54	44.54	42.74	44.54	44.54	.94
5	13.50	14.16	16.99	13.40	13.30	13.70	13.80	13.80	13.70	13.70	13.80	13.10	13.10	.57
6	33.26	33.98	11.73	7.67	8.57	9.21	8.57	8.57	9.21	9.21	8.57	8.26	8.26	1.42
7	29.53	31.11	30.48	31.73	30.86	32.07	31.45	31.45	32.07	32.07	31.45	30.50	30.50	.73
8	27.36	28.73	28.58	26.31	26.95	26.64	26.35	26.35	26.64	26.64	26.35	26.64	26.64	.86
9	13.97	14.33	14.63	14.63	15.83	14.63	14.63	14.63	14.63	14.63	14.63	15.36	14.63	.73
10	50.68	43.33	43.50	34.13	43.98	43.96	46.67	46.67	43.96	43.96	46.67	43.18	46.67	1.34
11	25.03	23.00	24.04	23.30	23.46	23.72	23.40	23.40	23.72	23.72	23.40	23.40	23.40	.79
12	73.33	74.33	73.62	74.66	76.50	74.66	74.66	74.66	74.66	74.66	74.66	74.66	74.66	.84
13	14.02	13.99	13.96	14.06	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	.53
14	48.73	47.00	46.40	44.00	44.00	45.70	42.30	42.30	45.70	45.70	42.30	43.30	43.30	.73
15	33.13	33.44	33.13	33.44	33.44	34.00	32.80	32.80	34.00	34.00	32.80	32.80	32.80	1.04
16	70.33	68.33	68.33	68.33	68.33	68.33	68.33	68.33	68.33	68.33	68.33	68.33	68.33	.78
17	33.13	33.44	33.44	33.44	33.44	33.44	33.44	33.44	33.44	33.44	33.44	33.44	33.44	.73
18	50.68	43.33	43.50	34.13	43.98	43.96	46.67	46.67	43.96	43.96	46.67	43.18	46.67	1.34
19	25.03	23.00	24.04	23.30	23.46	23.72	23.40	23.40	23.72	23.72	23.40	23.40	23.40	.79
20	73.33	74.33	73.62	74.66	76.50	74.66	74.66	74.66	74.66	74.66	74.66	74.66	74.66	.84
21	14.02	13.99	13.96	14.06	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	.53
22	48.73	47.00	46.40	44.00	44.00	45.70	42.30	42.30	45.70	45.70	42.30	43.30	43.30	.73
23	33.13	33.44	33.13	33.44	33.44	34.00	32.80	32.80	34.00	34.00	32.80	32.80	32.80	1.04
24	70.33	68.33	68.33	68.33	68.33	68.33	68.33	68.33	68.33	68.33	68.33	68.33	68.33	.78
25	14.02	13.99	13.96	14.06	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.50	.53
26	48.73	47.00	46.40	44.00	44.00	45.70	42.30	42.30	45.70	45.70	42.30	43.30	43.30	.73

TABLE 6

SUMMARY OF PRETEST DATA, SUBJECT B22

FS	NYLON			OPERATIONAL			RIGID			MEAN	STANDARD DEVIATION
	6	8	10	6	8	10	6	8	10		
GH	1044	1154	1070	1228	1180	1137	1086	1042	1150		
RI	761130	770301	761216	770415	770315	770203	770106	761118	770217		
1	85.71	85.82	85.94	85.14	85.83	86.17	86.62	85.71	86.16	85.90	.41
2	114.64	114.04	112.94	114.04	114.04	114.34	113.34	114.24	113.64	113.92	.53
3	87.84	87.54	88.64	87.54	86.44	87.84	87.64	88.24	87.44	87.88	.44
4	45.24	44.84	44.34	45.44	44.94	44.14	43.84	44.14	44.24	44.57	.56
5	13.90	12.50	13.40	13.30	12.40	13.70	13.80	13.10	13.60	13.29	.55
6	7.94	7.94	6.98	6.99	8.26	9.21	8.26	7.62	7.94	7.90	.68
7	31.43	32.39	32.38	32.70	32.70	31.75	31.75	30.60	32.39	32.03	.64
8	26.87	26.67	28.89	26.99	26.67	26.35	26.35	26.35	26.35	26.81	.81
9	13.97	14.92	13.34	15.24	13.65	15.92	12.70	13.97	14.29	14.22	1.00
10	45.08	45.72	45.72	44.77	44.13	43.82	42.86	42.54	42.55	44.13	1.28
11	25.40	25.24	25.40	25.24	25.40	25.08	25.40	25.72	25.40	25.36	.17
12	47.62	46.99	47.31	46.99	46.36	46.99	47.31	47.94	46.99	47.17	.45
13	14.30	14.20	14.90	14.70	14.70	14.30	14.60	14.50	14.30	14.50	.24
14	43.10	43.30	42.80	42.80	42.70	43.00	43.20	43.20	42.30	42.93	.32
15	33.80	55.90	56.30	54.80	56.70	56.40	55.20	52.20	53.80	54.99	1.51
16	38.70	40.20	40.40	39.00	40.40	42.20	40.80	41.10	40.50	40.37	1.05
17	32.90	35.20	33.00	32.60	34.60	34.90	34.20	34.90	32.90	33.91	1.05
18	29.20	37.50	36.60	39.10	38.30	38.50	37.10	38.10	35.00	36.67	3.00
19	68.58	67.63	68.26	67.94	67.31	67.94	67.63	66.99	67.63	67.77	.48

TABLE 7

SUMMARY OF PRETEST DATA, SUBJECT B3

IS	HYLON			OPERATIONAL			RIGID			STANDARD DEVIATION
	6	8	10	6	8	10	6	8	10	
SH	1089	1103	1135	980	1028	1072	1017	1144	1032	
RH	770107	770120	770201	760915	761104	761216	761026	770215	761117	
1	79.37	81.18	80.27	84.35	82.09	81.63	82.54	80.27	82.09	1.48
2	103.84	104.34	104.24	102.74	104.34	103.24	105.64	103.74	104.14	.81
3	77.94	75.84	78.54	78.44	78.04	78.44	78.04	78.04	77.34	.84
4	44.34	41.84	42.24	41.64	43.14	42.04	42.74	43.74	44.34	105
5	14.20	13.10	14.90	15.90	14.00	13.90	14.40	11.30	13.70	.85
6	8.89	7.62	9.21	8.26	8.89	8.10	8.89	7.94	7.94	.56
7	28.56	28.89	29.84	30.80	29.21	30.43	29.53	29.21	28.89	.75
8	25.40	25.72	24.13	25.40	26.04	24.76	25.72	25.08	28.26	1.15
9	12.38	10.80	11.11	10.32	12.38	10.80	12.38	15.24	12.35	1.46
10	47.04	47.62	48.90	49.21	46.67	44.77	47.94	44.13	44.13	1.26
11	25.40	25.40	25.40	25.40	25.40	25.40	25.40	25.40	25.40	1.00
12	44.45	44.45	42.86	43.82	44.61	44.13	43.50	43.08	43.46	1.13
13	14.50	14.50	14.50	14.50	14.50	14.50	14.50	14.70	14.70	1.1
14	46.40	47.80	46.40	44.10	46.30	48.40	46.70	46.50	46.30	1.46
15	55.70	55.70	55.40	55.90	55.90	59.40	54.30	54.30	55.90	1.40
16	40.40	41.70	40.40	40.10	40.80	40.30	42.70	40.80	40.70	1.19
17	53.00	53.00	52.70	53.00	52.60	53.30	53.00	51.40	53.00	1.15
18	54.30	54.30	54.30	54.30	56.30	57.90	54.70	54.20	55.30	1.26
19	59.57	59.57	59.57	59.57	59.57	59.06	59.46	59.57	59.57	1.17

TABLE 8

SUMMARY OF PRETEST DATA, SUBJECT C1

CYCLE	HYLON				OPERATIONAL				RIBID				STANDARD DEVIATION	
	6	8	10	10	6	8	10	10	6	8	10	10		11
1	1124	1034	1067	1020	1091	1003	1107	761098	770502	770502	770502	770502	770502	770502
2	75.15	75.08	75.74	75.28	73.92	73.47	75.06	73.47	75.74	74.76	74.76	74.76	74.76	74.76
3	108.94	108.94	109.54	110.44	107.24	109.74	110.24	109.74	109.54	109.44	109.44	109.44	109.44	109.44
4	73.75	61.34	62.94	61.84	78.94	82.14	82.74	82.14	82.94	81.74	82.94	81.74	81.74	81.74
5	43.34	45.24	44.94	43.34	42.94	44.74	44.94	44.74	44.54	44.54	44.04	44.04	44.04	44.04
6	14.00	13.45	13.50	12.70	12.80	13.20	13.50	13.20	13.60	13.60	13.29	13.29	13.29	13.29
7	6.57	7.94	7.94	8.89	9.68	6.67	9.21	6.67	9.84	9.84	8.65	8.65	8.65	8.65
8	50.35	51.12	52.07	50.43	50.96	51.75	50.48	51.75	51.75	51.75	51.22	51.22	51.22	51.22
9	27.30	26.99	26.99	27.30	25.72	26.85	26.99	26.85	27.30	26.99	26.99	26.99	26.99	26.99
10	12.70	12.00	13.02	12.38	13.34	13.02	12.38	13.02	12.70	12.70	12.70	12.70	12.70	12.70
11	45.06	48.90	46.04	45.72	49.21	44.45	45.09	44.45	46.36	46.36	46.39	46.39	46.39	46.39
12	25.40	25.40	25.40	25.08	23.97	25.08	25.40	25.08	25.40	25.40	25.17	25.17	25.17	25.17
13	46.99	45.40	45.72	46.36	46.36	46.67	46.99	46.67	47.51	46.51	46.51	46.51	46.51	46.51
14	14.10	14.50	14.09	14.40	14.10	14.29	13.90	14.29	14.10	14.10	14.11	14.11	14.11	14.11
15	44.00	44.20	44.10	44.80	44.40	44.10	44.80	44.10	44.70	44.51	44.51	44.51	44.51	44.51
16	54.40	56.21	57.40	57.40	55.00	54.51	56.14	54.51	55.50	55.87	55.87	55.87	55.87	55.87
17	36.10	34.00	34.80	37.70	38.50	37.50	38.29	37.50	38.20	38.20	38.20	38.20	38.20	38.20
18	51.30	50.80	50.70	57.80	53.70	51.10	52.70	51.10	52.87	52.87	52.87	52.87	52.87	52.87
19	23.50	24.90	25.90	26.60	25.39	25.90	27.40	25.90	27.40	27.40	27.40	27.40	27.40	27.40
20	62.86	62.86	62.86	62.86	62.86	62.86	62.86	62.86	62.86	62.86	62.86	62.86	62.86	62.86

TABLE 9

SUMMARY OF PRETEST DATA, SUBJECT C2

SUBJECT	RYLON				OPERATIONAL				PILIP				MEAN	STANDARD DEVIATION
	6	8	10	10	6	8	10	10	6	8	10	10		
1	79.95	81.18	80.39	80.50	82.99	81.18	82.69	81.07	81.63	81.22	81.63	81.63	81.22	.93
2	104.94	103.44	103.04	109.34	106.94	110.04	111.34	106.54	110.24	108.98	110.24	110.24	108.98	1.61
3	81.74	82.14	81.04	82.14	81.44	81.54	80.04	80.94	81.34	81.31	81.34	81.34	81.31	.65
4	48.14	44.54	44.14	43.94	43.64	43.94	44.64	43.64	44.84	44.25	44.84	44.84	44.25	.53
5	14.50	13.70	14.20	14.30	14.80	13.20	13.90	14.50	13.50	14.02	13.50	13.50	14.02	.54
6	6.35	6.85	6.85	8.57	7.94	8.26	8.89	6.19	7.94	7.88	7.94	7.94	7.88	1.06
7	33.17	33.17	34.29	33.18	33.02	33.02	32.70	32.39	34.29	33.29	34.29	34.29	33.29	.66
8	27.4	28.26	28.26	27.30	26.67	27.62	27.62	27.94	27.50	27.62	27.50	27.50	27.62	.50
9	13.58	13.97	13.65	13.34	13.97	13.65	13.65	12.70	14.29	13.51	14.29	14.29	13.51	.62
10	46.58	47.62	47.62	46.67	46.58	47.94	46.59	46.04	46.04	47.03	46.04	46.04	47.03	.87
11	27.94	27.94	27.94	25.72	25.49	25.40	25.40	25.68	25.08	25.61	25.08	25.08	25.61	.90
12	47.51	46.58	46.58	47.94	47.31	47.62	47.62	48.90	47.94	47.94	47.94	47.94	47.94	.55
13	14.50	14.50	14.50	14.20	13.80	14.60	14.50	15.10	14.60	14.47	14.60	14.60	14.47	.59
14	45.10	45.10	45.10	45.10	44.60	43.90	44.20	46.70	48.29	45.43	48.29	48.29	45.43	1.35
15	53.90	53.90	53.90	54.89	57.10	54.90	51.50	57.20	53.50	54.00	53.50	53.50	54.00	2.15
16	57.90	57.90	57.90	58.10	58.40	59.10	59.10	57.60	59.50	58.59	59.50	59.50	58.59	.62
17	35.40	35.40	35.40	35.80	37.60	35.50	32.00	35.20	35.20	34.52	35.20	35.20	34.52	2.08
18	38.80	38.80	38.80	38.80	37.40	38.29	38.50	32.10	38.60	38.10	38.60	38.60	38.10	1.57
19	61.91	61.91	61.91	61.91	61.63	63.18	61.63	63.30	63.18	62.13	63.18	63.18	62.13	.94

TABLE 1

SUMMARY OF INVESTMENT DATA, 1950-1954

Year	1950		1951		1952		1953		1954	
	Investment	Income	Investment	Income	Investment	Income	Investment	Income	Investment	Income
1	63.12	67.98	57.76	68.66	69.12	81.89	60.16	61.98	60.16	65.13
2	100.54	117.74	105.14	105.24	115.54	125.54	104.14	104.74	104.14	123.67
3	60.14	78.94	76.74	77.84	78.14	77.84	70.14	76.14	70.14	75.13
4	45.94	45.74	44.54	45.54	42.14	42.24	45.14	45.14	45.14	45.58
5	54.50	14.60	15.00	14.70	14.15	14.80	14.60	14.40	14.60	14.71
6	51.12	8.89	8.57	7.94	8.26	9.21	7.62	7.94	7.62	6.54
7	41.12	21.84	40.48	31.43	51.43	39.89	31.12	36.83	31.12	31.12
8	10.55	19.84	29.55	28.26	27.94	29.55	28.58	28.84	28.58	29.05
9	17.02	11.06	11.75	12.70	10.16	11.11	12.06	12.70	12.06	11.92
10	49.21	50.48	49.21	48.58	46.99	47.12	46.36	46.04	46.36	47.80
11	17.02	25.40	25.08	25.72	25.49	25.40	25.40	24.76	25.40	25.47
12	45.15	46.26	48.58	49.14	49.85	46.94	48.26	48.26	48.26	48.62
13	17.02	14.90	15.00	15.10	14.90	15.30	15.30	15.00	15.30	15.06
14	47.00	47.00	47.80	46.90	47.40	47.50	48.50	48.50	48.50	47.54
15	50.20	52.80	50.20	57.80	56.40	54.20	52.00	51.80	52.00	51.74
16	59.20	59.90	50.50	40.20	38.00	39.90	39.00	40.00	39.00	39.00
17	51.40	57.00	57.00	41.70	36.10	37.10	37.80	37.90	37.80	37.40
18	26.70	51.40	54.40	37.10	35.00	35.70	35.80	37.80	35.80	34.94
19	61.91	61.80	60.01	60.01	62.23	60.96	61.60	59.57	61.60	61.07

2.3.4 Photogrammetric Calibration

Calibration of conversion constants was based upon the method illustrated in Figure 4 . The fiducials on the lexan panel ($y = -32.062$) and the side of the seat pan ($y = -8.0$) were digitized and the average conversion factors for those planes were calculated to be 2787.13 counts per foot (cpf) and 1650.74 cpf respectively.

Referring to Figure 4 the following values were assigned:

$$\begin{aligned}r_o &= r_{o2} = 1 \text{ foot} \\r_p &= 1650.74 \text{ counts} \\r_{p2} &= 2787.13 \text{ counts} \\s_o - s_{o2} &= 24.062 \text{ inches.}\end{aligned}$$

The distance, r , from the axis at which the ray from p_o to the focal point penetrated the object 2 plane was calculated to be:

$$\begin{aligned}\frac{r}{r_{o2}} &= \frac{r_p}{r_{p2}} \\r &= 1 \text{ foot} \times \left(\frac{1650.74 \text{ counts}}{2787.13 \text{ counts}} \right) \\r &= .592 \text{ foot} = 7.107 \text{ inches.}\end{aligned}$$

The apparent distance from the focal point to the plane $y = -8.0$ inches was calculated to be:

$$\begin{aligned}\frac{s_o}{s_o - s_{o2}} &= \frac{r_o}{r_{o2} - r} \\s_o &= (s_o - s_{o2}) \left(\frac{r_o}{r_{o2} - r} \right) \\s_o &= 24.062 \text{ inches} \left(\frac{12 \text{ inches}}{4.893 \text{ inches}} \right) \\s_o &= 59.01 \text{ inches.}\end{aligned}$$

Calculation of a conversion constant, f_n , for any plane, $y=n$, was then accomplished using:

$$f_n = \frac{s_c}{s_o + (B-y)} \times 1650.74 \text{ counts per foot}$$

when $y=n$ =one half the measured breadth of the subject between anthropometric points on the left and right side.

2.3.5 Data Reduction Process

The data reduction process consisted of data editing, digitizing, and electronic data processing. Film editing and digitizing were accomplished on the Producers Service Corporation model PVR film analyzer (PVR) interfaced with a teletype terminal (TTY) with paper tape punch. Tape to card conversion and electronic processing and plotting were accomplished on the CDC Cyber 74 System at the Aeronautical Systems Division's Digital Computation Facility (ASD/AD) in Building 676, Area B, Wright-Patterson Air Force Base.

2.3.5.1 Editing

The primary camera film was viewed on a light table and the frames and .01 second timing pulses were counted throughout the event. The frame exposure rate (frames per second) was scanned for consistency and the average frame rate was calculated. During each run processed the frame rate was constant, ± 1 frame per second, during the 300 milliseconds following initiation. During the program film speeds ranged from 462 to 495 frames/second.

The film was mounted on the PVR and was transported forward in the cine mode until the operator observed that the subject motion had apparently terminated. The number of the frame was noted as termination time.

2.3.5.2 Digitizing

Upon completion of the editing procedure, the film was transported reverse to frame zero, the first frame in which the strobe flash was observed.

1. Seat forward fiducial
2. Seat aft fiducial
3. Hip fiducial
4. Knee fiducial
5. Shoulder fiducial
6. Elbow fiducial
7. Trageon fiducial
8. 9TAP mount fiducial

The digital values of these coordinates, preceded by the frame number, were punched into paper tape in the format (I5, 8F7.0/I5, 8F7.0). Each of the 8F7.0 fields contained four pairs of coordinates.

After the coordinates projected from frame zero were digitized, the coordinates from each succeeding frame were digitized in the same sequence until frame 150 (approximately 300 msec).

2.3.5.3 Electronic Data Processing

This portion of the process required three procedures, data preparation, computation, and plotting.

Data Preparation: During the data preparation procedure, the file recorded on punched paper tape was communicated to the computer at ASD/AD from a TTY via voice quality lines. The file was then edited to correct format and/or character errors, and was batched to a card punch for creation of the permanent file. Concurrently, the identification, control, and comparison constant cards required by program HIFPD were punched for storage with the card file.

The identification card contained alphanumeric information in cards columns (cc) 1 thru 80 which was printed on output tables as table identification. The form used was RSD STUDY, SUBJECT--, RUN----, YYMMDD, material. The next to last entry is the date on which the test was conducted in terms of year, month, and day of month.

The control card contained the test number and program control switch characters. The format and definition of switching functions is listed in Paragraph 2.2.10.

The conversion constant card contained the film speed (frames per second) and conversion constants to be applied to the second, third, and fourth pairs of coordinates on the first line read from each frame, and the first thru fourth pairs of coordinates on the second line read from each frame. The format for this card was (8F10.0).

Upon receipt of the card file of PCS coordinate readings, it was merged with the previously punched ID, control, and constant cards, and the computer control cards for submission to ASD/AD for computation. The composition of a typical computer run deck is illustrated in Figure 14.

Computation: Film frame coordinate positions of the tracked points were converted to 2 dimensional seat coordinate time histories by program HIFPD.

The PCS coordinate readings of the two reference fiducials from the first film frame were used as the basis for the location of optical axis relative to the reference points and for the angular relationship between the axes of the PCS and the SCS. Readings of these points from each subsequent film frame translated and rotated the PCS coordinate system to coincide with the orientation of the first frame. This was done to minimize errors due to vibration of the camera during the test event.

The displacement from the first reference point to the second reference point was calculated by multiplying the coordinates by the conversion constant card. In this case, the displacement from the optical axis of each of the tracked points was calculated by dividing its PCS coordinates by its conversion constant. The values of x and z displacements from the optical axis of the reference point was then subtracted from the x and z displacements of each of the tracked points yielding y and z displacements of each point relative to the reference point. This coordinate system had been translated to the origin of the aft seat reference fiducial.

From the time histories of each point, HIFPD computed total velocity and acceleration time histories of each point, fitting a moving quadratic arc to each point during each differentiation, and the angular velocity and acceleration time histories of the 9TAF mount about the hip point and of the shoulder about the hip point; again fitting a moving quadratic arc to eleven points during each differentiation.

The resulting time histories were printed out as tables and written on magnetic tape for plotting.

Plotting: After examination of the time histories, the results of the computation revealed no apparent errors. A plot request was submitted to ASD/AD. The data written on magnetic tape by HIFPD were read and plotted with the COMP Plotter.

2.3.6 Results and Accuracy

The results of this effort were delivered as time histories of displacement, velocity and acceleration in tabular and graphic forms.

Analysis of the propagation of error in the tracked points resulted in a maximum estimated error of 0.001 in all points except the elbow.² During all test runs the subject demonstrated lateral motion toward the plane of symmetry of the seat.

²Graf, P.A. and H.T. Mehlsman, Accuracy of Instrumentation for Motion Data, AMRL-TR-79-76, April, 1980, Aeromedical Research Laboratory, Wright-Patterson Air Force Base, Dayton, Ohio.

extremities extended forward from the seat. These lateral excursions of the elbows caused the breadth across the elbows to approach, but not become less than, the breadth across the shoulders at maximum extension of the arms. The mean of the maximum lateral excursion of the elbows was 1.96 inches from a mean lateral displacement of 10.84 inches from the plane of symmetry to 8.88 inches. The estimated error in solutions to elbow coordinates at maximum extension of the arms was 0.23 inches.

From a study conducted by H. T. Mohlman of the UDRI, the effects of smoothing the raw solutions and the first and second derivatives may be summarized as follows:

- (1) Attenuation of peak values of displacement, velocity and acceleration is a function of frequency.
- (2) The eleven point quadratic fit yields closer correlation than either seven, nine, thirteen, or fifteen point quadratic fits.
- (3) The attenuation of any specific displacement, velocity, or acceleration peak would be reasonably predictable if the frequency of the peak could be properly interpreted. A technique used to evaluate the frequency response characteristics of the smoothing filter is described in a later section (page 115) and is detailed in the above reference report.
- (4) Oscillations in velocity and acceleration curves are predominately artifacts induced in the smoothing fit.

The referenced work included investigation of sampling theory and application of the quadratic fits to digitized photometric data acquired during BPRD tests 172 and 173.

The accuracy of the digitizing was checked using the standard deviation about the mean for the solution of the rear seat reference point with respect to the forward reference point. The standard deviations were:

	X-AXIS	Z-AXIS
1177	.0037	.0031
1178	.0037	.0032
1179	.0031	.0032
1184	.0039	.0032
99	.0044	.0035
1148	.0017	.0002
115	.0014	.0011
1146	.0015	.0011
1147	.0017	.0002
1151	.0015	.0002

The largest standard deviation in the sample, 0.0044 feet, represents a standard deviation of 10 counts which is considerably less than the 10 count standard deviation used to estimate the error.

The effect of smoothing the displacement solutions of the tracked points are indicated in Table 11, which presents the standard deviations of the difference between unsmoothed and smoothed components of the displacements taken from a representative sample of the tests. The resultant standard deviations in the sample range from .029 inch (test 1140, hip) to 0.052 inch (test 993, head point 1), were considerably less than the estimated maximum error of 0.12 inch.

2.4 -500 INJURY PROTECTION COMPARISON

Cadaver subjects have been widely used to assess patterns and severity of injury resulting from exposure to impact environments. These assessments have been used as the basis for predicting the probability of injury to living beings who might be subjected to similar environments. An investigation of the reliability of this approach to injury protection assessments was required to compare results between living subjects and cadavers.

TABLE 11
STANDARD DEVIATION OF DIFFERENCE BETWEEN UNSMOOTHED AND SMOOTHED DISPLACEMENT IN FEET

	TEST 1135		TEST 1137		TEST 1044	
	X-AXIS	Z-AXIS	X-AXIS	Z-AXIS	X-AXIS	Z-AXIS
Hip	.0030	.0031	.0016	.0021	.0019	.0022
Knee	.0021	.0026	.0019	.0022	.0022	.0020
Shoulder	.0057	.0040	.0037	.0026	.0041	.0030
Elbow	.0032	.0039	.0027	.0025	.0030	.0026
Head Point 1	.0047	.0045	.0054	.0039	.0057	.0035
Head Point 2	.0054	.0044	.0057	.0027	.0060	.0045

	TEST 994		TEST 1046		TEST 1153	
	X-AXIS	Z-AXIS	X-AXIS	Z-AXIS	X-AXIS	Z-AXIS
Hip	.0020	.0026	.0016	.0015	.0015	.0021
Knee	.0028	.0026	.0018	.0020	.0024	.0021
Shoulder	.0050	.0032	.0027	.0024	.0034	.0025
Elbow	.0035	.0021	.0026	.0017	.0023	.0021
Head Point 1	.0061	.0047	.0042	.0038	.0047	.0036
Head Point 2	.0065	.0039	.0052	.0030	.0049	.0027

	TEST 1140		TEST 1142		TEST 1151	
	X-AXIS	Z-AXIS	X-AXIS	Z-AXIS	X-AXIS	Z-AXIS
Hip	.0017	.0017	.0017	.0018	.0017	.0018
Knee	.0016	.0021	.0019	.0021	.0019	.0017
Shoulder	.0036	.0023	.0029	.0026	.0034	.0024
Elbow	.0022	.0017	.0018	.0017	.0025	.0018
Head Point 1	.0055	.0038	.0039	.0030	.0042	.0036
Head Point 2	.0049	.0026	.0040	.0020	.0044	.0030

The Impact Protection Branch of the Aerospace Medical Research Laboratory (AMRL/BBP) conducted a test program to compare the responses of live anesthetized baboons with those of baboon cadavers. The intent was to match live animals with cadavers of similar anthropometry in pairs for comparative analysis. The data presented herein were derived from cinematographic recordings of the body segment responses of the subjects during $-50 G_x$ simulations conducted on the AMRL/BBP Horizontal Impulse Accelerator Facility during December 1977 and the AMRL/BBP Hydraulic Decelerator Facility during May 1978. These facilities are both located at AMRL/BBP, Wright-Patterson Air Force Base, Ohio.

Eighteen tests were conducted on the Horizontal Impulse Accelerator Facility. Six tests were conducted using a scaled three-point harness, three (1444 thru 1447) involved live anesthetized subjects, and three (1449 thru 1451) involved cadavers. A camera malfunction during test 1446 resulted in loss of photo data from that test.

Six live anesthetized subjects (tests 1453, 1454, 1456, 1457, 1459 and 1460) and six cadavers (tests 1462, 1463, 1464, 1466, 1467, and 1468) were exposed to the impact environment while restrained with a military type harness. Photometric data from these twelve tests was good and was reduced.

During the $-50 G_x$ simulations conducted on the Hydraulic Decelerator Facility in May 1979, six live anesthetized subjects (tests 103, 104, 105, 106, 108, and 109) and six cadavers (tests 110, 111, 113, 114, 115, and 116) were exposed while restrained with a military type harness. Because of a camera malfunction during test 110, photometric descriptions of the responses of only five cadavers were available for comparison.

2.4.1 Requirements

Primary requirements of the photometric data analysis effort were to derive, from cinematographic recordings, time histories of coordinate positions, velocities, and accelerations

the neck, shoulder, elbow and head. Angular velocity and acceleration of the seat about the y axis were also measured.

The points on the tracks were defined as follows:

1. The lateral-most point on the greater femoral condyle.

2. The lateral-most point on the lateral femoral condyle.

3. The lateral-most point on the acromion process of the scapula.

4. The lateral-most point on the lateral humeral condyle.

5. The geometric center of the head accelerometer pack.

6. The ear of the snout.

The points defined above are accepted as standard anthropometric tracking points in accordance with SAE J118, SAE Handbook, 1975 with the exception of those on the head. Ideally, a point at approximately the center of gravity of the head would have been specified, however prior experience dictated that the upper torso and head of each subject would require restraint from lateral movement during the countdown. The method of restraining the head and upper torso was to be such that it would have little or no effect on lateral responses. Again prior experience indicated the use of masking tape from one side of the headrest around the head under the mouth to the other side of the headrest would stabilize the lateral position of the subject. This method of restraining the head obscured the fiducial applied over the jaw hinge, thus the center of the accelerometer pack was specified.

2.4.2 Photometric Range

The photometric range, as illustrated in Figure 17, was a three dimensional, mutually perpendicular coordinate system. The origin was at the intersection of the seatpan plane, the seat-back plane, and the plane of symmetry of the seat. The x-axis was positive forward along the horizontal line, the y-axis was

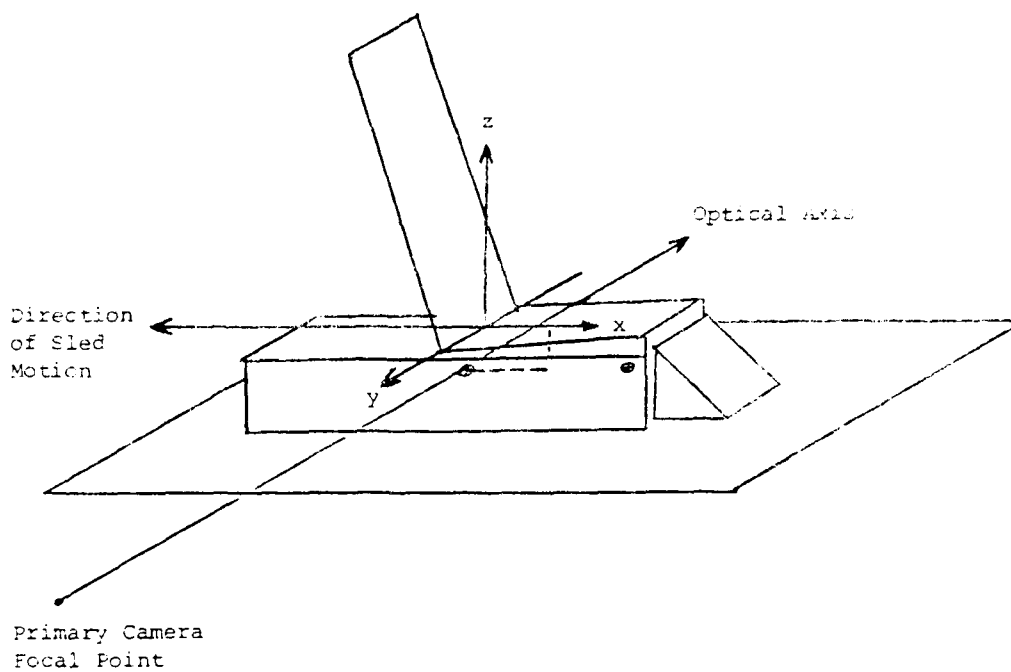


Figure 17. -50 G Injury Protection Comparison Photometric Range^x and Seat Coordinate System.

positive to the right of the seat along the horizontal line, and the z-axis was positive upward along the zenith line.

The Photosonics model 1B cameras, with 8mm lenses, were mounted onboard the sled. The primary data camera was mounted with its focal point at coordinates (11.84, 53.12, 3.88) inches. Its optical axis was normal to the plane of symmetry of the seat. The front view camera was mounted with its focal point at coordinates (63.65, 0.75, 4.0) inches. Its optical axis was parallel to the x axis.

Seat reference fiducials were applied to the RH side of the seat frame structure at coordinates (2.28, 5.88, -3.7) inches and (10.70, 5.88, -4.29) inches.

2.4.3 Photogrammetric Calibration

Review of films of the first tests demonstrated severe "barrel" distortion of the image (magnification decreased as distance from the optical axis increased). A grid board, made of flat black plywood with a 1-inch by 1-inch grid of white threads, was held with its face in the plane $y=0$ and was photographed on the primary data camera. The grid board was then held with its face in the plane $x=.5$ inch and was photographed on the front view camera.

The film image recorded on the primary data camera (side view) was mounted on the Producers Service Corporation model PVR film analyzer. The grid system was rotated until the horizontal grid line closest to the x-axis and the vertical grid line closest to the y-axis were parallel to the respective axis.

The intersections of the vertical grid line images and the x-axis were digitized from the line which coincided with the y-axis to the grid line 32 inches forward from it. This was replicated twice and the three sets of readings were averaged. The average readings were plotted versus grid board displacement (Figure 18). Since program HIFPD was used to process the data,

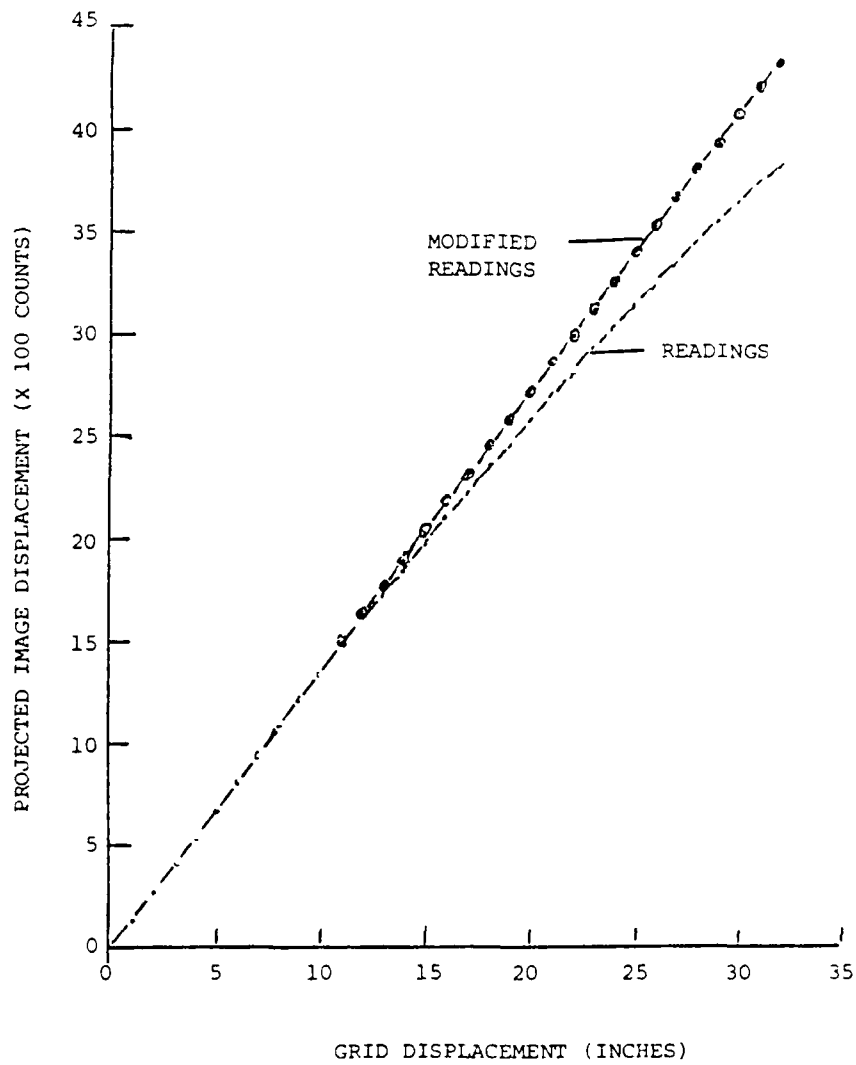


Figure 18. Average and Modified $-50G_x$ Readings Versus Grid Displacement.

it was incumbent that the readings be modified to present a linear relationship between observed point distance from the optical axis and corrected image distance from the optical axis.

As is the case with most fine wide angle lenses, the linear displacement of an image point from the optical axis approximated a direct relationship to angular displacement from the optical axis to the line from the focal point to the observed point.

From readings of grid lines in the relatively undistorted central portion of the image frame ($\cos \theta \approx .99$) and the fiducials on the seat frame structure, the apparent distance from the focal point to the grid was calculated to be 60.63 inches by the method illustrated in Figure 4. Using an arc of radius 60.63 inches each reading was modified by dividing by the cosine of the angle between the optical axis and the ray from the observed point. A conversion factor was calculated in terms of counts read per inch grid displacement for each point. The best straight line fit to the resulting conversion factors was calculated to be 136.1 counts per inch (1633.2 counts per foot). The coefficient of determination (r^2) and correlation coefficient (r) each exceeded .9999. Application of this conversion constant to the modified readings resulted in solutions within $\pm .10$ inch. These results are tabulated in Table 12 and plotted in Figure 13. The mean of the errors was .0206 inch and the standard deviation was .0345 inch.

2.4.4 Data Acquisition

Prior to the start of the test program range survey data, presented in the Photometric Range section, were measured and recorded.

During preparation for each data run, fiducials were marked on the anthropometric points to be tracked. These fiducials were applied with a black felt tip marker since no self-adhering fiducials had been found to effectively adhere to the skin of the subjects.

TABLE 11
 DATA FOR MULTIPLICATION OF FILM SENSITIVITY
 TO COMPENSATE FOR IMAGE CLIPPING EFFECTS

Grid Displacement (inches)	Average Image Displacement (counts)	Angular Displacement from Optical Axis (degrees)	Reading (counts)	f (count-inch)	calculated displacement (inches)
1	134.3	1.9449	134.3	134.3	1.00
2	272.7	1.889	272.8	136.4	2.00
3	407.5	2.833	408.0	136.0	3.00
4	541.5	3.778	542.8	135.7	4.00
5	681.5	4.724	682.8	136.6	5.00
6	813.5	5.670	817.0	136.2	6.00
7	947.5	6.566	953.8	136.3	7.00
8	1086.0	7.517	1095.4	136.9	8.00
9	1215.0	8.443	1218.2	136.5	9.00
10	1349.5	9.366	1357.7	136.8	10.00
11	1478.7	10.283	1472.9	136.6	11.00
12	1603.3	11.195	1634.4	136.2	12.00
13	1737.0	12.102	1776.0	136.7	13.00
14	1857.0	13.002	1905.4	136.1	14.00
15	1986.7	13.896	2046.0	136.4	15.00
16	2113.0	14.783	2195.3	136.6	16.00
17	2233.0	15.663	2319.1	136.4	17.00
18	2360.0	16.538	2461.8	136.3	18.00
19	2472.3	17.400	2590.9	136.4	19.00
20	2588.0	18.256	2725.2	136.3	20.00
21	2709.0	19.104	2866.3	136.5	21.00
22	2812.3	19.944	2991.7	136.3	22.00
23	2925.7	20.774	3129.1	136.3	23.00
24	3040.0	21.596	3269.5	136.2	24.00
25	3149.3	22.409	3406.8	136.1	25.00
26	3256.3	23.211	3542.6	136.1	26.00
27	3357.0	24.005	3674.6	136.1	27.00
28	3463.7	24.786	3815.2	136.3	28.00
29	3562.6	25.562	3949.2	136.2	29.00
30	3668.5	26.326	4093.0	136.4	30.00
31	3759.3	27.081	4222.0	136.2	31.00
32	3840.0	27.825	4347.0	136.7	32.00

The anthropometric sitting height of the subject was measured while the subject was lying on its side. The measurement was taken from the lower base of the tail to the level of the brow ridge.

After the subject was positioned and the harness pretensioned, the lengths of the body segments and breadths at the shoulder, elbow, and knee fiducials were measured and recorded. The sitting height was again measured from the seat pan to the brow ridge along a line parallel to the seat back. These data along with subject and run signature data were recorded on a pretest measurements form. The data are defined in Table 13 and are presented in Tables 14 thru 16.

Cinematographic recordings of the subject were made on the cameras described in the Photometric Range section. The data cameras were operated at a nominal speed of five hundred (500) frames per second from time $t = -2.0$ to $t = +2.0$ seconds. Timing on the films was accomplished by a pulsed light emitting diode (LED) driven at 100 pulses per second. Synchronization was accomplished by a strobe flash triggered by a $t=0$ pulse simultaneously recorded on the electronic data acquisition system.

2.4.5 Data Reduction Process

The data reduction process consisted of data editing, digitizing, and electronic data processing. Film editing and digitizing were accomplished on the Producers Service Corporation model PVR film analyzer (PVR) interfaced with a teletype terminal (TTY) with paper tape punch. Tape-to-card conversion and electronic processing and plotting were accomplished on the CDC Cyber 74 system at the Aeronautical Systems Division's Digital Computation Facility (ASD/AD) in Building 676, Area B, Wright-Patterson Air Force Base, Ohio.

TABLE 13
PRETEST MEASUREMENTS

<u>Data Item</u>	<u>Definition</u>
1	Test Run Number.
2	Date of Test Run.
3	Subject Identification.
4	Weight of Subject (lbs).
5	Sitting Height (cm) measured from seat pan surface to brow ridge, parallel with seat back plane.
6	Distance (cm) in x-z plane between tip of snout and center of head accelerometer pack mounting screw.
7	Distance (cm) in x-z plane between center of head accelerometer pack mounting screw and jaw hinge point.
8	Distance (cm) in x-z plane between jaw hinge point and shoulder point.
9	Distance (cm) between the shoulder point and the hip point.
10	Distance (cm) between the shoulder point and elbow point.
11	Distance (cm) between hip point and knee point.
12, 13	Anthropometric sitting height (12 cm; 13 in). Measured from lower base of tail to brow ridge while subject lying on side.
14	Breadth (cm) across shoulder points.
15	Breadth (cm) across elbow points.
16	Breadth (cm) across knees.

TABLE 14A
 100 PRETEST MEASUREMENTS, LIVE SUBJECTS, 1 FT HARNESS, ACCELERATION

Data Item	1444	1446	1447
1			
2	771206	771207	771208
3	F-14	F-14	F-12
4		30.8	46.1
5	63.4	65.1	65.4
6	7.0	4.9	3
7	1.8	1.8	1.1
8	16.7	16.7	19.7
9	30.3	34.0	41.0
10	20.7	21.2	21.0
11	23.6	22.0	21.0
12		64.8	64.8
13		35.7	27.0
14	21.3	20.8	20.7
15	30.6	24.6	25.1
16	26.0	21.0	19.0

TABLE 14B
 100 PRETEST MEASUREMENTS, CADAVER SUBJECTS, 1 FT HARNESS, ACCELERATION

Data Item	1449	1450	1451
1			
2	771208	771208	771208
3	F-10	F-06	F-02
4	63.1	48.5	34.0
5	64.8	63.7	65.1
6	7.8	4.9	10.0
7	4.7	3	10.7
8	16.2	17.0	19.7
9	30.0	33.0	34.0
10	19.0	19.0	19.0
11	21.3	17.8	27.0
12	60.0	60.0	65.0
13	30.0	2.0	15.0
14	21.0	19.0	19.0
15	30.0	20.0	20.0
16	20.0	10.0	10.0

TABLE 15A
 THE STATISTICAL MEASUREMENTS OF THE DATA ON THE ...

Year	1950	1951	1952	1953	1954	1955
1	71115	71115	71115	71115	71115	71115
2	71115	71115	71115	71115	71115	71115
3	71115	71115	71115	71115	71115	71115
4	71115	71115	71115	71115	71115	71115
5	71115	71115	71115	71115	71115	71115
6	71115	71115	71115	71115	71115	71115
7	71115	71115	71115	71115	71115	71115
8	71115	71115	71115	71115	71115	71115
9	71115	71115	71115	71115	71115	71115
10	71115	71115	71115	71115	71115	71115
11	71115	71115	71115	71115	71115	71115
12	71115	71115	71115	71115	71115	71115
13	71115	71115	71115	71115	71115	71115
14	71115	71115	71115	71115	71115	71115
15	71115	71115	71115	71115	71115	71115
16	71115	71115	71115	71115	71115	71115
17	71115	71115	71115	71115	71115	71115
18	71115	71115	71115	71115	71115	71115
19	71115	71115	71115	71115	71115	71115
20	71115	71115	71115	71115	71115	71115

TABLE 15B
 THE STATISTICAL MEASUREMENTS OF THE DATA ON THE ...

Year	1950	1951	1952	1953	1954	1955
1	71115	71115	71115	71115	71115	71115
2	71115	71115	71115	71115	71115	71115
3	71115	71115	71115	71115	71115	71115
4	71115	71115	71115	71115	71115	71115
5	71115	71115	71115	71115	71115	71115
6	71115	71115	71115	71115	71115	71115
7	71115	71115	71115	71115	71115	71115
8	71115	71115	71115	71115	71115	71115
9	71115	71115	71115	71115	71115	71115
10	71115	71115	71115	71115	71115	71115
11	71115	71115	71115	71115	71115	71115
12	71115	71115	71115	71115	71115	71115
13	71115	71115	71115	71115	71115	71115
14	71115	71115	71115	71115	71115	71115
15	71115	71115	71115	71115	71115	71115
16	71115	71115	71115	71115	71115	71115
17	71115	71115	71115	71115	71115	71115
18	71115	71115	71115	71115	71115	71115
19	71115	71115	71115	71115	71115	71115
20	71115	71115	71115	71115	71115	71115

TABLE 16A

IPC PRETEST MEASUREMENTS LIVE SUBJECTS MIL HARNESS, DECELERATOR

<u>Data Item</u>						
1	103	104	105	106	108	109
2	780503	780503	780503	780503	780504	780504
3	F68	F78	F76	F86	F66	F64
4	50.0	51.0	51.5	47.25	57.5	50.5
5	66.4	70.5	68.7	66.6	69.9	66.6
6	8.9	7.4	7.8	7.9	7.7	10.2
7	9.7	11.1	10.9	8.3	10.7	9.7
8	16.5	14.1	14.8	17.2	18.4	15.2
9	39.1	40.0	40.0	37.9	39.4	29.0
10	22.4	23.2	24.1	23.1	20.6	23.0
11	27.9	26.9	26.3	22.0	21.5	25.6
12	71.1	67.9	68.6	64.8	67.3	70.5
13	28.0	26.75	27.0	25.5	26.5	27.75
14	22.4	20.2	21.2	19.2	21.4	22.1
15	22.9	23.1	28.0	26.1	27.2	29.0
16	20.5	9.0	21.3	25.7	26.1	15.1

TABLE 16B

IPC PRETEST MEASUREMENTS CADAVER SUBJECTS MIL HARNESS, DECELERATOR

1	110	111	113	114	115	116
2	780504	780504	780505	780505	780505	780505
3	F82	F84	F80	F72	F70	F74
4	45.75	53.5	51.25	48.0	46.0	56.0
5	64.0	70.0	67.0	71.3	67.4	70.5
6	9.0	8.0	8.1	6.5	9.0	8.9
7	8.7	10.1	8.8	7.5	8.8	9.4
8	13.5	14.3	8.1	16.0	17.3	14.3
9	38.9	43.0	40.3	43.0	39.5	42.1
10	21.6	22.7	20.0	28.0	23.3	23.0
11	24.0	26.5	20.6	23.2	26.0	21.3
12	64.8	67.3	63.5	70.5	69.8	69.2
13	35.5	26.5	25.0	27.75	27.5	27.25
14	21.0	19.5	20.6	21.3	21.7	21.8
15	24.6	30.3	32.7	24.2	25.7	25.5
16	19.5	23.0	14.0	19.8	17.2	27.0

AD-A100 918

DAYTON UNIV OH RESEARCH INST

F/8 6/19

TECHNIQUES AND PROCEDURES APPLIED TO PHOTOMETRIC METHODS FOR TH--ETC(U)

OCT 80 P A GRAF, H T MOHLMAN

F33615-76-C-0525

UNCLASSIFIED

UDR-TR-79-115


AFAMRL-TR-80-61

NL

2 of 3

40 A

100918

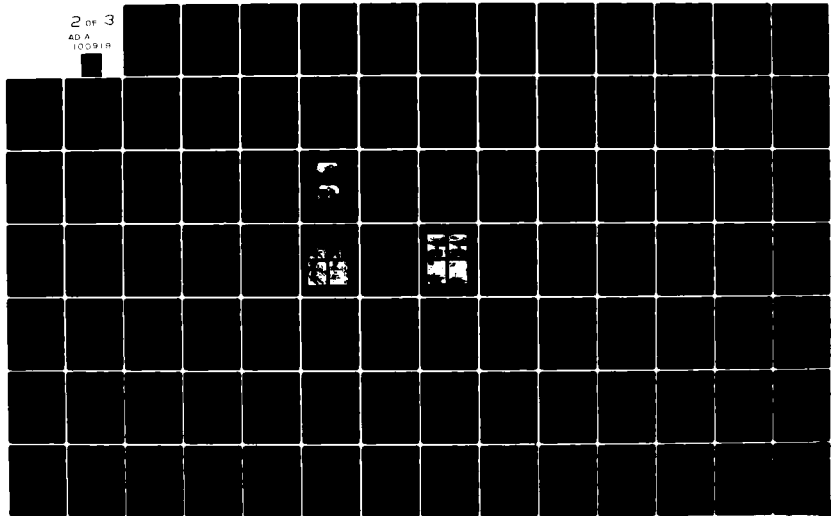

2.4.5.1 Editing

The seat side view camera film was viewed on a light table and the frames and 0.01 second timing pulses were counted throughout the event. The frame exposure rate (frames per second) was scanned for consistency and the average frame rate was calculated. During the test program the film speed ranged between 485 and 515 frames per second. During each test run the film speed was constant ± 1 frame per second, during the 200 milliseconds following initiation.

2.4.5.2 Digitizing

The film was mounted on the PVR and was transported forward in the cine mode to frame zero, the first frame in which the strobe flash was observed. The scales on the PVR were translated and rotated until the coordinates of the seat forward and aft fiducials were read to be within ± 20 counts of (-150, -1370) and (-1310, -1300) respectively. The projected image coordinates were then digitized in the following sequence.

1. Seat forward fiducial
2. Seat aft fiducial
3. Hip fiducial
4. Knee fiducial
5. Shoulder fiducial
6. Elbow fiducial
7. Head accelerometer pack
8. Tip of snout

The digital values of these coordinates, preceded by the frame number, were punched into paper tape in the format (I5, 8F7.0/I5, 8F7.0). Each of the 8F7.0 fields contained four pairs of coordinates.

After the coordinates projected from frame zero were digitized, the coordinates from each succeeding frame were digitized in the same sequence until the frame in which either of the head point images was obscured by the arm image.

2.4.5.3 Electronic Data Processing

This portion of the process required three procedures, data preparation, computation, and plotting.

Data Preparation: During the data preparation procedure, the file recorded on punched paper tape was communicated to the computer at ASD/AD from a TTY via voice quality lines. The file was then edited to correct format and/or character errors. Program CHIFPD was then attached to modify the readings to compensate for distortion. CHIFPD (Appendix D) calculated the resultant distance from the origin of each pair of PCS coordinates read in by

$$r = \sqrt{x^2 + y^2}$$

The angle (γ) between the ray from the point and the optical axis was then calculated by

$$\gamma = \frac{r}{K}$$

where K was input as 138.7 counts/degree.

The modified abscissa (x_c) was determined by

$$x_c = \frac{x}{\cos \gamma}$$

and the modified ordinate (y_c) was calculated by

$$y_c = \frac{y}{\cos \gamma}$$

The output was batched to a printer and a card punch for creation of the permanent file. Concurrently, the identification, control, and conversion constant cards required by program HIFPD were punched for merger with the card file.

The identification card contained alphanumeric information in card columns (cc) 1 through 80 which was printed on output tables as table identification. The form used was IPC TEST ---, IMPULSE ACCELERATOR (DECELERATOR).

The control card contained the test number and program control switch characters. The format and definition of switching functions is listed under "Description of Program HIFPD Input Data and Parameter Codes."

The conversion constant card contained the film speed (frames per second) and conversion constants to be applied to the second, third and fourth pairs of coordinates on the first line read from each frame, and the first through fourth pairs of coordinates on the second line read from each frame. The format for this card was (8F10.0).

Upon receipt of the card file of modified PCS coordinate readings, it was merged with the previously punched ID, control and constant cards, and the computer control cards for submission, to ASD/AD for computation. The composition of a typical computer runs deck is illustrated in Figure 14.

Computation: Film frame coordinate positions of the tracked points were converted to two-dimensional seat coordinate time histories by program HIFPD.

The PCS coordinate readings of the two reference fiducials from the first film frame are used as the basis for the location of optical axis relative to the reference points and for the angular relationship between the axes of the PSC and the SCS. Readings of these points from each subsequent film frame translated and rotated the PCS coordinate system to coincide with the orientation of the first frame. This was done to minimize errors due to vibration of the camera during the test event and to compensate for frame to frame variations caused by the rotating prism.

The displacement from the optical axis of the second reference point was calculated by dividing the PCS coordinates by the conversion constant contained in columns 11 through 20 in the conversion constant card. In turn the displacement from the optical axis of each of the tracked points was calculated by dividing its PCS coordinates by its conversion constant. The values of x and z displacements from the optical axis of each point were then subtracted from the x and z coordinates of the reference point yielding x and z coordinates of each point relative to the reference point. Thus the origin of the calculated coordinate system had been translated to the location of the aft seat reference fiducial.

From the time histories of seat coordinate positions, HIFPD computed total velocity and acceleration time histories of each point, fitting a moving quadratic arc to eleven points during each differentiation, and the angular velocity and acceleration time histories of the head accelerometer about the snout, and of the shoulder about the hip point, again fitting a moving quadratic arc to eleven points during each differentiation.

The resulting time histories were printed in tables and written on magnetic tape for plotting.

Plotting: After examination of the tabulated results of the computation revealed no apparent gross errors, a plot request was submitted to ASD/AD. The data written on the magnetic tape by HIFPD were read and plotted offline on the CALCOMP Plotter.

2.4.6 Results and Accuracy

The results of this effort were presented in tabular and graphic forms.

In the data report deficiencies in the derivations of velocity and acceleration time histories were cited. These deficiencies and a brief description of the analyses upon which they were based were presented in Paragraph 2.3.6.

The accuracy of the digitizing was indicated by the standard deviation about the mean for the solution of the rear seat reference point with respect to the forward reference point. The standard deviations were:

<u>Run</u>	<u>x-Axis (feet)</u>	<u>z-Axis (feet)</u>
1444	.0035	.0002
1447	.0035	.0002
1450	.0017	.0001
1451	.0108	.0005
1453	.0021	.0001
1456	.0036	.0002
1462	.0027	.0001
1466	.0019	.0001
105	.0036	.0002
109	.0053	.0002
111	.0046	.0002
115	.0030	.0001

The effect of smoothing the displacement solutions of the tracked points are indicated in Table 17, which presents the standard deviations of the difference between unsmoothed and smoothed components of the displacements taken from a representative sample of the tests.

2.5 UPPER TORSO RETRACTION

The survivability of emergency escape from aircraft has historically been a primary concern of the United States Air Force. Over the years, as aircraft performance has been improved, the risk of injury, either fatal or disabling, has tended to increase. Research efforts leading to the development of devices and systems to provide improved injury protection and reduction of risk, and evaluation of the products of these efforts, have continuously been conducted and/or sponsored by the Air Force.

TABLE 17A

STANDARD DEVIATION OF DIFFERENCE BETWEEN UNSMOOTHED AND SMOOTHED DISPLACEMENT
DATA IN FEET THREE POINT RESTRAINT, LIVE SUBJECTS

	<u>TEST 1444</u>		<u>TEST 1447</u>	
	<u>x-axis</u>	<u>z-axis</u>	<u>x-axis</u>	<u>z-axis</u>
Hip	.0032	.0017	.0063	.0049
Knee	.0025	.0032	.0085	.0061
Shoulder	.0037	.0031	.0137	.0129
Elbow	.0031	.0099	.0072	.0112
Head Point 1	.0135	.0086	.0110	.0075
Head Point 2	.0081	.0064	.0132	.0166

TABLE 17B

STANDARD DEVIATION OF DIFFERENCE BETWEEN UNSMOOTHED AND SMOOTHED DISPLACEMENT
DATA IN FEET THREE POINT RESTRAINT, CADAVER SUBJECTS

	<u>TEST 1450</u>		<u>TEST 1451</u>	
	<u>x-axis</u>	<u>z-axis</u>	<u>x-axis</u>	<u>z-axis</u>
Hip	.0018	.0017	.0105	.0041
Knee	.0033	.0028	.0104	.0069
Shoulder	.0095	.0096	.0169	.0103
Elbow	.0083	.0042	.0147	.0112
Head Point 1	.0092	.0101	.0223	.0109
Head Point 2	.0163	.0107	.0252	.0137

TABLE 17C

STANDARD DEVIATION OF DIFFERENCE BETWEEN UNSMOOTHED AND SMOOTHED DISPLACEMENT
DATA IN FEET MILITARY RESTRAINT, LIVE SUBJECTS

	<u>TEST 1453</u>		<u>TEST 1456</u>	
	<u>x-axis</u>	<u>z-axis</u>	<u>x-axis</u>	<u>z-axis</u>
Hip	.0023	.0024	.0031	.0034
Knee	.0056	.0050	.0038	.0039
Shoulder	.0140	.0049	.0104	.0052
Elbow	.0100	.0052	.0034	.0033
Head Point 1	.0083	.0062	.0101	.0089
Head Point 2	.0139	.0081	.0153	.0195

TABLE 17D

STANDARD DEVIATION OF DIFFERENCE BETWEEN UNSMOOTHED AND SMOOTHED DISPLACEMENT
IN FEET MILITARY RESTRAINT, CADAVER SUBJECTS

	<u>TEST 1462</u>		<u>TEST 1466</u>	
	<u>x-axis</u>	<u>z-axis</u>	<u>x-axis</u>	<u>z-axis</u>
Hip	.0027	.0021	.0029	.0028
Knee	.0034	.0022	.0032	.0040
Shoulder	.0063	.0026	.0153	.0084
Elbow	.0039	.0033	.0067	.0069
Head Point 1	.0081	.0032	.0099	.0066
Head Point 2	.0078	.0024	.0093	.0048

TABLE 17E
 STANDARD DEVIATION OF DIFFERENCE BETWEEN UNSMOOTHED AND SMOOTHED DISPLACEMENT
 DATA IN FEET

	TEST 105		TEST 109		TEST 111		TEST 115	
	x-axis	z-axis	x-axis	z-axis	x-axis	z-axis	x-axis	z-axis
Hip	.0036	.0038	.0035	.0032	.0036	.0036	.0040	.0024
Knee	.0074	.0055	.0040	.0044	.0034	.0036	.0042	.0033
Shoulder	.0077	.0055	.0081	.0031	.0154	.0057	.0069	.0030
Elbow	.0133	.0083	.0049	.0038	.0050	.0033	.0051	.0033
Head Point 1	.0104	.0074	.0196	.0120	.0138	.0073	.0093	.0109
Head Point 2	.0102	.0082	.0124	.0120	.0113	.0087	.0142	.0069

In an ejection environment, emphasis must be placed on the method of positioning and restraining the torso, head, and extremities of the crewman in his seat. Ideally the crewman would be restrained in such a manner that during an ejection event, he would demonstrate no motion relative to the seat. A crewman, however, also requires freedom of movement to perform his tasks. The obvious solution was the development of a restraint system which would provide the required freedom of movement but which in an emergency situation would rapidly retract the crewman into position and restrain him with force sufficient to protect him from responding adversely to the acceleration of the seat and the force of windblast.

The work described herein was accomplished to demonstrate a photo analysis method proposed for use to describe the response motion of body segments of human subjects exposed to the upper torso retraction environment. Laboratory simulations were conducted by the Biomechanical Protection Branch of the AF Aerospace Medical Research Laboratory (AMRL/BBP) during the period January - May 1978. The tests were conducted on the Body Positioning Restraint Device (BPRD) located in Building 824, Wright-Patterson Air Force Base, Ohio.

2.5.1 Requirements

Primary objectives of the photometric effort were:

- (1) To describe position-time histories of anthropometric points defining the body segments relative to the test device seat, and to derive velocity and acceleration time histories of these points.
- (2) To derive time histories of angular velocity and angular acceleration of the head about its y axis.
- (3) To derive time histories of angular velocity and angular acceleration of the helmet about its y axis.

- (4) To describe the position-time history of the retraction piston and to derive time histories of its velocity and acceleration.

Secondary objectives of this effort were:

- (1) To record motion of the shoulder harness relative to the subject's sternum for the purpose of assessing slippage of the harness relative to the chest and shoulders.
- (2) To record the test event from a number of viewpoints sufficient to demonstrate restraint system and subject performance.

The body segment motions specified for description were the upper arm, the upper leg, the torso and the head. The points selected to define these segments were:

- upper arm: The lateral-most projection of the acromion process of the scapula and the lateral most point on the lateral humeral condyle.
- upper leg: The lateral-most point on the greater femoral trochanter and the lateral most point on the lateral femoral condyle.
- torso : The lateral-most point on the greater femoral trochanter and the spinous process of the seventh cervical vertebra (C-7), which overlies the first thoracic vertebra (T-1) when the head is erect.
- head : The point located on the sagittal plane of the nose at the level of the pupils (which is the rhinion).

It was the concensus that in addition to the above, the lower leg and lower arm should also be defined although definition of these segments was not a current requirement. The former was defined by the lateral projection of the lateral malleolus of the

fibula, and the latter was defined by the lateral-most point on the lateral humeral condyle and the stylium.

Selection of all the above points was influenced by two primary concerns:

- (1) The requirement that the points could repeatedly be located.
- (2) The requirement that the points, or fixtures identifying the points, be observable throughout the test event.

All of the points described above are widely accepted as recommended points for defining body segments with the exception of the points on the head. The points on the head were selected because the helmet, together with the cupped chin strap, left only the forward facial area exposed. The points on the nose were considered to be the only practical points on the head which would satisfy the above requirements.

2.5.2 Photometric Range

The photometric range as illustrated in Figure 19, was a three dimensional, perpendicular coordinate system, the origin of which was at the intercept of the seatback plane, the seatpan plane, and the plane of symmetry of the seat. The z axis was positive upward along the centerline of the seatback, the x axis was positive forward along the line normal to the seatback plane, and y was positive to the right of the seat.

Reference fiducials were affixed to the seat structure, ten on the RH side panel and nine on forward facing surfaces. Three additional fiducials (20, 21, 22) were applied to the outboard surface of the RH side of the test facility frame structure forward of the seat. The points are identified in Figure 19 and their coordinate positions are presented in Table 18.

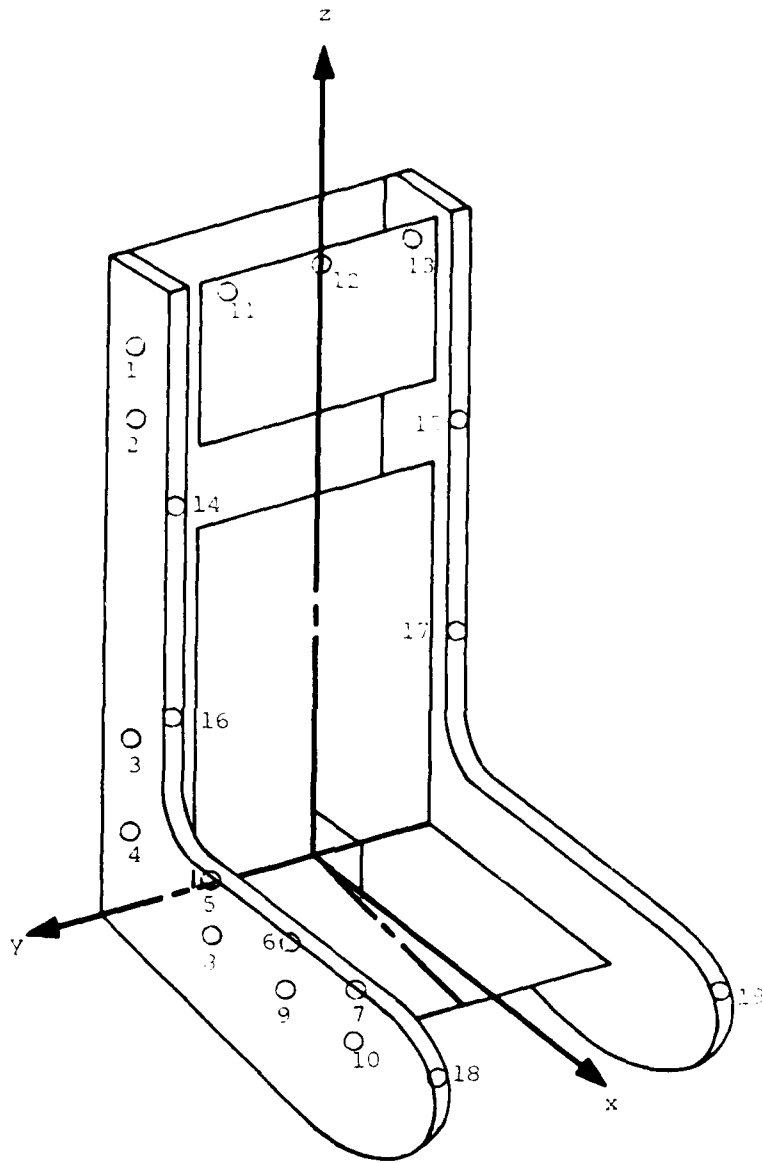


Figure 19. BPRD Seat Coordinate System and Reference Fiducial Locations.

TABLE 18
BPRD REFERENCE FIDUCIAL COORDINATES

<u>Point</u>	<u>x(inches)</u>	<u>y(inches)</u>	<u>z(inches)</u>
1	-2.05	10.5	34.57
2	-2.05	10.5	28.5
3	-2.05	10.5	10.55
4	-2.05	10.5	4.57
5	4.88	10.5	1.1
6	10.75	10.5	.43
7	15.87	10.5	- .25
8	4.41	10.5	- .83
9	10.35	10.5	- 1.26
10	15.55	10.5	- 1.69
11	0.0	7.68	40.28
12	0.0	0.0	40.30
13	0.0	- 7.83	40.31
14	0.0	9.83	22.64
15	0.0	9.83	22.64
16	0.0	- 9.83	12.6
17	0.0	- 9.83	12.6
18	22.89	9.83	- 3.16
19	22.88	- 9.83	- 3.24
20	32.45	-18.25	5.83
21	38.68	-18.25	2.08
22	31.24	-18.25	-12.27

Three Milliken 16mm motion picture cameras were mounted, two to the RH side of the test facility frame and the third forward of the frame. The locations of these cameras are illustrated in Figure 20 and the coordinates of their focal points and camera body orientations are listed in Table 19.

2.5.3 Photogrammetric Calibration

In the discussion of the approach to the photometric system two assumptions were made: that the focal lengths of the recording and projection lenses introduced no distortion, and that the focal lengths were precisely stated. The validity of these assumptions must be questioned.

A flat-black board, 24 inches x 48 inches, containing a 1 inch x 1 inch grid pattern of white thread was photographed by each camera as follows:

<u>Camera</u>	<u>View</u>	<u>Board Location and Orientation</u>
A	1	Surface in plane, $y=0$, longer edge on z axis, shorter edge on x axis.
A	2	Surface in plane, $y= -6.97$ inches, longer edge against plane $x=0$, shorter edge in plane $z=0$.
B	1	Surface in plane $y=0$, lower edge parallel with deck, $3/8$ inch above deck. Longer edge against forward edge of seat pan.
C	1	Surface perpendicular to deck $1/2$ inch forward of forward most points on armrests. Lower edge on deck.

These views of gridboard are on the film reel immediately after the views of test run 271.

From these films a slight "barrel distortion" was observed on all views. No corrections were made since the distortion was considered to be inconsequential in the area of the frame being evaluated.

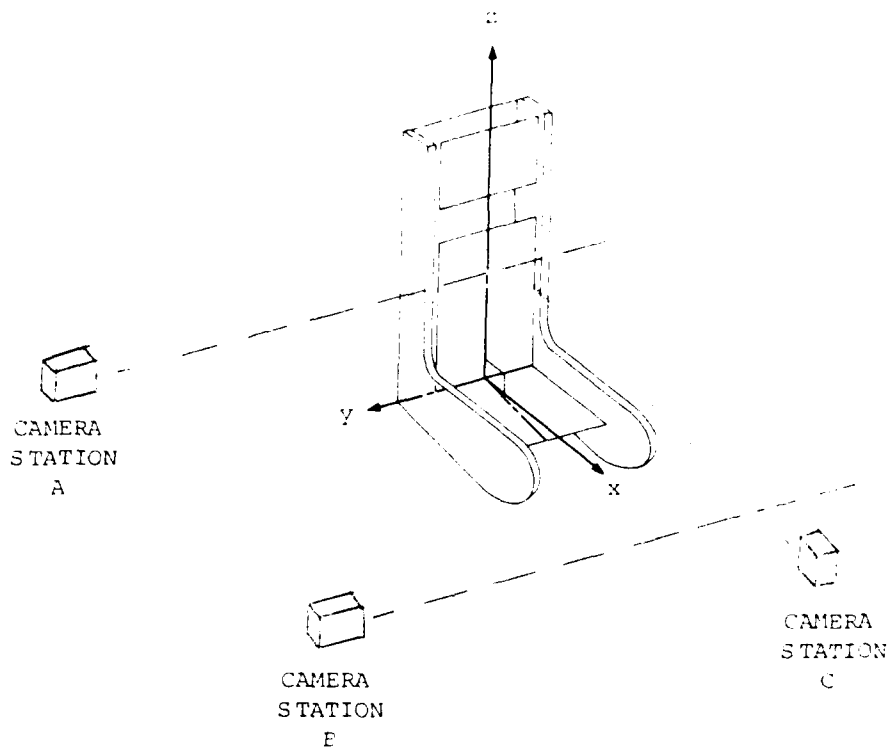


Figure 20. Camera Locations in BPRD Seat Coordinate System.

TABLE 19
 BPRD COORDINATES OF CAMERA FOCAL POINTS
 AND CAMERA BODY ORIENTATIONS

<u>Camera Station</u>	<u>FOCAL POINT COORDINATES</u>			<u>AZIMUTH</u>	<u>ELEVATION</u>	<u>ROLL</u>
	<u>x(inches)</u>	<u>y(inches)</u>	<u>z(inches)</u>	(radians)	(radians)	(radians)
A	0.0	66.61	19.21	4.712	.006	.002
B	28.0	37.49	-6.72	4.712	-.002	.236
C	68.98	0.84	8.36	3.142	.299	.001

From the gridboard views recorded on the camera at Station A, readings were taken from the PCS z axis intercepts of five pairs of horizontal gridlines, the lines of each pair being twelve inches apart. This same procedure was applied to the PCS x axis intercepts of five pairs of vertical gridlines. An average of the displacements of the PCS readings was taken for each of the gridboard locations. The resulting conversion factors were 1377.75 counts per foot at SCS $y=0$ and 1548 counts per foot at SCS $y = -6.969$ inches.

Referring to Figure 4 the following values were assigned:

$$\begin{aligned} r_o &= r_{o2} = 12 \text{ inches} \\ r_p &= 1377.75 \text{ counts} \\ r_{p2} &= 1548 \text{ counts} \\ s_o - s_{o2} &= 6.97 \text{ inches.} \end{aligned}$$

The distance from the axis at which the ray from p_o to the focal point penetrated the Object 2 Plane was calculated to be:

$$\begin{aligned} \frac{r}{r_{o2}} &= \frac{r}{r_{p2}} \\ r &= r_{o2} \frac{r_p}{r_{p2}} \\ r &= 12 \text{ inches} \left(\frac{1377.75 \text{ counts}}{1548 \text{ counts}} \right) \\ r &= 10.68 \text{ inches.} \end{aligned}$$

The apparent distance from the focal point to the plane $y=0$ was calculated to be:

$$\begin{aligned} \frac{s_o}{s_o - s_{o2}} &= \frac{r_o}{r_{o2} - r} \\ s_o &= (s_o - s_{o2}) \frac{r_o}{r_{o2} - r} \end{aligned}$$

$$s_o = 6.97 \text{ inches} \left(\frac{12 \text{ inches}}{1.32 \text{ inches}} \right)$$

$$s_o = 63.36 \text{ inches.}$$

Calculation of a conversion constant, f_n , for any plane, $y=n$, was then accomplished using:

$$f_n = \frac{s_o}{s_o - y} \times 1377.75 \text{ counts per foot}$$

where y was either one half the measured breadth of the subject between anthropometric points on the right and left side or the measured y displacement of fiducials on the test facility.

2.5.4 Data Reduction Process

The data reduction process consisted of data editing, digitizing, and electronic data processing. Film editing and digitizing were accomplished on the Producers Service Corporation model PVR film analyzer (PVR) interfaced with a teletype terminal (TTY) with paper tape punch. Tape to card conversion and electronic processing and plotting were accomplished on the CDC Cyber 74 System at the Aeronautical Systems Division's Digital Computation Facility (ASD/AD) in Building 676, Area B, Wright-Patterson Air Force Base.

2.5.4.1 Editing

The seat side view camera film was viewed on a light table and the frames and .01 second timing pulses were counted throughout the event. The frame exposure rate (frames per second) was scanned for consistency and the average frame rate was calculated. During the runs processed the frame rate was 500 ± 1 frames per second during the 300 milliseconds following initiation.

The film was mounted on the PVR and was transported forward in the cine mode until the operator observed that the subject motion had apparently terminated. The number of the frame was noted as termination time.

2.5.4.2 Digitizing

Upon completion of the editing procedure, the film was transported reverse to frame zero, the first frame in which the strobe flash was observed. The scales on the PVR were translated and rotated until the coordinates of fiducials 10 and 8 were read to be within ± 20 counts of (2145, -2860) and (640, -2765) respectively. The projected image coordinates were then digitized in the following sequence.

1. Arm rest forward fiducial (10)
2. Arm rest aft fiducial (8)
3. Mid thigh fiducial
4. Knee fiducial
5. Shoulder fiducial
6. Elbow fiducial
7. Upper nose fiducial
8. Lower nose fiducial
9. Retraction piston fiducial
10. T-1 vertebra fiducial
11. Upper helmet fiducial
12. Lower helmet fiducial

The digital values of these coordinates, preceded by the frame number, were punched into paper tape in the format (I5, 8F7.0/15, 8F7.0/15, 8F7.0). Each of the 8F7.0 fields contained four pairs of coordinates.

After the coordinates projected from frame zero were digitized, the coordinates from each succeeding frame were digitized in the same sequence until the fifteenth frame following the frame noted as termination time. The last fifteen frames were digitized to prevent timewise truncation of velocity

and acceleration curves due to smoothing of the data during electronic data processing.

2.5.4.3 Electronic Data Processing

This portion of the process required three procedures, data preparation, computation, and plotting.

Data Preparation: During the data preparation procedure, the file recorded on punched paper tape was communicated to the computer at ASD/AD from a TTY 35 via voice quality lines. The file was then edited to correct format and/or character errors, and was batched to a card punch for creation of the permanent file. Concurrently, the identification, control, and conversion constant cards required by program HIFPD were punched for merger with the card file.

The identification card contained alphanumeric information in card columns (cc) 1 thru 80 which was printed on output tables as table identification. The form used was RAPID RESTRAINT TEST _ _ _ , SUBJECT __ , YMMDD. The last entry is the date on which the test was conducted in terms of year, month, and day of month.

The control card contained the test number and program control switch characters. The format and definition of switching functions is listed under "Description of Program HIFPD Input Data and Parameter Codes."

The conversion constant card contained the film speed (frames per second) and conversion constants to be applied to the second, third, and fourth pairs of coordinates on the first line read from each frame, and the first thru fourth pairs of coordinates on the second line read from each frame. The format for this card was (8F10.0).

Upon receipt of the card file of PCS coordinate readings, it was merged with the previously punched ID, control, and constant cards, and the computer control cards for submission to ASD/AD for computation. The composition of a typical computer run deck is illustrated in Figure 14.

Computation: Film frame coordinate positions of the tracked points were converted to two-dimensional seat coordinate time histories by program HIFPD, which is described fully in Section 2.2. Two versions of the program were filed. The first read the digitized values from the first and second lines from each frame and wrote the appropriate heading and labels on tables and plots. The second version read the digitized values in the first and third lines from each frame and wrote the appropriate headings and labels on tables and plots. This variation required two passes through the computer.

Although program HIFPD is documented herein a brief discussion of the application is warranted.

The PCS coordinate readings of the two reference fiducials from the first film frame are used as the basis for the location of optical axis relative to the reference points and for the angular relationship between the axes of the PCS and the SCS. Readings of these points from each subsequent film frame translated and rotated the PCS, coordinate system to coincide with the orientation of the first frame. This was done to minimize errors due to vibration of the camera during the test event.

The displacement from the optical axis of the second reference point was calculated by dividing the PCS coordinates by the conversion constant contained in columns 11 thru 20 in the conversion constant card. In turn the displacement from the optical axis of each of the tracked points was calculated by dividing its PCS coordinates by its conversion constant. The

values of x and z displacements from the optical axis of each point were then subtracted from the x and z displacements of the reference point yielding x and z coordinates of each point relative to the reference point. Thus the origin of the calculated coordinate system had been translated to the location of reference fiducial 8.

From the time histories of seat coordinate positions, HIFPD computed total velocity and acceleration time histories of each point, fitting a moving quadratic arc to eleven points during each differentiation, and the angular velocity and acceleration time histories of the upper nose point about the lower, and of the shoulder about the mid thigh point; again fitting a moving quadratic arc to eleven points during each differentiation.

The resulting time histories were printed in tables and written on magnetic tape for plotting.

Plotting: After examination of the tabular results of the computation revealed no apparent gross errors, a plot request was submitted to ASD/AD. The data written on the magnetic tape by HIFPD were read and plotted offline on the CALCOMP Plotter.

2.5.5 Results and Accuracy

The results of this effort were presented in tabular and graphic forms. The accuracy with which these results represent the actual motions of the observed points is the subject of debate. The following deficiencies may be inferred from a study conducted by H. T. Mohlman of the UDRI.¹

- (1) Attenuation of peak values of displacement, velocity and acceleration is a function of frequency.
- (2) The eleven point quadratic fit yields closer correlation than either seven, nine, thirteen, or fifteen point quadratic fits.

¹Graf, P.A. and H.T. Mohlman, Accuracy of Digitized Photometric Data, AMRL-TR-79-76, April, 1980, Aerospace Medical Research Laboratory, Wright-Patterson Air Force Base, Ohio.

- (3) The attenuation of any specific displacement, velocity, or acceleration peak is reasonably predictable if the apparent frequency of the peak is properly interpreted.
- (4) Oscillations in velocity and acceleration curves are predominantly artifacts induced by reading errors. The frequency is a function of the sampling rate and the number of points included in the smoothing fit.

The referenced work included investigation of sampling theory and application of the quadratic fits to digitized photometric data acquired during BPRD tests 172 and 173.

Frequency response curves presented in Figure 21 were derived from fitting eleven points of sinusoidal motion at frequencies from 2 Hz to 35 Hz at a sampling rate of 500 samples/second. The data from which these curves were constructed are presented in Table 20 and are described in detail in the referenced report.

The accuracy of the digitizing was indicated by the standard deviation about the mean for the solution of the forward seat reference point with respect to the rear reference point. The standard deviations were:

<u>Run</u>	<u>x-Axis (feet)</u>	<u>z-Axis (feet)</u>
172	.0073	.00049
173	.0030	.00017

The effect of smoothing the displacement solutions of the tracked points are indicated in Table 21, which presents the standard deviations of difference between unsmoothed and smoothed components of the displacements.

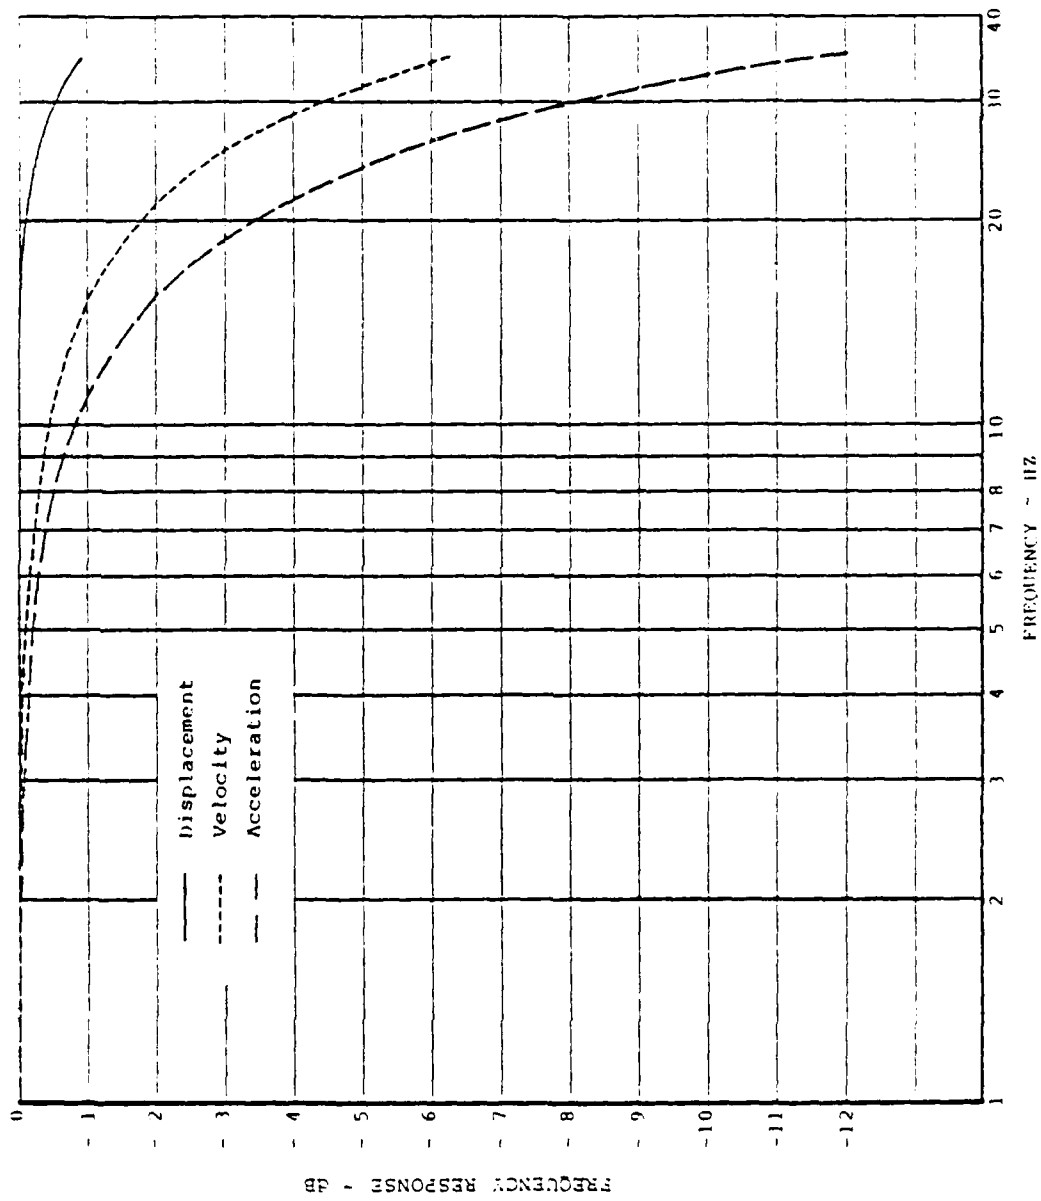


Figure 21. Frequency Response of 11-Point Smoothing as Applied in the HIFPD Program.

TABLE 20
 DISTORTION FACTOR (FK) COMPUTED FROM
 MULTIPLE FREQUENCY SINE FUNCTIONS

f_o (Hz) *	$r = \frac{f_o}{f_s}$	Distortion Factor (FK)			
		<u>F</u>	<u>DISPL</u>	<u>VEL</u>	<u>ACCEL</u>
2	.04	.9974	1.0000	.9981	.9963
4	.08	.9895	1.0000	.9925	.9851
6	.12	.9765	.9999	.9831	.9667
8	.16	.9584	.9997	.9700	.9413
10	.20	.9355	.9993	.9532	.9093
12	.24	.9079	.9985	.9327	.8713
14	.28	.8759	.9972	.9086	.8278
16	.32	.8399	.9953	.8809	.7796
18	.36	.8000	.9926	.8498	.7275
20	.40	.7568	.9888	.8154	.6724
22	.44	.7106	.9838	.7779	.6151
24	.48	.6618	.9975	.7376	.5567
26	.52	.6109	.9695	.6949	.4981
28	.56	.5583	.9597	.6500	.4403
30	.60	.5046	.9479	.6034	.3841
32	.64	.4500	.9340	.5556	.3305
34	.68	.3952	.9177	.5070	.2801
35	.70	.3679	.9086	.4826	.2563

* f_o applies only to an 11-point fit of data sampled at 500 samples per second; use r to determine FK for other fits and/or sample rates.

TABLE 21
 STANDARD DEVIATION OF DIFFERENCE BETWEEN UNSMOOTHED AND
 SMOOTHED DISPLACEMENT DATA IN FEET

	TEST 172		TEST 173	
	<u>x-axis</u>	<u>z-axis</u>	<u>x-axis</u>	<u>z-axis</u>
Hip	.0028	.0028	.0027	.0030
Knee	.0028	.0039	.0034	.0041
Shoulder	.0077	.0041	.0080	.0046
Elbow	.0039	.0091	.0048	.0039
Head Point 1	.0085	.0058	.0090	.0060
Head Point 2	.0121	.0083	.0128	.0085
Piston	.0046	.0077	.0062	.0072
T1	.0089	.0045	.0093	.0038
Helmet 1	.0090	.0037	.0099	.0038
Helmet 2	.0082	.0035	.0086	.0038

SECTION 3
ANALYSIS OF NONPLANAR MOTION

Exposure to impact environments having significant lateral components of acceleration usually result in three dimensional responses.

A method was developed by the UDRI to solve for the instantaneous coordinates of points relative to a seat coordinate system (SCS). The method, documented in AMRL-TR-78-94, employs program POOCH to calculate the apparent coordinates of the focal point of each camera and the orientation of its optical axis and the film frame axes in the SCS. The results output by POOCH are input to program SLED to calibrate the digitized readings of observed points. SLED solves for the most likely point of intercept of the rays from each observed point to each focal point and calculates the distance between the rays at each solution point.

This method was applied to photodata collected during the DOT 6 Year Old Child comparison and the Whole Body Restraint-Lateral study. The latter also required the derivation of velocity and acceleration time histories from the displacement-time data. Program WBRL was developed to smooth the component displacement-time histories and to derive smoothed component and resultant velocity and acceleration time histories. Program WBR-L, with explanatory comments, is listed in Appendix B.

3.1 DOT 6 YEAR OLD CHILD COMPARISON

The Department of Transportation, under an interagency agreement, requested a comparative analysis of the effectiveness of three types of automotive child restraint systems, and a comparison of the inertial and kinematic responses of three types of surrogate six-year-olds while restrained with each of the three systems. The surrogates were two manikins of different manufacture and nine live anesthetized baboons whose general anthropometry approximated that of a six year old child.

The impact environments were developed with the AMRL/BBP Horizontal Impulse Accelerator Facility at WPAFB. The impact environments simulated were twenty and thirty miles per hour head on and fifteen and twenty miles per hour left lateral. Seventy-five test runs, including system performance tests, were conducted from 22 October 1975 thru 19 December 1975.

3.1.1 Photometric Data Acquisition

The primary objectives of the photometric data system were to:

- Develop a method for calculating three dimensional displacement of anthropometric points.
- Collect data on two high speed motion picture cameras mounted onboard the test vehicle.
- Apply the developed method to reduce the photodata to time histories of three-dimensional coordinate positions in the SCS of two points on the head of each subject.

The method developed to solve the time-SCS position data resulted in the programs POOCH and SLED. These programs required application of fixed reference fiducials and a survey of their coordinates in the SCS. The camera and range survey data from forward impact configurations and left lateral impact configurations are presented in Figures 22 and 23 respectively.

Photo recordings were recorded on two Milliken DBM-4B cameras fitted with 10 mm lenses. The cameras were operated at a nominal rate of 500 frames per second. Timing of the film was provided by exposure of the film edges to light emitting diodes excited simultaneously by a central pulse generator at 100 pulses per second.

Figures 24 and 25 illustrate typical scenes as observed by these cameras prior to forward and lateral impacts respectively.

CAMERA SURVEY DATA

Camera	Focal Point Coordinates (x, y, z) inches	Azimuth	Elevation	Roll
6 (Forward)	(-41.1, 40.25, 42.5)	-33°	-14°	1°
7 (Forward)	(-40.6, -40.75, 43.0)	37°	-17°	1°

Angular Conventions:

Azimuth: Positive CW from x axis viewed from above.

Elevation: Positive incline above local horizontal.

Roll: Positive CW about optical axis.

RANGE SURVEY DATA

Reference Point Coordinates (x, y, z) inches)

Point	Runs 661 - 672	Runs 673 - 685	Runs 686 - 696	Runs 697 - 700
1		(45.47, -17.91, 45.22)	(45.34, -18.09, 45.25)	(45.59, -17.88, 45.25)
2		(45.62, -3.91, 45.16)	(45.81, -4.04, 45.25)	(45.70, -3.81, 45.19)
3		(45.12, 10.09, 45.19)		
4			(45.69, 14.13, 45.47)	(45.84, 14.62, 45.25)
5	(0.66, -13.12, 8.84)			
6	(0.88, -7.1, 7.79)			
7	(0.88, 6.62, 7.88)			
8	(0.69, 12.75, 6.09)			
9	(0.91, 0.0, 8.12)			
10	(0.09, 0.0, 3.57)			

Constant throughout test period.

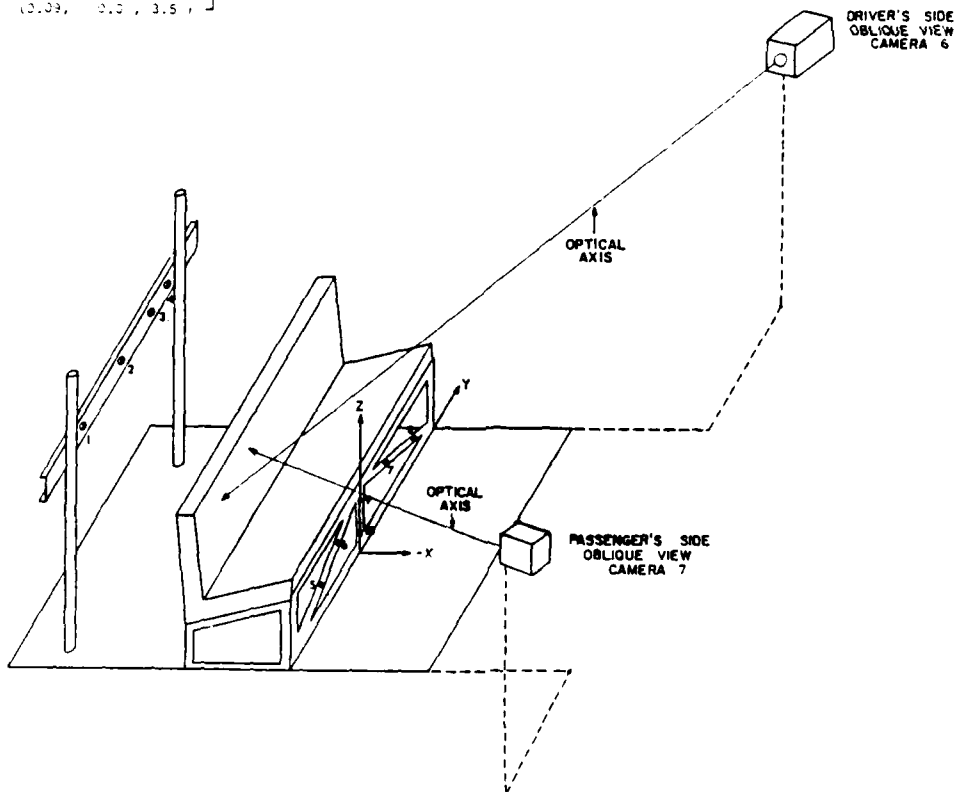


Figure 22. DOT Six-Year-Old Child Comparison Seat Coordinate System and Survey Data, Forward Impacts.

ANGULAR SURVEY DATA

Camera	Reference Point Coordinates (X, Y, Z) (inches)	Azimuth	Elevation	Run
7. Lateral	41.14, -16.75, 42.06	11.97	14.12	737
8. Lateral	41.19, -16.23, 42.04	11.97	14.12	738

Angular Conventions

Azimuth: Positive with X axis, viewed from above.
 Elevation: Positive inclined above local horizontal.
 Roll: Positive about vertical axis.

ANGLE SURVEY DATA

Reference Point Coordinates (X, Y, Z) (inches)

Point	Runs 738 - 736	Runs 737 - 736	Runs 737 - 734
1	41.14, -16.75, 42.06	41.19, -16.23, 42.04	41.14, -16.75, 42.06
2	41.19, -16.23, 42.04	41.19, -16.23, 42.04	40.81, -16.14, 42.44
3	41.14, -16.75, 42.06	40.87, -16.97, 44.15	
4	41.14, -16.25, 43.25	40.34, -16.97, 44.56	40.62, -16.11, 44.14
5	40.81, -16.14, 42.44		
6	40.81, -16.14, 42.44		
7	40.81, -16.14, 42.44		
8	40.81, -16.14, 42.44		
9	40.81, -16.14, 42.44		
10	40.81, -16.14, 42.44		

Constant throughout test period.

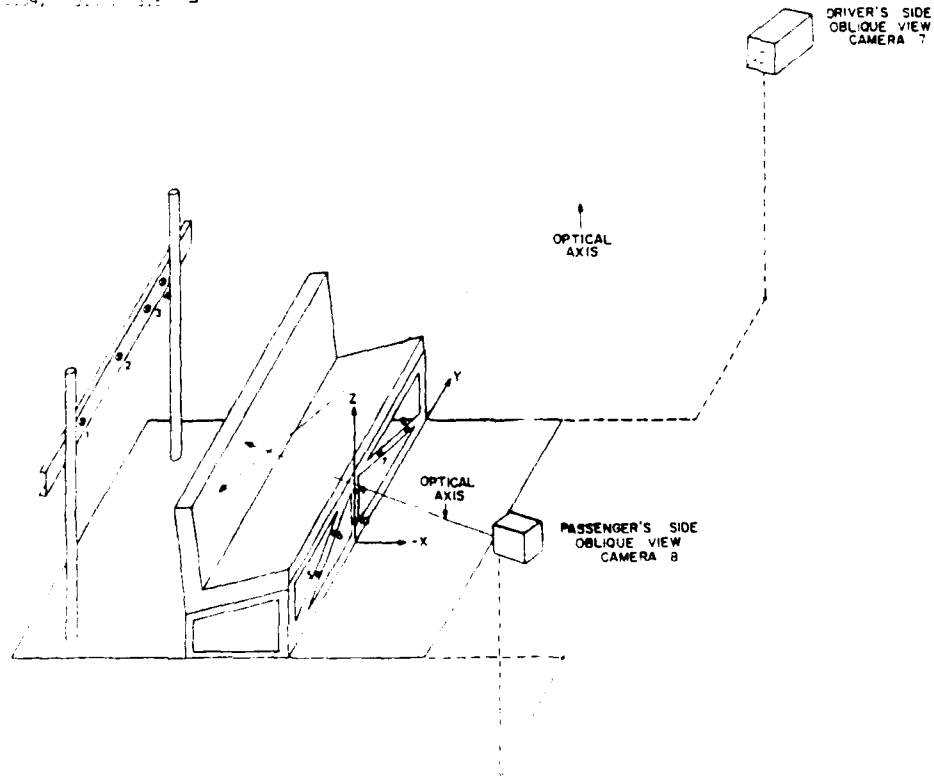


Figure 23. DOT Six-Year-Old Child Comparison Seat Coordinate System and Survey Data, Lateral Impacts.



Figure 24. Typical Scene Prior to Forward Impact as observed by Camera 5 (Upper and Lower).

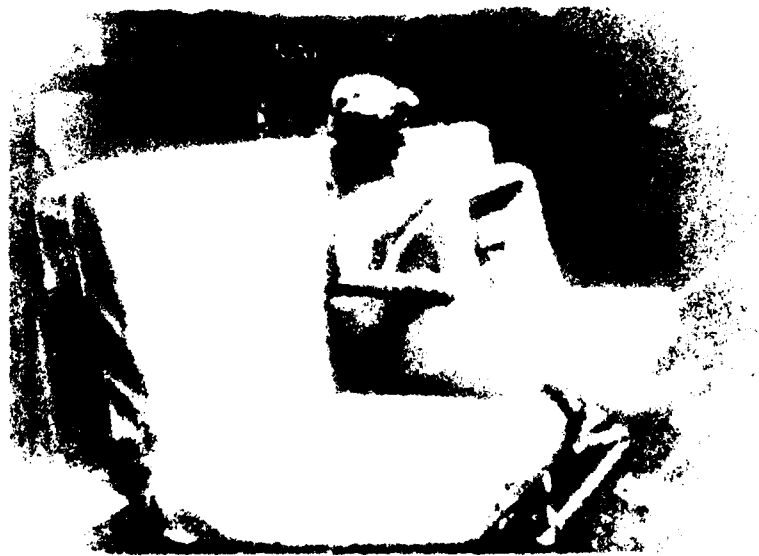


Figure 25. Typical Scene Prior to Lateral Impact
as Observed by Cameras 7 (Upper) and 8.

3.1.2 Data Reduction

Reduction of the recorded data to displacement-time histories required digitization, in the projected image coordinate system (PCS) of the coordinates of fixed reference fiducials and fiducials on the heads of the subjects, and electronic data processing of the digitized data by POOCH and SLED.

Digitizing was accomplished on a Producers Service Corporation model PVR film analyzer (PVR) which was interfaced to a teletype terminal equipped with a paper tape punch station (TTY).

The film was mounted on the PVR and was transported until the first time pulse ($t=0$) was observed. The film was transported in reverse until the twelfth frame before the t_0 pulse to compensate for the film path displacement of the LED from the exposure frame in the gate. The frame counter was reset to 0000.

The origin of the projected image coordinate system was located by numerically bisecting the major and minor dimensions of the projected frame and resetting the counters to zero at that point. The PCS coordinates of all observed reference fiducials were then digitized by locating the cursors over the center of each and depressing the record switch. The operator noted the code number of each observed fiducial as it was digitized. These values were later processed by POOCH to locate and orient the camera for the data from this test.

The operator then digitized the PCS coordinates of four reference fiducials, previously selected as being observable throughout the event, and the four points on the heads of the subjects. The resulting table of data was in the form of the following format throughout the program. During lateral impacts only one subject was exposed. When films from these tests were digitized the reading of the chin fiducial was repeated two additional times to fill the file.

LINE 1:

<u>Columns</u>	<u>Field</u>	<u>Data</u>
1- 5	I5	Frame number.
6-12	F7.0	PCS abscissa of reference point A.
13-19	F7.0	PCS ordinate of reference point A.
20-26	F7.0	PCS abscissa of reference point B.
27-33	F7.0	PCS ordinate of reference point B.
34-40	F7.0	PCS abscissa of reference point C.
41-47	F7.0	PCS ordinate of reference point C.
48-54	F7.0	PCS abscissa of reference point D.
55-61	F7.0	PCS ordinate of reference point D.

LINE 2:

1- 5	I5	Frame number.
6-12	F7.0	PCS abscissa of point on forehead, passenger seat.
13-19	F7.0	PCS ordinate of point on forehead, passenger seat.
20-26	F7.0	PCS abscissa of point on chin, passenger seat.
27-33	F7.0	PCS ordinate of point on chin, passenger seat.
34-40	F7.0	PCS abscissa of point on forehead, driver seat.
41-47	F7.0	PCS ordinate of point on forehead, driver seat.
48-54	F7.0	PCS abscissa of point on chin, driver seat.
55-61	F7.0	PCS ordinate of point on chin, driver seat.

NOTE: Points tracked on baboons were the head accelerometer and the tip of the snout.

After the data were digitized from frame zero the film was advanced to frame 001 and the points were again digitized in the same sequence. This procedure was repeated for each frame until one of the fiducials on the head of one of the subjects became unreadable.

The digital files recorded on paper tapes were communicated to the CDC computer system at Aeronautical Systems Division's Digital Computation Facility (ASD/AD) from a TTY via data modem and voice quality lines. The files were edited to correct format and/or character errors and were copied to disk storage and card punch. The card files were maintained as backup in case the disk files had been inadvertently purged.

The files were amended by insertion of camera location and orientation data output by POOCH, and the addition of the fixed reference fiducial SCS coordinates, the film frame-time equivalence table, and the interpolation interval and test run number as required by SLED.

The binary file of SLED was attached and executed. The output was copied, in batch mode, to a printer and card punch.

The results were visually checked for obvious errors. If the solutions evidenced no apparent discontinuities and the miss-distances at the solution points were less than 0.25 inch, the card deck containing the SCS solutions was prepared to generate plots. The plots generated presented y and z displacements versus x displacement.

3.2 WHOLE BODY RESTRAINT-LATERAL

Description of relative motion of anthropometric points of the torso, head, and extremities during laboratory simulations of impact environments are essential to the development and verification of predictive models. One method of describing the motion of these points is to track each point as a function of time with two or more motion picture cameras, quantify or evaluate the coordinates of their images as projected, and from these projected image coordinates calculate the loci of the points in the seat coordinate system. This method was applied during the Whole Body Restraint-Lateral (WBRL) Impact Study conducted by the Biomechanical Protection Branch of the AF Aerospace Medical Research Laboratory (AMRL/BBP). The experimental tests were conducted on the

Horizontal Impulse Accelerator facility in Building 824 at Wright-Patterson Air Force Base, Ohio between March and July 1977.

3.2.1 Seat Coordinate System

The seat coordinate system (SCS) was a left handed three-dimensional, mutually perpendicular system having its origin at the intercept of the seat centerline and the line of intersection of the seat pan upper surface and the seat back forward surface. The positive senses of the axes were to the rear (x axis), to the left (y axis), and upward (z axis) as illustrated in Figure 26.

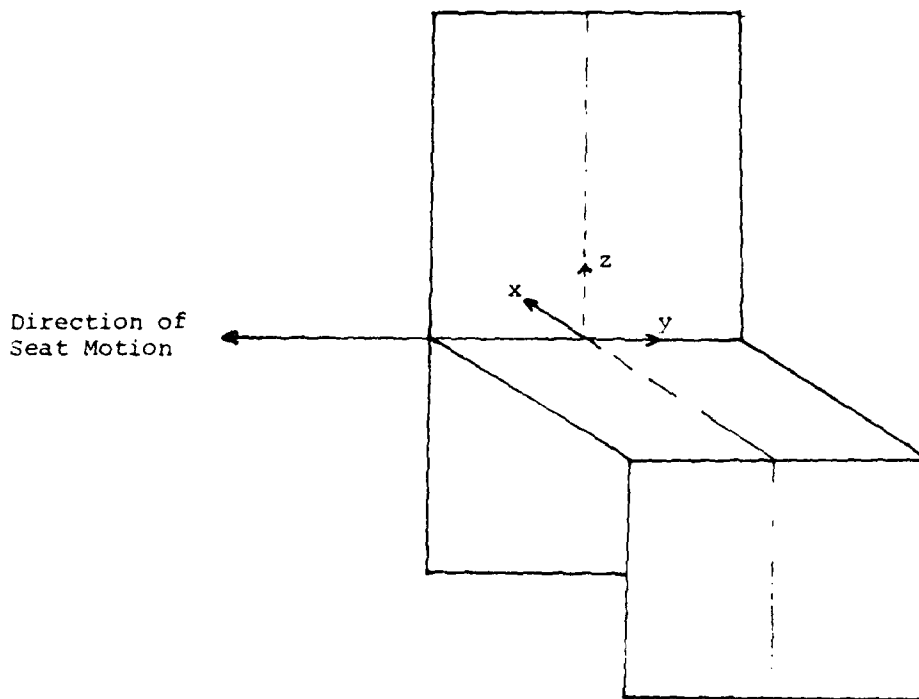


Figure 26. WBR-L Seat Coordinate System (SCS).

3.2.2 Camera Locations

Photographic records of the responses of the test subjects were acquired by four Milliken 16 mm cameras operating at nominal exposure rates of 500 frames per second. All four cameras were mounted onboard and were located and oriented such that each of the fiducials located on the nine anthropometric points to be tracked were observable by two of the cameras throughout the impact and response periods. The location and orientation scheme of the cameras is illustrated in Figure 27, and the coordinates of the focal points and orientations of optical axes are presented in Table 22.

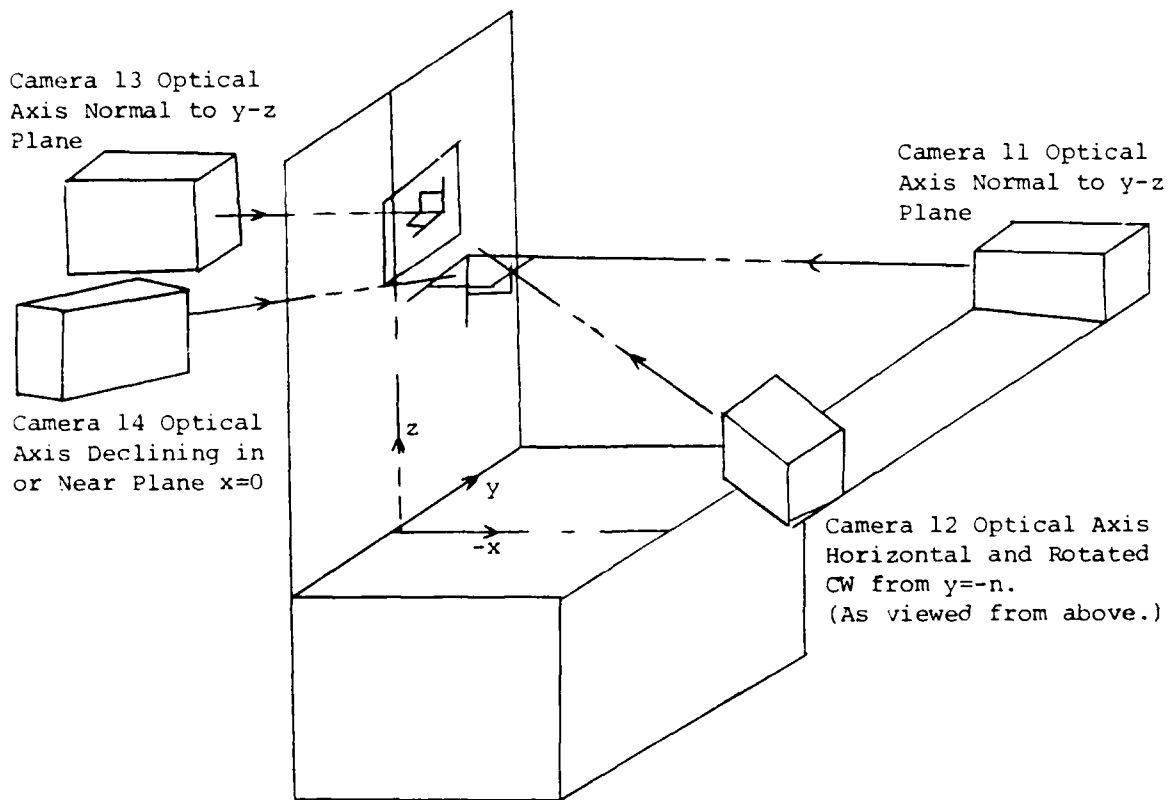


Figure 27. Schematic of Camera Locations and Orientations, WBR-L.

TABLE 22

SURVEY OF PHOTOGRAMMETRIC RANGE CAMERA DATA, WBEFL

	Station 11	Station 12	Station 13	Station 14
Camera Type	DMB-4B	DBM-4B	DBM-44	DBM-44
Camera #/B	4721	4720	44700-1	44697-1
Lens Focal Length (NOMINAL)	10 mm	10 mm	10 mm	10 mm
Focal Point Coordinates, Measured:				
x (ft)	-4.327	-4.245	1.333	.030
y (ft)	.419	-1.051	.510	-1.165
z (ft)	1.402	1.402	2.000	2.575
Lens Focal Length (Derived)	10.93 mm	11.96 mm	10.06 mm	7.69 mm
Focal Point Coordinates (Derived)				
x (ft)	-4.731	-4.869	1.340	0.065
y (ft)	0.578	-1.004	0.54	-1.161
z (ft)	1.389	1.454	1.991	2.570
Optical Axis Orientation (Derived)				
AZIMUTH (Deg)	-1.166	18.618	-179.604	- 95.082
ELEVATION (Deg)	-1.556	-1.482	- .011	-167.493
Camera Frame Orientation (Derived)				
Roll (Deg)	1.629	0.799	.034	.012

3.2.3 Data Acquisition

The data acquisition mission consisted of three distinct tasks:

1. Documentation of anthropometric measurements of each subject.
2. Tracking fiducial application, measurement, and documentation.
3. Cine recording of the tracking fiducials during the impact and response events.

Anthropometry of each test subject was measured and documented by AMRL/HED.

Tracking fiducial application, measurement and documentation were accomplished prior to each test run by the UDRI representative. Tracking fiducials were located as follows.

The suprasternal notch was located by palpation and marked with a nylon tip pen.

The lower end of the sternum was located by palpation and marked.

Two arcs of 10 cm radius were struck from the mark on the suprasternal notch to the right and left clavicles and were marked.

One-inch-diameter fiducials, printed in alternating black and yellow quadrants and having a one-sixteenth inch hole at the center, were placed over these four marks.

With the subject's head erect, a fiducial approximately three-eighths inch high and one-inch wide was centered on the **sagittal plane** of the nose at **the level** of the pupils. A fiducial of similar size was located at the level of the pupils at each lateral orbital rim.

Two additional tracking fiducials were previously mounted to a leather appliance which was strapped to the subject's pelvis. Initially these fiducials were placed on the subject over the anterior superior iliac spines. This proved to be unsatisfactory

because the fiducials on several subjects were obscured by abdominal skin folds when the subject was seated.

The last fiducial was intended to track the motion of the first thoracic vertebra (T-1). With the subject's head bowed forward the spinous process of the seventh cervical vertebra (C-7) was located by palpation and was followed as the subject erected his head. The fiducial was then placed over this point which, with the head erect, overlaid T-1.

With the subject seated in a mockup of the test seat relative dimensions were read with an anthropometer and recorded. Dimensions taken were:

R.H. eye fiducial - L.H. eye fiducial
R.H. eye fiducial - Nose fiducial
L.H. eye fiducial - Nose fiducial
Suprasternal notch fiducial - Lower sternum fiducial
Suprasternal notch fiducial - R.H. clavicle fiducial
Suprasternal notch fiducial - L.H. clavicle fiducial
Suprasternal notch fiducial - R.H. pelvic fiducial
Suprasternal notch fiducial - L.H. pelvic fiducial
Lower sternum fiducial - R.H. clavicle fiducial
Lower sternum fiducial - L.H. clavicle fiducial
R.H. pelvic fiducial - L.H. pelvic fiducial
R.H. clavicle fiducial - L.H. clavicle fiducial

After the subject was instrumented and seated in position, coordinates (in the seat coordinate system) of the suprasternal notch fiducial, the R.H. trageon, and the lower, forward, inboard corner of the Nine Transducer Accelerometer Pack (9TAP) were read and recorded. The 9TAP was mounted on the R.H. side of a welding mask headband which was secured by straps under the chin and the base of the occiput. It contained three linear accelerometers at the origin and two at the end of each arm aligned with each of the three axes of the head and was designed to yield time histories of linear acceleration in three axes and angular accelerations about those axes.

Prior to the first test, fixed reference fiducials were mounted on the test fixture. These fiducials are identified in Figure 28, and their coordinates are listed in Table 23.

Cine recording of the responses of the subjects were recorded from $t=-2$ seconds to $t=2$ seconds. The four Milliken cameras were remotely operated by circuits in the photo instrumentation control console which was programmed into the countdown sequence. Timing was provided by a pulse generator which simultaneously excited an LED in each of the cameras at the rate of one hundred pulses per second.

Synchronization of time among the films was accomplished by a strobe flash, observable by all cameras, initiated at $t=0$.

3.2.4 Data Reduction

The desired results of the data reduction effort were time histories of coordinate positions of the tracked points and the velocities and accelerations derived therefrom. The system used was a modified photo theodolite space position solution system. The phototheodolite system assumes synchronized exposure of films from two or more cameras. Since the cameras used were not synchronized, the system was modified to synchronize projected film frame images by linear interpolation of projected film frame coordinates between frames at fixed time intervals.

The overall data reduction task required three subtask areas, film editing, projected image digitizing, and electronic data processing.

3.2.4.1 Film Editing

Critical to the processing of the photo data were timing, legibility of reference and tracking fiducials, and documentation of any anomalies that might occur.

Each film was viewed on a light table to assure that there was no erratic behavior of film transport during recording. This was accomplished by sampling the film intervals between .01 second LED images on the film. If no significant deviations were

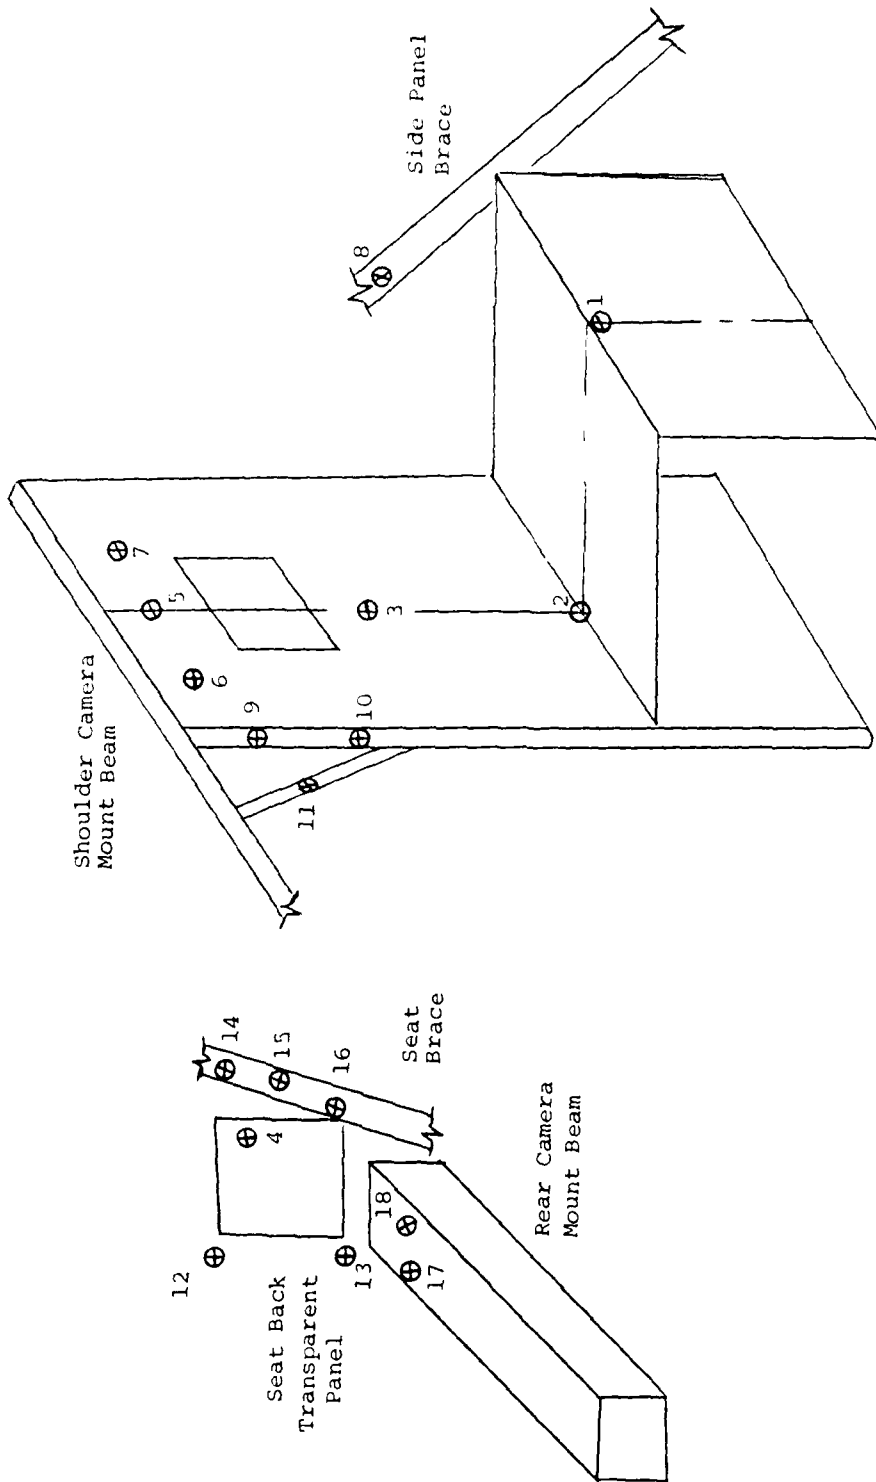


Figure 28. WBR- L Reference Fiducials Schematic.

TABLE 23
WBRL REFERENCE FIDUCIAL COORDINATES (CM)

<u>Ref. No.</u>	<u>x</u>	<u>y</u>	<u>z</u>
1	-45.0	0.0	- 2.5
2	0.0	0.0	0.0
3	0.0	0.0	45.2
4	0.0	0.0	70.0
5	0.0	0.0	91.2
6	0.0	-10.2	91.2
7	0.0	10.2	91.2
8	-43.7	45.0	39.5
9	5.6	-16.3	79.1
10	5.6	-16.3	63.8
11	5.2	-22.4	74.1
12	1.0	17.1	73.2
13	1.0	17.2	54.2
14	8.7	- 0.4	72.3
15	9.7	0.5	67.4
16	11.1	1.0	60.6
17	27.9	16.4	50.9
18	27.8	10.8	50.9

noted, the average frame rate was calculated. Since the cameras employed were pin registered, and a loop of 11 to 12 frames was required between the pulsed LED and the shutter, absolute timing was not possible.

Time zero was, by definition, the first frame in which the strobe flash was observable. Given a nominal frame rate of 500 frames per second (500 fps) the maximum synchronizing error was 2 milliseconds for each camera. However, given the shutter openings of 140° the maximum error between two given cameras becomes 1.22 milliseconds;

$$\left(\frac{360^\circ - 140^\circ}{360} \right) \times .002 \text{ sec}$$

3.2.4.2 Projected Image Digitizing

Films from cameras mounted onboard at stations 11, 12, 13, and 14 were digitized. The origin of the film frame coordinate system was determined by bisecting the horizontal and vertical centerlines of the projected film frame images from ten test runs. The readings of reference fiducials were tabulated and the average reading of each fiducial was calculated. These were defined as the table of standard readings used to set the scales for digitizing.

The film was mounted on the Producers Service Corporation (PSC) model PVR film analyzer and the scaling system was rotated until the cursors were in alignment with the projected film frame image at the frame defined as $t=0$. The cursors were set over the image of a reference fiducial and the scales were set to zero. **The cursors were then translated** until the negative values of the standard reading for that fiducial were counted and were again reset to zero. The readings of all reference fiducials were taken to assure that they were all within +20 counts (.02 inches) of the values in the table of standard readings.

From Cameras 11 and 12 the data points were digitized to punched paper tape in the format (I5, 8F7.0/5X, 8F7.0/5X, 8F7.0). The "I5" was the frame number. Each of the "8F7.0" formats was composed of four pairs of "-x, y" values in the projected film frame coordinate system. This was chosen to simplify the reading since the cameras at stations 11 and 12 were rotated onto their left sides to improve the field of view.

The PSC model PVR is constrained to read +x to the right of the operator and +y upward. Since the cameras at stations 11 and 12 were rotated to their left sides, the operator's view of the film frame was as illustrated in Figure 29. Thus with the PVR programmed to digitize Frame Number and four pairs of y, x values, the net result was the format presented above.

The first line of readings (I5, 8F7.0) contained the frame number and four "-x, y" film frame coordinates of fixed reference points. The first format "5X, 8F7.0/" contained the repeated frame number (5X) and four pairs of film frame coordinates (-x, y) of the suprasternal notch, lower sternum, R.H. clavicle and L.H. clavicle fiducials. The second format "5X, 8F7.0" contained the repeated frame number and four pairs of film frame coordinates (-x, y) of the R.H. pelvis, L.H. pelvis, R.H. eye, and nose fiducials.

For camera stations 13 and 14 the data points were digitized to punched paper tape in the format (I5, 8F7.0/5X, 8F7.0). For these views the PSC PVR was programmed to punch the coordinate pairs in "x, y" format since camera 13 was mounted upright and camera 14 was inverted.

The first line of readings (I5, 8F7.0) again contained the film frame number and pairs of x, y readings of four fixed reference points. The second line (5X, 8F7.0) contained the repeated frame number and the reading of the coordinates of the T1 fiducial read four times. This was done to satisfy the requirements of the preprogramming of the PVR and input format to Program SLED.



Figure 29. Projected Film Frames From Cameras 12 (Upper) and 11 as Viewed by Operator, WBR-L.

The operator's view of the projected images of films from cameras 13 and 14 is illustrated in Figure 30.

3.2.4.3 Electronic Data Processing

Electronic data processing required a sequence of related operations which could be broadly broken down into the areas of data preparation, computation and plotting, and review of results.

Three computer programs were required to achieve the results. Program POOCH was used to determine the apparent location and orientation of each of the four cameras. Program SLED was employed to solve for the most likely point of the intercept in the three-dimensional SCS of rays from each pair of cameras to each tracked point. Program WBRL was employed to calculate time histories of smoothed coordinate positions of each of the tracked points, smoothed component and resultant accelerations of each of the tracked points, and orthogonal projections of the relative positions of the right lateral orbital rim fiducial and the nose fiducial.

The results of these calculations were printed on hard copy and written on magnetic tape for offline plotting.

Programs POOCH and SLED are described in detail in AMRL-TR-78-94 "Photometric Methods for the Analysis of Human Kinematic Responses to Impact Environments."

Data Preparation: Preparation of data for input to program POOCH required digitization of projected image coordinates of each of the fixed reference points and transcribing these values together with the measured coordinates in the SCS of the points into tabulating cards. The approximate measured coordinates in the SCS of the focal point of the camera and the nominal focal length of the lens were also transcribed to accounting cards. These cards were then merged with system control cards and the binary program cards and transmitted to ASD/AD, Bldg. 676, WPAFB for processing.



Figure 10. Projected Film Frames From Cameras 13 (left) and 14 as Viewed by Operator, WBR-1.

Processing of projected image coordinates to three-dimensional positions in the SCS required, in addition to the digitized readings, location and orientation data for each of the cameras, reference fiducial table as seen by each camera, and a film frame-time equivalence table. Cards containing these data were punched and merged with the required system control cards and were submitted to ASD/AD for processing with program SLED.

The tables and plots output by program SLED were reviewed for apparent gross errors. When none were observed, the card files punched by program SLED were merged with system control cards and submitted to ASD/AD for processing to smoothed time-SCS coordinates, velocities and accelerations by program WBRL which is presented in Appendix A. Tables and plots generated by program WBRL are presented in Appendices B through N.

Computation and Plotting: These functions were accomplished on the CDC systems at ASD/AD. The programs used have been previously referenced, however it is well to note that the program WBRL calls subroutines from the system library to prepare and write the tapes used for offline plotting.

Review of Results: The coordinate solutions calculated by program SLED from the projected images of films from cameras 11 and 12 resulted in smooth time-displacement curves for the y and z components but were very erratic for the x component. Due to the shallow angle between the optical axes of these cameras (approximately 19.8 degrees) even slight reading error resulted in large fore and aft errors (x coordinates). These errors became even more magnified in the differentiation to x components of velocity and acceleration.

A statistical analysis of the miss distances between the rays constructed from both cameras at the solution points was accomplished by program SLED. The values of mean error and standard deviation from the mean calculated for each of the tracked points for each test is tabulated at the start of each of the data results appendices. The mean error and standard deviation

from the mean for the tracked points for all tests considered are presented in Tables 24 and 25.

The above data indicated that the SCS solutions for the T-1 fiducial were relatively poor. The high standard deviations for this point may be due to:

1. Refraction of rays passing through the seat back window.
2. Glare from both window and fiducial as the seat traveled past individual lamps.
3. Angle between the surface of the fiducial and the ray to camera 14 was very small.

In general the fiducial surfaces were very reflective and difficulty was experienced with recognizing the centers of all at various times throughout the tests.

Calculated values of velocity and acceleration were probably degraded as a function of frequency. A study by Mr. Mohlman of error induced by smoothing displacement, velocity, and acceleration data with a moving quadratic arc fit to eleven points will soon be published.² The study was based in part on the analysis of sinusoidal displacement data sampled at 2 millisecond intervals. The sinusoidal frequencies analyzed were varied from 2 Hz to 35 Hz. The results of this portion of Mr. Mohlman's study were presented in Figure 21 and Table 20.

TABLE 24
ANALYSIS OF MISS DISTANCE BETWEEN RAYS AT SOLUTION POINTS,
HUMAN SUBJECTS

	Number of Points	Mean Miss Distance (inches)	Standard Deviation From Mean (inches)
Suprasternal Notch	3728	.168	.168
Lower Sternum	3728	.177	.146
R.H. Clavicle	3728	.117	.149
L.H. Clavicle	3728	.118	.169
R.H. Pelvis	3727	.110	.128
L.H. Pelvis	3727	.188	.183
R.H. Eye	3727	.104	.182
Nose	3727	.107	.197
T-1	3702	.134	.244
TOTALS	33522	.114	.146

TABLE 25
ANALYSIS OF MISS DISTANCE BETWEEN RAYS AT SOLUTION POINTS,
MANIKIN SUBJECTS

	Number of Points	Mean Miss Distance (inches)	Standard Deviation From Mean (inches)
Suprasternal Notch	3363	.060	.057
Lower Sternum	3363	.055	.049
R.H. Clavicle	3363	.097	.101
L.H. Clavicle	3363	.080	.118
R.H. Pelvis	3364	.066	.103
L.H. Pelvis	3364	.183	.140
R.H. Eye	3364	.184	.190
Nose	3364	.088	.198
T-1	3391	.444	.447
TOTALS	30290	.117	.110

SECTION 4

PICTOGRAPHIC PRESENTATION

A need was seen to exist for a method of presenting, in a comprehensive manner, the sequential relative displacements of body segments as they respond to impact inputs. Program RSD was developed to process data, digitized from selected frames of motion picture recordings of laboratory simulations of $-G_x$ impacts, to a series of six time-incremented pictograms of body segment positions and restraint harness strap displacements relative to the seat.

This process was developed for the Biomechanical Protection Branch of the AF Aerospace Medical Research Laboratory (AMRL/BBP) located at Wright-Patterson Air Force Base (WPAFB), Ohio.

It was developed to minimize the manual effort required to convert digitized data to plotted pictograms. The processing program is written in FORTRAN language and utilizes library routines available on the CDC computer systems at Aeronautical Systems Division's Digital Computation Facility (ASD/AD) at WPAFB.

4.1 PROGRAM RSD INPUT REQUIREMENTS

This section describes the content and format of the data required to execute the program RSD. This program draws six graphs on the CALCOMP plotter which show the position of the head, shoulder, elbow, wrist, hip, knee and ankle at six time points during the test. The six graphs are plotted on a report size page (6-1/2 by 9 inches).

Execution of the program RSD requires the CCAU and CCPLOT1036 CALCOMP plot libraries. The CALCOMP plot output file is written on file TAPE7.

The first eight cards described below define the test parameters and the remaining six sets of six cards each define the input data at the six time points. The variable names used in the program are included with the data description. All references to the y axis in this text and in the program source listing (Appendix C) should be interpreted as the chair z axis.

Card Number 1 -- Title Card

<u>Columns</u>	<u>Format</u>	<u>Variable Name</u>	<u>Description</u>
1-60	6A10	TITLE	Title or caption printed below the set of six graphs. This title should be centered in the 60 column field.

Card Number 2 -- MISC. data in inches

1- 5			Card ID, — not read by the program	
6-12	F7.0	DPS	Distance between Lexan panel and seat side planes	
13-19	F7.0	DSC	Distance from seat side fiducial plane to seat center line	
20-26	F7.0	DPF	Distance between fiducials on Lexan panel	
27-33	F7.0	DSF	Distance between seat side fiducials	
34-40	F7.0	XSB	x shoulder belt attachment point] relative to seat origin
41-47	F7.0	YSB	y shoulder belt attachment point	
48-54	F7.0	XLB	x lap belt attachment point	
55-61	F7.0	YLB	y lap belt attachment point	
62-68	F7.0	XASSF	x aft seat side fiducial	
69-75	F7.0	YASSF	y aft seat side fiducial	

Card Number 3 -- Breadths across fiducials (BAF) to be tracked
data are in counts.

<u>Columns</u>	<u>Format</u>	<u>Variable Name</u>	<u>Description</u>
1- 5			Card ID
6-12	F7.0	BAF(1)	Hip
13-19	F7.0	BAF(2)	Knee
20-26	F7.0	BAF(3)	Ankle
27-33	F7.0	BAF(4)	Shoulder
34-40	F7.0	BAF(5)	Elbow
41-47	F7.0	BAF(6)	Wrist
48-54	F7.0	BAF(7)	Trageon
55-61	F7.0	BAF(8)	Nose
62-68	F7.0	BAF(9)	Harness lap buckle
69-75	F7.0	BAF(10)	Shoulder harness

Card Number 4 -- Panel and seat fiducial data in counts.

1- 5			Card ID
6-12	F7.0	XPF	x - Lexan Panel FWD fiducial
13-19	F7.0	YPF	y - Lexan Panel FWD fiducial
20-26	F7.0	XPA	x - Lexan Panel AFT fiducial
27-33	F7.0	YPA	y - Lexan Panel AFT fiducial
34-40	F7.0	XSF	x - Seat Side FWD fiducial
41-47	F7.0	YSF	y - Seat Side FWD fiducial
48-54	F7.0	XSA	x - Seat Side AFT fiducial
55-61	F7.0	YSA	y - Seat Side AFT fiducial

Card Numbers 5 to 7 -- x, y coordinates used to compute radii of body elements (in counts).

Card Number 5

<u>Columns</u>	<u>Format</u>	<u>Variable Name</u>	<u>Description</u>
1- 5			Card ID
6-12	F7.0	X1(2)	x ~ First knee point
13-19	F7.0	Y1(2)	y ~ First knee point
20-26	F7.0	X2(2)	x ~ Second knee point
27-33	F7.0	Y2(2)	y ~ Second knee point
34-40	F7.0	X1(3)	x ~ First ankle point
41-47	F7.0	Y1(3)	y ~ First ankle point
48-54	F7.0	X2(3)	x ~ Second ankle point
55-61	F7.0	Y2(3)	y ~ Second ankle point

Card Number 6

Same format as Card 5 above for the x, y points for the shoulder [X1(4), etc.] and the elbow [X1(5) etc.].

Card Number 7

Same format as Card 5 above for the x, y points for the wrist [X1(6), Y1(6), etc.].

Card Number 8 -- Trageon and eye points required to compute the angle between the Trageon-Nose line and the head z-axis (in counts).

1- 5			Card ID	
6-12	F7.0	TX	x ~ Trageon point	} measured when the head z-axis line is vertical
13-19	F7.0	TY	y ~ Trageon point	
20-26	F7.0	EX	x ~ Eye point	
27-33	F7.0	EY	y ~ Eye point	

(Note that the head and hip radii are computed using the center points from the 0 frame readings).

Film Data - the following six cards are required for each of the six plots.

Card Number 1 -- Time in milliseconds for this set of film data.

<u>Columns</u>	<u>Format</u>	<u>Variable Name</u>	<u>Description</u>
1- 5			ID or frame number (e.g. TIME =)
6- 8	A3	ITM	Time in milliseconds

Card Number 2

1- 5	I5		Frame number
6-12	F7.0	XSFF	x ~ Seat forward fiducial
13-19	F7.0	YSFF	y ~ Seat forward fiducial
20-26	F7.0	XAFF	x ~ Seat aft fiducial
27-33	F7.0	YAFF	y ~ Seat aft fiducial
34-40	F7.0	X(1)	x ~ Hip center point
41-47	F7.0	Y(1)	y ~ Hip center point
48-54	F7.0	X(2)	x ~ Knee center point
55-61	F7.0	Y(2)	y ~ Knee center point

Cards 3 through 6 have the same format as Card Number 2 above; they contain the x and y coordinates of the center point for each variable. The number in parenthesis is the index of the x and y arrays.

Card Number 3: Ankle(3), Shoulder(4), Elbow(5), and Wrist(6).

Card Number 4: Trageon(7), Nose(8), Lap Buckle(9), First Shoulder Harness(10).

Card Number 5: Next four Shoulder Harness points (11 to 14).

Card Number 6: Last two Shoulder Harness points (15 and 16).

(Note that the seven shoulder harness points are assumed to be listed in sequence from the buckle to the top shoulder point; that is, with increasing y values.)

4.2 FILM DIGITIZING PROCEDURE

The title to be printed below the pictograms (Card 1) was manually entered via the keyboard.

The time delay as required (Card 2) was manually entered via the keyboard.

The values of breadths across fiducials (Card 3) were manually entered via the keyboard. BAF's 1 thru 8 were obtained from the pretest measurements form. BAF's 9 and 10 were considered to be constant, the shoulder strap center-center distances being 6.88 inches at the single tree and 1 inch just above the buckle loops. The distances between centers of the shoulder straps were measured prior to several tests to be constant with the distance from the single tree to the clavicles, and were considered to be parallel over that span for all subjects.

The film recording on the primary film was started on the Producers Service Corporation Model 500 in single frame mode. The film was transported until the frame in which the strobe flash was first observed and projected and the frame counter was reset to zero. The film was transported forward in the single-frame mode, the operator noting the frame numbers at which the fourth, eighth, twelfth, sixteenth, and twentieth 0.01 second timing pulses appeared. The number of frames that the zeroth pulse was displaced from frame zero was subtracted from each of the other frame numbers to determine the frames from which data were to be obtained.

The film was transported backward while the operator observed the changing attitude of the subject's head. The number of the frame in which the head appeared to be erect was noted. Identification of this frame is strictly subjective, however, the error resulting from this judgment remains constant throughout the processing of data from each test.

After the film had been returned to frame zero the projected image coordinates of the reference fiducials on the lexan panel and the side of the seat pan were digitized in the order specified in the format for Card Number 4.

Two points were read at each of the joints on the subject's left arm and leg in the order specified in the formats for Cards 5, 6, and 7. These points were digitized to define the diameter of the circles representing the joints on the pictograms. The ankle of the subject was not in the field of view at frame zero, so the film was transported to a frame in which it was visible. The readings of the ankle points were read and a tracing was made in black ink on clear acrylic sheet of the fiducials on the ankle, knee, and intermediate point on the lower leg. The tracing also included the outline of the shin. This overlay was later used to locate the ankle fiducial when it was outside the field of view.

The film was transported to the frame noted as the one in which the head was erect and the coordinates of the fiducials at the trageon and nose were digitized as specified in the format for Card Number 8.

The film was returned to frame zero. At this point it is well to note the possibility that on some films the synchronizing flash can be bright enough to wash out the images of some of the fiducials. Had this occurred, time zero data would have been digitized from frame -1 (99999 on counter).







Time after initiation (msec) was entered manually via the keyboard as specified in the format for Film Data Card Number 1. The coordinates of the projected images were digitized in the order specified in the formats for Film Data Card Numbers 2 thru 6. All points on the seat and the subjects were defined by the fiducials with the exception of the shoulder, the elbow, and the wrist. As the arm elevated, the arm segments demonstrated rotary motion causing the fiducials on the elbow and wrist to rotate forward relative to the image of the arm. (Dummies with pinned joints do not demonstrate this rotation). At the shoulder, elbow and wrist

the points digitized were the estimated geometric centers of the images of the joints.

The first point digitized on the harness was the center of the buckle. The second, third, and fourth points were digitized upward along the left shoulder strap between the buckle and the clavicle. The fifth, sixth, and seventh points were digitized upward (rearward) along the left shoulder strap between the clavicle and seatback.

4.3 RESULTS

The pictograms generated by the test case are illustrated in Figure 31. The format and the presentation of the body segment positions appear to accurately reflect the projected images in the film frames from which the data were extracted. The projection of the shoulder strap, as plotted, does not accurately reproduce the observed path of the strap. A need to review the technique used to digitize the strap data, and to improve the method of fitting a curve to the data is indicated.

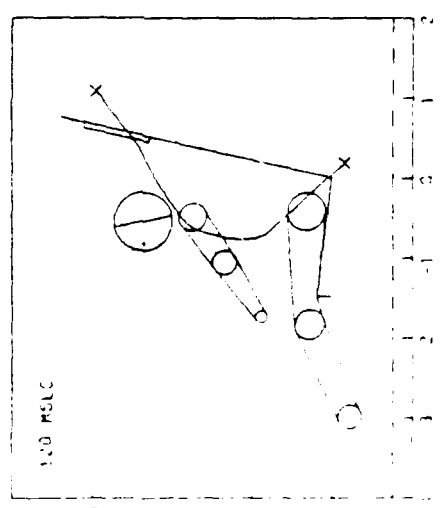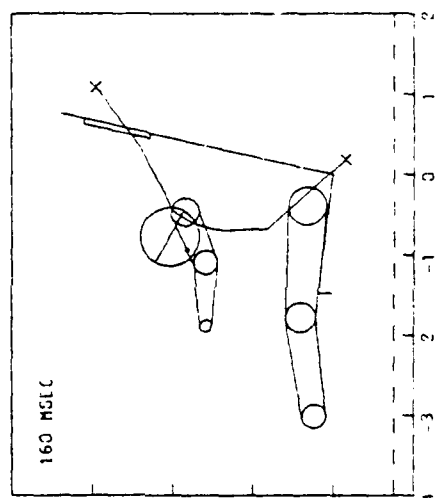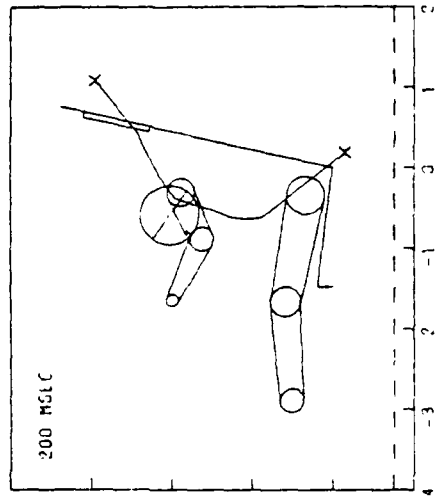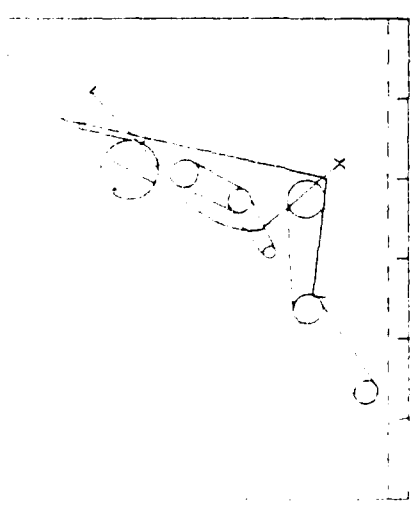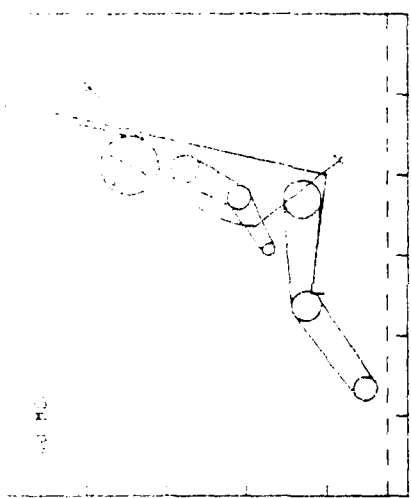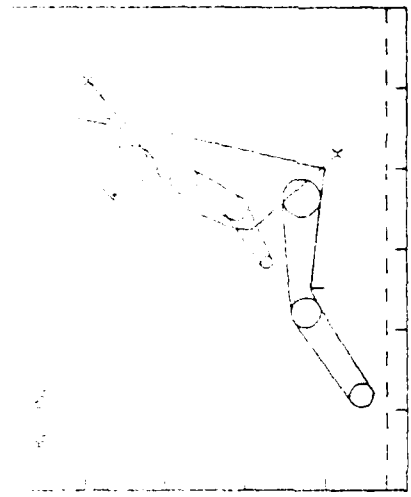

F 111 10 GX GENERIC RESTRAINT TFSI 1838 SUBJECT A1

Figure 4. Electograms of Displacements of Body Segments and Restraint Harness as a function of Time.

APPENDIX A
PROGRAM HIFPD

```

PROGRAM HIFPD(INPUT,OUTPUT,TAPES=INPUT,TAPE=OUTPUT,TAPE7)      000100
DIMENSION RES(302),VEL(3,2),MS(302),MH(302),MS2(3,2),MH2(302), 000120
1 HEADL(8),HEADR(8),HEADC(8),DATA(1024), YNPP(3),YNPL(3)      000140
2,VX(302),VZ(302),AX(302),AZ(302)                             000150
COMMON JD,JR, NN,NP,NC1,NC2,XX(302,6),ZZ(302,6), ICAL(8),      000160
1 IFR(302),X(302,8),Z(302,8),ID(12),IR(12),ACC(302),          000180
2ACC(302), CAL(8),XD(302),ZC(302),I(302),DI(302),DC(302)      000200
COMMON /CPLTC/ HEADL,TITLE(10),IRX,OYLF                        000220
EQUIVALENCE (RES(1),MS(1),DI(1)),(VEL(1),MH(1),DC(1)),(ACC(1),MS2(000240
1)),(ACCG(1),MH2(1))                                           000260
2,(XX(1,1),VX(1)),(XX(1,2),AX(1)),(ZZ(1,1),VZ(1)),(ZZ(1,2),AZ(1)) 000270
DATA ENDJ/10HEND /, YNPR/3HYES,3HYES,3H NO/,YNPL/3HYES,3H NO000280
1,3H NO/                                                         000300
DATA HEADR/9H RANGE,9H SLED,9H HIP,9H KNEE,                   000320
1 9H SHOULDER,9H ELBOW,9HHEAD PT 1,9HHEAD PT 2/,              000340
2 HEADL/5HRANGE,4HSLED,3HHIP,4HKNEE,8HSHOULDER,5HELLOW,9HHEAD PT 1000360
3, 9HHEAD PT 2/,                                               000380
4 HEADC/7H RANGE,7H SLED,6H HIP,7H KNEE,9H SHOULDER000400
5R,7H ELBOW,9HHEAD PT 1,9HHEAD PT 2/                           000420
.....000440
.....000460
HYGE IMPACT FACILITY PHOTOMETRIC DATA ANALYSIS PROGRAM      000480
.....000500
.....000520
PARAMETER NAME VERSUS ID CODE                                  000540
CODE NAME                                                       000560
.....000580
1 RANGE                                                         000600
2 SLED                                                           000620
3 HIP                                                            000640
4 KNEE                                                           000660
5 SHOULDER                                                       000680
6 ELBOW                                                           000700
7 HEAD PT 1                                                       000720
8 HEAD PT 2                                                       000740
.....000760
.....000780
.....000800
.....000820
IRX=0 --- NO X-AXIS CHANGE                                       000840
IRX=1 --- CHANGE POLARITY OF X-AXIS DATA (MULT.BY -1.0)      000860
.....000880
ITYPE=0 - READ AND PROCESS ALL 8 PARAMETER.                     000900
ITYPE=1 - READ AND PROCESS ONLY PARAMETERS 1, 2, 7 AND 8.      000920
.....000940
IPR<1 --- PRINT RAW DATA IN COUNTS                               000960
.....000980
ICAM=0 --- CAMERA IS NOT ON THE SLED                             001000
ICAM=1 --- CAMERA IS ON THE SLED; TRANSLATE AND ROTATE DATA. 001020
.....001040
IAOJ=0 -- NO X OR Z ADJUSTMENT READ OR APPLIED.                001060
IAOJ=1 -- XADJ AND ZADJ ARE READ AND ADDED TO ALL X AND Z DATA 001080
BEFORE ANY TAB OUTPUT.                                          001100
.....001120
IPL=0 --- PRINT AND PLOT LINEAR VEL AND ACCEL DATA            001140

```



```

C      IPL=1 --- PRINT LINEAR VEL AND ACCEL DATA          001160
C      IPL=2 --- OMIT LINEAR VEL AND ACCEL DATA          001180
C                                                         001200
C      IPA=0 --- PRINT AND PLOT ANGULAR VEL AND ACCEL DATA 001210
C      IPA=1 --- PRINT ANGULAR VEL AND ACCEL DATA      001240
C      IPA=2 --- OMIT ANGULAR VEL AND ACCEL DATA        001260
C                                                         001280
C      IPC=0 --- PRINT AND PLOT PARAMETER VERSUS SLED DATA 001300
C      IPC=1 --- PRINT PARAMETER VERSUS SLED DATA      001320
C      IPC=2 --- OMIT PARAMETER VERSUS SLED DATA        001340
C                                                         001360
C      DISPLACEMENT, VEL AND ACCEL DATA ARE COMPUTED FOR ANY SETS OF 001380
C      DATA. ID(I) AND IR(I) CONTAIN THE ITH SETS OF PARAMETER CODES 001400
C      FOR PARAMETER AND REFERENCE RESPECTIVELY.          001420
C                                                         001440
C      ID(I) --- CONTAINS PARAMETER IDENT CODE           001460
C      IR(I) --- CONTAINS REFERENCE IDENT CODE           001480
C                                                         001500
C      TITLE(1) --- CONTAINS THE DATE                     001520
C      TITLE(2) --- CONTAINS THE TEST NUMBER              001540
C      TITLE(3) ----> TITLE(10) --- CONTAIN AN 80 CHARACTER PAGE TITLE. 001560
C                                                         001580
C      CAL(I) --- CONTAINS THE CALIBRATION FACTORS FOR PARAMETERS 001600
C      THROUGH 8.                                         001620
C                                                         001640
C      JD --- FRAME NUMBER OF FIRST FRAME PLOTTED ON PARAMETER VERSUS 001660
C      SLED PLOT. (REDEFINED AFTER INPUT)                 001680
C      JR --- FRAME NUMBER OF LAST FRAME PLOTTED ON PARAMETER VERSUS 001700
C      SLED PLOT. (REDEFINED AFTER INPUT)                 001720
C                                                         001740
C      CALL PLOTS(DATA,1024,7)                             001750
C      MAXN IS THE MAXIMUM NUMBER OF FRAMES WHICH CAN BE PROCESSED WITH 001780
C      ABOVE ARRAY DIMENSIONS.                             001800
C      MAXN=150                                           001820
C      MAXN=302                                           001840
C      C1=-1.0E10                                         001860
C      CAL(1)=0.0                                         001880
C      ICAL(1)=1                                          001900
C      PI=3.1415926                                       001920
C      PI2=2.0*PI                                         001940
C      PI34=3.0*PI/4.0                                    001960
C      NP IS THE NUMBER OF POINTS USED IN THE QUADRATIC LEAST SQUARE FIT. 001980
C      NP=11                                              002000
C                                                         002020
C      READ TEST SETUP CARDS.                              002040
C      TITLE(1) CONTAINS THE DATE.                        002060
C                                                         002080
C      READ(5,1010)TITLE(1)                               002100
C      5 READ(5,1010)(TITLE(I),I=3,10)                   002120
C      IF (TITLE(3) .EQ. ENDD) GO TO 499                  002140
C      READ(5,1005) NP1,NP2,JD,JR                        002160
C      IF (NP1 .LT. 3) NP1=11                             002180
C      IF (NP2 .LT. 3) NP2=11                             002200
C                                                         002220
C      TITLE(2) CONTAINS THE TEST NUMBER.                 002240

```

C		002260
	READ(5,1030) TITLE(2),IRX,IPR,ITYPE,IPL,ICAM,IPA,IADJ,IPC,JD,JR,M,	002280
	1 (ID(I),IR(I),I=1,12),NP,DYLP	002300
	IF (NP .LT. 3) NP=11	002320
	IF (IADJ .GT. 0) READ(5,1020) XADJ,ZADJ	002340
	READ(5,1020) DT,(CAL(J),J=2,8)	002360
	IF (JD .LT. 1) JD=1	002380
	IF (JR .LT. 1) JR=999	002400
	WRITE(6,2500) TITLE,NP	002420
	IF (IADJ) 440,440,450	002440
440	IADJ=0	002460
	GO TO 455	002480
450	IADJ=1	002500
455	IF (ICAM) 460,460,465	002520
460	ICAM=0	002540
	GO TO 470	002560
465	ICAM=1	002580
470	IF (IRX) 480,480,490	002600
480	IRX=0	002620
	GO TO 495	002640
490	IRX=1	002660
495	IF (IPR) 500,500,505	002680
500	IPR=C	002700
	GO TO 510	002720
505	IPR=1	002740
510	IF (IPL-1) 515,525,520	002760
515	IPL=0	002780
	GO TO 525	002800
520	IPL=2	002820
525	IF (IPA-1) 530,540,535	002840
530	IPA=0	002860
	GO TO 540	002880
535	IPA=2	002900
540	IF (IPC-1) 545,560,550	002920
545	IPC=0	002940
	GO TO 560	002960
550	IPC=2	002980
560	I=1	003000
	IFLAG=0	003020
	NC1=1	003040
	NC2=999	003060
	IFRD=100	003080
	IF(DT) 565,565,570	003100
565	DT=500.4	003120
570	IF (ITYPE) 575,575,580	003140
575	ITYPE=0	003160
	J1=3	003180
	GO TO 1L	003200
580	ITYPE=1	003220
	J1=7	003240
585	READ(5,1000) ICD,IFR(I),(X(I,J),Z(I,J),J=1,2),(X(I,J),Z(I,J),J=7,8)	003260
	1)	003280
	DO 590 J=3,6	003300
	X(I,J)=0.0	003320
590	Z(I,J)=0.0	003340

IF (ICD-1) 595,595,100	003100
595 IF (IFR(I)-IFRD) 600,600,610	003100
630 WRITE(6,2410) IFR(I)	003100
IFLAG=1	003100
610 IFRD=IFR(I)	003100
GO TO 4C	003100
C	003100
C FROM HERE TO LABEL 115: READ A MAXIMUM OF 'MAXN' FRAMES OF INPUT DATA	003500
C	003500
10 READ(5,1000) ICD,IFR(I),(X(I,J),Z(I,J),J=1,4)	003500
C FOLLOWING CARD CHANGED TO INPUT PAPER TAPE DATA:	003500
IF (ICD-1) 15,15,100	003500
C IF (ICD-1) 100,15,100	003500
15 IF (IFR(I)-IFRD) 20,20,25	003500
20 WRITE(6,2410) IFR(I)	003500
IFLAG=1	003500
25 READ(5,1000) ICD,IFRD,(X(I,J),Z(I,J),J=5,8)	003500
C FOLLOWING CARD CHANGED TO INPUT PAPER TAPE DATA:	003500
IF (ICD-2) 30,30,70	003500
C IF (ICD-2) 70,30,70	003500
30 IF (IFR(I)-IFRD) 35,40,35	003500
35 WRITE(6,2400) IFR(I),IFRD	003500
IFLAG=1	003500
40 T(I)=FLOAT(IFR(I))/DT	003500
IF (IFR(I) .EQ. JD) NC1=I	003500
IF (IFR(I) .EQ. JR) NC2=I	003500
C ADD 'XADJ' AND 'ZADJ' TO I-TH DATA POINT:	003500
IF (IADJ) 55,55,42	003500
42 DO 45 J=1,2	003500
X(I,J)=X(I,J)+XADJ	003500
45 Z(I,J)=Z(I,J)+ZADJ	003500
DO 50 J=J1,8	003500
X(I,J)=X(I,J)+XADJ	003500
50 Z(I,J)=Z(I,J)+ZADJ	003500
55 IF (I-MAXN) 60,60,65	003500
60 I=I+1	003500
IF (ITYPE) 10,10,585	003500
65 WRITE(6,2840) MAXN,IFR(I)	003500
IF (ITYPE) 10,10,585	003500
70 WRITE(6,2000) ICD,IFRD	003500
IFLAG=1	003500
GO TO 10	003500
110 IF (ICD-9) 110,115,110	003500
110 WRITE(6,2000) ICD,IFR(I)	003500
IFLAG=1	003500
IF (ITYPE) 10,10,585	003500
115 N=I-1	003500
DTT=(T(N)-T(1))/FLOAT(N-1)	003500
IF (IRX) 118,118,116	003500
116 DO 117 I=1,N	003500
DO 117 J=1,8	003500
117 X(I,J)=-X(I,J)	003500
C	003500
C PRINT TEST PARAMETER SUMMARY PAGE.	003500
C	003500

```

118 WRITE(6,2100) (I,I=1,M) 004460
WRITE(6,2110) TITLE(2),N,DT,IRX,IITYPE,ICAM,IADJ,IPR,IPL,IPA,IPC,M, 004480
1 (ID(I),IR(I),I=1,M) 004500
WRITE(6,2120) HEADL(I),I=2,8) 004520
WRITE(6,2130) ICAL(I),I=2,8) 004540
IF (IADJ .GT. 0) WRITE(6,2135) XADJ,ZADJ 004560
WRITE(6,2140) DT 004580
WRITE(6,2150) N 004600
WRITE(6,2155) YNPL(I-IRX) 004620
WRITE(6,2160) YNPR(IPR+1) 004640
WRITE(6,2190) YNPR(IPL+1),YNPL(IPL+1) 004660
WRITE(6,2180) YNPR(IPA+1),YNPL(IPA+1) 004680
WRITE(6,2170) YNPR(IPC+1),YNPL(IPC+1) 004700
DO 130 J=2,8 004720
IF (ABS(CAL(J))) 120,125,120 004740
120 CAL(J)=1.0/CAL(J) 004760
ICAL(J)=1 004780
GO TO 130 004800
125 ICAL(J)=0 004820
WRITE(6,2020) HEADL(J) 004840
130 CONTINUE 004860
WRITE(6,2570) 004880
IF (M) 137,137,132 004900
132 DO 135 K=1,M 004920
JO=ID(K) 004940
JR=IR(K) 004960
IF (ICAL(JO) .LT. 1 .OR. ICAL(JR) .LT. 1) GO TO 135 004980
WRITE(6,2210) K,HEADL(JO),HEADL(JR) 005000
135 CONTINUE 005020
137 IF (IPR) 140,140,105 005040
C 005060
C PRINT RAW INPUT DATA IN COUNTS. 005080
C 005100
140 WRITE(6,2500) TITLE,NP 005120
WRITE(6,2550) 005140
WRITE(6,2560) HEADC 005160
DO 145 I=1,N 005180
145 WRITE(6,2580) IFR(I),(X(I,J),Z(I,J),J=1,8) 005200
WRITE(6,2500) TITLE,NP 005220
WRITE(6,2552) 005240
WRITE(6,2560) HEADC 005260
C 005280
C COMPUTE AND PRINT FRAME TO FRAME DIFFERENCES IN COUNTS 005300
C 005320
IF (ITYPE) 148,148,146 005340
146 DO 147 J=3,6 005360
XD(J)=0.0 005380
147 XD(J)=0.0 005400
148 DO 161 I=2,N 005420
XD(1)=X(I,1)-X(I-1,1) 005440
ZD(1)=Z(I,1)-Z(I-1,1) 005460
XD(2)=X(I,2)-X(I-1,2)-XD(1) 005480
ZD(2)=Z(I,2)-Z(I-1,2)-ZD(1) 005500
DO 150 J=1,8 005520
XD(J)=X(I,J)-X(I-1,J)-XD(1) 005540

```


725	CONTINUE	006620
	IF (IPC-1) 728,728,743	006640
726	LINE=60	006660
	DO 740 I=N1,N2	006680
	IF (LINE-50) 735,730,730	006700
730	WRITE(6,2500) TITLE,NP	006720
	WRITE(6,2555)	006740
	WRITE(6,2565) (HEADC(J),J=3,8)	006760
	LINE=0	006780
C	PRINT PARAMETER VERSUS SLED DATA.	006800
735	WRITE(6,2565) IFR(I),T(I),(XX(I,JJ),ZZ(I,JJ),JJ=1,6)	006820
	LINE=LINE+1	006840
740	CONTINUE	006860
	IF (IPC) 742,742,743	006880
742	IF (NC1 .LT. N1) NC1=N1	006900
	IF (NC2 .GT. N2) NC2=N2	006920
	NN=NC2-NC1+1	006940
	IP=1	006960
C	PLOT PARAMETER VERSUS SLED DATA.	006980
	CALL CPLT(T,DI,DC,IP)	007000
	WRITE(6,2595) IFR(NC1),IFR(NC2)	007020
743	IF (IPA-2) 745,800,800	007040
C	*****	007060
C	COMPUTE ANGULAR VELOCITY AND ACCELERATION; HERE TO LABEL 775.	007080
C	*****	007100
745	XD(N1-1)=PI	007120
	ZD(N1-1)=PI	007140
	IF (ICAL(3)+ICAL(5)-2) 756,750,750	007160
750	DO 755 I=N1,N2	007180
	H1=ZZ(I,3)-ZZ(I,1)	007200
	H2=XX(I,3)-XX(I,1)	007220
C	SHOULDER - HIP ANGLE	007240
	XD(I)=ATAN2(H1,H2)	007260
	IF (XD(I) .LT. 0.0) XD(I)=XD(I)+PI2	007280
	IF (ABS(XD(I)-XD(I-1)) .GT. PI34) XD(I)=XD(I)+PI2	007300
755	CONTINUE	007320
	CALL DERIV1(T,XD,WS,N,NP,1)	007340
	CALL DERIV1(T,WS,WS2,N,NP,2)	007360
	GO TO 758	007380
756	DO 757 I=N1,N2	007400
	XD(I)=0.0	007420
	WS(I)=0.0	007440
757	WS2(I)=0.0	007460
758	IF (ICAL(7)+ICAL(8)-2) 762,759,759	007480
759	DO 760 I=N1,N2	007500
	H1=ZZ(I,5)-ZZ(I,6)	007520
	H2=XX(I,5)-XX(I,6)	007540
C	HEAD PT 1 - HEAD PT 2 ANGLE:	007560
	ZD(I)=ATAN2(H1,H2)	007580
	IF (ZD(I) .LT. 0.0) ZD(I)=ZD(I)+PI2	007600
	IF (ABS(ZD(I)-ZD(I-1)) .GT. PI34) ZD(I)=ZD(I)+PI2	007620
760	CONTINUE	007640
	CALL DERIV1(T,ZD,WH,N,NP,1)	007660
	CALL DERIV1(T,WH,WH2,N,NP,2)	007680
	GO TO 763	007700

762 DO 764 I=N1,N2	007720
ZD(I)=0.0	007740
WH(I)=0.0	007760
764 WH2(I)=0.0	007780
768 LINE=60	007800
DO 775 I=N3,N4	007820
IF (LINE=50) 772,770,770	007840
770 WRITE(6,2500) TITLE, NP	007860
WRITE(6,2551)	007880
WRITE(6,2520)	007900
LINE= 0	007920
C PRINT ANGULAR VELOCITY AND ACCELERATION.	007940
772 WRITE(6,2590) IFR(I),T(I),XD(I),WS(I),WS2(I),ZD(I),WH(I),WH2(I)	007960
LINE=LINE+1	007980
775 CONTINUE	008000
IF (IPA) 780,780,800	008020
780 IP=2	008040
NN=N4-N3+1	008060
JD=5	008080
JR=3	008100
IF (ICAL(3)+ICAL(5)-2) 790,785,785	008120
C PLOT ANGULAR VELOCITY AND ACCELERATION DATA.	008140
795 CALL CPLT(T(N3),WS(N3),WS2(N3),IP)	008160
790 JD=7	008180
JR=8	008200
IF (ICAL(7)+ICAL(8)-2) 800,795,795	008220
795 CALL CPLT(T(N3),WH(N3),WH2(N3),IP)	008240
800 CONTINUE	008260
IF (M .LT. 1 .OR. IPL .EQ. 2) GO TO 5	008280
DO 200 J=2,8	008300
IF (ICAL(J)) 200,200,190	008320
190 DO 195 I=2,N	008340
X(I,J)= X(I,J)-X(1,J)	008360
195 Z(I,J)= Z(I,J)-Z(1,J)	008380
X(1,J)= 0.0	008400
Z(1,J)= 0.0	008420
200 CONTINUE	008440
IP=3	008460
C 202 DO 410 NP=NP1,NP2,2	008480
C N1=(NP-1)/2+1	008500
C N2=N-N1+1	008520
C N3=3*N1-2	008540
C N4=N-N3+1	008560
C NN=N4-N3+1	008580
C	008600
C *****	008620
C COMPUTE LINEAR VELOCITY AND ACCEL DATA FOR PARAMETER ID(K) WITH	008640
C RESPECT TO IR(K); HERE TO LABEL 400.	008660
C *****	008680
C	008700
DO 400 K=1,M	008720
JD=ID(K)	008740
IF (JD .LE. 1) GO TO 390	008760
JR=IP(K)	008780
IF (JR .LT. 1) GO TO 395	008800

```

IF (ICAL(JD) .LT. 1 .OR. ICAL(JR) .LT. 1) GO TO 400
XMP=C1
ZMP=C1
RM= C1
XMN=-C1
ZMN=-C1
DO 212 I=1,N
IF (JR=1) 205,205,210
205 DI(I)=X(I,JD)
DC(I)=Z(I,JD)
GO TO 212
210 DI(I)=X(I,JD)-X(I,JR)
DC(I)=Z(I,JD)-Z(I,JR)
212 CONTINUE
CALL SM(T,DI,XD,N,NP)
CALL SM(T,DC,ZD,N,NP)
C COMPUTE MEAN AND STANDARD DEVIATION OF DIFFERENCE BETWEEN SMOOTHED
C AND UNSMOOTHED DISPLACEMENT DATA:
CALL MEAN2(N1,N2,DI,DC,XD,ZD,SMX,SMX2,SMZ,SMZ2)
C
C COMPUTE MAXIMUM X, Z AND RESULTANT DISPLACEMENT.
C
DO 260 I=N1,N2
RES(I)=SQRT(XD(I)*XD(I)+ZD(I)*ZD(I))
IF (XD(I)-XMP) 220,220,215
215 XMP=XD(I)
TXMP=T(I)
GO TO 230
220 IF (XD(I)-XMN) 225,230,230
225 XMN=XD(I)
TXMN=T(I)
230 IF (ZD(I)-ZMP) 240,240,235
235 ZMP=ZD(I)
TZMP=T(I)
GO TO 250
240 IF (ZD(I)-ZMN) 245,245,250
245 ZMN=ZD(I)
TZMN=T(I)
250 IF (RES(I)-RM) 260,260,255
255 RM=RES(I)
TRM= T(I)
260 CONTINUE
C COMPUTE LINEAR VELOCITY.
CALL DERIV1(T,XD,VX,N,NP,1)
CALL DERIV1(T,ZD,VZ,N,NP,1)
C COMPUTE LINEAR ACCELERATION DATA.
CALL DERIV1(T,VX,AX,N,NP,2)
CALL DERIV1(T,VZ,AZ,N,NP,2)
LINE=60
DO 280 I=N3,N4
VEL(I)=SQRT(VX(I)*VX(I)+VZ(I)*VZ(I))
ACC(I)=SQRT(AX(I)*AX(I)+AZ(I)*AZ(I))
IF (LINE=50) 275,270,270
270 WRITE(6,2500) TITLE,NP
WRITE(6,2200) HEADR(JD),HEADL(JR)

```

```

008820
008840
008860
008880
008900
008920
008940
008960
008980
009000
009020
009040
009060
009080
009100
009120
009130
009132
009140
009160
009180
009200
009220
009240
009260
009280
009300
009320
009340
009360
009380
009400
009420
009440
009460
009480
009500
009520
009540
009560
009580
009600
009620
009640
009650
009660
009680
009690
009700
009720
009730
009735
009740
009760
009780

```


WRITE(6,2510)	009800
LINE= 0	009800
C PRINT LINEAR DISPL, VEL AND ACCEL DATA.	009840
275 ACCG(I)=ACC(I)/32.2	009860
WRITE(6,2600) IFR(I),T(I),XD(I),ZD(I),RES(I),VEL(I),ACC(I),ACCG(I)	009880
LINE=LINE+1	009900
280 CONTINUE	009920
IF (LINE=40) 330,330,320	009940
320 WRITE(6,2500) TITLE,NP	009960
WRITE(6,2200) HEADR(JD),HEADL(JR)	009980
330 WRITE(6,2700) XMP,TXMP	010000
WRITE(6,2710) XMN,TXMN	010020
WRITE(6,2720) ZMP,TZMP	010040
WRITE(6,2730) ZMN,TZMN	010060
WRITE(6,2740) RM,TRM	010080
WRITE(6,2920) SMX,SMX2,SMZ,SMZ2	010100
C	010120
C PLOT LINEAR VELOCITY AND ACCELERATION DATA.	010140
C	010160
350 IF (IPL) 360,360,400	010180
360 CALL CPLT(T(N3),VEL(N3),ACCG(N3),IP)	010200
GO TO 400	010220
390 WRITE(6,2500) TITLE,NP	010240
WRITE(6,2800) K	010260
GO TO 460	010280
395 WRITE(6,2500) TITLE,NP	010300
WRITE(6,2810) K	010320
400 CONTINUE	010340
C 410 CONTINUE	010360
GO TO 5	010380
999 WRITE(6,2900)	010400
CALL PLOTE	010420
STOP	010440
C FOLLOWING CARD CHANGED TO INPUT PAPER TAPE DATA:	010460
1000 FORMAT(I1,I4,8F7.0)	010480
C1000 FORMAT(I1,I5,8F6.0)	010500
1010 FORMAT(8A10)	010520
1020 FORMAT(8F10.0)	010540
1030 FORMAT(A5,8I1, 2I3,I2,12(I2,I1),I3,F5.0)	010560
2000 FORMAT(/ 4X,*ERROR IN CARD IDENTIFICATION NUMBER; CARD ID=*,I2,	010580
1 *; FRAME NUMBER =*,I4)	010600
2100 FORMAT(/ / 4X,*TEST N DT IRX ITYPE ICAM IADJ IPR	010620
IPL IPA IPC M SETS:*,12I4)	010640
2110 FORMAT(3X,A5,I6,F10.3,I4,7I6,I5,7X,12(I3,I1))	010660
2120 FORMAT(/ / 36X,7(A10,2X))	010680
2130 FORMAT(4X,*CALIB DATA IN COUNTS PER FOOT:*,F9.3,6F12.3)	010700
2135 FORMAT(/ 4X,*ADJUSTMENT FACTORS ADDED TO ALL X AND Z INPUT DATA: X010720	
1ADJ=*,F10.2,* AND ZADJ=*,F10.2)	010740
2140 FORMAT(/ 4X,*AVERAGE TIME INCREMENT BETWEEN POINTS:*,F10.5)	010760
2150 FORMAT(/4X,*NUMBER OF FRAMES READ: *,I4,* FRAMES*)	010780
2155 FORMAT(/4X,*REVERSE POLARITY OF X-AXIS DATA (MULT. BY -1.0): *,A3)	010800
2160 FORMAT(/4X,*PRINT LISTING OF INPUT DATA IN COUNTS: *,A3)	010820
2170 FORMAT(/4X,*PARAMETERS RELATIVE TO SLED DISPLACEMENTS: PRINT? *,010840	
1A3,4X,*PLOT? *,A3)	010860
2180 FORMAT(/4X,*ANGULAR VELOCITY AND ACCELERATION DATA: PRINT? *,010880	

```

1A3,4X,*PLOT? *,A3) 010900
2190 FORMAT(/4X,*LINEAR VELOCITY AND ACCELERATION DATA PRINT? *,010920
1A3,4X,*PLOT? *,A3) 010940
2210 FORMAT(/ 31X,A9,* MOTION RELATIVE TO THE *,A9 010960
2210 FORMAT(/10X,I2,*) *,A9,* MOTION RELATIVE TO THE *,A9) 010980
2430 FORMAT(/ 4X,*ERROR IN FRAME NUMBERS; FRAME NUMBER ON CARD 1 =*,I4,011000
1 * FRAME NUMBER ON CARD 2 =*,I4) 011020
2410 FORMAT(/ 4X,*FRAME NUMBER IS NOT INCREASING; CHECK FRAME COUNT FOR 011040
1 CARD 1, FRAME= *,I5) 011060
2510 FORMAT(1M1,3X,*DATE: *,A10,20X,*TEST NUMBER: *,A5/ 011080
1/ 4X,8A10,5X,I2,* POINT QUADRATIC FIT*) 011100
2510 FORMAT(/ 32X,*DISPLACEMENT*,15X,*VELOCITY *,2(5X,*ACCELERATION*)/011120
A 4X,*FRAME*, 011140
1 4X,*TIME*,8X,*X*,10X,*Z *,2(5X,*RESULTANT*),2(8X,*RESULTANT*)/011160
8 4X,* NO. *, 011180
2 4X,* (SEC)*,2(5X,* (FEET)*),6X,* (FEET)*,7X,* (FT/SEC)*,7X,* (FT/SEC 011200
3SQ)*,10X,* (G)*) 011220
2520 FORMAT(/ 29X,*SHOULDER - HIP*,21X,*HEAD PT 1 - HEAD PT 2*/ 011240
1 * FRAME TIME*, 2( 7X,*TIME A*, 8X,*W*,10X,*W-ACC*, 4X)/ 011260
2 * NO. (SEC)*, 2(4X,* (RAD/SECS) (RAD/SEC) (RAD/SEC SQ) *) 011280
2540 FORMAT(/4X,*THE FOLLOWING IS A LISTING OF THE INPUT DATA IN COUNTS 011300
1S AFTER TRANSLATION AND ROTATION OF ON-BOARD CAMERA DATA*) 011320
2550 FORMAT(/4X,*THE FOLLOWING IS A LISTING OF THE INPUT DATA IN COUNTS 011340
1S*) 011360
2551 FORMAT(/4X,*THE FOLLOWING IS A LISTING OF THE ANGULAR MOTION OF THE 011380
1HE HEAD AND SHOULDER:*) 011400
2552 FORMAT(/4X,*THE FOLLOWING IS A LISTING OF D(I)-DR(I)-D(X-I)+DR(I)- 011420
1I) IN COUNTS:*) 011440
2555 FORMAT(/4X,*THE FOLLOWING IS A LISTING OF PARAMETER SLEW DISPLAC 011460
1EMENT IN FEET:*) 011480
2560 FORMAT(/ * FRAME *, 8(6X,A10)/ 2X,*NO. *, 8(8X,*X*,5) 011500
2565 FORMAT(/ * FRAME TIME *,6( 7X,A10)/ 011520
1 * NO. (SEC)*, 6( 7X,*X*,6X,*Z *) 011540
2570 FORMAT(/4X,*LINEAR DISPLACEMENT, VELOCITY AND ACCELERATION DATA 011560
1WILL BE COMPUTED FOR THE FOLLOWING:*) 011580
2580 FORMAT(1X,I4,2X,8(F9.0,F7.0)) 011600
2585 FORMAT(1X,I4,F11.5,6(F10.3,F7.3)) 011620
2590 FORMAT(1X,I4,F11.5,2(F10.3,F11.3,F13.3,6X)) 011640
2595 FORMAT(/4X,*THE ABOVE DATA WAS PLOTTED (X VERSUS Z) FOR FRAME NUM 011660
1BER*,I4,* TO FRAME NUMBER*,I4) 011680
2630 FORMAT(4X,I4, F11.5,F10.3,F11.3,F12.3,F15.3,F16.3,F17.3) 011700
2700 FORMAT(/ 4X,*MAXIMUM POSITIVE X DISPLACEMENT=*,F8.3, * AT TIME * 011720
1, F8.5) 011740
2710 FORMAT(/ 4X,*MAXIMUM NEGATIVE X DISPLACEMENT=*,F8.3, * AT TIME * 011760
1, F8.5) 011780
2720 FORMAT(/ 4X,*MAXIMUM POSITIVE Z DISPLACEMENT=*,F8.3, * AT TIME * 011800
1, F8.5) 011820
2730 FORMAT(/ 4X,*MAXIMUM NEGATIVE Z DISPLACEMENT=*,F8.3, * AT TIME * 011840
1, F8.5) 011860
2740 FORMAT(/ 4X,*MAXIMUM RESULTANT DISPLACEMENT=*,F8.3, * AT TIME * 011880
1, F8.5) 011900
2800 FORMAT(///4X, *OMIT COMPUTATIONS FOR SET*,I3/ 4X,*THE PROGRAM IS 011920
1 NOT DESIGNED TO COMPUTE RANGE DISPLACEMENT, VELOCITY AND ACCELERAD 011940
2TION.* / 4X,*DATA PARAMETER CODE IS LESS THAN OR EQUAL TO 1*) 011960
2810 FORMAT(///4X, *OMIT COMPUTATIONS FOR SET*,I3/ 011980

```

```

      1      4X,*REFERENCE PARAMETER CODE IS LESS THAN 1*)      012000
2820 FORMAT(/ 4X,*CALIBRATION FACTOR IS 0.0 THUS COMPUTATIONS WILL BE 0012020
      1MITTED FOR THE FOLLOWING PARAMETER: *,A10)      01200J
2830 FORMAT(/1X,13*(1H*))//4X, *OMIT THE REMAINDER OF THE COMPUTATIONS012050
      1 FOR THIS TEST BECAUSE OF INPUT CARD PROBLEMS.*//      012080
      2 4X,*SEE ERROR STATEMENTS AT THE BEGINNING OF THE OUTPUT FOR THIS 012100
      3TEST*// 1X,13*(1H*))      012120
2840 FORMAT(/4X,*NUMBER OF FRAMES IS >*,I4,*; OMIT DATA FOR FRAME NUMB012140
      1ER:*,I4)      012160
2900 FORMAT(*1 END OF JOB*)      012180
2920 FORMAT(/4X,*MEAN AND STANDARD DEVIATION OF UNSMOOTHED-SMOOTHED DIS012200
      1PLACEMENT DATA:*/4X,*MEAN AND S.D. OF X=*,1P2E15.5/4X,*MEAN AND S.012220
      20. OF Z=*, 2E15.5)      012240
      END      012260

```

	SUBROUTINE CPLT(T,Y,Z,IP)	012280
	DIMENSION X(302),T(1),Y(1),Z(1)	012300
	COMMON JD, JR, N, NP, I1, I2, XX(302,6), ZZ(302,6), ICAL(8)	012320
	COMMON /CPLTC/ HEADL(8), DATE, TEST, TITLE(8), IRX, DYLP	012340
C	IP=1 --- COMPOSITE PLOT OF PARAMETER VERSUS SLED DATA	012360
C	IP=2 --- PLOT OF ANGULAR VEL AND ACCEL	012380
C	IP=3 --- PLOT OF VEL AND ACCEL	012400
C	SXMAX IS THE MAXIMUM LENGTH OF THE TIME SCALE IN INCHES.	012420
C	SXMAX=17.0	012440
	SXMAX=32.0	012460
	SY=10.0	012480
	DX=0.02	012500
	N1=N+1	012520
	N2=N+2	012540
	IF (IP=2) 300,5,5	012560
	5 DO 10 J=1,N	012580
10	X(J)=T(J)	012600
	X(N1)=FLOAT(IFIX(X(1)*100.01))*0.01	012620
	X(N2)=DX	012640
	SX= FLOAT(IFIX((X(N)-X(N1))/DX)+1)	012660
	IF (SX .GT. SXMAX) SX= SXMAX	012680
	CALL AXIS(0.0,0.0,12*TIME IN SEC.,-12,SX,0.0,X(N1),DX)	012700
	IF (IP .EQ. 2) GO TO 400	012720
	AMX=-1.0E10	012740
	AMN= 1.0E10	012760
	DO 15 J=1,N	012780
	AMX=AMAX1(AMX,Y(J))	012800
	AMX=AMAX1(AMX,Z(J))	012820
	AMN=AMIN1(AMN,Y(J))	012840
	AMN=AMIN1(AMN,Z(J))	012860
15	CONTINUE	012880
	IF (AMN) 30,20,20	012900
20	AMN=0.0	012920
	GO TO 40	012940
30	AMN=FLOAT(IFIX(AMN/2.5)-1)*2.5	012960
40	AMX=FLOAT(IFIX(AMX/2.5)+1)*2.5	012980
	IF (DYLP) 43,43,42	013000
42	DY=DYLP	013020
	GO TO 90	013040
43	DYY=(AMX-AMN)/SY	013060
	IF (DYY-2.5) 44,44,45	013080
44	DY=2.5	013100
	YMIN=AMN	013120
	GO TO 100	013140
45	IF (DYY-5.0) 46,46,48	013160
46	DY=5.0	013180
	GO TO 90	013200
48	IF (DYY-10.0) 50,50,60	013220
50	DY=10.0	013240
	GO TO 90	013260
60	IF (DYY-20.0) 70,70,80	013280
70	DY=20.0	013300
	GO TO 90	013320
80	DY=30.0	013340
90	YMIN=FLOAT(IFIX(AMN/DY)) *DY	013360

	IF (YMIN .GT. AMN) YMIN=YMIN-DY	013320
	IF (YMIN .GT. AMN) YMIN=YMIN-DY	013335
130	YMAX=SY*DY+YMIN	013340
	IF (AMX .LE. YMAX) GO TO 102	013345
	YMIN=YMIN+DY	013350
	YMAX=YMAX+DY	013355
132	Y(N1)=YMIN	013360
	Z(N1)=YMIN	013365
	Y(N2)=DY	013370
	Z(N2)=DY	013375
	CALL AXIS(0.0,0.0,26HVEL IN FT/SEC --- ACC IN G,26,SY,90.,YMIN,DY)	013380
	IF (YMIN) 105,110,110	013385
135	Y0=ABS(YMIN/DY)	013390
	CALL PLOT(0.0,Y0,3)	013395
	CALL PLOT(SX, Y0,2)	013400
110	DO 120 I=1,N	013405
	IF (Y(I) .GT. YMAX) Y(I)=YMAX	013410
	IF (Z(I) .GT. YMAX) Z(I)=YMAX	013415
	IF (Y(I) .LT. YMIN) Y(I)=YMIN	013420
	IF (Z(I) .LT. YMIN) Z(I)=YMIN	013425
120	CONTINUE	013430
130	CALL LINE(X,Y,N,1,10,1)	013435
	CALL LINE(X,Z,N,1,10,3)	013440
	H1=HEADL(J0)	013445
	CALL SYMBOL(0.25,9.5,0.105,H1,0.0,3)	013450
	CALL SYMBOL(0.25,9.3,0.105,6HREL TO,0.0,6)	013455
	H1=HEADL(JR)	013460
	CALL SYMBOL(0.25,9.1,0.105,H1,0.0,3)	013465
	J=1	013470
	CALL SYMBOL(0.5, 8.8,0.105,J,0.0,-1)	013475
	CALL SYMBOL(0.65,8.75,0.105,3HVEL,0.0,3)	013480
	J=3	013485
	CALL SYMBOL(0.5, 8.55,0.105,J,0.0,-1)	013490
	CALL SYMBOL(0.65,8.50,0.105,3HACC,0.0,3)	013495
140	CALL SYMBOL(0.25,9.8,0.105,4HTEST,0.0,4)	014000
	CALL SYMBOL(0.75,9.8,0.105,TEST,0.0,5)	014005
	CALL NUMBER(1.75,9.8,0.105,FLOAT(NP),0.0,-1)	014010
	CALL SYMBOL(2.05,9.8,0.105,9HPOINT FIT,0.0,9)	014015
	GO TO 999	014020
C		014100
C	PLOT THE COMPOSITE PLOT OF PARAMETERS VERSUS SLED.	014110
C	NOTE: ORDINATE AND ABSCISSA SCALING IS FIXED.	014120
C		014130
C		014140
310	ZMIN=0.0	014150
C	XMIN=-1.4-2.2*FLOAT(IRX)	014200
	XMIN=-1.0	014205
	DZ=0.4	014210
	DX=0.4	014215
	SX=10.0	014220
	CALL AXIS(0.0,0.0,14HX DISP IN FEET,-14,SX,0.0,YMIN,DX)	014300
	CALL AXIS(0.0,0.0,14HZ DISP IN FEET, 14,SY,90.0,ZMIN,DZ)	014305
	CALL SYMBOL(0.25,9.5,0.105,16HDATA REL TO SLED,0.0,16)	014310
	X(N1)=YMIN	014315
	X(N2)=DX	014320
	Z(N1)=ZMIN	014325

Z(N2)=DZ	014420
XMAX=SX*DX+XMIN	014440
ZMAX=SY*DZ+ZMIN	014460
Y0=10.0	014480
DO 310 J=1,6	014500
IF (ICAL(J+2)) 310,310,305	014520
315 H1=HEADL(J+2)	014540
Y0=Y0-0.25	014560
CALL SYMBOL(-1.75,Y0+0.05,0.105,J,0.0,-1)	014580
CALL SYMBOL(-1.60,Y0,0.105,H1,0.0,9)	014600
310 CONTINUE	014620
DO 325 J=1,6	014640
IF (ICAL(J+2)) 325,325,315	014660
315 II=0	014680
DO 320 I=II,I2	014700
II=II+1	014720
X(II)=XY(I,J)	014740
Z(II)=Z(I,J)	014760
IF (X(II) .GT. XMAX) X(II)=XMAX	014780
IF (X(II) .LT. XMIN) X(II)=XMIN	014800
IF (Z(II) .GT. ZMAX) Z(II)=ZMAX	014820
IF (Z(II) .LT. ZMIN) Z(II)=ZMIN	014840
320 CONTINUE	014860
CALL LINE(X,Z,N,1,-1,J)	014880
325 CONTINUE	014900
GO TO 140	014920
C	014940
C SETUP AND PLOT ANGULAR VEL AND ACCEL.	014960
C	014980
430 CALL SCALE(Y,SY,N,1)	015000
CALL SCALE(Z,SY,N,1)	015020
YMIN=Y(N1)	015040
ZMIN=Z(N1)	015060
DY= Y(N2)	015080
DZ= Z(N2)	015100
WRITE(6,2000) YMIN,DY,ZMIN,DZ	015120
CALL AXIS(0.0,0.0,22,ANGULAR VEL -- RAD/SEC, 22,SY,90.,YMIN,DY)	015140
CALL AXIS(SX,0.0,26,ANGULAR ACC -- RAD/SEC/SEC,-26,SY,90.,ZMIN,DZ)	015160
GO TO 130	015180
330 CALL PLOT(SX+3.0,0.0,-3)	015200
RETURN	015220
2000 FORMAT(//4X,*THE ABOVE VEL AND ACCEL DATA ARE PLOTTED: YMIN=*,	015240
1F10.2,* DY=*,F8.2 ,SX,* ZMIN=*,F10.2,* DZ=*,F8.2)	015260
END	015280

	SUBROUTINE SM(X,Y,YC,N,NP)	015310
C	NP MUST BE AN ODD INTEGER .GE. 3.	015320
C	COMPUTE THE COEFFICIENTS FOR A QUADRATIC LEAST SQUARES FIT OF 'NP'	015340
C	POINTS AND COMPUTE THE FIT OF THE DATA (NO DERIVATIVES) 'YC(I)'. DIMENSION C(3),X(1),Y(1),YC(1)	015360
	M=(NP-1)/2	015380
	NN=N-M	015400
	N1=NN+1	015420
	DO 10 I=1,M	015440
10	YC(I)=0.0	015460
	DO 20 I=N1,N	015480
20	YC(I)=0.0	015500
	MM=M+1	015520
	DO 100 I=MM,NN	015540
	N1=I-M	015560
	N2=I+M	015580
	CALL QLSQ(X,Y,N1,N2,C)	015600
	YC(I)=C(1)*X(I)*X(I)+C(2)*X(I)+C(3)	015620
C	YP(I)=2.0*C(1)*X(I)+C(2)	015640
C	YPP(I)=2.0*C(1)	015660
110	CONTINUE	015680
	RETURN	015700
	END	015720
		015740

SUBROUTINE DERIV1(X,Y,YP,N,NP,IO)	015760
C NP MUST BE AN ODD INTEGER .GE. 3.	015780
C IO=1 FOR FIRST DERIVATIVE.	015800
C IO=2 FOR SECOND DERIVATIVE.	015820
C COMPUTE THE COEFFICIENTS FOR A QUADRATIC LEAST SQUARES FIT OF 'NP'	015840
C POINTS AND COMPUTE THE FIRST DERIVATIVE 'YP(I)'.	015860
DIMENSION C(3),X(1),Y(1),YP(1)	015880
M=(NP-1)/2	015900
K=M*M*IO	015920
NN=N-K	015940
N1=NN+1	015960
DO 10 I=1,K	015980
10 YP(I)=0.0	016000
DO 20 I=N1,N	016020
20 YP(I)=0.0	016040
MM=K+1	016060
DO 100 I=MM,NN	016080
N1=I-M	016100
N2=I+M	016120
CALL QLSQ(X,Y,N1,N2,C)	016140
YP(I)=2.0*C(1)*X(I)+C(2)	016160
C YC(I)=C(1)*X(I)*X(I)+C(2)*X(I)+C(3)	016180
C YPP(I)=2.0*C(1)	016200
100 CONTINUE	016220
RETURN	016240
END	016260


```

SUBROUTINE QLSQ(X,Y,N1,N2,C)
DIMENSION X(1),Y(1),C(1)
C THIS SUBROUTINE COMPUTES THE QUADRATIC LEAST SQUARE COEFFICIENTS
C *C(3)* FOR NP DATA POINTS (NP MUST BE AN ODD INTEGER .GE. 3).
C THE DATA NEED NOT BE EQUALLY SPACED.
C C(1)*(X**2)+C(2)*X+C(3)=Y
C C(1)*X+C(2)=Y
C SUBSTITUTE XP=X-FF, WHERE FF IS X((N1+N2)/2)
C THEN C(3)=C(3)+C(1)*FF*FF-C(2)*FF
C C(2)=C(2)-2.0*C(1)*FF
C C(1)=C(1)
C
F(A1,A2,A3,B1,B2,B3,C1,C2,C3)=A1*(B2*C3-B3*C2)+A2*(B3*C1-A1*C3)+A3*(B1*C2-B2*C1)
FN=FLOAT(N2-N1+1)
NN=(N1+N2)/2
FF=X(NN)
Z1=0
Z2=0
Z3=0
Z4=0
Z5=0
Z6=0
Z7=0
10 DO 20 I=N1,N2
X2=X(I)-FF
X1=X2*X2
Z1=Z1+X2
Z2=Z2+X1
Z3=Z3+X1*X2
Z4=Z4+X1*X1
Z5=Z5+Y(I)
Z6=Z6+X2*Y(I)
Z7=Z7+X1*Y(I)
20 CONTINUE
DEN=F(Z4,Z3,Z2,Z3,Z2,Z1,Z2,Z1,FN)
C(1)=F(Z7,Z6,Z5,Z3,Z2,Z1,Z2,Z1,FN)/DEN
C(2)=F(Z4,Z3,Z2,Z7,Z6,Z5,Z2,Z1,FN)/DEN
C(3)=F(Z4,Z3,Z2,Z3,Z2,Z1,Z7,Z6,Z5)/DEN
C(3)=C(3)+C(1)*FF*FF-C(2)*FF
C(2)=C(2)-2.0*C(1)*FF
RETURN
END

```

```

016300
016310
016320
016330
016340
016350
016360
016370
016380
016390
016400
016410
016420
016430
016440
016450
016460
016470
016480
016490
016500
016510
016520
016530
016540
016550
016560
016570
016580
016590
016600
016610
016620
016630
016640
016650
016660
016670
016680
016690
016700
016710
016720
016730
016740
016750
016760
016770
016780
016790
016800
016810
016820
016830
016840
016850
016860
016870
016880
016890
016900
016910
016920
016930
016940
016950
016960
016970
016980
016990
017000
017010
017020
017030
017040
017050
017060
017070
017080
017090
017100
017110
017120
017130
017140

```

```

SUBROUTINE ROTATE(N,J1,IPR)                                017160
COMMON JD, JR, NN, NP, NC1, NC2, XX(302,6), ZZ(302,6), ICAL(8), 017170
1 IFR(302), X(302,8), Z(302,8), ID(12), IR(12), ACC(302), 017200
2 ACCS(302), CAL(8), XD(302), ZD(302)                    017220
C THIS SUBROUTINE TRANSLATES, ROTATES, AND CALIBRATES THE ON-BOARD 017240
C CAMERA DATA STORED IN THE 'X' AND 'Z' ARRAYS. ALL DATA ARE 017260
C TRANSLATED TO A COORDINATE SYSTEM THROUGH THE SLED RANGE REFERENCE 017280
C POINT (FIRST X,Z PAIR FOR EACH TIME). 017300
C X AXIS IS THEN ROTATED SO THE ANGLE BETWEEN THE SLED RANGE REFERENCE 017320
C AND THE SLED REFERENCE (SECOND X,Z PAIR FOR EACH TIME) IS THE SAME 017340
C FOR ALL TIME STATIONS (SAME AS AT TIME 0). 017360
C FIRST POINT IS RANGE REFERENCE ON THE SLED. 017380
C SECOND POINT IS THE SLED REFERENCE POINT. 017400
PIZ=6.283185308 017420
I=1 017440
XR=X(I,1) 017460
ZR=Z(I,1) 017480
IF (IPR) 10,10,15 017500
10 WRITE(6,2580) IFR(I),(X(I,J),Z(I,J),J=1,8) 017520
C SUBTRACT INITIAL RANGE VALUE FROM SLED REFERENCE AND DETERMINE THE 017540
C REFERENCE ANGLE. 017560
15 X1=X(I,2)-XR 017580
Z1=Z(I,2)-ZR 017600
X(I,2)=X(I,2)*CAL(2) 017620
Z(I,2)=Z(I,2)*CAL(2) 017640
DO 20 J=J1,8 017660
X(I,J)=X(I,J)*CAL(J) 017680
Z(I,J)=Z(I,J)*CAL(J) 017700
C *THR* IS THE REFERENCE ANGLE BETWEEN THE TWO REFERENCE POINTS ON THE 017720
C SLED FOR THE FIRST TIME STATION (RANGE AND SLED REFERENCE POINTS): 017740
C ALL DATA FOR I=2 TO N ARE ROTATED TO MAKE THE ANGLE BETWEEN THE TWO 017760
C POINTS THE SAME. 017780
35 THR=ATAN2(Z1,X1) 017800
IF (THR .LT. 0.0) THR=THR+PIZ 017820
DO 50 I=2,N 017840
H1=X(I,1) 017860
H2=Z(I,1) 017880
C TRANSLATE SLED REFERENCE DATA TO COORDINATE SYSTEM THROUGH SLED RANGE 017900
C REFERENCE AND DETERMINE THE ANGLE BETWEEN SLED RANGE REFERENCE AND 017920
C THE SLED REFERENCE POINTS (FOR I-TH TIME STATION). 017940
X1=X(I,2)-H1 017960
Z1=Z(I,2)-H2 017980
THI=ATAN2(Z1,X1) 018000
IF (THI .LT. 0.0) THI=THI+PIZ 018020
C ALL DATA ARE ROTATED BY ANGLE TH=THI-THR. 018040
TH=THI-THR 018060
CS=COS(TH) 018080
SN=SIN(TH) 018100
C ROTATE SLED REFERENCE AND TRANSLATE BACK TO INITIAL COORDINATE SYSTEM 018120
X0(2)=X1*CS+Z1*SN*XP 018140
Z0(2)=-X1*SN+Z1*CS*XR 018160
X(I,2)=X0(2)*CAL(2) 018180
Z(I,2)=Z0(2)*CAL(2) 018200
DO 40 J=J1,8 018220
C TRANSLATE BY H1 AND H2 AND ROTATE BY ANGLE *TH* THEN TRANSLATE BACK 018240

```

C	GO INITIAL COORDINATE SYSTEM.	010000
	A1=X(I,J)-H1	010001
	Z1=Z(I,J)-H2	010002
	XD(J)=X1*CS+Z1*SN+XR	010003
	ZD(J)=-X1*SN+Z1*CS+ZR	010004
	X(I,J)=XD(J)*CAL(J)	010005
40	Z(I,J)=ZD(J)*CAL(J)	010006
	X(I,1)=XR	010007
	Z(I,1)=ZR	010008
	IF (IPR) 45,45,50	010009
45	WRITE(6,2580) IFR(I),X(I,1),Z(I,1),(XD(J),ZD(J),J=2,8)	010010
50	CONTINUE	010011
2580	FORMAT(1X,I4,2X,8(F9.0,F7.0))	010012
	RETURN	010013
	END	010014

SUM = 0.0	018540
MULTIPLY BY 1.0, ABOUT THE MEAN FOR USED REFERENCE DATA	018565
DIMENSION X(10),Z(10)	018570
SMX=SMZ=0.0	018575
DO 50 I=1,N	018580
XK=X(I)*X(I)	018585
50 SMZ=SMZ+Z(I)	018590
AVX=SMX/FLUAT(N)	018600
AVZ=SMZ/FLUAT(N)	018610
SMX=SMZ=0.0	018620
DO 100 I=1,N	018630
SMX=SMX+(X(I)-AVX)**2	018640
100 SMZ=SMZ+(Z(I)-AVZ)**2	018650
SMX=SQRT(SMX/FLUAT(N-1))	018660
SMZ=SQRT(SMZ/FLUAT(N-1))	018670
WRITE(6,2000) AVX,SMX,AVZ,SMZ	018680
2000 FORMAT(*1 MEAN AND STANDARD DEVIATION ABOUT THE MEAN OF THE USED	018690
1 REFERENCE DATA IN FEET)X,SMX,MEAN AND S.D. OF Z=*,1-CE1F.5X*,	018700
2 *MEAN AND S.D. OF Z=*,2E15.5)	018710
RETURN	018720
END	018730

	SUBROUTINE MEAN2(N1,N2,DI,OC,XC,ZO,SMX,SMX2,SMZ,SMZ2)	018960
	DIMENSION DI(1),OC(1),XD(1),ZD(1)	018980
C	COMPUTE AVERAGE AND S.D. OF UNSMOOTHED MINUS SMOOTHED DATA:	019000
	FNN=FLOAT(N2-N1+1)	019020
	SMX=SMX2=SMZ=SMZ2=0.0	019040
	DO 100 I=N1,N2	019060
	DIFX=DI(I)-XD(I)	019080
	DIFZ=OC(I)-ZD(I)	019100
	SMX=SMX+DIFX	019120
	SMZ=SMZ+DIFZ	019140
	SMX2=SMX2+DIFX**2	019160
110	SMZ2=SMZ2+DIFZ**2	019180
	SMX=SMX/FNN	019200
	SMZ=SMZ/FNN	019220
	SMX2=SQRT((SMX2-SMX*SMX*FNN)/(FNN-1.0))	019240
	SMZ2=SQRT((SMZ2-SMZ*SMZ*FNN)/(FNN-1.0))	019260
	RETURN	019280
	END	019300

APPENDIX B
PROGRAM WBRL

PROGRAM WURL(INPUT,OUTPUT,TAPES=INPUT,TAPE6=OUTPUT,TAPE7)	000100
COMMON X(150,9),Y(150,9),Z(150,9),XX(150,9),YY(150,9),ZZ(150,9)	000120
1, TITLE(9), T(150), VRES(150),ARES(150),XA(150),YA(150),	000140
2 ZA(150),FMN(12),FMX(12)	000160
DIMENSION DATA(1024),FMNC(3,2),FMXC(3,2),IS(9),IE(9)	000180
DATA END/5#999999/,NP/11/,CON/1.0E10/,FCT/0.7/,FCTC/0.85/,INC/4/	000200
1, TCON/1.0E-05/,NMAX/150/	000220
CALL PLGTS(DATA,1024,7)	000240
CALL PLOT(0.0,-0.5,-3)	000260
CALL PLOT(0.0,0.7,-3)	000280
CALL FACTOR(FCT)	000300
CALL DATE(TODAY)	000320
CALL TIME(CLOCK)	000340
NS=(NP-1)/2	000360
10 READ(5,1000) TEST,TCOMP,DT	000380
IF (EOF(5)) 999,20	000400
20 READ(5,1100) TITLE	000420
IF (DT .LT. TCON) DT=0.002	000440
NST=0	000460
DO 25 I=1,NMAX	000480
T(I)=FLOAT(I-1)*DT	000500
IF (ABS(TCOMP-T(I)) .LT. TCON) NST=I	000520
25 CONTINUE	000540
IF (NST .LT. 1) WRITE(6,3300)	000560
IERR=0	000580
DO 90 K=1,5	000600
J2=2*K	000620
J1=J2-1	000640
IF (K .EQ. 5) J2=J1	000660
I=1	000680
READ(5,1200) TOM,(X(I,J),Y(I,J),Z(I,J),J=J1,J2)	000700
DO 30 I=1,NMAX	000720
IF (ABS(T(I)-TOM) .LT. TCON) GO TO 35	000740
30 CONTINUE	000760
IOK=(J1+1)/2	000780
IF (IERR .EQ. 0) WRITE(6,3050)	000800
WRITE(6,3010) TEST,IOK,TOM	000820
IERR=1	000840
GO TO 60	000860
35 IS(J1)=I	000880
IS(J2)=I	000900
IF (I .EQ. 1) GO TO 50	000920
DO 40 J=J1,J2	000940
X(I,J)=X(1,J)	000960
Y(I,J)=Y(1,J)	000980
40 Z(I,J)=Z(1,J)	001000
50 I=I+1	001020
IF (I .GT. NMAX) GO TO 55	001040
READ(5,1200) TOM,(X(I,J),Y(I,J),Z(I,J),J=J1,J2)	001060
IF (TOM .GT. 930.0) GO TO 70	001080
IF (ABS(TOM-T(I)) .LT. TCON) GO TO 50	001100
IF (IERR .EQ. 0) WRITE(6,3050)	001120
IERR=IERR+1	001140
IOK=(J1+1)/2	001160
WRITE(6,3000) TEST,IOK,T(I),TOM	001180

GO TO 60	001200
55 IF (IERR .EQ. 0) WRITE(6,3050)	001220
IDK=(J1+1)/2	001240
WRITE(6,3060) NMAX,IDK	001260
50 READ(5,1300) CK	001280
IF (CK .EQ. END) GO TO 70	001300
GO TO 60	001320
70 IE(J1)=I-1	001340
IE(J2)=I-1	001360
30 CONTINUE	001380
IF (IERR) 190,100,10	001400
130 MAXT=MAX0(IE(1),IE(3),IE(5),IE(7),IE(9))-NS	001420
DO 200 J=1,9	001440
N=IE(J)-IS(J)+1	001460
N1=IS(J)+NS	001480
N2=IE(J)-NS	001500
N3=N1+NS	001520
N4=N2-NS	001540
N5=N3+NS	001560
N6=N4-NS	001580
DO 160 I=1,12	001600
FMN(I)=CON	001620
160 FMX(I)=-CON	001640
I=IS(J)	001660
CALL SM(T,X(I,J),XX(I,J),N,NP)	001680
CALL SM(T,Y(I,J),YY(I,J),N,NP)	001700
CALL SM(T,Z(I,J),ZZ(I,J),N,NP)	001720
C COMPUTE VELOCITY COMPONENTS:	001740
CALL DERIV1(T,XX(I,J),X(I,J),N,NP,1)	001760
CALL DERIV1(T,YY(I,J),Y(I,J),N,NP,1)	001780
CALL DERIV1(T,ZZ(I,J),Z(I,J),N,NP,1)	001800
DO 170 II=N3,N4	001820
X(II,J)=X(II,J)/12.0	001840
Y(II,J)=Y(II,J)/12.0	001860
170 Z(II,J)=Z(II,J)/12.0	001880
C COMPUTE ACCELERATION COMPONENTS:	001900
CALL DERIV1(T,X(I,J),XA(I),N,NP,2)	001920
CALL DERIV1(T,Y(I,J),YA(I),N,NP,2)	001940
CALL DERIV1(T,Z(I,J),ZA(I),N,NP,2)	001960
LINE=60	001980
DO 190 I=N1,N2	002000
IF (LINE=50) 175,172,172	002020
172 WRITE(6,2500) TODAY,CLOCK,TEST,TITLE,NP	002040
WRITE(6,2505) J	002060
WRITE(6,2510)	002080
LINE=0	002100
175 FMN(1)=AMIN1(FMN(1),XX(I,J))	002120
FMN(2)=AMIN1(FMN(2),YY(I,J))	002140
FMN(3)=AMIN1(FMN(3),ZZ(I,J))	002160
FMX(1)=AMAX1(FMX(1),XX(I,J))	002180
FMX(2)=AMAX1(FMX(2),YY(I,J))	002200
FMX(3)=AMAX1(FMX(3),ZZ(I,J))	002220
IF (I .LT. N3 .OR. I .GT. N4) GO TO 178	002240
C COMPUTE RESULTANT LINEAR VELOCITY:	002260
VRES(I)=SQRT(X(I,J)**2+Y(I,J)**2+Z(I,J)**2)	002280

FMN(5)=AMIN1(FMN(5),X(I,J))	002300
FMN(6)=AMIN1(FMN(6),Y(I,J))	002320
FMN(7)=AMIN1(FMN(7),Z(I,J))	002340
FMN(8)=AMIN1(FMN(8),VRES(I))	002360
FMX(5)=AMAX1(FMX(5),X(I,J))	002380
FMX(6)=AMAX1(FMX(6),Y(I,J))	002400
FMX(7)=AMAX1(FMX(7),Z(I,J))	002420
FMX(8)=AMAX1(FMX(8),VRES(I))	002440
IF (I .LT. N5 .OR. I .GT. N6) GO TO 180	002460
C COMPUTE RESULTANT LINEAR ACCELERATION:	002480
ARES(I)=SQRT(XA(I)**2+YA(I)**2+ZA(I)**2)	002500
FMN(9)=AMIN1(FMN(9),XA(I))	002520
FMN(10)=AMIN1(FMN(10),YA(I))	002540
FMN(11)=AMIN1(FMN(11),ZA(I))	002560
FMN(12)=AMIN1(FMN(12),ARES(I))	002580
FMX(9)=AMAX1(FMX(9),XA(I))	002600
FMX(10)=AMAX1(FMX(10),YA(I))	002620
FMX(11)=AMAX1(FMX(11),ZA(I))	002640
FMX(12)=AMAX1(FMX(12),ARES(I))	002660
GO TO 185	002680
178 WRITE(6,2600) I,T(I),XX(I,J),YY(I,J),ZZ(I,J)	002700
GO TO 187	002720
180 WRITE(6,2600) I,T(I),XX(I,J),YY(I,J),ZZ(I,J),X(I,J),Y(I,J)	002740
1,Z(I,J),VRES(I)	002760
GO TO 187	002780
185 WRITE(6,2600) I,T(I),XX(I,J),YY(I,J),ZZ(I,J),X(I,J),	002800
1 Y(I,J),Z(I,J),VRES(I),XA(I),YA(I),ZA(I),ARES(I)	002820
187 LINE=LINE+1	002840
190 CONTINUE	002860
WRITE(6,2700) (FMN(I),I=1,3),(FMN(I),I=5,12)	002880
WRITE(6,2750) (FMX(I),I=1,3),(FMX(I),I=5,12)	002900
CALL PLT(J,N1,N2,N3,N4,N5,N6,MAXT,TEST)	002920
IF (J .LT. 7 .OR. J .GT. 8) GO TO 200	002940
JJ=J-6	002960
FMNC(1,JJ)=FMN(1)	002980
FMXC(1,JJ)=FMX(1)	003000
FMNC(2,JJ)=FMN(2)	003020
FMXC(2,JJ)=FMX(2)	003040
FMNC(3,JJ)=FMN(3)	003060
FMXC(3,JJ)=FMX(3)	003080
200 CONTINUE	003100
N2=MIN0(IE(7),IE(8))-NS	003120
CALL FACTOR(FCTC)	003140
N1=MAX0(IS(7),IS(8))+NS	003160
IF (N1 .GT. NST) NST=N1	003180
CALL PC(FMNC,FMXC,NST,N2,INC,TEST)	003200
CALL FACTOR(FCT)	003220
GO TO 10	003240
999 CALL PLOTE(NA)	003260
WRITE(6,3200) NA	003280
STOP "END OF JOB"	003300
1000 FORMAT(A10,2F10.0)	003320
1100 FORMAT(8A10)	003340
1200 FORMAT(F5.0,6F6.3)	003360
1300 FORMAT(A5)	003380

```

2510 FORMAT(1H1,*DATE: *,A10,12X,*TIME: *,A10,12X,*TEST NUMBER: *,      003400
1 A10// 1X,8A10,5X,I2,* POINT QUADRATIC FIT*)      003420
2535 FORMAT(/** DATA FOR VARIABLE CODE NUMBER *,I2)      003440
2510 FORMAT(/** FRAME TIME*, 5X,*DISPLACEMENT (INCHES)*,14X,*VELOCITY (003460
1FEET/SEC)*,16X,*ACCELERATION (FEET/SEC SQ)*/      003480
2* NO. (SEC) X*,8X,*Y*,8X,*Z*,4X,2(5X,*X*,9X,*Y*,
39X,*Z*,5X,*RESULTANT*))      003520
2630 FORMAT(1X,I4,F7.3,3F9.3,8F10.3)      003540
2730 FORMAT(* MINIMUM *,3X,3F9.3,8F10.3)      003560
2750 FORMAT(* MAXIMUM *,3X,3F9.3,8F10.3)      003580
3030 FORMAT(/** TEST: *,A10,5X,*TIME ERROR IN DECK*,I3,* --- T(I)= *,      003600
1 F7.3,* AND INCORRECT TIME = *,F7.3/** READ THROUGH REMAINING DECK,03620
2S IN THIS TEST AND PROCEED TO THE NEXT TEST.**)      003640
3010 FORMAT(/** TEST: *,A10,2X,*TIME ERROR IN DECK*,I3,* ---FIRST TIME=003660
1*,F7.3/* FIRST TIME DOESN'T MATCH TIME DATA COMPUTED FROM GIVEN DT003680
2.* / * SKIP THIS TEST.**)      003700
3050 FORMAT(1H1)      003720
3050 FORMAT(/** INDEX OF INPUT DATA POINTS IS GREATER THAN OR EQUAL TO 003740
1*,I3,* FOR DECK*,I3/* SOME DATA POINTS MAY HAVE BEEN LOST.*/      003760
2* INDEX OF THE FIRST DATA POINT = 1+T/DT, WHERE T IS THE TIME OF 003780
3HE FIRST DATA POINT.**)      003800
3230 FORMAT(*1 END OF JOB: NUMBER OF BLOCK ADDRESSES= *,I3)      003820
3300 FORMAT(*1TIME OF FIRST POINT IN COMPOSITE PLOT (TCOMP) DOESN'T MAT003840
1CH ANY STANDARD TIME COMPUTED FROM THE GIVEN DT.**)      003860
2 * COMPOSITE PLOT WILL CONTAIN ALL AVAILABLE POINTS.**)      003880
END      003900

```

	SUBROUTINE SM(X,Y,YC,N,NP)	003920
C	NP MUST BE AN ODD INTEGER .GF. 3.	003940
C	COMPUTE THE COEFFICIENTS FOR A QUADRATIC LEAST SQUARES FIT OF 'NP'	003960
C	POINTS AND COMPUTE THE FIT OF THE DATA (NO DERIVATIVES) 'YC(I)'.	003980
	DIMENSION C(3),X(1),Y(1),YC(1)	004000
	M=(NP-1)/2	004020
	NN=N-M	004040
	N1=NN+1	004060
	DO 10 I=1,M	004080
10	YC(I)=0.0	004100
	DO 20 I=N1,N	004120
20	YC(I)=0.0	004140
	MM=M+1	004160
	DO 100 I=MM,NN	004180
	N1=I-M	004200
	N2=I+M	004220
	CALL QLSQ(X,Y,N1,N2,C)	004240
	YC(I)=C(1)*X(I)*X(I)+C(2)*X(I)+C(3)	004260
C	YP(I)=2.0*C(1)*X(I)+C(2)	004280
C	YPP(I)=2.0*C(1)	004300
100	CONTINUE	004320
	RETURN	004340
	END	004360

	SUBROUTINE DERIV1(X,Y,YP,N,NP,IO)	004380
C	NP MUST BE AN ODD INTEGER .GE. 3.	004400
C	ID=1 FOR FIRST DERIVATIVE.	004420
C	ID=2 FOR SECOND DERIVATIVE.	004440
C	COMPUTE THE COEFFICIENTS FOR A QUADRATIC LEAST SQUARES FIT OF 'NP'	004460
C	POINTS AND COMPUTE THE FIRST DERIVATIVE 'YP(I)'.	004480
	DIMENSION C(3),X(1),Y(1),YP(1)	004500
	M=(NP-1)/2	004520
	K=M+M*IO	004540
	NN=N-K	004560
	N1=NN+1	004580
	DO 10 I=1,K	004600
10	YP(I)=0.0	004620
	DO 20 I=N1,N	004640
20	YP(I)=0.0	004660
	MM=K+1	004680
	DO 100 I=MM,NN	004700
	N1=I-M	004720
	N2=I+M	004740
	CALL QLSQ(X,Y,N1,N2,C)	004760
	YP(I)=2.0*C(1)*X(I)+C(2)	004780
C	YC(I)=C(1)*X(I)*X(I)+C(2)*X(I)+C(3)	004800
C	YPP(I)=2.0*C(1)	004820
100	CONTINUE	004840
	RETURN	004860
	END	004880

```

SUBROUTINE QLSQ(X,Y,N1,N2,C)
DIMENSION X(1),Y(1),C(1)
C
C THIS SUBROUTINE COMPUTES THE QUADRATIC LEAST SQUARE COEFFICIENTS
C 'C(3)' FOR NP DATA POINTS (NP MUST BE AN ODD INTEGER .GE. 3).
C THE DATA NEED NOT BE EQUALLY SPACED.
C C(1)*(X**2)+C(2)*X+C(3)=Y
C C(1)*X+C(2)=Y
C SUBSTITUTE XP=X-FF, WHERE FF IS X((N1+N2)/2)
C THEN C(3)=C(3)+C(1)*FF*FF-C(2)*FF
C C(2)=C(2)-2.0*C(1)*FF
C C(1)=C(1)
C
C F(A1,A2,A3,B1,B2,B3,C1,C2,C3)=A1*(B2*C3-B3*C2)+A2*(B3*C1-B1*C3)+A3
C 1*(B1*C2-B2*C1)
C FN=FLOAT(N2-N1+1)
C NN=(N1+N2)/2
C FF=X(NN)
C Z1=0
C Z2=0
C Z3=0
C Z4=0
C Z5=0
C Z6=0
C Z7=0
10 00 20 I=N1,N2
C X2=X(I)-FF
C X1=X2*X2
C Z1=Z1+X2
C Z2=Z2+X1
C Z3=Z3+X1*X2
C Z4=Z4+X1*X1
C Z5=Z5+Y(I)
C Z6=Z6+X2*Y(I)
C Z7=Z7+X1*Y(I)
20 CONTINUE
C DEN=F(Z4,Z3,Z2,Z3,Z2,Z1,Z2,Z1,FN)
C C(1)=F(Z7,Z6,Z5,Z3,Z2,Z1,Z2,Z1,FN)/DEN
C C(2)=F(Z4,Z3,Z2,Z7,Z6,Z5,Z2,Z1,FN)/DEN
C C(3)=F(Z4,Z3,Z2,Z3,Z2,Z1,Z7,Z6,Z5)/DEN
C C(3)=C(3)+C(1)*FF*FF-C(2)*FF
C C(2)=C(2)-2.0*C(1)*FF
C RETURN
C END

```

```

004900
004920
004940
004960
004980
005000
005020
005040
005060
005080
005100
005120
005140
005160
005180
005200
005220
005240
005260
005280
005300
005320
005340
005360
005380
005400
005420
005440
005460
005480
005500
005520
005540
005560
005580
005600
005620
005640
005660
005680
005700
005720
005740
005760

```

```

      CALL TIME (T(1),N1,N2,N3,N4,N5,N6,MAXT,TEST)
      COMMON X(150,3),Y(150,3),Z(150,3),XX(150,3),YY(150,3),ZZ(150,3)
1  TITLE(8),T(150),VRES(150),AREF(150),XA(150),YA(150),
2  Z(150),FHN(12),FMX(12)
      DIMENSION IT(150)
      DATA DT/3.047, DY/3.07, SY/4.07, EV/5.07, DA/300.7
      IF (UMAT(IFIX(T(MAXT)/DT)+1)
      IF (DT .LT. 10.0 .OR. ST .LT. 3.0) WRITE(6,2000) ST
      ***** (2) PROBABLE ERROR IN LENGTH OF TIME AXIS: ST=*,F5.1)
      NP=NP+1
      NP=1
      DO 50 I=1,NP
5  IT(I)=T(I+NF)
      IT(NP+1)=0.0
      IT(NP+2)=DT
      FHN=FHN(1)
      FMX(1)=UMAT(IFIX(FHN(1)))
      IF (FHN .GT. 3.0) FHN(1)=FHN(1)+1.0
      FHN=FHN(2)
      FMX(2)=UMAT(IFIX(FHN(2)))
      IF (FHN .GT. 3.0) FHN(2)=FHN(2)+1.0
      FHN=FHN(3)
      FMX(3)=UMAT(IFIX(FHN(3)))
      IF (FHN .GT. 3.0) FHN(3)=FHN(3)+1.0
      CALL AXIS(0.0,0.0,10*TIME (SEC),-10,ST,0.0,0.0,DT)
      CALL AXIS(0.0,0.0,11* DISP (IN),11,SY,90.0,FHN(1),DY)
      CALL AXIS(-0.75,0.0,11* DISP (IN),11,SY,90.0,FHN(2),DY)
      CALL AXIS(-1.5,0.0,11* DISP (IN),11,SY,90.0,FHN(3),DY)
      CALL SYMBOL(-1.5,6.0,0.14,6*TEST,90.0,6)
      CALL SYMBOL(-1.5,6.8,0.14,TEST,90.0,10)
      CALL SYMBOL(-1.0,6.0,0.14,15*VARIABLE CODE,90.0,15)
      FHN=
      CALL NUMBER(-1.0,8.1,0.14,FHN,90.0,-1)
      CALL PL(TT,XX(N1,J),NP,4,FHN(1),DY,SY)
      CALL PL(TT,YY(N1,J),NP,9,FHN(2),DY,SY)
      CALL PL(TT,ZZ(N1,J),NP,8,FHN(3),DY,SY)
      CALL PLOT(0.0,5.0,-3)
      CALL AXIS(0.0,0.0,10*TIME (SEC),-10,ST,0.0,0.0,DT)
      FHN=AMIN1(FHN(5),FHN(6),FHN(7),FHN(8))
      VHN=UMAT(IFIX(FHN))
      IF (VHN .LT. 0.0) VHN=VHN-1.0
      CALL AXIS(0.0,0.0,17*VFLQCTTY (FT/SEC),17,SY,90.0,VHN,DV)
      NP=NP+1
      NP=1
      DO 50 I=1,NP
5  IT(I)=T(I+NF)
      IT(NP+1)=0.0
      IT(NP+2)=DT
      CALL PL(TT,XX(N3,J),NP,4,VHN,DV,SY)
      CALL PL(TT,YY(N3,J),NP,9,VHN,DV,SY)
      CALL PL(TT,ZZ(N3,J),NP,8,VHN,DV,SY)
      CALL PLOT(0.0,5.0,-3)
      CALL AXIS(0.0,0.0,10*TIME (SEC),-10,ST,0.0,0.0,DT)
      CALL PL(TT,XX(N1,J),NP,4,VHN,DV,SY)

```

```

005740
005800
005820
005840
005860
005880
005900
005920
005940
005960
005980
006000
006020
006040
006060
006080
006100
006120
006140
006160
006180
006200
006220
006240
006260
006280
006300
006320
006340
006360
006380
006400
006420
006440
006460
006480
006500
006520
006540
006560
006580
006600
006620
006640
006660
006680
006700
006720
006740
006760
006780
006800
006820
006840
006860
006880
006900

```

AMN=FLOAT(IFIX(FPN/100.0))*100.0	006800
IF (FPN .LT. 0.0) AMN=AMN-100.0	006820
CALL AXIS(0.0,0.0,18*ACCEL (FIX(SEC/SEC)),18,ST,0.0,0.0,0.0)	006840
NP=N6-N5+1	006860
NF=N5-1	006880
DO 100 I=1,NF	006900
110 TT(I)=T(I+NF)	006920
TT(NP+1)=0.0	006940
TT(NP+2)=01	006960
CALL PL(TT,XA(N5),NP,4,AMN,DA,SY)	007000
CALL PL(TT,YA(N5),NP,9,AMN,DA,SY)	007020
CALL PL(TT,ZA(N5),NP,8,AMN,DA,SY)	007040
CALL PL(TT,APES(N5),NP,2,AMN,DA,SY)	007060
CALL PLOT(ST+5.0,-10.0,-7)	007080
RETURN	007100
END	007120

SUBROUTINE PL(T,Y,NP,NSYM,YMN,DY,SY)	007200
DIMENSION T(1),Y(1)	007220
DATA INT/20	007240
N1=NP+1	007260
N2=NP+2	007280
Y(N1)=YMN	007300
Y(N2)=DY	007320
SS=SY	007340
IF (DY-100.) 10,20,20	007360
10 SS=SS+1.	007380
GO TO 30	007400
20 SS=SS+0.5	007420
30 YMX=YMN+SS*DY	007440
DO 60 I=1,NP	007460
IF (Y(I) .GT. YMX) Y(I)=YMX	007480
60 CONTINUE	007500
CALL LINE(T,Y,NP,1,INT,NSYM)	007520
WRITE(6,2000) T(1),Y(1),T(NP),Y(NP),T(N1),T(N2),YMN,DY,SY,YMX,	007540
1 SS,NP,NSYM	007560
2000 FORMAT(1X,11F9.3,15,13)	007580
RETURN	007600
END	007620

SUBROUTINE PC (FMNC,FMXC,NST,N2,INC,TEST)	007640
COMMON X(150,9),Y(150,9),Z(150,9),XX(150,9),YY(150,9),ZZ(150,9)	007660
DIMENSION FMNC(3,2),FMXC(3,2)	007680
DATA SX/5.0/,SZ/5.0/,DEL/2.0/,HT/0.105/,J1/7/,J2/8/,ISY7/2/,ISY8/3	007700
1/	007720
RDEL=1.0/DEL	007740
YMX=AMAX1(FMXC(2,1),FMXC(2,2))	007760
YMX=FLOAT(IFIX(YMX))	007780
IF (YMX .GE. 0.0) YMX=YMX+1.0	007800
YMN=AMIN1(FMNC(2,1),FMNC(2,2))	007820
SY=(YMX-YMN)*RDEL	007840
I=IFIX(SY)	007860
IF (SY .GT. FLOAT(I)) SY=FLOAT(I)+1.0	007880
IF (SY .GT. 12.0) GO TO 25	007900
GO TO 70	007920
25 SY=12.0	007940
YMX=YMN+SY*DEL	007960
IF (FMXC(2,1) .LE. YMX) GO TO 50	007980
DO 40 I=NST,N2,INC	008000
IF (YY(I,J1) .GT. YMX) YY(I,J1)=YMX	008020
+0 CONTINUE	008040
50 IF (FMXC(2,2) .LE. YMX) GO TO 70	008060
DO 60 I=NST,N2,INC	008080
IF (YY(I,J2) .GT. YMX) YY(I,J2)=YMX	008100
60 CONTINUE	008120
70 XMN=AMIN1(FMNC(1,1),FMNC(1,2))	008140
ZMN=AMIN1(FMNC(3,1),FMNC(3,2))	008160
XMN=XMN+DEL*(SX+0.5)	008180
ZMN=ZMN+DEL*(SZ+0.5)	008200
IF (FMXC(1,1) .LE. XMN) GO TO 90	008220
DO 80 I=NST,N2,INC	008240
IF (XX(I,J1) .GT. XMN) XX(I,J1)=XMN	008260
90 CONTINUE	008280
90 IF (FMXC(1,2) .LE. XMN) GO TO 110	008300
DO 100 I=NST,N2,INC	008320
IF (XX(I,J2) .GT. XMN) XX(I,J2)=XMN	008340
100 CONTINUE	008360
110 IF (FMXC(3,1) .LE. ZMN) GO TO 130	008380
DO 120 I=NST,N2,INC	008400
IF (ZZ(I,J1) .GT. ZMN) ZZ(I,J1)=ZMN	008420
120 CONTINUE	008440
130 IF (FMXC(3,2) .LE. ZMN) GO TO 150	008460
DO 140 I=NST,N2,INC	008480
IF (ZZ(I,J2) .GT. ZMN) ZZ(I,J2)=ZMN	008500
140 CONTINUE	008520
150 CALL AXIS(0.0,0.0,11HZ DISP (IN),-11,SY,0.0,YMN,DEL)	008540
CALL AXIS(0.0,0.0,11HZ DISP (IN),11,SZ,90.0,ZMN,DEL)	008560
DO 170 I=NST,N2,INC	008580
Y1=(YY(I,J1)-YMN)*RDEL	008600
Z1=(ZZ(I,J1)-ZMN)*RDEL	008620
CALL SYMBOL(Y1,Z1,HT,ISY7,J.0,-1)	008640
Y1=(YY(I,J2)-YMN)*RDEL	008660
Z1=(ZZ(I,J2)-ZMN)*RDEL	008680
170 CALL SYMBOL(Y1,Z1,HT,ISY8,0.0,-2)	008700
CALL PLOT(0.0,0.0,-3)	008720

AD-A100 918

DAYTON UNIV OH RESEARCH INST

F/8 6/19

TECHNIQUES AND PROCEDURES APPLIED TO PHOTOMETRIC METHODS FOR TH--ETC(U)

OCT 80 P A GRAF, H T MOHLMAN

F33615-76-C-0525

UNCLASSIFIED

UDR-TR-79-115

AFAMRL-TR-80-61

NL

3 of 3

AD A
100918



END
DATE
FORMED
7-81
DTIC

APPENDIX C
PROGRAM RSD

```

PROGRAM RSD(INPUT,OUTPUT,TAPE7,TAPES=INFUT,TAPE6=OUTPUT)          000100
C*****000120
C          000140
C THIS RESTRAINT SYSTEM DYNAMICS (RSD) PROGRAM DRAWS 6 GRAPHS WHICH 000160
C SHOW THE MOTION OF THE HEAD, SHOULDER, ELBOW, WRIST, HIP, KNEE, AND 000180
C ANKLE AT 6 TIME POINTS DURING THE TEST.                          000200
C          000220
C THE INPUT VARIABLES READ BY SUBROUTINE INPT ARE DEFINED IN THE    000240
C WRITE-UP DESCRIBING THE INPUT DATA FORMAT.                       000260
C          000280
C THE COMMENTS IN THIS SOURCE LISTING SHOULD ADEQUATELY DOCUMENT THIS 000300
C SMALL PROGRAM.                                                    000320
C          000340
C THE FOLLOWING 5 SUBROUTINES ARE PART OF THIS PROGRAM:            000360
C FRAME -- DRAWS THE PLOT FRAME AND THE SEAT IN THE FRAME;        000380
C BODY -- DRAWS BODY ELEMENTS;                                    000400
C TANG -- COMPUTES AND DRAWS TANGENT LINES BETWEEN BODY ELEMENTS; 000420
C INPT -- READS ALL DATA EXCEPT THE TITLE CARD, COMPUTES CALIBRATION 000440
C          FACTORS, AND CONVERTS DATA FROM COUNTS TO INCHES.      000460
C INTRPL- INTERPOLATES SHOULDER HARNESS POINTS BETWEEN THE FIRST AND 000480
C          FIFTH BELT FIDICUAL.                                     000500
C          000520
C*****000540
C          DIMENSION DATA(1024),PX(6),PY(6),TITLE(6)              000560
C          COMMON X(18),Y(18),R(7),ANG, SX2,SY2,ITM                000580
C PX AND PY CONTAIN THE SIX PLOT ORIGINS IN SEQUENCE:              000600
C          DATA PX/0.0,3.25,3.25,-6.5,3.25,3.25/,PY/4.,0.,0.,-3.,0.,0./ 000620
C          CALL PLOTS(DATA,1024,7)                                  000640
C PLOT DATA USING A 92 % SCALE FACTOR:                             000660
C          FCTR=0.92                                              000680
C          CALL FACTOR(FCTR)                                       000700
C IP IS THE TIME OR PLOT INDEX; IP IS INCREMENTED FROM 1 TO 6 FOR THE 600720
C TIME SAMPLES:                                                    000740
C          10 IP=0                                                000760
C READ AND PRINT THE PLOT TITLE:                                     000780
C          READ(5,1200) TITLE                                       000800
C          IF (EOF(5)) 99,20                                         000820
C          20 WRITE(6,2200) TITLE                                     000840
C          WRITE(6,2300)                                             000860
C SUBROUTINE INPT READS THE REMAINING SETUP DATA PLUS THE 0 TIME DATA 000880
C AND CONVERTS THE DATA FROM COUNTS TO INCHES:                    000900
C          CALL INPT(IP)                                           000920
C CONVERT RADII TO PLOT SCALE INCHES;                               000940
C THE PLOT SCALE IS 1/2 INCH = 1 FOOT (BEFORE APPLICATION OF SCALE 000960
C FACTOR 'FCTR' ABOVE):                                            000980
C          DO 30 I=1,7                                             001000
C          30 R(I)=R(I)/24.                                         001020
C          WRITE(6,2000) (R(I),I=1,7),ANG                          001040
C          IP=IP+1                                                  001060
C          II=18                                                    001080
C          GO TO 55                                                 001100
C          50 IP=IP+1                                               001120
C CALIB IS AN ENTRY POINT IN SUBROUTINE INPT; DATA ARE READ AND 001140
C CALIBRATED FOR THE IP-TH FRAME:                                  001160
C          CALL CALIB(IP)                                           001180

```

```

      II=16
C CONVERT ALL X AND Z-AXIS DATA TO PLOT SCALE INCHES AND ADJUST TO 001200
C LOWER LEFT PLOT ORIGIN (X AND Z ARE PRESENTLY REFERENCED TO THE 001220
C INTERSECTION OF THE SEAT BACK AND SEAT PAN): 001240
      55 DO 40 I=1,II 001260
          X(I)=X(I)/24.0+2.0 001280
          60 Y(I)=Y(I)/24.0+0.5 001300
C PRINT X AND Y DATA IN PLOT SCALE INCHES: 001320
      WRITE(6,2100) (X(I),Y(I),I=1,II) 001340
C SET ORIGIN FOR PLOT 'IP': 001360
      CALL PLOT(PX(IP),PY(IP),-3) 001380
C IO AND IA CONTROL ORDINATE AND ABSCISSA ANNOTATION (0-- ANNOTATION 001400
C IS OMITTED; 1-- ANNOTATION IS DRAWN): 001420
      IO=0 001440
      IF (IP .EQ. 1 .OR. IP .EQ. 4) IO=1 001460
      IA=0 001480
      IF (IP .GE. 4) IA=1 001500
C DRAW PLOT AND CHAIR OUTLINE: 001520
      CALL FRAME(IO,IA) 001540
C DRAW FIGURE IN THE CHAIR: 001560
      CALL BODY 001580
      IF (IP .LT. 6) GO TO 50 001600
C PRINT PLOT TITLE BELOW THE SET OF SIX PLOTS: 001620
      CALL SYMBOL(-5.95,-1.0,0.14,TITLE,0.0,60) 001640
      CALL PLOT(5.0,0.0,-3) 001660
      GO TO 10 001680
      999 CALL PLOTE 001700
      STOP 'END OF JOB' 001720
1200 FORMAT(6A10) 001740
2000 FORMAT(* RADII IN PLOT SCALE INCHES PLUS THE NOSE-TRAGEON ANGLE IO01780
      1N RADIANS ARE:*(11X,8F10.3)) 001800
2100 FORMAT(* CALIBRATED DATA POINTS IN PLOT SCALE INCHES ARE:*/ 001820
      1 (11X,8F10.3)) 001840
2200 FORMAT(*1 TEST TITLE: *,6A10) 001860
2300 FORMAT(/** CALIBRATION DATA, RADII, AND CALIBRATED DATA ARE PRINTED 001880
      1D IN THE FOLLOWING SEQUENCE FOR INDEX I=1 TO 16:*/ 001900
      2 5X,*HIP, KNEE, ANKLE, SHOULDER, */5X,*ELBOW, WRIST, TRAGEON, NOSE 001920
      3,*/5X,*LAP HARNESS BUCKLE, AND 7 SHOULDER HARNESS POINTS.*/ 001940
      4* CHECK WRITE-UP OF INPUT CARD FORMATS FOR VARIABLE DEFINITIONS.* 001960
      END 001980

```

```

SUBROUTINE FRAME(IO,IA)                                002000
C                                                         002020
C THIS SUBROUTINE DRAWS THE PLOT FRAME PLUS THE CHAIR WITHIN THE FRAME. 002040
C THE PLOT SCALE IS 1/2 INCH = 1 FOOT.                 002060
C                                                         002080
COMMON X(18),Y(18),R(7),ANG,SX2,SY2,ITM              002100
DIMENSION IABSC(7),IORD(5)                            002120
DATA IABSC/2H-4,2H-3,2H-2,2H-1,2H 0,2H 1,2H 2/,IORD/1H0,1H1,1H2,
11H3,1H4/,HGHT/0.07/,SX/3.0/,SY/2.5/                 002140
C DEFINE IMAGE FRAME:                                   002160
CALL PLOT(0.0,0.0,3)                                   002180
CALL PLOT(SX,0.0,2)                                    002200
CALL PLOT(SX,SY,2)                                     002220
CALL PLOT(0.,SY,2)                                    002240
CALL PLOT(0.,0.,2)                                    002260
CALL PLOT(0.,0.,2)                                    002280
C DRAW DASHED LINE AT DECK HEIGHT--2.94' ABOVE ABSCISSA: 002300
Y1=2.94/24.                                           002320
XD=0.096774                                           002340
X1=-XD                                                 002360
DO 20 I=1,16                                          002380
X1=X1+XD                                               002400
CALL PLOT(X1,Y1,3)                                     002420
X1=X1+XD                                               002440
20 CALL PLOT(X1,Y1,2)                                  002460
C DRAW X-AXIS TIC MARKS:                               002480
X1=0.                                                  002500
Y1=0.07                                               002520
DO 40 I=1,5                                           002540
X1=X1+0.5                                             002560
CALL PLOT(X1,0.0,3)                                   002580
40 CALL PLOT(X1,Y1,2)                                  002600
C DRAW Y-AXIS TIC MARKS:                               002620
X1=0.07                                               002640
Y1=0.                                                  002660
DO 60 I=1,4                                           002680
Y1=Y1+0.5                                             002700
CALL PLOT(0.0,Y1,3)                                   002720
60 CALL PLOT(X1,Y1,2)                                  002740
C FOR IA=0, DRAW ABSCISSA ANNOTATION:                  002760
IF (IA) 85,85,70                                       002780
70 X1=-1.5*HGHT                                       002800
Y1=-.12                                               002820
DO 80 I=1,7                                           002840
CALL SYMBOL(X1,Y1,HGHT,IABSC(I),0.0,2)               002860
80 X1=X1+0.5                                           002880
C FOR IO=0, DRAW ORDINATE ANNOTATION:                  002900
85 IF (IO) 120,120,90                                   002920
90 X1=-1.5*HGHT                                       002940
Y1=-0.5*HGHT                                         002960
DO 100 I=1,5                                          002980
Y1=Y1+0.5                                             003000
100 CALL SYMBOL(X1,Y1,HGHT,IORD(I),0.0,1)            003020
C PRINT ELAPSED TIME IN UPPER LEFT CORNER:            003040
120 CALL SYMBOL (0.2,2.25,HGHT,ITM,0.0,3)           003060
CALL SYMBOL(0.48,2.25,HGHT,4MMSEC,0.0,4)            003080

```

C	DRAW SEAT CONFIGURATION:	003100
C	SX2,SY2 ARE THE COORDINATES OF THE UPPER LEFT CORNER OF THE CHAIR	003120
C	SEAT PAN; THE SLOPE OF THE SEAT PAN IS 7.25 DEGREES AND THE SLOPE	003140
C	OF THE SEAT BACK IS 12.67 DEGREES.	003160
	SX2=1.261	003190
	SY2=0.594	003200
	CALL PLOT(1.261,0.5,3)	003220
	CALL PLOT(SX2,SY2,2)	003240
	CALL PLOT(2.0,0.5,2)	003260
	CALL PLOT(2.38,2.19,2)	003280
C	DRAW SEAT BACK HEAD REST:	003300
	CALL PLOT(2.262,1.637,3)	003320
	CALL PLOT(2.223,1.646,2)	003340
	CALL PLOT(2.314,2.052,2)	003360
	CALL PLOT(2.356,2.043,2)	003380
	RETURN	003400
	END	003420


```

SUBROUTINE BODY                                003440
C                                               003460
C THIS SUBROUTINE DRAWS THE BODY ELEMENTS PLUS THE SHOULDER HARNESS AND LAP BELT POINTS IN EACH FRAME. 003480
C LAP BELT POINTS IN EACH FRAME.              003500
C                                               003520
C DIMENSION U(9),V(9)                          003540
C COMMON X1,X2,X3,X4,X5,X6,X7,X8,3X(8),XS9,XLB,Y1,Y2,Y3,Y4,Y5,Y6,Y7,003560
C 1Y8,3Y(8),YS8,YLB,R1,R2,R3,R4,R5,R6,R7,ANG, SX2,SY2,ITM 003580
C DATA A1/3.0/A2/360.0/HGHT/0.077, IBCD/4/ 003600
C DRAW HIP AND KNEE CIRCLES:                    003620
C CALL CIRCLE(X1+R1,Y1,A1,A2,R1,R1,A1)         003640
C CALL CIRCLE(X2+R2,Y2,A1,A2,R2,R2,A1)         003660
C IPLT=1 FOR HIP-TO-KNEE TANGENT LINES AND IPLT>1 FOR ALL OTHER 003680
C CALLS TO SUBROUTINE 'TANG':                  003700
C IPLT=1                                         003720
C COMPUTE HIP-TO-KNEE TANGENT LINES:           003740
C CALL TANG(X1,Y1,X2,Y2,R1,R2,IPLT,SX2,SY2)    003760
C 75 IPLT=2                                     003780
C DRAW ANKLE CIRCLE:                            003800
C CALL CIRCLE(X3+R3,Y3,A1,A2,R3,R3,A1)         003820
C DRAW ANKLE-TO-KNEE TANGENT LINES:           003840
C CALL TANG(X2,Y2,X3,Y3,R2,R3,IPLT,SX2,SY2)    003860
C DRAW SHOULDER, ELBOW AND WRIST CIRCLES AND TANGENTS: 003880
C CALL CIRCLE(X4+R4,Y4,A1,A2,R4,R4,A1)         003900
C CALL CIRCLE(X5+R5,Y5,A1,A2,R5,R5,A1)         003920
C CALL CIRCLE(X6+R6,Y6,A1,A2,R6,R6,A1)         003940
C IPLT=3                                         003960
C CALL TANG(X4,Y4,X5,Y5,R4,R5,IPLT,SX2,SY2)    003980
C IPLT=4                                         004000
C CALL TANG(X5,Y5,X6,Y6,R5,R6,IPLT,SX2,SY2)    004020
C DRAW HEAD CIRCLE:                             004040
C CALL CIRCLE(X7+R7,Y7,A1,A2,R7,R7,A1)         004060
C PLOT EYE POINT:                               004080
C CALL SYMBOL(X8,Y8,HGHT/2.0,3,0.0,-1)         004100
C COMPUTE AND DRAW HEAD Z-AXIS LINE:           004120
C THETA -- ANGLE TRAGEON=NOSE LINE MAKES IN X,Y AXIS THROUGH TRAGEON 004140
C POINT.                                         004160
C THETA=ATAN2(Y8-Y7,X8-X7)                      004180
C IF (THETA .LT. 0.0) THETA=THETA+6.2831853    004200
C ANG -- ANGLE BETWEEN TRAGEON=NOSE LINE AND HEAD Z-AXIS. 004220
C ANG IS COMPUTED IN RADIANS IN SUBROUTINE INPT: 004240
C THETA=THETA-ANG                               004260
C XP=R7*COS(THETA)                              004280
C YP=R7*SIN(THETA)                              004300
C XL1=X7+XP                                     004320
C XL2=X7-XP                                     004340
C YL1=Y7+YP                                     004360
C YL2=Y7-YP                                     004380
C PLOT Z-AXIS LINE DETERMINED BY POINTS XL1,YL1 AND XL2,YL2: 004400
C CALL PLOT(XL1,YL1,3)                          004420
C CALL PLOT(XL2,YL2,2)                          004440
C WRITE(6,2100) XL1,YL1,XL2,YL2                004460
C PLOT RESTRAINT BELT LOWER ATTACH POINT (XLB,YLB) PLUS THE LAP BUCKLE 004480
C POINT (BX(1),BY(1)):                          004500
C CALL SYMBOL(XLB,YLB,HGHT,IBCD,C.0,-1)         004520

```

CALL PLOT(BX(1),BY(1),2)	004540
C INTERPOLATE 9 POINTS BETWEEN 1-ST AND 5-TH BELT POINTS; INTERPOLATE	004560
C X DATA FOR A GIVEN Y:	004580
DY=(BY(5)-BY(1))/10.	004600
DO 100 I=1,9	004620
100 U(I)=BY(1)+DY*FLOAT(I)	004640
I1=6	004660
I2=9	004680
CALL INTRPL(I1,BY(1),BX(1),I2,U,V)	004700
WRITE(6,2000) BX(1),BY(1),(V(I),U(I),I=1,9),(BX(I),BY(I),I=5,9)	004720
C PLOT THE 9 INTERPOLATED POINTS:	004740
DO 120 I=1,9	004760
120 CALL PLOT(V(I),U(I),2)	004780
C PLOT THE LAST 4 SHOULDER HARNESS POINTS:	004800
DO 130 I=5,8	004820
130 CALL PLOT(BX(I),BY(I),2)	004840
C PLOT THE SHOULDER HARNESS SEAT ATTACH POINT:	004860
CALL SYMBOL(XSB,YSB,HGHT,IBCD,0.0,-2)	004880
RETURN	004900
2000 FORMAT(* LAP BELT AND SHOULDER HARNESS X,Y POINTS ARE (BUCKLE POINTS	004920
1T, 9 INTERPOLATED POINTS, PLUS THE LAST 4 SHOULDER HARNESS POINTS)	004940
2I*/ (11X,8F10.3)	004960
2100 FORMAT(* X,Y POINTS AT BOTH ENDS OF THE HEAD Z-AXIS LINE ARE:*/	004980
1 11X,4F10.3)	005000
END	005020

```

SUBROUTINE TANG(X1,Y1,X2,Y2,R1,R2,IPLT, SX2,SY2)          J05040
DIMENSION LABEL(2,4)                                    005050
DATA 090/1.57079633/                                    005060
  1,LABEL/10H  HIP AND,8H KNEE  ,10H KNEE AND,8H ANKLE  ,  005080
  2 10HSHOULDER A,8HND ELBOW,10H ELBOW AND,8H WRIST /    005100
C THIS SUBROUTINE COMPUTES AND DRAWS THE TANGENT LINES CONNECTING  005120
C THE TWO CIRCLES. THE CIRCLE CENTERS ARE AT X1,Y1 AND X2,Y2 AND THE  005140
C RADII ARE R1 AND R2. THE CIRCLES WITH TANGENT LINES FORM THE BODY  005160
C SEGMENTS.                                               005180
C WHEN THIS ROUTINE WAS CODED, R1 WAS ALWAYS > R2 AND X1,Y1 WAS  005200
C ALWAYS FURTHER FROM THE PLOT ORIGIN THAN X2,Y2; THUS WE WERE ALWAYS  005220
C WORKING FROM THE SMALL CIRCLE TO THE LARGE CIRCLE. HOWEVER, THE  005240
C ALGORITHMS WERE DERIVED SUCH THAT THE COMPUTATIONS SHOULD BE CORRECT  005260
C EVEN IF THESE CONDITIONS ARE NOT FULLFILLED.           005280
  XO=X1-X2                                               005300
  YO=Y1-Y2                                               005320
C SLOPE == SLOPE OF LINE THROUGH THE TWO CIRCLE CENTER POINTS:  005340
  SLOPE=YO/XO                                             005360
  THETA=ATAN(ABS(SLOPE))                                  005380
  FCT=SIGN(1.0,SLOPE)                                     005400
C DIST == DISTANCE BETWEEN THE TWO CIRCLE CENTER POINTS:      005420
  DIST=SQRT(XO*XO+YO*YO)                                  005440
  PHI=ASIN((R1-R2)/DIST)                                  005460
C ANGLES THETA AND PHI ARE REQUIRED TO COMPUTE ANGLES A1 AND A2 WHICH  005480
C ARE THEN USED TO DEFINE THE X AND Y COORDINATES OF THE TANGENT  005500
C POINTS:                                                 005520
  A1=090-THETA-FCT*PHI                                    005540
  A2=090-THETA+FCT*PHI                                    005560
  SU=SIN(A1)                                              005580
  SL=SIN(A2)                                              005600
  CU=-FCT*COS(A1)                                         005620
  CL=FCT*COS(A2)                                          005640
C COMPUTE X AND Y UPPER AND LOWER TANGENT POINTS FOR CIRCLE 1:  005660
  XU1=X1+R1*CU                                           005680
  YU1=Y1+R1*SU                                           005700
  XL1=X1+R1*CL                                           005720
  YL1=Y1-R1*SL                                           005740
C COMPUTE X AND Y UPPER AND LOWER TANGENT POINTS FOR CIRCLE 2:  005760
  XU2=X2+R2*CU                                           005780
  YU2=Y2+R2*SU                                           005800
  XL2=X2+R2*CL                                           005820
  YL2=Y2-R2*SL                                           005840
C PLOT UPPER TANGENT LINE:                                  005860
  CALL PLOT(XU1,YU1,3)                                    005880
  CALL PLOT(XU2,YU2,2)                                    005900
  WRITE(6,2100) LABEL(1,IPLT),LABEL(2,IPLT),XU1,YU1,XL1,YL1,XU2,YU2,  005920
  1 XL2,YL2                                               005940
C PLOT LOWER TANGENT LINE:                                  005960
  50 CALL PLOT(XL1,YL1,3)                                  005980
  IF (IPLT=1) 100,100,60                                  006000
  50 CALL PLOT(XL2,YL2,2)                                  006020
  RETURN                                                  006040
C BOTTOM HIP-TO-KNEE TANGENT LINE MAY INTERFERE WITH THE UPPER LEFT  006060
C CORNER OF THE SEAT PAN (SX2,SY2); CHECK AND DRAW LINE ACCORDINGLY.  006080
C IF IT DOES INTERFERE, COMPUTE THE TANGENT FROM THE CORNER OF THE  006100

```

```

C SEAT PAN TO THE KNEE CIRCLE. 006120
C COMPUTE SLOPE OF TANGENT LINE: 006140
130 SLOPE=(YL1-YL2)/(XL1-XL2) 006160
C COMPUTE Y (YC) COORDINATE FOR SEAT PAN SX2 POINT; IF YC > SY2, THEN 006180
C THE SEAT PAN DOESN'T INTERFERE WITH THE HIP-TO-KNEE TANGENT LINE: 006200
YC=SLOPE*(SX2-XL2)+YL2 006220
IF (YC .GE. SY2) GO TO 60 006240
C COMPUTE TANGENT FROM SX2,SY2 --> KNEE CIRCLE (R2): 006260
C KNEE CIRCLE CENTER MUST BE TO THE LEFT OF SX2,SY2: 006280
IF (X2 .GE. SX2) GO TO 150 006300
C JIST -- DISTANCE FROM CORNER OF THE SEAT PAN TO THE CENTER OF THE 006320
C KNEE CIRCLE: 006340
DIST=SQRT((SX2-X2)**2+(SY2-Y2)**2) 006360
IF (DIST .GT. R2) GO TO 120 006380
C OMIT TANGENT LINE FOR JIST < R2---SEAT PAN POINT IS WITHIN THE 006400
C RADIUS OF THE KNEE CIRCLE: 006420
WRITE(6,2300) DIST,R2 006440
GO TO 150 006460
C ALP IS THE SLOPE OF THE LINE FROM THE CENTER OF THE KNEE CIRCLE TO 006480
C THE SEAT PAN POINT: 006500
120 ALP=ATAN((SY2-Y2)/(SX2-X2)) 006520
C COMPUTE GAMMA USING THE TWO KNOWN SIDES OF THE TRIANGLE: 006540
GAM=ACOS(R2/DIST) 006560
C COMPUTE 'PHI' --- ANGLE IN NEW TRIANGLE REQUIRED TO COMPUTE TANGENT 006580
C POINT XL2,YL2 BELOW: 006600
PHI=GAM-ALP 006620
C COMPUTE X AND Y COORDINATES OF TANGENT POINT ON THE KNEE CIRCLE: 006640
XL2=X2+R2*COS(PHI) 006660
YL2=Y2-R2*SIN(PHI) 006680
C DRAW THE TANGENT LINES FROM THE HIP CIRCLE TO THE CORNER OF THE SEAT 006700
C PAN TO THE KNEE CIRCLE: 006720
CALL PLOT(SX2,SY2,2) 006740
WRITE(6,2400) SLOPE,YC,SY2,DIST,ALP,GAM,XL2,YL2 006760
GO TO 60 006780
150 CALL PLOT(SX2,SY2,2) 006800
2100 FORMAT(* UPPER AND LOWER TANGENT POINTS FOR THE *,A10,A8,* CIRCLE 006820
1 ARE:*/(11X,8F10.3)) 006840
2300 FORMAT(* THE DISTANCE FROM THE CORNER OF THE SEAT PAN TO THE CENTE 006860
1R OF THE KNEE CIRCLE =*,F8.3,* THE KNEE RADIUS =*,F8.3) 006880
2400 FORMAT(* SLOPE, YC, SY2, DIST, ALP, GAM, XL2, YL2 FROM THE CORNER 006900
1 OF THE SEAT PAN TO KNEE CIRCLE TANGENT POINT COMPUTATIONS:*/ 006920
2 11X,8F10.3) 006940
RETURN 006960
END 006980

```

```

SUBROUTINE INPT(IP)                                007000
  DIMENSION BAF(10),X1(7),Y1(7),X2(7),Y2(7),CAL(16) 007020
  COMMON X(16),XS8,XLB,Y(16),YS8,YL9,R(7),ANG, SX2,SY2,ITM 007040
C THIS SUBROUTINE READS ALL INPUT DATA EXCEPT THE 'TITLE' CARD, 007060
C COMPUTES ALL CONVERSION FACTORS (COUNTS TO INCHES), AND 007080
C CALIBRATES ALL DATA. 007100
C THE DATA POINT SEQUENCE IS: 007120
C   INDEX          PARAMETER 007140
C     1            HIP 007160
C     2            KNEE 007180
C     3            ANKLE 007200
C     4            SHOULDER 007220
C     5            ELBOW 007240
C     6            WRIST 007260
C     7            TRAGEON 007280
C     8            NOSE 007300
C     9            HARNESS BUCKLE 007320
C    10-16        SHOULDER HARNESS 007340
  DATA RAD/57.2957795/ 007360
C READ AND WRITE ALL TEST PARAMETER INPUT DATA: 007380
C ALL PARAMETER SYMBOLS SHOULD BE DEFINED IN THE WRITE-UP DESCRIBING 007400
C THE FORMAT OF THE INPUT DATA: 007420
  READ(5,1000) DPS,OSC,DPF,OSF,XS8,YS8,XLB,YL9,XASSF,YASSF 007440
  WRITE(6,3010) DPS,OSC,DPF,OSF,XS8,YS8,XLB,YL9,XASSF,YASSF 007460
  READ(5,1000) BAF 007480
  WRITE(6,3020) BAF 007500
  READ(5,1000) XPF,YPF,XPA,YPA,XSF,YSF,XSA,YSA 007520
  WRITE(6,3030) XPF,YPF,XPA,YPA,XSF,YSF,XSA,YSA 007540
  READ(5,1100) (X1(I),Y1(I),X2(I),Y2(I),I=2,6) 007560
  WRITE(6,3040) (X1(I),Y1(I),X2(I),Y2(I),I=2,6) 007580
  READ(5,1000) TX,TY,EX,EY 007600
  WRITE(6,3050) TX,TY,EX,EY 007620
C COMPUTE PANEL AND SEAT CONVERSION FACTORS: 007640
  PCAL=SQRT((XPF-XPA)**2+(YPF-YPA)**2)/DPF 007660
  SCAL=SQRT((XSF-XSA)**2+(YSF-YSA)**2)/OSF 007680
C COMPUTE DISTANCE FROM THE FOCAL POINT TO THE SEAT (SS): 007700
  SS=(DPS*OSF)/(DPF-(SCAL/PCAL)*DPF) 007720
  WRITE(6,3060) PCAL,SCAL,SS 007740
C COMPUTE THE ANGLE THE TRAGEON - NOSE LINE MAKES WITH THE Z-AXIS 007760
C THROUGH THE HEAD: 007780
  DX=TX-EX 007800
  DY=TY-EY 007820
  ANG=ATAN(ABS(DX/DY)) 007840
C COMPUTE REMAINING CONVERSION FACTORS: 007860
  DO 100 I=1,10 007880
100 CAL(I)=SS*SCAL/(SS+OSC-BAF(I)/2.0) 007900
  DO 110 I=13,16 007920
110 CAL(I)=CAL(10) 007940
  DCAL=CAL(13)-CAL(9) 007960
C COMPUTE RAOII OF ALL BODY ELEMENTS EXCEPT THE HEAD AND THE HIP: 007980
  DO 150 I=2,6 008000
150 R(I)=SQRT((X2(I)-X1(I))**2+(Y2(I)-Y1(I))**2)/(2.0*CAL(I)) 008020
  ENTRY CALIB 008040
C READ PHOTO DATA FOR EACH TIME SET: 008060
  READ(5,1200) ITM 008080

```

```

WRITE(6,2100) ITM                                008100
READ(5,1100) XSFF,YSFF,XSAF,YSAF,(X(I),Y(I),I=1,16) 008120
WRITE(6,3100) XSFF,YSFF,XSAF,YSAF,(X(I),Y(I),I=1,16) 008140
C COMPUTE CALIB FACTORS FOR 3 SHOULDER STRAP POINTS WITHOUT FIDUCIALS: 008160
YBU=Y(9)                                          008130
YFCT=OCAL/(Y(13)-YBU)                            008210
CAL(10)=CAL(9)+YFCT*(Y(10)-YBU)                  008220
CAL(11)=CAL(9)+YFCT*(Y(11)-YBU)                  008240
CAL(12)=CAL(9)+YFCT*(Y(12)-YBU)                  008260
WRITE(6,2200) CAL                                008280
C CALIBRATE ALL DATA FOR I-TH FRAME:            008300
XSAF=XSAF/SCAL                                    008320
YSAF=YSAF/SCAL                                    008340
XF=XASSF-XSAF                                     008360
YF=YASSF-YSAF                                     008380
DO 200 I=1,16                                     008400
X(I)=X(I)/CAL(I)+XF                               008420
230 Y(I)=Y(I)/CAL(I)+YF                           008440
IF (IP .GT. 0) RETURN                             008460
C COMPUTE RADII OF HIP AND HEAD (FOR 0 FRAME ONLY): 008480
XHR=0.23076923*Y(7)-1.0190769                    008500
R(7)=(XHR-X(7))*COS(12.6667/RAD)                  008520
YSP=-0.12634*X(1)                                 008540
R(1)=(Y(1)-YSP)*COS(7.25/RAD)                     008560
RETURN                                             008580
1030 FORMAT(5X,10F7.0)                            008600
1100 FORMAT(5X,8F7.0)                             008620
1200 FORMAT(5X,A3)                                 008640
2130 FORMAT(*1ITH=*,A3,* MSEC; INPUT DATA FOR THIS TIME FRAME ARE:*/) 008660
2200 FORMAT(* CALIBRATION DATA FOR THIS TIME FRAME ARE:*/ 008680
1 (11X,8F10.3)                                    008700
3010 FORMAT(*0DPS ETC.=*,10F10.3)                 008720
3020 FORMAT(* BAF ETC.=*,10F10.3)                 008740
3030 FORMAT(* XPF ETC.=*,10F10.3)                 008760
3040 FORMAT(* X1 ETC.=*,8F10.3/(11X,8F10.3))      008780
3050 FORMAT(* TX ETC.=*,4F10.3)                   008800
3060 FORMAT(* PCAL ETC.=*,3F10.3)                 008820
3130 FORMAT(*XSFF ETC.=*,8F10.3/(11X,8F10.3))     008840
END                                                008860

```

```

SUBROUTINE INTRPL(L,X,Y,N,U,V)
C INTERPOLATION OF A SINGLE-VALUED FUNCTION
C TAKEN FROM COMMUNICATIONS OF ACM, OCTOBER 1972, VOL 15, NUMBER 12.
C ALGORITHM NUMBER 433.
C REPRINT PRIVILEGE GRANTED BY PERMISSION OF THE ASSOCIATION FOR
C COMPUTING MACHINERY.
C THIS SUBROUTINE INTERPOLATES, FROM VALUES OF THE FUNCTION
C GIVEN AS ORDINATES OF INPUT DATA POINTS IN AN X-Y PLANE
C AND FOR A GIVEN SET OF X VALUES (ABSCISSAS), THE VALUES OF
C A SINGLE-VALUED FUNCTION Y=Y(X).
C THE INPUT PARAMETERS ARE
C L = NUMBER OF INPUT DATA POINTS(MUST BE 2 OR GREATER)
C X = ARRAY OF DIMENSION L STORING THE X VALUES(ABSCISSAS) OF INPUT
C DATA POINTS (IN ASCENDING ORDER)
C Y = ARRAY OF DIMENSION L STORING THE Y VALUES(ORDINATES) OF INPUT
C DATA POINTS
C N = NUMBER OF POINTS AT WHICH INTERPOLATION OF THE Y VALUE
C (ORDINATE) IS DESIRED (MUST BE 1 OR GREATER)
C U = ARRAY OF DIMENSION N STORING THE X VALUES (ABSCISSAS) OF
C DESIRED POINTS
C THE OUTPUT PARAMETER IS
C V = ARRAY OF DIMENSION N WHERE THE INTERPOLATED Y VALUES
C (ORDINATES) ARE TO BE DISPLAYED
C DECLARATION STATEMENTS
C DIMENSION X(L),Y(L),U(N),V(N)
C EQUIVALENCE (P3,X3),(Q0,Y3),(Q1,T3)
C REAL M1,M2,M3,M4,M5
C EQUIVALENCE (UK,DX),(IMN,X2,A1,M1),(IMX,X5,A5,M5),
C 1 (J,SW,SA),(Y2,W2,W4,Q2),(Y5,W3,Q3)
C PRELIMINARY PROCESSING
C 10 L0=L
C LM1=L0-1
C LM2=LM1-1
C LP1=L0+1
C NN=N
C IF(LM2 .LT. 0) GO TO 90
C IF (N0 .LE. 0) GO TO 91
C DO 11 I=2,L0
C IF (X(I-1)-X(I)) 11,95,96
C 11 CONTINUE
C IPV=0
C MAIN DO-LOOP
C DO 80 K=1,N0

```

```

008890
008900
008920
008940
008960
008980
009000
009020
009040
009060
009080
009100
009120
009140
009160
009180
009200
009220
009240
009260
009280
009300
009320
009340
009360
009380
009400
009420
009440
009460
009480
009500
009520
009540
009560
009580
009600
009620
009640
009660
009680
009700
009720
009740
009760
009780
009800
009820
009840
009860
009880
009900
009920
009940
009960

```

	UK=U(K)	009980
C		010000
C	ROUTINE TO LOCATE THE DESIRED POINT	010020
C		010040
	20 IF(LM2 .EQ. 0) GO TO 27	010060
	IF (UK .GE. X(L0)) GO TO 26	010080
	IF(UK .LT. X(1)) GO TO 25	010100
	IMN=2	010120
	IMX=L0	010140
	21 I=(IMN+IMX)/2	010160
	IF (UK .GE. X(I)) GO TO 23	010180
	22 IMX=I	010200
	GO TO 24	010220
	23 IMN=I+1	010240
	24 IF (IMX .GT. IMN) GO TO 21	010260
	I=IMX	010280
	GO TO 30	010300
	25 I=1	010320
	GO TO 30	010340
	26 I=LP1	010360
	GO TO 30	010380
	27 I=2	010400
C		010420
C	CHECK IF I=IPV	010440
C		010460
	30 IF (I .EQ. IPV) GO TO 70	010480
	IPV=I	010500
C		010520
C	ROUTINES TO PICK UP NECESSARY X AND Y VALUES AND	010540
C	TO ESTIMATE THEM IF NECESSARY	010560
C		010580
	40 J=I	010600
	IF (J .EQ. 1) J=2	010620
	IF (J .EQ. LP1) J=L0	010640
	X3=X(J-1)	010660
	Y3=Y(J-1)	010680
	X4=X(J)	010700
	Y4=Y(J)	010720
	A3=X4-X3	010740
	M3=(Y4-Y3)/A3	010760
	IF (LM2 .EQ. 0) GO TO 43	010780
	IF (J .EQ. 2) GO TO 41	010800
	X2=X(J-2)	010820
	Y2=Y(J-2)	010840
	A2=X3-X2	010860
	M2=(Y3-Y2)/A2	010880
	IF (J .EQ. L0) GO TO 42	010900
+1	X5=X(J+1)	010920
	Y5=Y(J+1)	010940
	A4=X5-X4	010960
	M4=(Y5-Y4)/A4	010980
	IF (J .EQ. 2) M2=M3+M3-M4	011000
	GO TO 45	011020
42	M4=M3+M3-M2	011040
	GO TO 45	011060

43	M2=M3	011080
	M4=M3	011100
45	IF (J .LE. 3) GO TO 46	011120
	A1=X2-X(J-3)	011140
	M1=(Y2-Y(J-3))/A1	011160
	GO TO 47	011180
46	M1=M2+M2-M3	011200
47	IF (J .GE. LM1) GO TO 48	011220
	A5=X(J+2)-X5	011240
	M5=(Y(J+2)-Y5)/A5	011260
	GO TO 50	011280
48	M5=M4+M4-M3	011300
C		011320
C	NUMERICAL DIFFERENTIATION	011340
C		011360
50	IF (I .EQ. LP1) GO TO 52	011380
	M2=ABS(M4-M3)	011400
	M3=ABS(M2-M1)	011420
	SW=M2+M3	011440
	IF (SW .NE. 0.0) GO TO 51	011460
	M2=0.5	011480
	M3=0.5	011500
	SW=1.0	011520
51	T3=(M2*M2+M3*M3)/SW	011540
	IF (I .EQ. 1) GO TO 54	011560
52	M3=ABS(M5-M4)	011580
	M4=ABS(M3-M2)	011600
	SW=M3+M4	011620
	IF (SW .NE. 0.0) GO TO 53	011640
	M3=0.5	011660
	M4=0.5	011680
	SW=1.0	011700
53	T4=(M3*M3+M4*M4)/SW	011720
	IF (I .NE. LP1) GO TO 60	011740
	T3=T4	011760
	SA=A2+A3	011780
	T4=0.5*(M4+M5-A2*(A2-A3)*(M2-M3)/(SA*SA))	011800
	X3=X4	011820
	Y3=Y4	011840
	A3=A2	011860
	M3=M4	011880
	GO TO 60	011900
54	T4=T3	011920
	SA=A3+A4	011940
	T3=0.5*(M1+M2-A4*(A3-A4)*(M3-M4)/(SA*SA))	011960
	X3=X3-A4	011980
	Y3=Y3-M2*A4	012000
	A3=A4	012020
	M3=M2	012040
C		012060
C	DETERMINATION OF THE COEFFICIENTS	012080
C		012100
60	Q2=(2.0*(M3-T3)+M3-T4)/A3	012120
	Q3=(-M3-M3+T3+T4)/(A3*A3)	012140
C		012160

C	COMPUTATION OF THE POLYNOMIAL	012180
C	70 DX=UK-P0	012200
	30 V(K)=Q0+OX*(Q1+OX*(Q2+OX*Q3))	012220
	RETURN	012240
C	ERROR EXIT	012260
C	90 WRITE (6,2090)	012280
	GO TO 99	012300
	31 WRITE (6,2091)	012320
	GO TO 99	012340
	35 WRITE (6,2095)	012360
	GO TO 97	012380
	36 WRITE (6,2096)	012400
	37 WRITE (6,2097) I,X(I)	012420
	39 WRITE (6,2099) L0,N0	012440
	RETURN	012460
C	FORMAT STATEMENTS	012480
C	2090 FORMAT (1X/22H *** L = 1 OR LESS./)	012500
	2091 FORMAT (1X/22H *** N = 0 OR LESS./)	012520
	2095 FORMAT (1X/27H *** IDENTICAL X VALUES./)	012540
	2096 FORMAT (1X/33H *** X VALUES OUT OF SEQUENCE./)	012560
	2097 FORMAT (6H I =,I7,10X,6HX(I) =,E12.3)	012580
	2099 FORMAT (6H L =,I7,10X,3HN =,I7/36H ERROR DETECTED IN ROUTINE	012600
	1INTRPL)	012620
	END	012640

APPENDIX D
PROGRAM CHIFPD

```

PROGRAM CHIFPD(INPUT,OUTPUT,TAPE5=INPUT,TAPE6=OUTPUT)          000100
C*****000120
C          000140
C PROGRAM 'CHIFPD' CALIBPATES THE 'HIFPD' PROGRAM INPUT DATA. 000160
C          000180
C THE PROGRAM COMPUTES THE FOLLOWING FOR EACH (X,Z) DATA POINT: 000200
C (1) MAGNITUDE R=SQRT(X**2+Z**2) ---> R IN COUNTS          000220
C (2) ANGLE ALPHA=R/(138.6848159*57.29577951) ---> ALPHA IN RADIAN 000240
C (3) ADJUSTED R=RA=R/COS(ALPHA) ---> RA IN COUNTS          000260
C (4) ADJUSTED X=XA=X*RA/R ---> XA IN COUNTS                000280
C (5) ADJUSTED Z=ZA=Z*RA/R ---> ZA IN COUNTS                000300
C          000320
C DATA ARE READ AND PRINTED IN THE STANDARD 'HIFPD' PROGRAM FORMAT. 000340
C          000360
C*****000380
      DIMENSION X(4),Z(4),XA(4),ZA(4)                          000400
      DATA RAD/57.29577951/,CON/138.6848159/                    000420
      FCT=CON*RAO                                                000440
      10 READ(5,1000) F1,(X(I),Z(I),I=1,4)                       000460
      IF (EOF(5)) 999,20                                         000480
      20 DO 100 I=1,4                                             000500
      R=SQRT(X(I)**2+Z(I)**2)                                     000520
      ALPH=R/FCT                                                 000540
      C1=COS(ALPH)                                              000560
      XA(I)=X(I)/C1                                             000580
      ZA(I)=Z(I)/C1                                             000600
      100 CONTINUE                                              000620
      WRITE(6,1000) F1,(XA(I),ZA(I),I=1,4)                       000640
      GO TO 10                                                  000660
      999 STOP                                                  000680
      1000 FORMAT(A5,8F7.0)                                       000700
      END                                                         000720

```

DATE
ILMED
-18