SD4700P Universal USB-C and USB 3.0 Docking Station with 60W USB 3.0 Power Splitter

	SD4700P	60W USB 3.0 Power Splitter (sold separately)	
Part No.	K38240EU	K38310EU	
EAN code	5028252521734	5028252594332	





Supporting the latest USB-C connections and legacy computers with USB 3.0 ports, the SD4700P Universal USB-C and USB 3.0 Docking Station is the ideal docking solution for evolving computer environments. Engineered using the most stable and trusted technology, the SD4700P provides compatibility that just works. Exhaustively tested with new and legacy laptop models, the SD4700P extends the life of your technology investments and is easy and painless to set up.

FEATURES AND BENEFITS

- Universal Docking Station is a smart technology investment for evolving and mixed computer environments - conveniently connecting any laptop equipped with USB-C or USB 3.0 and supporting both Windows and Mac
- Simple set-up allows you to connect and quickly transfer audio, video, data and power¹, keeping your workspace clean and clutter-free, while also easily accommodating mixed deployments and flexible workspaces
- DisplayPort++/HDMI provides flexible video connections with support up to 2560 x 1600 @ 60Hz for a single monitor or 2048 x 1152 @ 30Hz for dual monitors via DisplayLink

Kensington

- 6 USB ports extend the productivity capabilities of today's thin laptops via one USB port (5V/3A) and five USB 3.0 ports, one of which is a 2.1A fast-charging port to power and charge a tablet or smartphone
- 135W power supply adapter provides ample power for dock and up to 60W of power for devices connected via Power Delivery (PD) USB-C1
- Combo 3.5mm headphone and microphone jack lets users easily connect their favourite headset
- Gigabit Ethernet port provides a reliable 1Gbps wired networking connection
- Kensington Security Slot protects your technology investment via easy implementation of a cable lock
- Zero Footprint Mounting provides the option to attach the dock to the back of any VESA® compatible external display (sold separately; K33959WW)
- Optional 60W USB 3.0 Power Splitter provides a power delivery option for USB 3.0 laptops and includes 8 power tip adapters to provide connectivity options for Dell, HP, Lenovo and other leading manufacturers





¹ USB-C host device must support Power Delivery. Power Delivery is not supported on USB 3.0 host devices without the use of the 60W USB 3.0 Power Splitter (sold separately; K38310EU)



SD4700P Universal USB-C and USB 3.0 Docking Station with 60W USB 3.0 Power Splitter

SYSTEM REQUIREMENT

- Operating systems supported:
 - Windows 7 or above; macOS 10.13
- Plug & Play: DisplayLink driver installation required; download software from Kensington.com, or via Windows update
- **Power Delivery:**
 - SD4700P: supports USB-C PD 3.0; 5V/9V/12V/20V up to 3A; 60W maximum
 - 60W Power Splitter: two 20V power output (1 x 75W to power SD4700P and 1 x 60W to power laptops); 135W maximum

- System resource requirement:
 - 60W Power Splitter: host device must be using the SD4700P Universal USB-C and USB 3.0 Docking Station. Includes multi-brand barrel connectors for different laptop manufacturers.

HOST CONNECTIVITY

Host docking connector: USB-C or USB-A through the tethered adapter

VIDEO CONNECTIONS

- SD4700P video connectors:
 - HDMI v1.3
 - DisplayPort v1.1 ++ (Passive cables/adapters for HDMI or DVI conversion)
- SD4700P maximum resolution supported:
 - Single monitor: 2560 x 1600 Dual monitors: 2048 x 1152
 - **HDCP support:** No

AUDIO CONNECTIONS

- SD4700P audio connectors:
 - one 3.5mm combo audio port for audio in and out
- SD4700P audio channels supported: Stereo LR

USB CONNECTIONS

- **SD4700P all ports:** support up to 5Gbps transfer rate
- **SD4700P USB 3.0 Ports:** Five; (1) front with 5V/2.1A fast-charging and (4) back supporting 5V/0.9A
- SD4700P USB-C Ports: Two; (1) front with 5V/3A and (1) rear supporting 60W power delivery

NETWORK CONNECTIONS

SD4700P Ethernet port: RJ45

Compatible Ethernet speeds: 10/100/1000Mbps



PRODUCT DIMENSIONS

SD4700P without peripherals:

Width: 200mm (7.9in) Depth: 91.2mm (3.6in) Height: 30.5mm (1.2in)

Unit weight: 1.13kg (39.86oz)

Enclosure colour and material: Black PC/ABS

Desktop footprint: 182cm² (28in²); n/a if mounted behind VESA® compatible monitor

60W Power Splitter:

Width: 35mm (1.4in) Depth: 70mm (2.8in) Height: 18mm (0.7in) Unit weight: 0.08kg (0.18lbs)

Enclosure colour and material: Black PC Cable length: TPE tethered cable 1M and 0.5M

PACKAGING DIMENSIONS

SD4700P packaging style: Brown box (K38240NA and K38240EU); retail box (K38240AU)

Unit box:

Width: 215mm (8.46in) o Depth: 105mm (4.13in) Height: 4.29in (109mm)

Packaging weight: 1.63kg (3.6lbs) US power cord only (K38240NA); 1.81kg (4.0lbs) EU and UK power cord (K38240EU/K38240AU)

Master carton: 4 pcs

Width: 448mm (17.64in)

Depth: 230mm (9.06in)

Height: 138mm (5.43in)

Weight: 4.52kg (10.0lbs) (K38240NA); 5.40kg (11.9lbs) (K38240EU)

Package content:

One SD4700P Docking Station

One USB-C to USB-C Cable, 1m (3ft), with a tethered USB-C (F) to USB 3.0 (M) adapter

One AC Power Adapter with US power cable included (K38240NA); One AC Power Adapter with EU and UK power cables included (K38240EU); One AC Power Adapter with AU power cable included (K38240AU)

One quick start instruction guide

Warranty information

60W Splitter packaging style: Retail box, brown box

Retail box:

Width: 97mm (3.82in) Depth: 125mm (4.92in) Height: 44mm (1.73in)

Packaging weight: 0.14kg (0.31lbs)

Master carton: 4 pcs

Width: 133mm (5.24in) Depth: 190mm (7.48in) Height: 112mm (4.41in) Weight: 0.66kg (1.5lbs)

Package content:

One 60W Power Splitter

One 1m laptop cable

One 0.5m power plug cable for connecting to SD4700P

Eight power tips with holder

Four power adapter retention rings in polybag

Quick start guide

Warranty information



OTHER FEATURES

SD4700P Kensington Security Slot

VESA® mount compatible: Mounting plate (K33959WW) sold separately

POWER AND ENVIRONMENTAL

Power adapter rating:

SD4700P

Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A

AC: 50/60Hz; 1.8A

Operating temperature: 0 to 40°C (32 to 140°F) Storage temperature: -40 to 70°C (-40 to 158°F)

Relative humidity: 5% to 95% non-condensing

COUNTRY OF ORIGIN, REGULATORY, AND WARRANTY

Country of origin: China


Certifications and compliance: CE, FCC, RCM, REACH, RoHS, WEEE, VCCI

Warranty: 3 years limited - worldwide

Kensington



SD4700P BACK

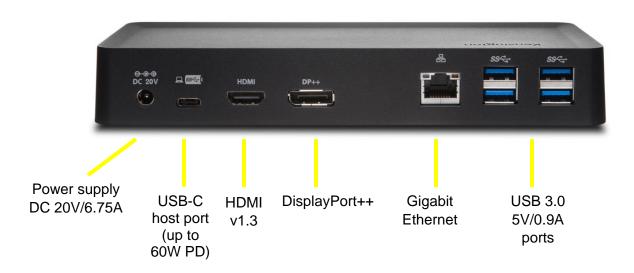

60W POWER SPLITTER



POWER TIP ADAPTERS

No	Targus	Kensington	Brand
1	3P	Α	Most NB
2	3W	С	Dell
3	3X9	D1	Lenovo
4	3H2	Н	HP
5	3l2	I	HP
6	3A	G	Acer
7	3H	M	Dell
8	3Z	0	ASUS





Retention ring to hold power tips