

SD5550T Thunderbolt™ 3 and USB-C Dual 4K Hybrid Docking Station

Part Number: K38131NA | UPC Code: 8589638131


The perfect hybrid dock for maximum productivity and compatibility

At last, the perfect dock for maximum productivity and compatibility has arrived. Innovatively engineered to support mixed computing environments with high transfer speed requirements, the Kensington SD5550T Thunderbolt™ 3 and USB-C Dual 4K Hybrid Docking Station plugs into the power of one − one dock for more power, more bandwidth, and more compatibility.

- True Universal Compatibility Perfect for hot-desking and mixed deployment environments, the SD5550T works with Thunderbolt 3 & USB-C laptops running Windows or macOS.
- Thunderbolt 3 Technology Allows users to transfer up to 40Gbps of data, video and audio (10Gbps for USB-C 3.1 Gen2 laptops and 5Gbps for USB-C 3.1 Gen1 laptops) using the included Thunderbolt 3 cable for a quick and powerful plug and play experience.
- Single or Dual 4K Video Output for Thunderbolt 3 Enabled
 Devices* Extend visual productivity with the crisp resolution,
 contrast and color depth of Ultra HD (Single or Dual 4K 60Hz) via
 two DisplayPort ports. USB-C laptops must support Alt Mode.
- 60W Power Delivery Quickly and simply charge any Thunderbolt 3 or USB-C enabled laptop, and peripheral USB accessories, using the Thunderbolt 3 connection. USB-C laptops must support Power Delivery.
- **Productive Desktop Ports** Two USB-C 3.1 Gen2 ports (up to 10Gbps), three USB-A ports (1 Gen2@10Gbps; 2 Gen1@5Gbps), one Gigabit Ethernet port, and one audio combo jack.

*For USB-C Alt Mode devices, a maximum resolution of Single 4K 30Hz or Dual 1080p @ 30Hz is supported (dual monitors are for devices that support MST).







Kensington


SD5550T Thunderbolt™ 3 and USB-C Dual 4K Hybrid Docking Station

Part Number: K38131NA | UPC Code: 8589638131

Front



Back

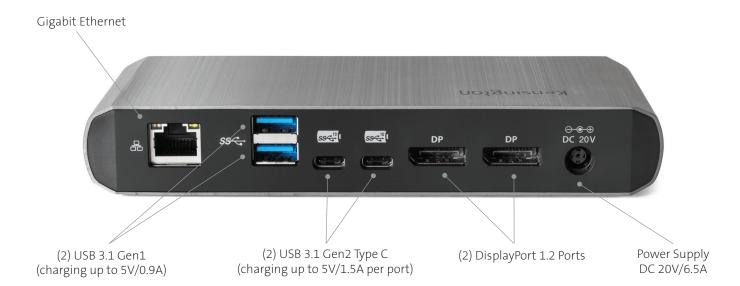



SD5550T Thunderbolt™ 3 and USB-C Dual 4K Hybrid Docking Station

Part Number: K38131NA | UPC Code: 8589638131

	Operating Systems Supported	Windows 10 and macOS 10.14 or later
	Plug & Play	Yes, for Thunderbolt™ 3 and USB-C™
		Alt Mode laptops
	System Resource Requirement	N/A
Host Connectivity		
	Host Docking Connector	Thunderbolt™ 3 or USB-C Alt Mode laptops with Power Delivery up to 60W
Video Connections		
	Video Connectors	(2) DisplayPort 1.2
	HDCP Support	No
	Maximum Resolution Supported	Thunderbolt™ 3 - Single Monitor: 4K@60Hz Thunderbolt™ 3 - Dual Monitors: 4K@60Hz USB-C™ - Single Monitor: 4K@30Hz USB-C™ - Dual Monitors: 1080p@30Hz
Audio Connections		
	Audio Connectors	3.5mm audio for headphone/speaker
	Audio Channels Supported	Stereo LR
USB Connections		
	Front Panel	(1) USB 3.1 Gen2 Port, charging up to 5V/1.5↓ (1) Thunderbolt™ 3 and USB-C Alt mode upstream port
	Back Panel	(2) USB 3.1 Gen2 Type C Ports, charging up to 5V/1.5A per port (2) USB 3.1 Gen1 Port, charging up to 5V/0.9
Network Connections		
	Ethernet Port	RJ45
	Compatible Ethernet Speed	10/100/1000 Mbps
Security and Mounting		
	Kensington Security Slot	(1) Standard slot (1) Nano slot
	VESA Mount Compatible	Yes, sold separately VESA Mounting Plate (K33959WW) Docking Station Mounting Bracket (K34050W

Kensington

Product Dimensions

Product Dimensions		
	Unit Dimensions	Length: 170mm (6.69in) Width: 80mm (3.15in) Height: 27mm (1.07in)
	Desktop Footprint	136 cm² (21.07 in2); zero if mounted behind VESA compatible monitor
	Unit Weight	320g (0.71lbs)
	Enclosure Color and Material	Black ABS chassis, Aluminum frame, and top glass
Packaging Dimensions		
	Packaging Style	White Box (K38130US); Retail Box (K38131NA/EU)
	Packaging Specifications	Width: 307mm (12.09in) Length: 215mm (8.46in) Height: 255mm (10.04in) Weight: 1200g (2.7lbs)
	Master Carton	6 pcs
	Package Contents	One Kensington SD5500T/SD5550T Dock One TB3 cable, 0.7m (2.3ft) One AC Power Adapter with US power cable included (K38130US/K38131NA); One AC Power Adapter with EU + UK power cords included (K38131EU); One AC Power Adapter with AU + JP power cords included (K38131AP) Quick Start Guide Warranty Information
Power and Environmental		
	Power Adapter Rating	Input: 100-240V; 2.5A max Output: 20V DC; 6.5A, positive center polarity
	Operating Temperature	0 to 40° C (32 to 140° F)
	Storage Temperature	-40 to 70° C (-40 to 158° F)
	Relative Humidity	5% to 95% non-condensing
Country of Origin, Regulatory and Warranty		
	Country of Origin	Thailand
	Certifications and Compliance	CE, FCC, RCM, ERP, VCCI, CB, REACH, RoHS, Thunderbolt certification





FOR MORE INFORMATION CONTACT: 1-855-692-0054 | sales@kensington.com

