

DIGITAL NAVIGATION

[Ordering Tree](#) [nLight Platform](#) [Sensor Switch JOT](#) [Photometrics](#) [Performance Data](#) [Drawings](#)

FEATURES & SPECIFICATIONS

INTENDED USE — The EPANL Series LED Edge-Lit Flat Panel provides a fully luminous appearance across the face of the lens. This provides a soft, glare-free solution that is visually comfortable within the space. Suitable for many lighting applications including schools, offices and other commercial spaces, retail, convenience stores, hospitals and healthcare facilities. **Certain airborne contaminants can diminish the integrity of acrylic and/or polycarbonate.** [Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.](#)

CONSTRUCTION — Built to last with an aluminum frame for strength and durability, the seamless frame prevents light leak in the corners. The PMMA light guide plate and lens resists yellowing and transmits light with superior efficacy. The satin white lens provides excellent shielding and fully luminous appearance. EPANL's low-profile design provides increased installation flexibility especially in restricted plenum spaces. The back plate includes integral T-bar clips for installation into 15/16" or 9/16" T-grid ceilings. Fixture may be recessed, suspended, surface box mounted or mounted in a hard-ceiling see accessories section for more information. Fixture may be mounted and wired in continuous rows.

Integrated Sensor (nLight Wired Networking): This sensor is nLight-enabled, meaning it has the ability to communicate over an nLight network. When wired, using CAT-5 cabling, with other nLight-enabled sensors, power packs, or WallPods, an nLight control zone is created. Once linked to a Gateway, directly or via a Bridge, the zone becomes capable of remote status monitoring and control via SensorView software.

Integrated Smart Sensor (nLight Air Wireless Platform): The RES7 sensor is nLight AIR enabled, meaning it has the ability to communicate over the wireless nLight control platform. It is available with an automatic dimming photocell, and either a digital PIR or a microphonics (PDT) dual technology occupancy sensor. It pairs to other luminaires and wall switches through our mobile app, CLAIRITY, which allows for simple sensor adjustment

Integrated Wireless Sensor (single room control): Sensor Switch VERTEX JOT or JOTVTX15 luminaire-embedded occupancy and ambient light sensor allows the luminaire to power off when the space is unoccupied or when enough ambient light is entering the space. See page X for more details on the integrated wireless sensor.

ELECTRICAL — Long-life LEDs, coupled with a high-efficiency driver, provide superior illumination for extended service life. High Efficiency EPANL maintains 97.7% of lumens at 60,000 hours (L97/60,000). 0-10V dimming driver, dims to 1% or 10% and contains non-isolated dimming leads.

LISTINGS — CSA Certified to meet US and Canadian standards. Tested to meet UL1958. Intended for indoor use only. Product is not to be stored in non-climate controlled spaces. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified. Damp location listed. IC rated. IP5X rated. Long nomenclature, configurable product is rated and certified to meet NSF Splash Zone 2.

WARRANTY — 5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

Dimensions

	1x4	2x2	2x4
Length	47.72"	23.70"	47.72"
Width	11.85"	23.70"	23.70"
Depth	2.19"	2.19"	2.19"
Weight	13.9 lbs	7.4 lbs	15.1 lbs

* Base configurations; options may add weight

Catalog Number
Notes
Type

EPANL LED

1'x4', 2'x2', and 2'x4'



Embed nLight controls today. Prepare for tomorrow.

Now

- User-friendly install
- Enhanced energy savings
- Code compliance

Tomorrow

- Scalability
- Space configuration
- Future-ready

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a **shaded background***
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a **shaded background***

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

EPANL LED Flat Panel



A+ Capable options indicated by this color background.

ORDERING INFORMATION

Example: EPANL 2X4 4000LM 80CRI 35K MIN1 MVOLT E10WCP NLTAIR2 RIO

Series	Width and Length	Lumens	CRI	Color Temperature	Minimum Dimming Level ‡	
EPANL LED Flat Panel	1x4 1'x4'	<u>Standard Lumens:</u>	80CRI 80 CRI	30K 3000K 35K 3500K 40K 4000K 50K 5000K	MIN10 Dims to 10% ‡ MIN1 Dims to 1%	
		1500LM 1500 Lumens				<u>High Efficiency Lumens:</u>
		3000LM 3000 Lumens				1500LMHE 1500 Lumens
	4000LM 4000 Lumens	3000LMHE 3000 Lumens				
	4800LM 4800 Lumens	4000LMHE 4000 Lumens				
	6000LM 6000 Lumens	4800LMHE 4800 Lumens				
	6000LM 6000 Lumens	6000LMHE 6000 Lumens				
	2x2 2'x2'	2000LM 2000 Lumens				2000LMHE 2000 Lumens
		3400LM 3400 Lumens				3400LMHE 3400 Lumens
4000LM 4000 Lumens		4000LMHE 4000 Lumens				
4800LM 4800 Lumens		4800LMHE 4800 Lumens				
2x4 2'x4'	3000LM 3000 Lumens	3000LMHE 3000 Lumens				
	4000LM 4000 Lumens	4000LMHE 4000 Lumens				
	4800LM 4800 Lumens	4800LMHE 4800 Lumens				
	5400LM 5400 Lumens	5400LMHE 5400 Lumens				
	6000LM 6000 Lumens	6000LMHE 6000 Lumens				
	6800LM 6800 Lumens	6800LMHE 6800 Lumens				
	7200LM 7200 Lumens	7200LMHE 7200 Lumens				

Control Input ‡	Voltage	Step Level Dimming	Emergency Option
ZT Generic 0-10V Dimming	MVOLT 120-277V	(Blank) None	E10WCP EM Self-Diagnostic battery pack, 10W Constant Power, Certified in CA Title 20 MAEDBS ‡
EZT eldoLED 0-10V Dimming	120 120V	SLD Step Level Dimming ‡	GTD Generator Transfer Device ‡
NLIGHT nLight enabled (Wired)	277 277V		EMG for use with NLIGHT or NLTAIR2 on generator supply EM power ‡
DALI eldoLED DALI	347 347V ‡		

nLight Interface	Control	Individual Control
<u>nLight Wired:</u> ‡ (blank) No constant lumen management CL80 Constant lumen output 80%	<u>nLight Wired:</u> ‡ (blank) no control	JOT Wireless room control with "Just One Touch" pairing ‡ JOTVTX15 Wireless occupancy sensor with "Just One Touch" pairing ‡
<u>nLight Wireless:</u> NLTAIR2 nLight AIR Generation 2 enabled ‡	<u>nLight Wireless:</u> RIO nLight AIR Radio module without sensor ‡ RES7 nLight AIR PIR integral occupancy sensor with automatic dimming photocell for Networking Capabilities ‡ RES7PDT nLight air microphonics dual technology occupancy sensor with automatic dimming photocell ‡	

Options	
GLR Fast-blowing fuse ‡	PWS1856LV 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit w/low voltage purple and grey wires ‡
GMF Slow-blowing fuse ‡	CP Chicago plenum ‡
PWS1836 6' pre-wire, 3/8" diameter, 18 gauge, 1 circuit	NPLT Narrow Pallet
PWS1846 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuit	BDP Factory Installed Ballast Disconnect Plug
PWS1846 PWSLV Two cables: one 6' pre-wire, 3/8" diameter, 18 gauge, 2 circuits; one 6' pre-wire, 3/8" diameter, 18 gauge, purple and gray ‡	RRL_ RELOC®-ready luminaire ‡
	USPOM Product assembled in the USA ‡

NOTE: ‡ indicates option value has ordering restrictions. Please reference the Option Value Ordering Restrictions chart on the next page. Options are sorted alphabetically.

EPANL LED Flat Panel

‡ Option Value Ordering Restrictions	
Option Value	Restriction
347	Not available with SLD, E10WCP, or GTD options.
Control Input	If Step Level Dimming (SLD) or NLTAIR2 is specified, leave this section blank.
CP	Not available with nLight wired (NLIGHT), nLight wireless (NLTAIR2).
E10WCP	Refer to Emergency Battery Estimated Lumen section for lumen estimation. Test Switch must be remote mounted or installed in an adjacent ceiling tile. When using pre-wire option, use PWS1846 or PWS1846 PWSLV.
EMG	Requires a connection to existing NLIGHT or NLTAIR2 network. Power is provided from separate nLight enabled fixture.
GLR, GMF	Must specify voltage. 120 or 277, with GLR and GMF fusing.
GTD	Not available with JOT, JOTVTX15, sensor options or emergency battery options. Must specify voltage. Requires BSE labeling, voltage specific. Consult factory for options. Example: GTD BSE10.
JOT, JOTVTX15	Not available with NLIGHT, DALI, SLD, GTD, EMG, or NLTAIR2 options. Option not NSF qualified.
MIN10	Not available with EZT, NLIGHT or DALI.
Minimum Dimming Level	If Step Level Dimming (SLD) is specified, leave this section blank.
nLight Wired	Requires NLIGHT control input.
NLTAIR2	Only available with MIN1 minimum dimming level option.
PWS1846 PWSLV	Not available with GTD, nLight wired, nLight wireless, NLIGHT or NLTAIR2.
PWS1856LV	Not available with nLight wired, nLight wireless, NLIGHT, or NLTAIR2.
RES7EM, RES7PDTEM, RIOEM	See UL924 Sequence of Operation chart on page 4.
RRL	For ordering logic consult RRL_2013 .
SLD	Not available with with any nLight Interface, Control options, or GTD. When using prewire option use PWS1846.
USPOM	Not available with NLIGHT, NLTAIR2, JOT or JOTVTX15.

Non-configurable Fixtures

ORDERING INFORMATION												
Catalog Number	UPC	Description	Lumens	Color Temperature	CRI	Voltage	Wattage	LPW	Pallet Quantity	DLC Classification	DLC Product Id	Stocked
EPANL 14 40L 35K	00190887602739	1x4 0-10v dimming Flat Panel	3905	3500K	>80	MVOLT (120-277V)	39	101	26	Standard	P2EP2UU2	Yes
EPANL 14 40L 40K	00190887602753	1x4 0-10v dimming Flat Panel	4397	4000K	>80	MVOLT (120-277V)	38	114	26	Standard	PSDQ2435	Yes
EPANL 14 40L 50K	00191723811605	1x4 0-10v dimming Flat Panel	4225	5000K	>80	MVOLT (120-277V)	39	110	26	Standard	PQRR9J9D	Yes
EPANL 14 40LHE 35K	00190887602746	1x4 0-10v dimming Flat Panel	3922	3500K	>80	MVOLT (120-277V)	31	128	26	Premium	PW4EWKTF	
EPANL 14 40LHE 40K	00190887602760	1x4 0-10v dimming Flat Panel	3857	4000K	>80	MVOLT (120-277V)	30	127	26	Premium	PYVJHHA	
EPANL 22 34L 35K M4	00190887602647	2x2 0-10v dimming Flat Panel	3285	3500K	>80	MVOLT (120-277V)	31	105	52	Standard	PSJAMM3U	Yes
EPANL 22 34L 40K M4	00190887602678	2x2 0-10v dimming Flat Panel	3270	4000K	>80	MVOLT (120-277V)	31	107	52	Standard	PPEMCYR8	Yes
EPANL 22 34L 50K	00191723811650	2x2 0-10v dimming Flat Panel	3385	5000K	>80	MVOLT (120-277V)	33	103	52	Standard	PID80U18	Yes
EPANL 22 34LHE 35K	00191723811650	2x2 0-10v dimming Flat Panel	3357	3500K	>80	MVOLT (120-277V)	26	129	52	Premium	P4A3BZHM	
EPANL 22 34LHE 40K	00190887602685	2x2 0-10v dimming Flat Panel	3361	4000K	>80	MVOLT (120-277V)	26	130	52	Premium	P8CTRGQ2	
EPANL 24 40L 35K M2	00190887602692	2x4 0-10v dimming Flat Panel	4039	3500K	>80	MVOLT (120-277V)	39	104	26	Standard	PMCKJFQQ	Yes
EPANL 24 40L 40K M2	00190887602715	2x4 0-10v dimming Flat Panel	3898	4000K	>80	MVOLT (120-277V)	37	106	26	Standard	PJKBRVAZ	Yes
EPANL 24 40L 50K	00191723812312	2x4 0-10v dimming Flat Panel	4108	5000K	>80	MVOLT (120-277V)	39	105	26	Standard	PELRMDH9	Yes
EPANL 24 40LHE 35K	00190887602708	2x4 0-10v dimming Flat Panel	3953	3500K	>80	MVOLT (120-277V)	30	131	26	Premium	PTBTGX3F	
EPANL 24 40LHE 40K	00190887602722	2x4 0-10v dimming Flat Panel	4013	4000K	>80	MVOLT (120-277V)	31	131	26	Premium	P1FS4WBQ	



EPANL

ACCESSORIES

Accessories: Order as separate catalog number.	
DGA14	Drywall grid adapter for 1x4 recessed fixture.
DGA22	Drywall grid adapter for 2x2 recessed fixture.
DGA24	Drywall grid adapter for 2x4 recessed fixture.
PANLEM E10WCP BKT CVR	Field installable kit includes 10 watt battery, bracket and cover ¹
PANLEM BKT CVR	Field installable kit bracket and cover only, 10W battery NOT included ¹
2X2SMKSH	2'x2' Surface Mount Troffer Kit
2X4SMKSH	2'x4' Surface Mount Troffer Kit
1X4SMKSH	1'x4' Surface Mount Troffer Kit
BDP U	Field Installable Ballast Disconnect Plug
PAC 2DNF 36	Panel Air Craft Kit, 2 cables with Y splitter, No Power Feed, 36 inches. Recommended for 1X4 or 2X2 Panel Fixtures only. ²
PAC 2DF 36	Panel Air Craft Kit, 2 cables with Y splitter, with Power Feed, 36 inches. Recommended for 1X4 or 2X2 Panel Fixtures only. ²
PAC 4DNF 36	Panel Air Craft Kit, 4 cables, No Power Feed, 36 inches. Recommended for 2X4, 1X4 or 2X2 Panel Fixtures. ²
PAC 4DF 36	Panel Air Craft Kit, 4 cables, with Power Feed, 36 inches. Recommended for 2X4, 1X4 or 2X2 Panel Fixtures. ²
PAC 2DNF 72	Panel Air Craft Kit, 2 cables with Y splitter, No Power Feed 72 inches. Recommended for 1X4 or 2X2 Panel Fixtures only. ²
PAC 2DF 72	Panel Air Craft Kit, 2 cables with Y splitter, with Power Feed, 72 inches. Recommended for 1X4 or 2X2 Panel Fixtures only. ²
PAC 4DNF 72	Panel Air Craft Kit, 4 cables, No Power Feed, 72 inches. Recommended for 2X4, 1X4 or 2X2 Panel Fixtures. ²
PAC 4DF 72	Panel Air Craft Kit, 4 cables, with Power Feed, 72 inches. Recommended for 2X4, 1X4 or 2X2 Panel Fixtures. ²

Emergency Battery Estimated Lumens

Use the formula below to estimate the delivered lumens in emergency mode

$$\text{Estimated Lumens} = 1.25 \times P \times \text{LPW}$$

P = Output power of emergency driver (10W for PS1055CP)

LPW = Lumen per watt rating of the luminaire.

SMKSH Accessory



Notes:

1. Test switch must be remote mounted or installed in an adjacent ceiling tile.
2. See Suspension Kits section below for additional detail.

UL924 Sequence of Operation

For 90 minutes following any complete AC power interruption >200 ms:


- Digital dimming is commanded to high end trim level.
- Device ignores wireless lighting control commands.

Suspension Kits


2 drops (1x4)



2 drops (2x2)

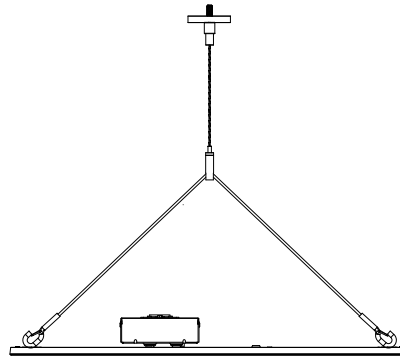

4 drops (2x4)

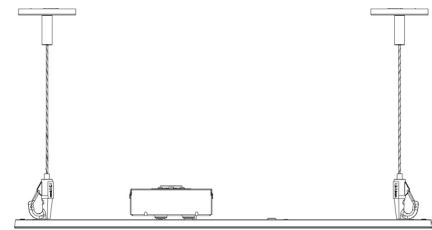


EPANL LED Flat Panel

nLight Platform

nLight embedded fixtures offer:	Customers get:
Manual Dimming	Convenience and visual comfort for occupants
Motion Sensing and/or Daylight Harvesting	Energy savings and code compliance
Fixture or Group Level Control	Ability to configure lighting to the space requirements
Flexibility	Ease of fixture moves, adds and changes
Wireless Wall Switch (nLight AIR Only)	Ease and flexibility of placement
Astronomical and Time of Day Scheduling	Energy savings and building security
Scalable Solution	nLight controls to grow with your business
Future-Ready	nLight platform to set foundation for future upgrades and capabilities

nLight Air Wireless

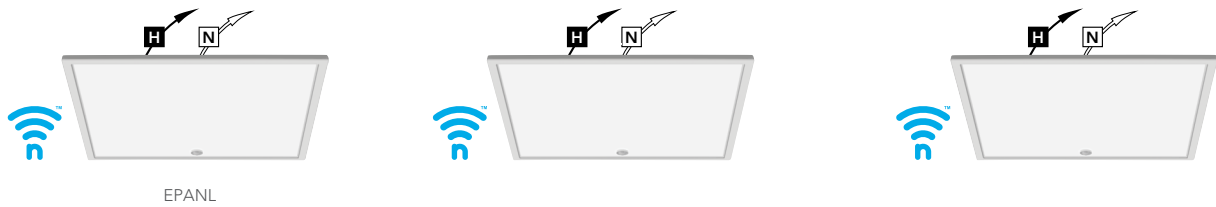


Simple as 1,2,3

1. Install the nLight® AIR fixtures with embedded smart sensor
2. Install the wireless battery-powered wall switch
3. With the CLAIRITY Pro app, pair the fixtures with the wall switch and if desired, customize the sensor settings for the desired outcome



nLight Wired Networking

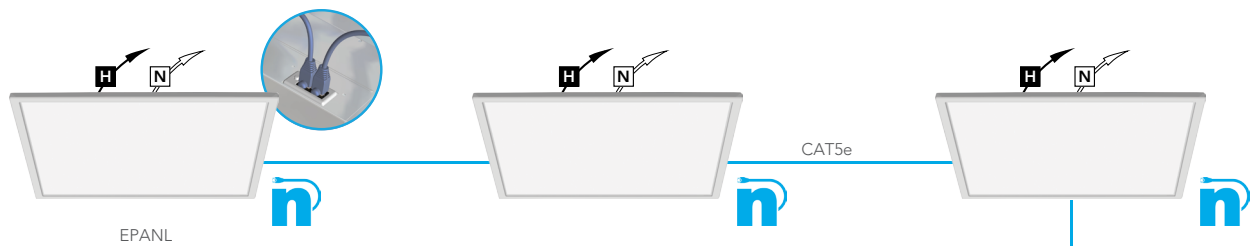

Simple as 1,2,3

1. Install the nLight® Wired fixtures with nIO control
2. Install the nLight Wired wall switch
3. Connect the fixtures using standard CAT5e cables and the devices will automatically discover each other and work (plug and play)




EPANL LED Flat Panel

Controls Accessories

nLight® Wired Control Accessories: <i>Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlight.</i>			
WallPod stations	Model number	Occupancy sensors	Model number
On/Off	nPODMA [Color]	Small motion 360°, ceiling (PIR / dual tech)	nCM 9 RJB / nCM PDT 9 RJB
On/Off & raise/lower	nPODMA DX [Color]	Large motion 360°, ceiling (PIR / dual tech)	nCM10 RJB / nCM PDT 10 RJB
Graphic touchscreen	nPOD TOUCH [Color]	Wall switch with raise/lower	nWSX PDT LV DX [color]
Photocell controls	Model number	Cat-5 cable (plenum rated)	Model number
Full range dimming	nCM ADCX RJB	10' cable	CATS 10FT J1
		30' cable	CATS 30FT J1

nLight® AIR Control Accessories: <i>Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlightair.</i>	
Wall switches	Model number
On/Off single pole	rPODBA [color] G2
On/Off two pole	rPODB A2P [color] G2
On/Off & raise/lower single pole	rPODBA DX [color] G2
On/Off & raise/lower two pole	rPODBA 2P DX [color] G2

EPANL fixtures with integrated rIO devices complement any small office space. Pair them with an rCMS occupancy sensor and the space now has wireless occupancy sensing and dimming capability. For additional configuration options please consult with Tech Support.

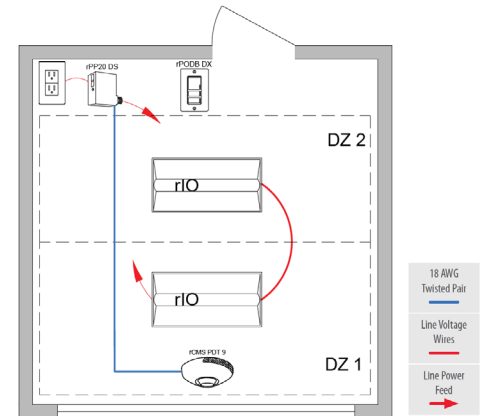

rCMS ¹		Example: RCMS PDT 10 AR G2					
Series / Detection	Power Supply ¹	Occupancy Detection	Lens (Required)	Operating Mode	Generation		
RCMS nLight AIR occupancy and daylight sensor	[blank] Power Supply ordered separately PS 150 Standard 150 mA Power Supply	[blank] PIR Detection PDT Dual Tech PIR/ Microphonics	10 Large Motion/ Extended Range 360° 9 Small Motion/ Extended Range 360° 6 High Bay 360° Lens	[BLANK] None AR Auxiliary Relay	G2	Generation 2 compatibility	


Notes

1 RCMS requires low voltage power from either RPP20 DS 24V G2 or PS150.



Sensor Coverage Pattern Mini 360° Lens


- Recommended for walking motion detection from mounting heights between 8 ft (2.44 m) and 20 ft (6.10 m)
- Initial detection of walking motion along sensor axes at distances of 2x the mounting height up to 15 ft (4.57 m) and 1.75x up to 20 ft (6.10 m).
- Provides 12 ft (3.66 m) radial detection of small motion when mounted at 9 ft (2.74 m)
- Initial detection will occur earlier when walking across sensor's field of view than when walking directly at sensor

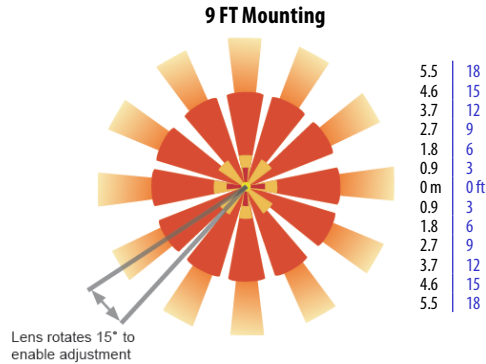

nLight AIR Wireless

nLight AIR is the ideal solution for retrofit or new construction spaces where adding additional wiring can be labor intensive and nLight AIR is available with or without an integral sensor. The integrated rES7 or rES7PDT smart sensors are part of each luminaire in the nLight AIR network, which can be grouped to control multiple luminaires. The granularity of control with the digital PIR occupancy detection and daylight sensing makes a great solution for any application.

Sequence of Operation (nES7 and Sensor)

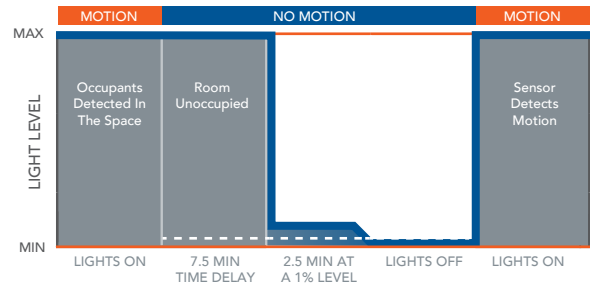

*The presetting on the automatic dimming photocell is 10fc (RES7).


Sensor Switch JOT



Sensor Switch JOT Enabled Wireless Solution

Designed with contractors in mind, the Sensor Switch JOT enabled wireless solution offers a straightforward approach to the installation and pairing of lighting fixtures and controls. Absolutely no 0-10V control wires and no mobile apps are needed with JOT enabled products, allowing for lightning speed installation right out of the box.

- 1. Power:** Install JOT enabled fixtures and controls as instructed.
- 2. Pair:** Insert the pairing tool into the pinhole on the wall switch; press and hold any button for 6 seconds.
- 3. Play:** Once paired, each fixture will individually dim down to 10% brightness. All products will be fully functional.

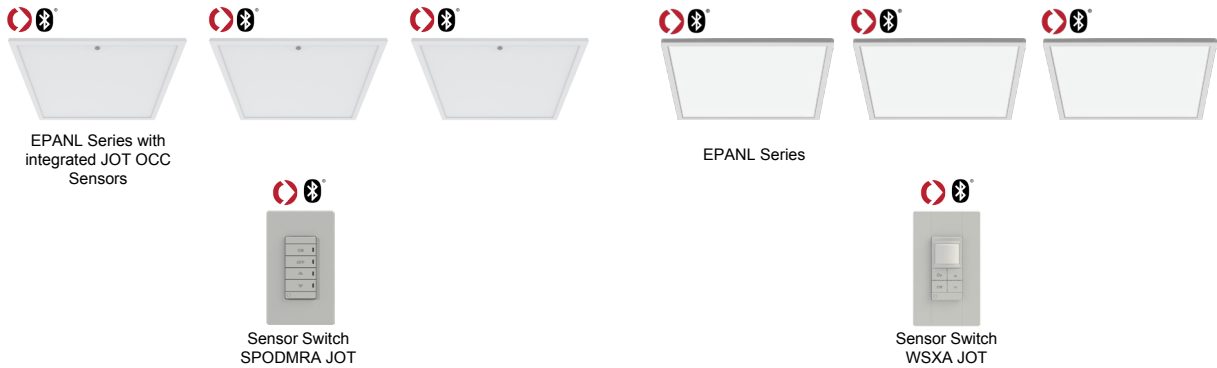

EPANL LED Flat Panel

Performance Data					
Model No.	Classification	Reported Light Output	Reported Wattage	Reported Efficacy (AC)	Product Id
EPANL 1X4 1500LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	1510.65	13.9584	108.225	P7WQT2HL
EPANL 1X4 1500LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	1510.65	13.9584	108.225	P7U3OVTJ
EPANL 1X4 1500LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	1573.59	13.9584	112.734	P8VKRLEE
EPANL 1X4 1500LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	1573.59	13.9584	112.734	P7KC755F
EPANL 1X4 1500LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	1636.53	13.9584	117.244	PJAP0IUK
EPANL 1X4 1500LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	1636.53	13.9584	117.244	P93PN6HF
EPANL 1X4 1500LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	1699.48	13.9584	121.753	PJ2LT8RF
EPANL 1X4 1500LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	1699.48	13.9584	121.753	PMO20WDF
EPANL 1X4 1500LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	1419.21	11.9032	119.229	P783S2UK
EPANL 1X4 1500LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	1419.21	11.9032	119.229	P08VAI49
EPANL 1X4 1500LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	1457.43	11.9032	122.44	PPJ3S90F
EPANL 1X4 1500LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	1457.43	11.9032	122.44	PIKV3IEP
EPANL 1X4 1500LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	1508.38	11.9032	126.72	P2590KI9
EPANL 1X4 1500LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	1508.38	11.9032	126.72	P66FTD1J
EPANL 1X4 1500LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	1542.62	11.9032	129.597	PD3A29J1
EPANL 1X4 1500LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	1542.62	11.9032	129.597	PW3538GV
EPANL 1X4 3000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	2841.34	26.9231	105.536	PEYKSSNY
EPANL 1X4 3000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	2841.34	26.9231	105.536	P7W193ZL
EPANL 1X4 3000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	2959.73	26.9231	109.933	PBMBSQ08
EPANL 1X4 3000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	2959.73	26.9231	109.933	PTOHAAX5
EPANL 1X4 3000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3078.12	26.9231	114.33	PNKUCJIA
EPANL 1X4 3000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3078.12	26.9231	114.33	P53ZWBUF
EPANL 1X4 3000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3196.51	26.9231	118.727	PMHIZSAT
EPANL 1X4 3000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3196.51	26.9231	118.727	PFZRHIIYS
EPANL 1X4 3000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	2770.8	22.6176	122.506	PJYIEF30
EPANL 1X4 3000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	2770.8	22.6176	122.506	P49S17R0
EPANL 1X4 3000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	2845.41	22.6176	125.805	PTUGXVMO
EPANL 1X4 3000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	2845.41	22.6176	125.805	P61KCZHV
EPANL 1X4 3000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	2944.9	22.6176	130.204	PJYUQUN8
EPANL 1X4 3000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	2944.9	22.6176	130.204	PJZRVW5F
EPANL 1X4 3000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	3011.74	22.6176	133.159	POAT294T
EPANL 1X4 3000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	3011.74	22.6176	133.159	PT45WGFZ
EPANL 1X4 4000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	3425.5	30.8	111.21	PSWJWZ98
EPANL 1X4 4000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3658.6	36.9863	98.9177	P6T4CQC1
EPANL 1X4 4000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3658.6	36.9863	98.9177	PWA05BF9
EPANL 1X4 4000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3811.04	36.9863	103.039	PB2IF8PG
EPANL 1X4 4000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3811.04	36.9863	103.039	PIOB3Q45
EPANL 1X4 4000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3963.48	36.9863	107.161	P7MFGP4R
EPANL 1X4 4000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3963.48	36.9863	107.161	PQH0HMOH
EPANL 1X4 4000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4115.92	36.9863	111.282	PY8MM627
EPANL 1X4 4000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4115.92	36.9863	111.282	P3XBCGJO
EPANL 1X4 4000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3666.56	30.5585	119.985	PKNCNIT4
EPANL 1X4 4000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3666.56	30.5585	119.985	PWGLG65K
EPANL 1X4 4000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3765.3	30.5585	123.216	PZJ17EWI
EPANL 1X4 4000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3765.3	30.5585	123.216	P4L0LVRU
EPANL 1X4 4000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	3896.94	30.5585	127.524	PZGUZ2R2
EPANL 1X4 4000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	3896.94	30.5585	127.524	PY7QZBWI
EPANL 1X4 4000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	3985.4	30.5585	130.419	PDAKJ8B3
EPANL 1X4 4000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	3985.4	30.5585	130.419	PELA05TB
EPANL 1X4 4800LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4633.29	44.64	103.78	PII6VKUP
EPANL 1X4 4800LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4633.29	44.64	103.78	PKJO28DR
EPANL 1X4 4800LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4807.31	44.64	107.68	P716D3WI
EPANL 1X4 4800LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4807.31	44.64	107.68	PJ87LC64
EPANL 1X4 4800LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4923.32	44.64	110.28	PIC1QWVG
EPANL 1X4 4800LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4923.32	44.64	110.28	PZW1PDPZ
EPANL 1X4 4800LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4966.83	44.64	111.25	PQAFPPJ6
EPANL 1X4 4800LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4966.83	44.64	111.25	PCNBYZM0
EPANL 1X4 4800LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4339.56	37.1684	116.754	PU1UIM5B
EPANL 1X4 4800LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4339.56	37.1684	116.754	PNSWOKZ3
EPANL 1X4 4800LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4456.42	37.1684	119.898	POBHX07V
EPANL 1X4 4800LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4456.42	37.1684	119.898	PO7FGWK3
EPANL 1X4 4800LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	4612.23	37.1684	124.09	PHA0PQJ5
EPANL 1X4 4800LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	4612.23	37.1684	124.09	PZ9DDI8L
EPANL 1X4 4800LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	4716.91	37.1684	126.907	PL0V456F
EPANL 1X4 4800LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	4716.91	37.1684	126.907	PJIAJ050
EPANL 1X4 5400LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	5156.16	44.3512	116.257	PK18C75K
EPANL 1X4 5400LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	5156.16	44.3512	116.257	PC2IS9KU
EPANL 1X4 5400LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	5272.36	44.3512	118.877	PNX0E6ZR
EPANL 1X4 5400LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	5272.36	44.3512	118.877	PE4NWEOC
EPANL 1X4 5400LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	5490.23	44.3512	123.79	PF0B5KQD
EPANL 1X4 5400LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	5490.23	44.3512	123.79	PVWW80J1
EPANL 1X4 5400LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	5664.52	44.3512	127.72	PECOGL65
EPANL 1X4 5400LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	5664.52	44.3512	127.72	P7PAYNFS



EPANL

EPANL LED Flat Panel

Performance Data					
Model No.	Classification	Reported Light Output	Reported Wattage	Reported Efficacy (AC)	Product Id
EPANL 1X4 6000LM 80CRI 30K [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	5953.43	54.7	108.83	P84A41CZ
EPANL 1X4 6000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	5953.43	50.9	116.94	PL3AU798
EPANL 1X4 6000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	5953.43	50.9	116.94	PCMNH26U
EPANL 1X4 6000LM 80CRI 35K [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	5996.89	54.7	109.63	PW16HVP3
EPANL 1X4 6000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	5996.89	50.9	117.79	P31GEZNP
EPANL 1X4 6000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	5996.89	50.9	117.79	P9MS2F1Z
EPANL 1X4 6000LM 80CRI 40K [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	6170.71	54.7	112.81	PD7JL7CS
EPANL 1X4 6000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	6170.71	50.9	121.21	PECOZVXY
EPANL 1X4 6000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	6170.71	50.9	121.21	PRCGVIDH
EPANL 1X4 6000LM 80CRI 50K [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	6240.24	54.7	114.08	P206CCK4
EPANL 1X4 6000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	6240.24	50.9	122.57	PSBGKZ54
EPANL 1X4 6000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	6240.24	50.9	122.57	PEVMDG8B
EPANL 2X2 2000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	1988.22	18.7689	105.932	P084CQTR
EPANL 2X2 2000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	1988.22	18.7689	105.932	PN6WT230
EPANL 2X2 2000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	2071.06	18.7689	110.345	P4AJOG1I
EPANL 2X2 2000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	2071.06	18.7689	110.345	P4YZS08D
EPANL 2X2 2000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	2153.91	18.7689	114.759	PIQUALNF
EPANL 2X2 2000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	2153.91	18.7689	114.759	PULQ3DQ4
EPANL 2X2 2000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	2236.75	18.7689	119.173	P167DQJ5
EPANL 2X2 2000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	2236.75	18.7689	119.173	P1FNCFUQ
EPANL 2X2 2000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	1855.84	15.5537	119.319	P8MIUS1X
EPANL 2X2 2000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	1855.84	15.5537	119.319	PRXPVWQJ
EPANL 2X2 2000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	1905.82	15.5537	122.532	PUZ253KEZ
EPANL 2X2 2000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	1905.82	15.5537	122.532	PLMYSZF6
EPANL 2X2 2000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	1972.45	15.5537	126.816	PZSE53J1
EPANL 2X2 2000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	1972.45	15.5537	126.816	PZK2K0D4
EPANL 2X2 2000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	2017.22	15.5537	129.694	PCLAME02
EPANL 2X2 2000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	2017.22	15.5537	129.694	PV0MYAQV
EPANL 2X2 3400LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3291.23	30.267	108.74	PN5Q2LMI
EPANL 2X2 3400LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3291.23	30.267	108.74	PU14CBM6
EPANL 2X2 3400LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3428.36	30.267	113.271	PMKTPCS2
EPANL 2X2 3400LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	3428.36	33.17	103.357	PSV0Z4T5
EPANL 2X2 3400LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3428.36	30.267	113.271	PB1DW61J
EPANL 2X2 3400LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3565.5	30.267	117.801	PWRHGEH4
EPANL 2X2 3400LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	3565.5	33.17	107.492	PS9YY80V
EPANL 2X2 3400LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3565.5	30.267	117.801	PG7KBSGU
EPANL 2X2 3400LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3702.63	30.267	122.332	PL60Z4K5
EPANL 2X2 3400LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3702.63	30.267	122.332	PP79GBQH
EPANL 2X2 3400LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3198.44	26.5431	120.5	P25AS4VV
EPANL 2X2 3400LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3198.44	26.5431	120.5	PZENR7ML
EPANL 2X2 3400LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3284.57	26.5431	123.745	PC28H7F3
EPANL 2X2 3400LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3284.57	26.5431	123.745	PGFCX23Z
EPANL 2X2 3400LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	3399.41	26.5431	128.071	PWGICRXA
EPANL 2X2 3400LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	3399.41	26.5431	128.071	PZQGNSEP
EPANL 2X2 3400LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	3476.57	26.5431	130.978	PS7KW7H4
EPANL 2X2 3400LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	3476.57	26.5431	130.978	PD556JBH
EPANL 2X2 4000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3804.31	37.3793	101.776	P10JU6T
EPANL 2X2 4000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3804.31	37.3793	101.776	PG8NY3EM
EPANL 2X2 4000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3962.83	37.3793	106.017	PVNFV904
EPANL 2X2 4000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3962.83	37.3793	106.017	PG3TFG09
EPANL 2X2 4000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4121.34	37.3793	110.257	PSL7HREA
EPANL 2X2 4000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4121.34	37.3793	110.257	PP2PR06A
EPANL 2X2 4000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4279.85	37.3793	114.498	P94H4XFG
EPANL 2X2 4000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	4279.85	41.12	104.082	PCS6ET48
EPANL 2X2 4000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4279.85	37.3793	114.498	PFQ0F3LM
EPANL 2X2 4000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3873.81	32.8566	117.901	PTN8M36S
EPANL 2X2 4000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3873.81	32.8566	117.901	PXW23VVD
EPANL 2X2 4000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3978.12	32.8566	121.075	P566L1U0
EPANL 2X2 4000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3978.12	32.8566	121.075	PG06EXAT
EPANL 2X2 4000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	4117.21	32.8566	125.309	PDZJZV9
EPANL 2X2 4000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	4117.21	32.8566	125.309	P8BAID21
EPANL 2X2 4000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	4210.66	32.8566	128.153	P3P7W4AB
EPANL 2X2 4000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	4210.66	32.8566	128.153	PQCCGU60
EPANL 2X2 4800LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4557.89	44.59	102.19	PFMXZJ5K
EPANL 2X2 4800LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4557.89	44.59	102.19	P00QSHI3
EPANL 2X2 4800LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4729.07	44.59	106.03	PUWKTO50
EPANL 2X2 4800LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4729.07	44.59	106.03	P76F06V1
EPANL 2X2 4800LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4843.2	44.59	108.59	PO0Y8NZ2
EPANL 2X2 4800LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4843.2	44.59	108.59	PB9V8XNL
EPANL 2X2 4800LM 80CRI 50K [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	4886	47.72	102.38	P2880829
EPANL 2X2 4800LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4886	44.59	109.55	PW25Y5X9
EPANL 2X2 4800LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4886	44.59	109.55	PAAM27H

EPANL LED Flat Panel

Performance Data					
Model No.	Classification	Reported Light Output	Reported Wattage	Reported Efficacy (AC)	Product Id
EPANL 2X2 4800LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4419.76	36.4056	121.404	PYMYFE0
EPANL 2X2 4800LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4419.76	36.4056	121.404	PX02EX68
EPANL 2X2 4800LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	4538.78	36.4056	124.673	PZ0PLM19
EPANL 2X2 4800LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	4538.78	36.4056	124.673	PF2L9X2I
EPANL 2X2 4800LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	4697.47	36.4056	129.032	PNQ40WFF
EPANL 2X2 4800LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	4697.47	36.4056	129.032	P2NS3V80
EPANL 2X2 4800LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	4804.09	36.4056	131.96	PG3ZCKUI
EPANL 2X2 4800LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	4804.09	36.4056	131.96	PND00X14
EPANL 2X4 3000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3015.05	28.5088	105.759	PGB293WJ
EPANL 2X4 3000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3015.05	28.5088	105.759	PXWRSANS
EPANL 2X4 3000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3140.68	28.5088	110.165	PUS2L415
EPANL 2X4 3000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3140.68	28.5088	110.165	PWJKJ91G
EPANL 2X4 3000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3266.31	28.5088	114.572	PVRS0QB
EPANL 2X4 3000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3266.31	28.5088	114.572	PPQP99LT
EPANL 2X4 3000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3391.93	28.5088	118.979	P4H3UGFQ
EPANL 2X4 3000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3391.93	28.5088	118.979	PL14CPSN
EPANL 2X4 3000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	2943.27	22.78	129.18	PHDE0RE3
EPANL 2X4 3000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	2943.27	22.78	129.18	PYUNOTIN
EPANL 2X4 3000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	2985.92	22.78	131.05	P2GQ1ISA
EPANL 2X4 3000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	2985.92	22.78	131.05	PC230I10
EPANL 2X4 3000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	3071.23	22.78	134.79	PNWQLGKR
EPANL 2X4 3000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	3071.23	22.78	134.79	P3CL956W
EPANL 2X4 3000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	3113.89	22.78	136.66	PIIH40FQ
EPANL 2X4 3000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	3113.89	22.78	136.66	PG09TWNV
EPANL 2X4 4000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	3913.85	37.6165	104.046	PLDIMHXG
EPANL 2X4 4000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	3913.85	37.6165	104.046	PL1K0BJN
EPANL 2X4 4000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4076.93	37.6165	108.382	PPTL71HY
EPANL 2X4 4000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4076.93	37.6165	108.382	PRO2E004
EPANL 2X4 4000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4240.01	37.6165	112.717	PT1H08CF
EPANL 2X4 4000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	4240.01	41.38	102.465	PPHYW4X1
EPANL 2X4 4000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4240.01	37.6165	112.717	PGSERWDA
EPANL 2X4 4000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4403.09	37.6165	117.052	P8TD444V
EPANL 2X4 4000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4403.09	37.6165	117.052	PTXVJN0I
EPANL 2X4 4000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	3873.77	31.42	123.26	P8R62R83
EPANL 2X4 4000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	3873.77	31.42	123.26	P23T82YA
EPANL 2X4 4000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	3929.91	31.42	125.04	PIY82204
EPANL 2X4 4000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	3929.91	31.42	125.04	P5KW17RT
EPANL 2X4 4000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	4042.19	31.42	128.62	PPUGPYNE
EPANL 2X4 4000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	4042.19	31.42	128.62	P9VND0D5
EPANL 2X4 4000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	4098.34	31.42	130.4	PTRH2WMJ
EPANL 2X4 4000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	4098.34	31.42	130.4	P55XJ12N
EPANL 2X4 4800LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4817.48	45.17	106.64	PZB2XR63
EPANL 2X4 4800LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4817.48	45.17	106.64	PHYF1N9C
EPANL 2X4 4800LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4998.42	45.17	110.64	P4PIGUFW
EPANL 2X4 4800LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	4998.42	48.3	103.48	PXLIDECE
EPANL 2X4 4800LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4998.42	45.17	110.64	PI2A3L85
EPANL 2X4 4800LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	5119.05	45.17	113.31	P45KVRJP
EPANL 2X4 4800LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	5119.05	48.3	105.98	PCPUDE61
EPANL 2X4 4800LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	5119.05	45.17	113.31	P018HM99
EPANL 2X4 4800LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	5164.28	45.17	114.31	PG2MHOZE
EPANL 2X4 4800LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	5164.28	48.3	106.92	P70IOAPR
EPANL 2X4 4800LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	5164.28	45.17	114.31	PWTS0ASQ
EPANL 2X4 4800LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4491.17	37.4489	119.928	P3RF62H6
EPANL 2X4 4800LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4491.17	37.4489	119.928	POC36E5U
EPANL 2X4 4800LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	4612.11	37.4489	123.157	PYK5A8HX
EPANL 2X4 4800LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	4612.11	37.4489	123.157	PYWZDYOR
EPANL 2X4 4800LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	4773.36	37.4489	127.463	P47QIRYT
EPANL 2X4 4800LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	4773.36	37.4489	127.463	PHOQXWON
EPANL 2X4 4800LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	4881.71	37.4489	130.356	PR3IS10
EPANL 2X4 4800LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	4881.71	37.4489	130.356	PKP1XLJT
EPANL 2X4 5400LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	5344.83	48.86	109.38	P0568YSR
EPANL 2X4 5400LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	5344.83	48.86	109.38	P00696LI
EPANL 2X4 5400LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	5545.58	48.86	113.49	PFCL1300
EPANL 2X4 5400LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	5545.58	48.86	113.49	PK7Q1VHH
EPANL 2X4 5400LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	5679.41	48.86	116.23	PR3K6SHH
EPANL 2X4 5400LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	5679.41	48.86	116.23	P8KYWF8W
EPANL 2X4 5400LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	5729.59	48.86	117.25	PVKX96GJ
EPANL 2X4 5400LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	5729.59	48.86	117.25	PX1YH6FH

EPANL LED Flat Panel


Performance Data					
Model No.	Classification	Reported Light Output	Reported Wattage	Reported Efficacy (AC)	Product Id
EPANL 2X4 5400LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	5301.88	40.5282	130.82	P3JOACOV
EPANL 2X4 5400LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	5301.88	40.5282	130.82	PARJN9JC
EPANL 2X4 5400LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	5421.36	40.5282	133.768	P4E4JYPW
EPANL 2X4 5400LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	5421.36	40.5282	133.768	PBVWKM6
EPANL 2X4 5400LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	5645.39	40.5282	139.295	PWCONHMW
EPANL 2X4 5400LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	5645.39	40.5282	139.295	PAHJYVRW
EPANL 2X4 5400LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	5824.61	40.5282	143.717	PDKG7XHY
EPANL 2X4 5400LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	5824.61	40.5282	143.717	P2L5I059
EPANL 2X4 6000LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	6317.66	50.1	126.09	PD2QM1LA
EPANL 2X4 6000LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	6317.66	50.1	126.09	P32NF8NU
EPANL 2X4 6000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	6363.77	50.1	127.01	PSV30WTM
EPANL 2X4 6000LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	6363.77	55.1	115.49	P89SURCD
EPANL 2X4 6000LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	6363.77	50.1	127.01	PKW759Q3
EPANL 2X4 6000LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	6548.23	50.1	130.69	PWVK6LER
EPANL 2X4 6000LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	6548.23	50.1	130.69	PHICROVH
EPANL 2X4 6000LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	6622.01	50.1	132.16	PQMLFRM
EPANL 2X4 6000LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	6622.01	50.1	132.16	PSF8NNOO
EPANL 2X4 6000LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	5754.61	42.6042	135.071	P6JUAFCI
EPANL 2X4 6000LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	5754.61	42.6042	135.071	POJ81Q95
EPANL 2X4 6000LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	5884.29	42.6042	138.115	PENZU105
EPANL 2X4 6000LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	5884.29	42.6042	138.115	PKFFWFCU
EPANL 2X4 6000LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	6127.44	42.6042	143.822	P2GVOFOB
EPANL 2X4 6000LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	6127.44	42.6042	143.822	PAO4TVD1
EPANL 2X4 6000LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	6321.96	42.6042	148.388	PZZYBV55
EPANL 2X4 6000LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	6321.96	42.6042	148.388	PXP5CMGA
EPANL 2X4 6800LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	7013.23	62.17	112.79	PW2KT9FQ
EPANL 2X4 6800LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	7013.23	62.17	112.79	PBEOWDCQ
EPANL 2X4 6800LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	7064.42	62.17	113.61	PW0040LR
EPANL 2X4 6800LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	7064.42	62.17	113.61	P7ALFH3K
EPANL 2X4 6800LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	7269.19	62.17	116.9	P8FFEBQH
EPANL 2X4 6800LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	7269.19	65.4	111.14	PSLOAG67
EPANL 2X4 6800LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	7269.19	62.17	116.9	PIUM942B
EPANL 2X4 6800LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	7351.1	62.17	118.22	PCMK605N
EPANL 2X4 6800LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	7351.1	62.17	118.22	PSAP1VBW
EPANL 2X4 6800LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	6450.41	47.681	135.283	PTT9MBX1
EPANL 2X4 6800LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	6450.41	47.681	135.283	PNHSDDT2
EPANL 2X4 6800LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	6595.78	47.681	138.331	PICAPAMD
EPANL 2X4 6800LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	6595.78	47.681	138.331	PHA6TVBP
EPANL 2X4 6800LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	6868.33	47.681	144.048	P8IUL0J1
EPANL 2X4 6800LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	6868.33	47.681	144.048	P7786UMO
EPANL 2X4 6800LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	7086.37	47.681	148.621	PUZSKJKQ
EPANL 2X4 6800LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	7086.37	47.681	148.621	PMB46YK
EPANL 2X4 7200LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	7387.86	66.42	111.22	P2QQIV0K
EPANL 2X4 7200LM 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	7387.86	69.68	106.02	PF1518JE
EPANL 2X4 7200LM 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	7387.86	66.42	111.22	P2GTCTW3J
EPANL 2X4 7200LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	7441.79	66.42	112.03	PCRM0D2R
EPANL 2X4 7200LM 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	7441.79	69.68	106.79	PKVV7048
EPANL 2X4 7200LM 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	7441.79	66.42	112.03	P41RL2HS
EPANL 2X4 7200LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	7657.49	66.42	115.28	PS2AC19A
EPANL 2X4 7200LM 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	7657.49	69.68	109.89	PBV78YXA
EPANL 2X4 7200LM 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	7657.49	66.42	115.28	PCLJ4VZN
EPANL 2X4 7200LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	standard	7743.78	66.42	116.57	PIS28TOX
EPANL 2X4 7200LM 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] 347 [ALL OPTIONS]	standard	7743.78	69.68	111.13	PSPB7FBG
EPANL 2X4 7200LM 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	standard	7743.78	66.42	116.57	PIROA8L6
EPANL 2X4 7200LMHE 80CRI 30K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	6792	49.5324	137.122	PJN0UK7J
EPANL 2X4 7200LMHE 80CRI 30K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	6792	49.5324	137.122	PW92G8XR
EPANL 2X4 7200LMHE 80CRI 35K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	6945.06	49.5324	140.213	PHWEYL0D
EPANL 2X4 7200LMHE 80CRI 35K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	6945.06	49.5324	140.213	PXHH12RI
EPANL 2X4 7200LMHE 80CRI 40K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	7232.05	49.5324	146.006	PW3R2AGO
EPANL 2X4 7200LMHE 80CRI 40K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	7232.05	49.5324	146.006	PZY6WXTJ
EPANL 2X4 7200LMHE 80CRI 50K [MIN1, MIN10] [BLANK, ZT, EZT, NLIGHT] [MVOLT, 120, 277] [ALL OPTIONS]	Premium	7461.63	49.5324	150.642	PPYDM8D6
EPANL 2X4 7200LMHE 80CRI 50K [MVOLT, 120, 277] SLD [ALL OPTIONS]	Premium	7461.63	49.5324	150.642	P71GKCWE

EPANL LED Flat Panel


PHOTOMETRICS

Full Photometric data is available on Lithonia.acuitybrands.com


EPANL 2x2 4000LM 80CRI 40K, 4121 delivered lumens.

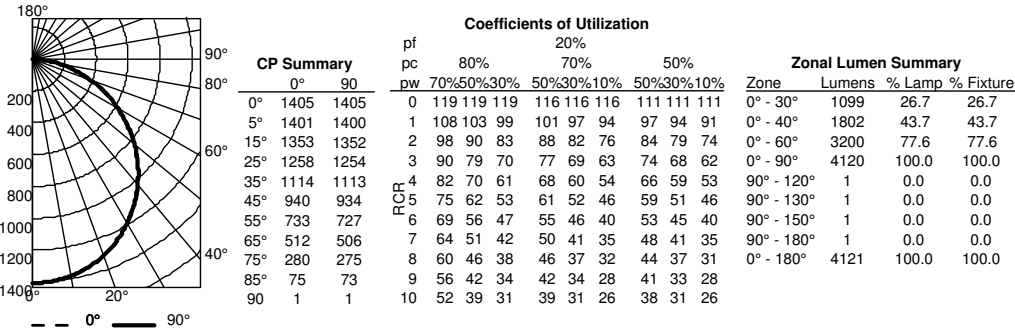

EPANL 2x4 4800LM 80CRI 40K, 5119 delivered lumens.

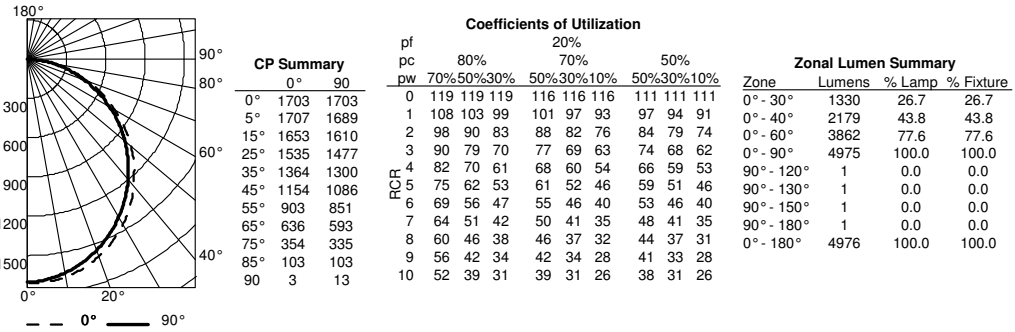


EPANL 2x4 6800LM 80CRI 40K, 7269 delivered lumens.

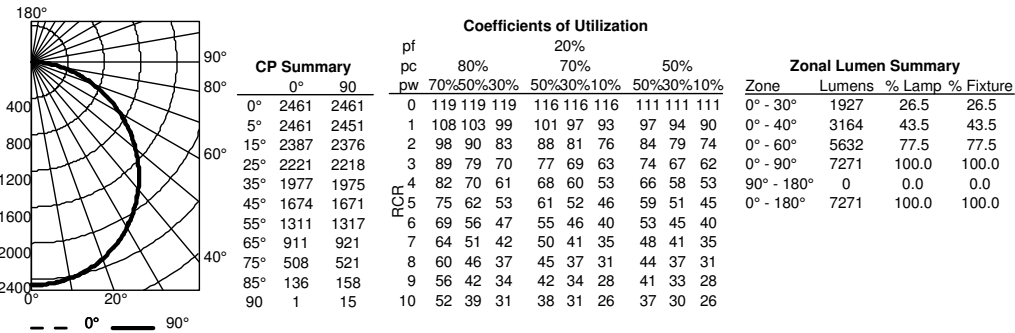


DIMENSIONS

1X4 Configurations

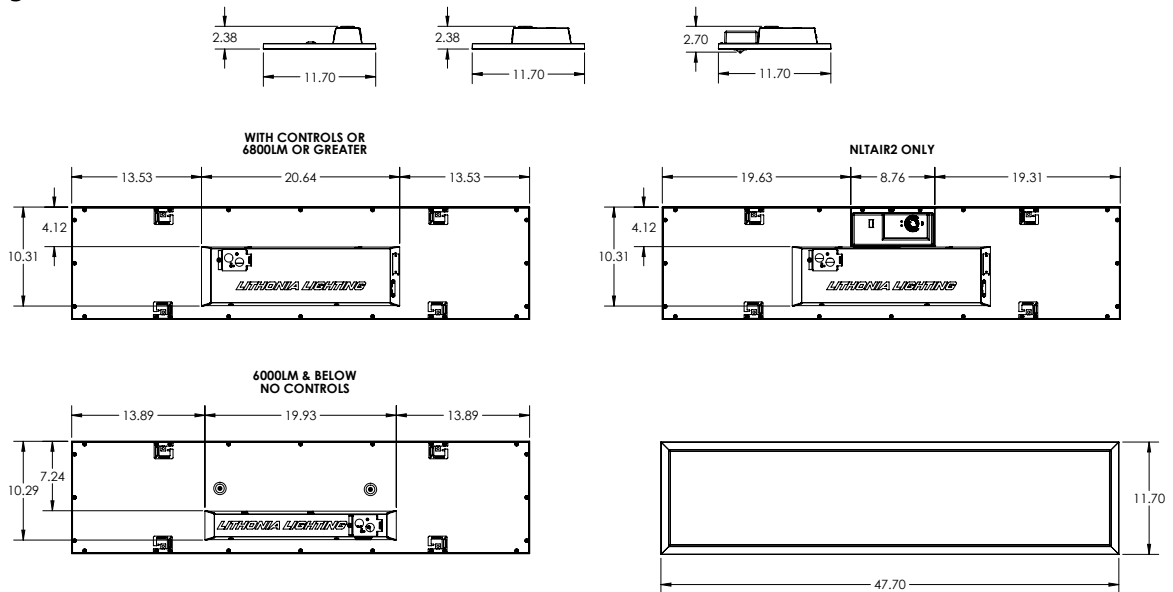

2X2 Configurations

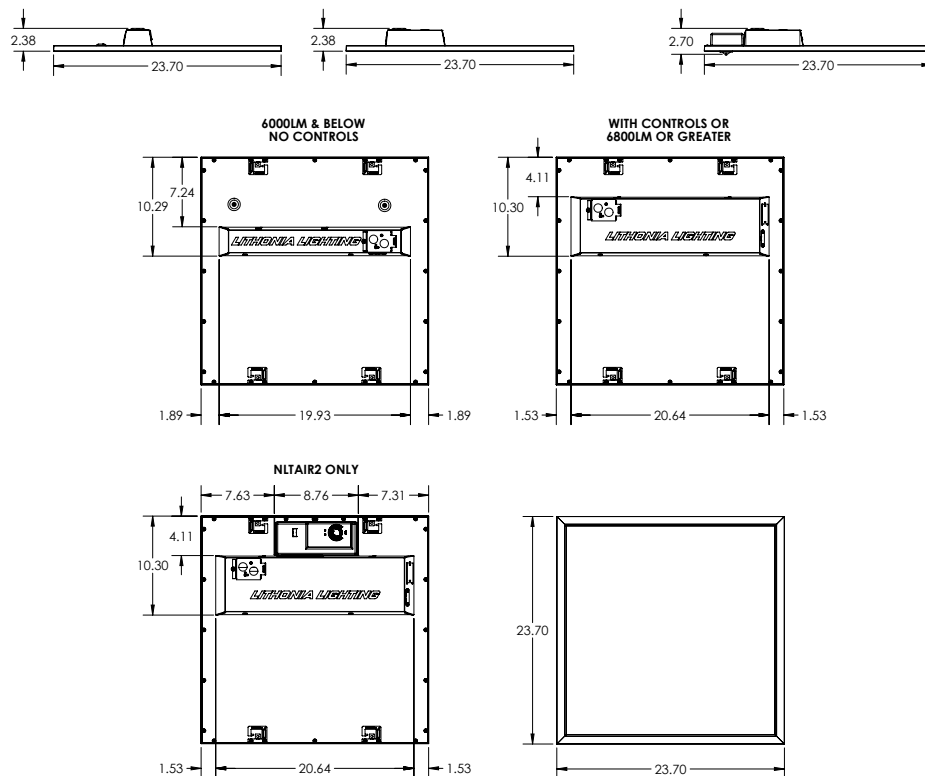

DIMENSIONS (continued)

2X4 Configurations

