

# 55" Full HD 1080p Commercial Large Format Display

Narrow Bezel Optimized for Video Walls

**CDP5560-L**



Put your public information out there with confidence – 24/7. Ideal for reliable continuous use, the ViewSonic® CDP5560-L 55" commercial LED display delivers your messages with vibrant Full HD images, wide angle clarity and powerful stereo sound. Thanks to the narrow bezel design your video walls grab greater attention as well, in big, bold configurations up to 5 x 5 daisy-chained portrait or landscape displays. Plus, it's easy to manage with versatile connectivity options, an intuitive on-screen scheduling interface, multi-display management from your notebook or PC, and a one-time setup function that safeguards your preferred source settings.

### **Key Features:**

Full HD 1080p resolution with 450-nits brightness

Heat monitoring protection and screen saver feature for added reliability and durability

SuperClear® panel technology for stunning color performance and wide-angle viewing

HDMI, DisplayPort, DVI, CVBS, YPbPr (YCbCr), VGA and RS232 for versatile connectivity

RS232 with IR pass-through for simplified management of display settings

### **Designed for:**


Hospitality

Retail

Business

# 55" Full HD 1080p Commercial Large Format Display

**CDP5560-L**

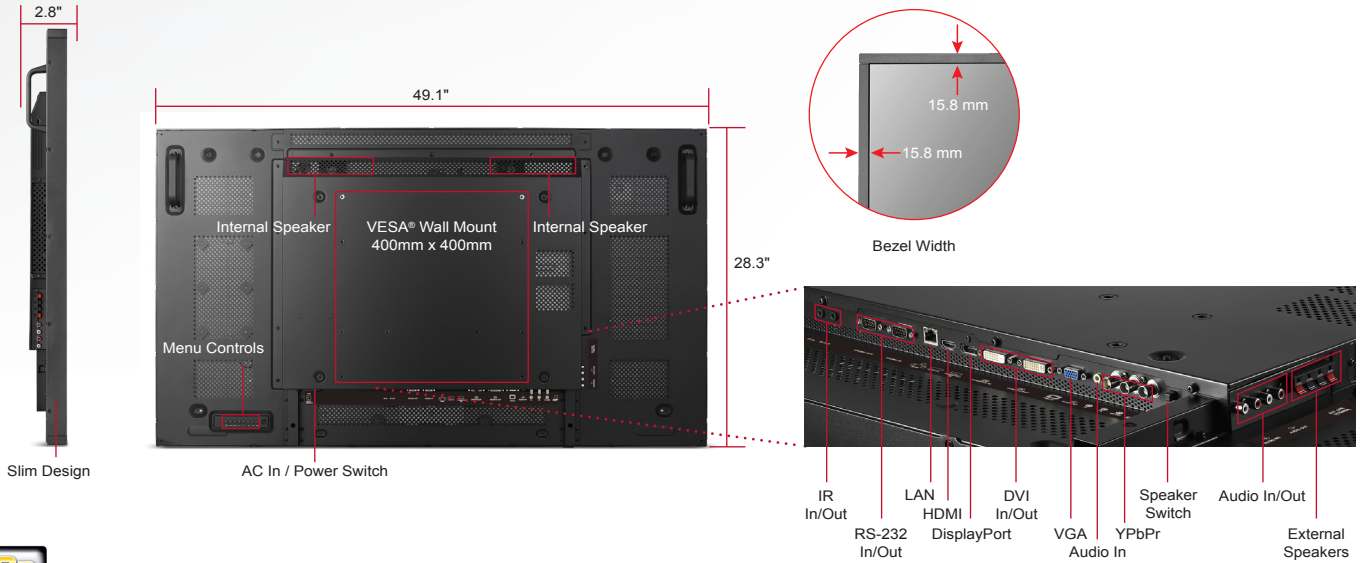

## Specifications

<b>PANEL</b>	Type	55" color TFT LED Module with LED Backlight	<b>CONTROLS (CONT.)</b>	Configuration 3	Power Save, Heat Status, Screen Saver, Side Border Color, Configuration 3 Reset
	Display Area	47.6" horizontal x 26.8" vertical; 55" diagonal		Advanced Option	Input Change, Terminal Setting, Scan Conversion, Color System, Scan Mode, Serial Control, LAN Setting, APM, Advanced Option Reset, Factory Reset
	Optimum Resolution	1920x1080	<b>POWER</b>	Voltage	AC 100-240V (universal), 50-60Hz
	Contrast Ratio	1300:1 (typ)		Consumption	245W (typ)
	Viewing Angles	178° horizontal, 178° vertical	<b>OPERATING CONDITIONS</b>	Temperature	32-104°F (0-40°C)
	Response Time	12ms		Humidity	20-80% (non-condensing)
	Light Source	Long life, 50,000 hrs. (typ)	<b>DIMENSIONS (W x H x D)</b>	Physical	49.1 x 28.3 x 2.8 in. / 1247 x 717.8 x 70 mm
	Brightness	450 cd/m <sup>2</sup>		Packaging	49.1 x 38.5 x 15.8 in. / 1476 x 978 x 400 mm
	Aspect Ratio	16:9	<b>BEZEL DIMENSIONS</b>	Left/Right	15.8mm / 15.8mm
	Panel Surface	Hard coating 3H		Top/Bottom	15.8mm / 15.8mm
<b>INPUT</b>	Video Input	HDMI, DVI, DP, component (BNC), VGA,	<b>WEIGHT</b>	Net	67.4 lbs / 30.6 kg
	Video Output	VGA, DVI-D		Gross	79.5 lbs / 36.1 kg
	Control Input/Output	RS232, RJ45	<b>WALL MOUNT</b>	VESA Compatible®	400 x 400 mm
<b>AUDIO OUTPUT</b>	Speakers	Internal 10-watt (x2)	<b>REGULATIONS</b>		CE, CB, WEEE, C-tick, FCC, ICES003, UL/cUL, CU, ENERGY STAR 6.0
<b>INPUT SIGNAL</b>	TV/Video Comp	480i, 480p, 720p, 1080i, 1080p	<b>RECYCLE/DISPOSAL</b>		Please dispose of in accordance with local, state, or federal laws
<b>CONNECTOR</b>	Analog	15-pin mini D-sub (VGA), RCA Audio In	<b>WARRANTY</b>		Three-year limited warranty on parts, labor and backlight
	Digital	HDMI, DVI-D, DisplayPort, YPbPr (BNC)			
	Power	3-pin plug			
<b>CONTROLS</b>	Panel	POWER, MUTE, INPUT, VOL +/-, UP, DOWN, MENU			
	Picture	Brightness, Contrast, Sharpness, Black Level, Tint, Color, Color Temperature, Gamma Selection, Noise Reduction, Film Mode, Picture Reset			
	Screen	Auto Setup, Auto Adjust, H Position, V Position, Clock, Clock Phase, Zoom Mode, Custom Zoom, Input Resolution, Screen Reset			
	Sound	Balance, Treble, Bass, Audio Reset			
	PIP	PIP Mode, PIP Size, PIP Audio, PIP H Position, PIP V Position, SUB input, PIP Reset			
	Configuration 1	Off Timer, Schedule, Data and Time, Configuration 1 Reset			
	Configuration 2	Language, OSD Turn Off, OSD H Position, OSD V Position, Information OSD, Monitor Information, Monitor ID, IR Control, Tiling, Power on Delay, Closed Caption, Configuration 2 Reset			

## Optional Accessories

Stand.....	STND-021
Wall Mount.....	WMK-014



## What's in the box?

CDP5560-L display, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.