


tel: (770) 209-9925 fax: (770) 209-0671 web: www.traxinsights.com

Smart Restroom Digital Signage Installation Guide

- 1 32" LG 32SM5KE-B Monitor 88" off the ground outside of each restroom
- Install power outlet and cat5 connection under or adjacent to monitor

We suggest using a combo outlet like the one shown in figure 2.

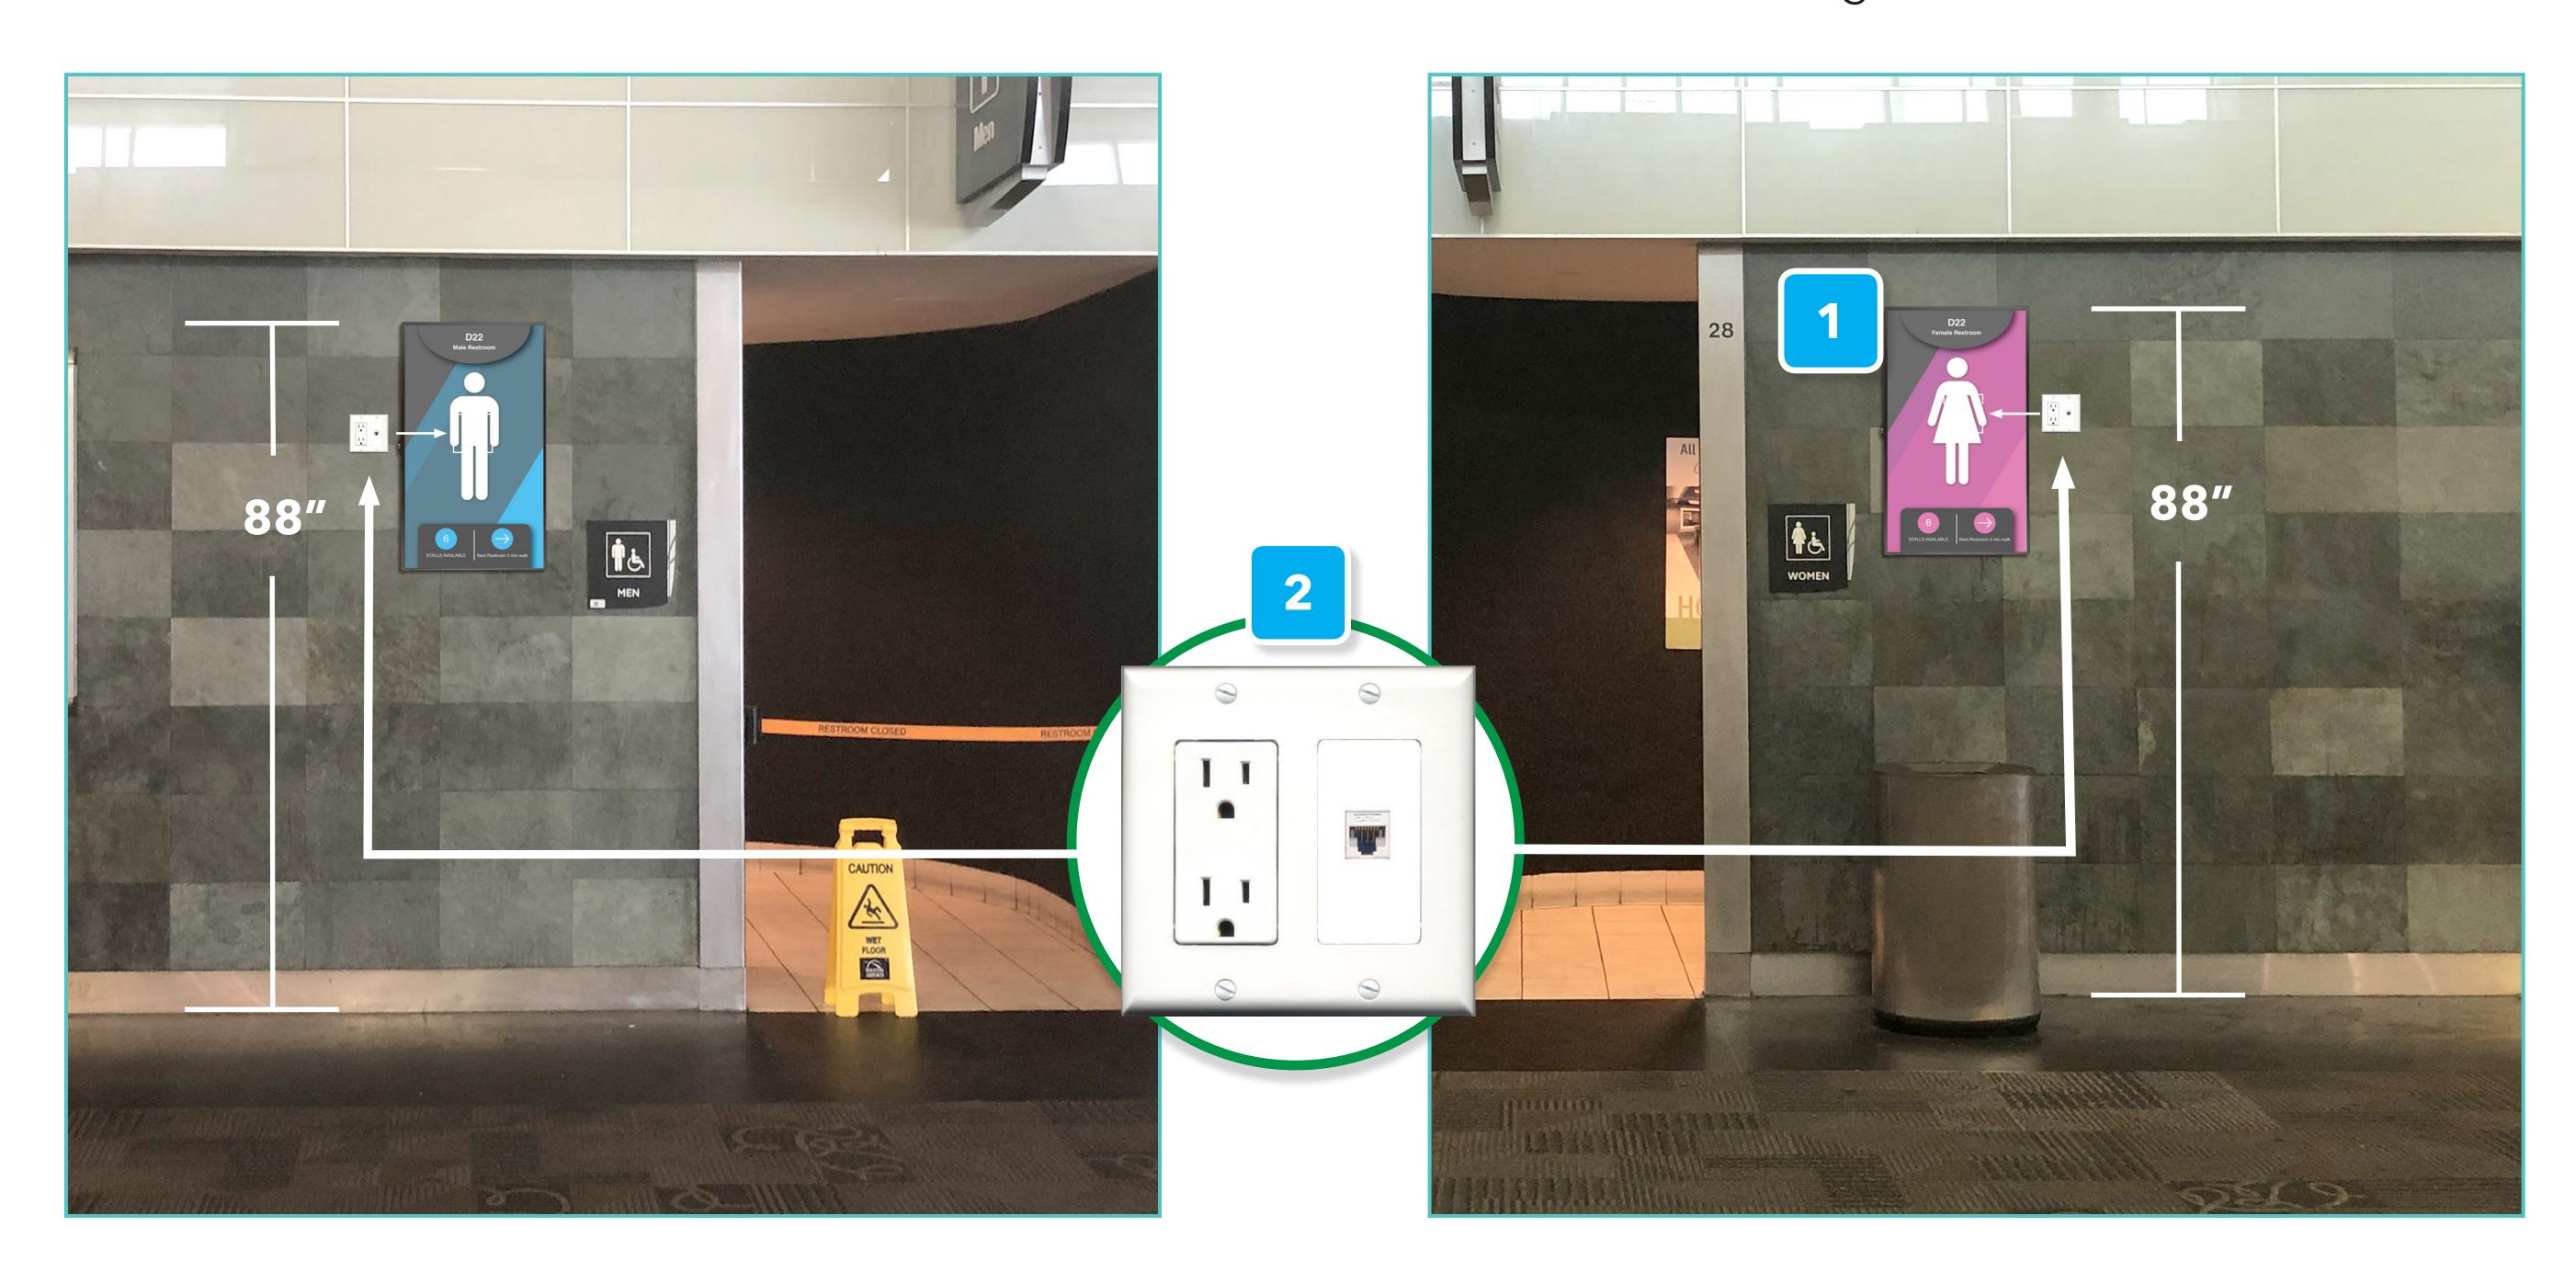

MONITOR TECHNICAL DATA	
General	
Monitor Dimension (W x H x D)	28.7" x 16.9" x 2.2" / 729.4 x 428.9 x 55.5 mm
Weight (Head)	11.9 lbs / 5.4 kg
VESA TM Standard Mount Interface	200mm x 200mm
Connectivity	
Input	HDMI (3), DP, DVI-D, Audio, USB 3.0
External Control	RS232C In/out, RJ45 In, IR Receiver In
Output	DP (SST), Audio (Off/Fixed/Variable)
Power	
Power Supply	100-240V~, 50/60Hz
HARDWARE LIST	
32" monitor	
Cat5 cables	
Power chord	
Monitor bracket	

