


- * SPACER FOR 1/4 INCH THICK DISC
- * TORQUE BOLTS TO 12 FT. LBS.
- * MAX. OPERATING PRESSURE -- 200 PSI
- * BUNA N SEALS
- * USE LOCOTITE #242 ON FRICTION PAD SCREWS

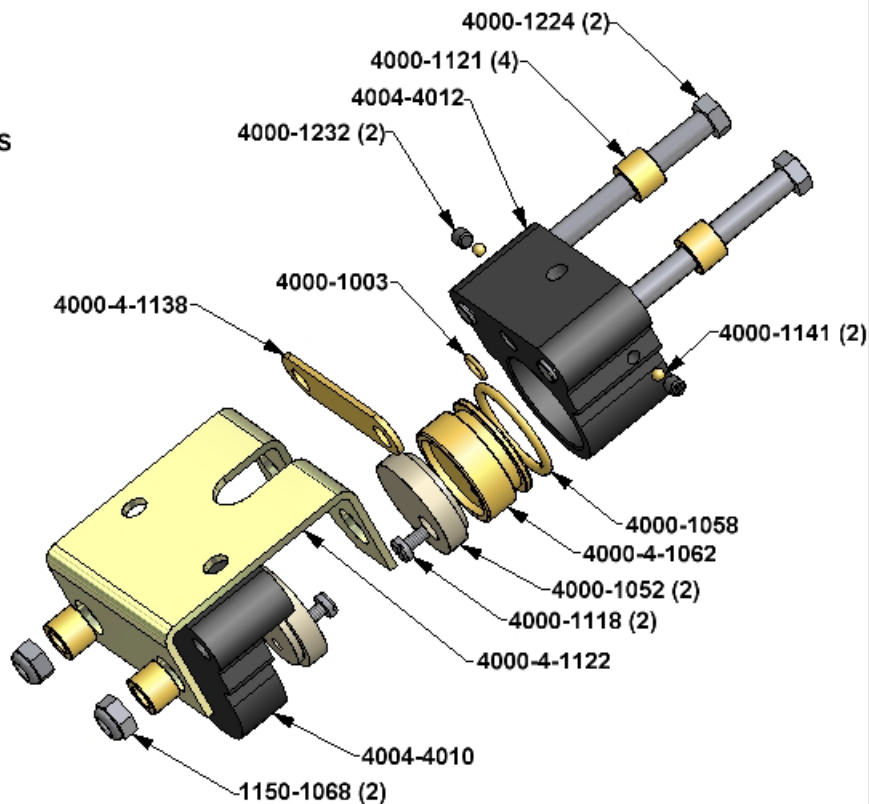

UNLESS OTHERWISE SPECIFIED DO NOT SCALE DRAWING REMOVE ALL SURFS TAP DEPTHS FULL THD. DRILL DEPTHS FULL DIA.	THIRD ANGLE PROJECTION	W.C. BRANHAM INC. RIVER FALLS, WI.	
		DATE WCB 12/02/02	TITLE P47SBF CALIPER
C1 1/2 INCH 2 P. 4CH 4-010 S PLACE --.005	CHECKER	DR. E.	DESIGN NUMBER 4004-0041
TYPICAL EXTERNAL CLASS 2A INTERNAL CLASS 2B	SCALE	CLASS	REVISION