



Eaton 9PX lithium-ion UPS

Double conversion UPS that offers a set it and forget it deployment

The 9PX lithium-ion UPS is part of the Eaton 9 series single-phase double conversion UPS line, best applied to mission-critical equipment for constant power conditioning. The 9PX lithium-ion UPS provides 8–10 years of life expectancy for UPS and batteries, and has power ratings varying from 1–3 kVA, with low and high voltage options, while also offering up to four external battery modules for extra runtime. The 9PX lithium-ion UPS has the same reliable features as the lead-acid UPS: load segments allow for prioritized shutdown, remote power on (RPO), remote on/off (ROO) and output relay ports that increase control capabilities. For connectivity and enhanced UL and IEC cybersecurity, the Eaton Gigabit Network Card is compatible and is offered as an optional bundle.



For even more runtime, add up to 4 extended battery module (EBM) to your UPS



Key features and benefits

Save money

- **2-3X longer battery life:** minimize battery maintenance expense—ideal for large deployments and edge applications
- **Runtime:** lithium-ion UPS provides 80–120% more runtime at full load compared to lead-acid batteries
- **Warranty:** 5-year all-inclusive (electronics and battery) warranty

Save space

- **1U lithium EBM vs 2U lead-acid EBM**
- **Lightweight design** 40% less weight than a comparable lead-acid UPS allowing easier installation and saving time

Reduce risk

- **24/7 monitoring:** battery management system (BMS) improves reliability and performance by actively monitoring temperature and charge
- **Cybersecure:** remote monitoring service and network connectivity card options provide cybersecurity protection and keep you connected with your UPS status updates
- **On-board BMS monitoring** in combination with proven Lithium Iron Phosphate (LFP) chemistry provides a reliable and safe offering, giving you peace of mind

IPM – Intelligent Power Manager

The power of automation.

IPM is an easy-to-use disaster avoidance platform with sophisticated capabilities that include triggering alerts and automating resolutions to keep applications running. IPM enables you to:

- Leverage Eaton's integrations with industry leaders to keep critical applications running and automate resolutions for your entire network risking potential downtime.
- Migrate workloads to increase system uptime and minimize generator load by suspending non-critical virtual machines.
- Power cap servers to keep critical loads running longer by limiting server power consumption.

Learn more at Eaton.com/IPM

VPM – Visual Power Manager

The power of monitoring.

With Visual Power Manager (VPM), you can remotely monitor the power of thousands of PDU and UPS devices through a user-friendly, visual interface that simplifies data for quick action. VPM enables you to:

- Gain vendor agnostic insight. Monitor a mixed environment through VPM's unique protocol-based data collection.
- Know what's coming. Analyze power devices visually and get notified ahead of replacement through custom reports.
- Get real-time, rack-level statistics. Quickly remediate through up-to-the-minute analytics, notifications and alarms for events exceeding what any branch can support.

Learn more at Eaton.com/VPM

PredictPulse™ Insight

The power of predictability.


PredictPulse Insight is the industry's first cloud-based 24x7 remote monitoring and predictive analytics subscription service to forecast data center power component failure and proactively replace components before failure. PredictPulse enables you to:

- **Save time.** Focus on other critical IT tasks while this predictive analytics service and Eaton's remote monitoring team oversees power remotely.
- **Save money.** Eliminate surprise maintenance expenses — this subscription-based service includes parts, labor, on-going preventive maintenance and expedited repairs.
- **Reduce risk.** Utilize Eaton's proprietary algorithms, based on data from thousands of installed devices to predict UPS component failure and proactively replace parts before issues arise.

Learn more at Eaton.com/PredictPulse


Rear panel overview

Model 9PX1500RT-L

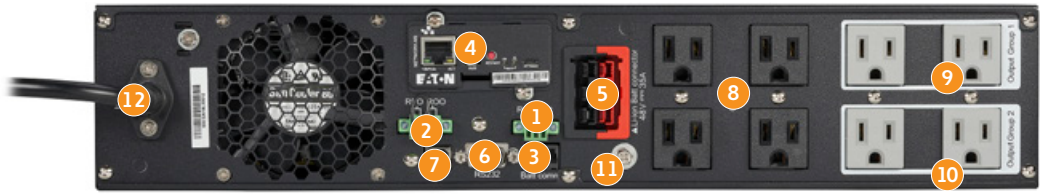


- | | | |
|---|---|-------------------------------------|
| 1 Output relay port | 5 EBM connector | 9 (2) 5-15R (load segment group 1) |
| 2 Remote power off (RPO) and remote on/off (ROO) port | 6 RS-232 serial communication port (cable included) | 10 (2) 5-15R (load segment group 2) |
| 3 External battery module (EBM) detection port | 7 USB port (cable included) | 11 Ground bonding screw |
| 4 Network Card-M2 (optional) | 8 (2) 5-15R managed outlets (primary group) | 12 8-foot line cord with 5-15P |

Model 9PX2200GRT-L and 9PX3000GRT-L

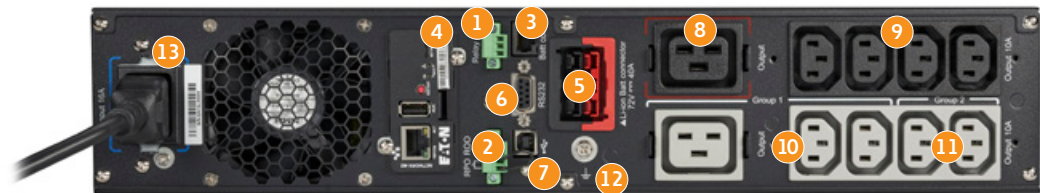

- | | | |
|---|---|---|
| 1 Output relay port | 6 RS-232 serial communication port (cable included) | 10 (1) C19 and (2) C13 managed outlets (load segment group 1) |
| 2 Remote power off (RPO) and remote on/off (ROO) port | 7 USB port (cable included) | 11 (2) C13 managed outlets (load segment group 2) |
| 3 External battery module (EBM) detection port | 8 (1) C19 outlet | 12 Ground bonding screw |
| 4 Network Card-M2 (optional) | 9 (4) C13 managed outlets (primary group) | 13 C20/L6-20P input connection (detachable L6-20P to C19 input cord is 6-feet long) |
| 5 EBM connector | | |

Model : 9PX3000RT-L

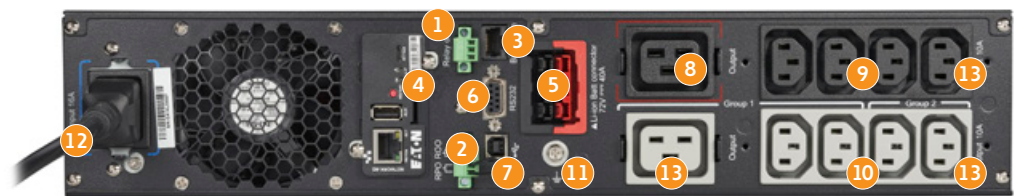

- | | | |
|---|--|---|
| 1 Output relay port | 6 RS-232 serial communication port (cable included) | 10 (2) 5-20R managed outlets (load segment group 2) |
| 2 Remote power off (RPO) and remote on/off (ROO) port | 7 USB port (cable included) | 11 Ground bonding screw |
| 3 External battery module (EBM) detection port | 8 (2) 5-20R and (1) L5-30R managed outlets (primary group) | 12 L5-30P input cord (8 feet long) |
| 4 Network Card-M2 (optional) | 9 (2) 5-20R managed outlets (load segment group 1) | 13 AC output branch protector |
| 5 EBM connector | | |

For additional rear panel views, please visit Eaton.com/9PX.

9PX lithium-ion rackmount and tower model selection guide*

The 9PX lithium-ion rackmount comes as a stand-alone UPS or as part of a network bundle for easy configuration and deployment. For complete specifications, including interactive battery runtime graphs, visit Eaton.com/9PX.

Rackmount UPS, 120V (default), 100V, 110V, 115V, 125V

| Catalog number | Rating (VA/Watts) | Input connection | Output connection | Dimensions (H x W x D), in. | Rack size | Weight, lbs. |
|----------------|-------------------|------------------|-----------------------|-----------------------------|-----------|--------------|
| 9PX1500RT-L | 1500VA / 1350W | 5-15P, 8 ft. | (8) 5-15R | 3.41 x 17.32 x 17.72 | 2U | 35.5 |
| 9PX2000RT-L | 2000VA / 1800W | 5-20P, 8 ft. | (1) L5-20R, (6) 5-20R | 3.41 x 17.32 x 23.83 | 2U | 50.6 |
| 9PX3000RT-L | 3000VA / 2400W | 5-30P, 8 ft. | (1) L5-30R, (6) 5-20R | 3.41 x 17.32 x 23.83 | 2U | 52.7 |

Global rackmount UPS, 208V (default), 230V, 240V

| | | | | | | |
|--------------|----------------|--------------|------------------|----------------------|----|------|
| 9PX1500GRT-L | 1500VA / 1350W | C14 | (8) C13 | 3.41 x 17.32 x 17.72 | 2U | 34.8 |
| 9PX2200GRT-L | 2200VA / 2000W | C20 / L6-20P | (8) C13, (2) C19 | 3.41 x 17.32 x 23.83 | 2U | 48.6 |
| 9PX3000GRT-L | 3000VA / 2400W | C20 / L6-20P | (8) C13, (2) C19 | 3.41 x 17.32 x 23.83 | 2U | 50.2 |

| Catalog number | Description | Rating (VA/Watts) | Input connection | Output connection | Dimensions (H x W x D), in. | Rack size |
|----------------|-------------------------------------|-------------------|------------------|-----------------------|-----------------------------|-----------|
| 9PX1500RTN-L | 9PX 1500 120V RT w/ Network Card-M2 | 1500 / 1350 | 5-15P, 8 ft. | (8) 5-15R | 3.41 x 17.32 x 17.72 | 2U |
| 9PX2000RTN-L | 9PX 2000 120V RT w/ Network Card-M2 | 2000 / 1800 | 5-20P, 8 ft. | (6) 5-20R, (1) L5-20R | 3.41 x 17.32 x 23.83 | 2U |
| 9PX3000RTN-L | 9PX 3000 120V RT w/ Network Card-M2 | 3000 / 2400 | L5-30P, 8 ft. | (6) 5-20R, (1) L5-30R | 3.41 x 17.32 x 23.84 | 2U |

9PX lithium-ion EBM options

| Catalog number | Description | Rack size | Weight, lbs. |
|----------------|---|-----------|--------------|
| 9PXEBM48RT-L | Extended battery module for 9PX1500RT-L and 9PX1500GRT-L | 1U | 36.5 |
| 9PXEBM72RT-L | Extended battery module for 9PX2000RT-L, 9PX2200GRT-L, 9PX3000RT-L and 9PX3000GRT-L | 1U | 46.6 |

9PX lithium-ion options

Power distribution (PDU) and maintenance bypass (MBP) options

| Catalog | Description | Input connection | Output connection | Dimensions (H x W x D), in. |
|------------------|---|------------------|-------------------|-----------------------------|
| EHBPL1500R-PDU1U | HotSwap MBP for use with 700–1500 VA 9PX models | 5-15P | (6) 5-15R | 2.1 (2U_ x 17.3 x 3.8 |
| EHBPL2000R-PDU1U | HotSwap MBP for use with 9PX2000RT | 5-20P | (6) 5-20R | 2.1 (2U_ x 17.3 x 3.8 |
| EHBPL3000R-PDU1U | HotSwap MBP for use with 9PX3000RT | L5-30P | (5) 5-20R | 2.1 (2U_ x 17.3 x 3.8 |
| ePBZ74 | Basic 2 kVA, 120V, 0U ePDU | 5-20P / L5-20P | (14) 5-20R | 24 (0U) x 1.5 x 1.5 |
| ePBZ78 | Basic 3 kVA, 120V, 0U ePDU | L5-30P | (20) 5-20R | 1.7 (1U) x 17 x 5.1 |
| ePBZ88 | Basic 2–3 kVA, 208V, 0U ePDU | C20 | (10) C13, (2) C19 | 1.7 (1U) x 19 x 2.4 |
| ePBZ93 | Basic 3 kVA, 208V, 0U ePDU | L6-20P | (20) C13, (4) C19 | 35 (0U) x 1.9 x 2.4 |
| ePBZ79 | Basic 3–6 kVA, 120V, 1U ePDU | L6-30P | (16) C13, (4) C19 | 1.7 (1U) x 17 x 5.1 |

*For additional Eaton PDU options, please visit Eaton.com/RackPDUSelector

| Catalog number | Description |
|----------------|--|
| NETWORK-M2 | Gigabit Network Card |
| EMPD1H1C2 | Environmental Monitoring Probe (EMP) Gen 2 for use with Network-M2 |
| RELAY-MS | Relay / Serial Interface Card |

Mounting Hardware

| | |
|---------|---|
| RK2PA | 1U two-post rail kit (optional) |
| RK2PC | 2-post rack mounting rail kit (one kit required for each UPS and EBM) |
| BINTSYS | Battery integration – vertical mounting platform with wheels |

*For additional Eaton PDU options, please visit Eaton.com/RackPDUSelector

Lithium-ion vs lead-acid

| Characteristic | VRLA battery | Lithium-ion battery | Lithium-ion benefit |
|--------------------------|--------------|---------------------|---|
| Average battery lifespan | 3–5 years | 8-10 years | 2–3x longer life |
| Weight | 43–86 lbs | 34.8–52.7 lbs | 20% lighter UPS, 40% lighter EBM |
| EBM Footprint | 2U | 1U | Increased U space for critical equipment |
| Warranty | 2 years | 5 years | 2.5x warranty coverage |
| Battery replacement cost | \$650* | \$0 | Reduced TCO |

*Battery and labor cost for one replacement



2U UPS with 1U EBM in 4 post rack



Advanced control with IPM software allows for remote management and integration into leading virtualization platforms
Eaton.com/intelligentpower

To view battery runtimes and interact with the Eaton 9PX lithium-ion UPS,
please visit: Eaton.com/9PX

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2021 Eaton
All Rights Reserved
Printed in USA
Publication No. BR153145EN / GG
March 2021

Eaton, ABM, Intelligent Power Manager and
PredictPulse are registered trademarks.

All other trademarks are property
of their respective owners.

Follow us on social media to get the
latest product and support information.

