

DATA SHEET

NEC/TOKIN

MINIATURE SIGNAL RELAY EE2 SERIES

**Compact and lightweight, High breakdown voltage,
Surface mounting type**

DESCRIPTION


The EE2 series surface-mounting type sustaining high-performance of NEC TOKIN EC2 series.

FEATURES

- Compact and light weight
- 2 form c contact arrangement
- Low power consumption
- Reduced mounting space : 15 mm × 9.5 mm
- High-breakdown voltage of coil to contacts : 1500 Vac, 2500 V
(rise time : 2 μ s, fall time : 10 μ s)
- Low power consumption : 100 to 140 mW
- Capable of High-power switching : 700 Vac, 4.2 A, 4 times in case of accident
- NK type guarantee 1.5kVac over withstanding voltage at open contact. (Only make contact)

APPLICATIONS

Electronic switching systems, PBX, terminal equipment, telephone system.

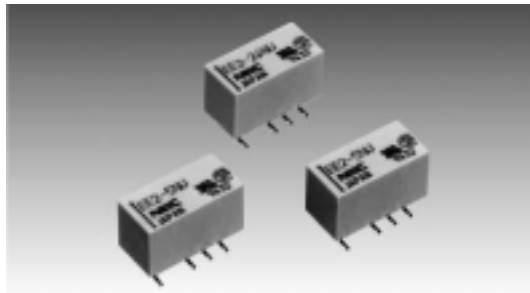

For Right Use of Miniature Relays

DO NOT EXCEED MAXIMUM RATINGS.


Do not use relays under exceeding conditions such as over ambient temperature, over voltage and over current. Incorrect use could result in abnormal heating, damage to related parts or cause burning.

READ CAUTIONS IN THE SELECTION GUIDE.

Read the cautions described in NEC/TOKIN's "Miniature Relays" when you choose relays for your application.

PART NUMBER SYSTEM


EE2-5SNU-L

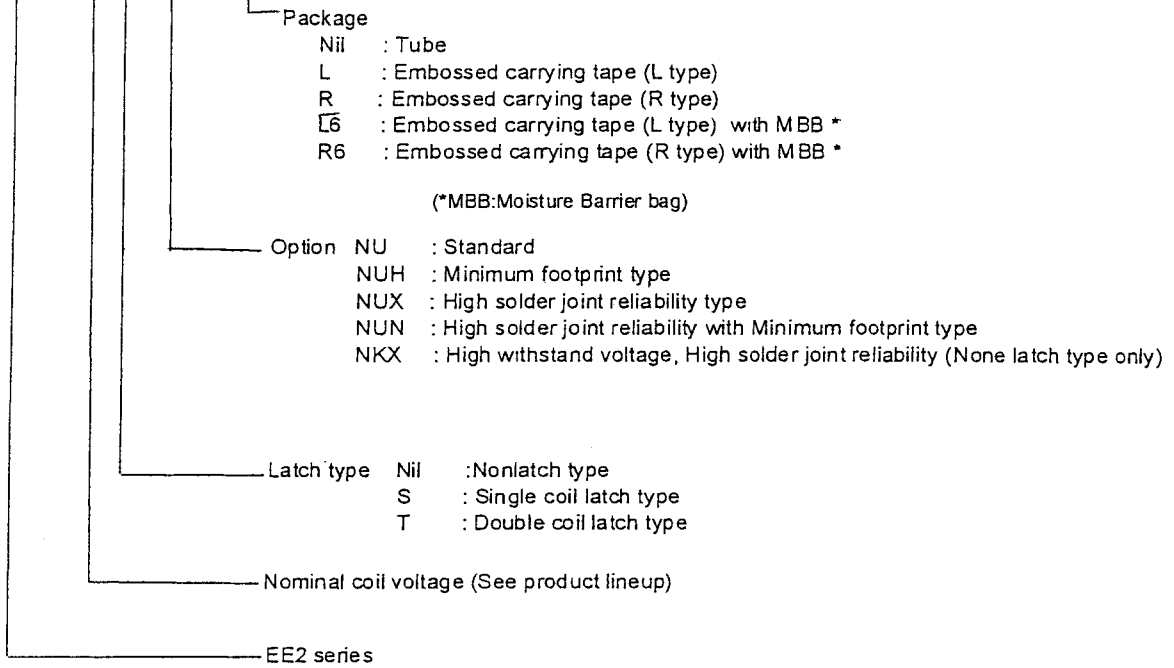


OUTLINE DRAWINGS AND DIMENSIONS

Unit : mm (inch)


EE2-..NU

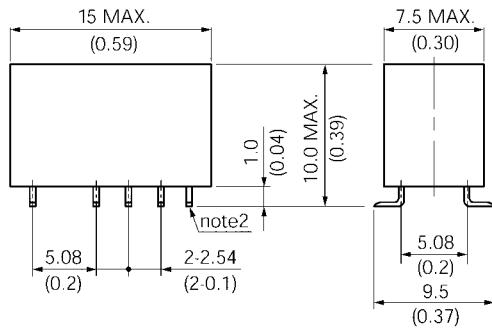


EE2-..NUX

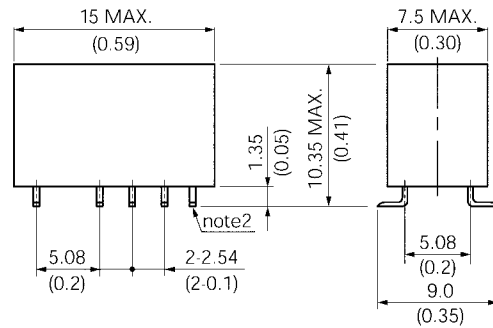

EE2-..NUH

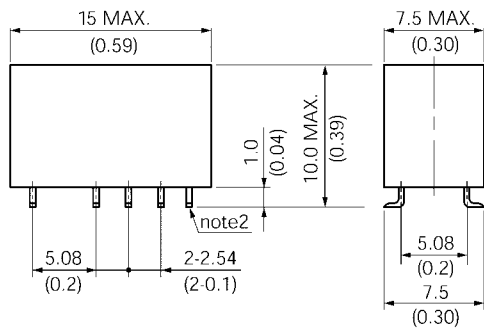

EE2-..NUN,..NKX

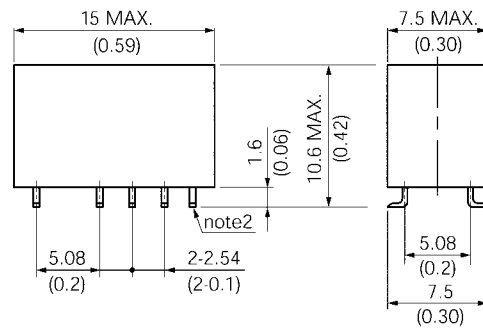


Note 1. General tolerance : ±0.2 (±0.008)

Note 2. This pair of pins at the right end applies to double coil latch type only.

PAD LAYOUTS (bottom view)

unit : mm (inch)



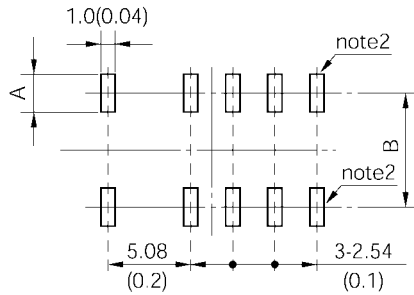


Type	A	B
EE2-..	3.0 (0.118)	7.3 (0.287)
EE2-..NU	3.0 (0.118)	7.3 (0.287)
EE2-..NUX	2.73 (0.107)	7.02 (0.276)
EE2-..NUH	2.0 (0.079)	6.29 (0.248)
EE2-..NUN	2.0 (0.079)	6.29 (0.248)

Note 1. General tolerance : ±0.1 (±0.004)


Note 2. This pair of pads at the right end applies to double coil latch type only.

PIN CONFIGURATIONS (bottom view)

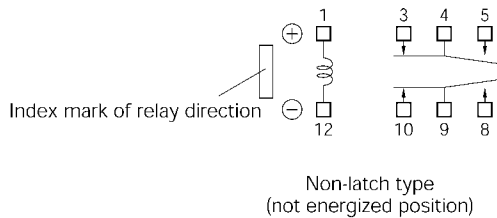

S : Coil polarity of set (operate)
R : Coil polarity of reset (release)

MARKINGS (top view)



- 1 Part number
- 2 Manufacturer
- 3 Country of origin
- 4 Date code
- 5 Index mark of relay direction (pin No.1, 12)
- 6 UL, CSA Marking

SAFETY STANDARD AND RATING

UL Recognized (UL508)* File No E73266	CSA Certified (CSA C22.2 No14) File No LR46266
30 Vdc, 2 A (Resistive)	
110 Vdc, 0.3 A (Resistive)	
125 Vac, 0.5 A (Resistive)	

* Spacing : UL114, UL478

TUV Certificate (EN60255 / IEC60255)
No. R 9751153 (Nonlatch and Single-coil-latch)
Creepage and clearance of coil to contact is more than 2 mm. (According EN60950)
Basic insulation class

PERFORMANCE CHARACTERISTICS

Contact Form		2 Form C
Contact Material		Silver alloy with gold alloy overlay
Contact Ratings	Maximum Switching Power	60 W, 125 VA
	Maximum Switching Voltage	220 Vdc, 250 Vac
	Maximum Switching Current	2 A
	Maximum Carrying Current	2 A
Minimum Contact Ratings		10 mVdc, 10 μ A *1
Initial Contact Resistance		75 m Ω max. (Initial)
Nominal Operating Power	Nonlatch type	140 mW (3 to 12 V), 200 mW (24 V) (ND type : 200 to 230 mW) (NK type : 230 mW)
	Single coil latch type	100 mW (ND type : 100 to 170 mW)
	Single coil latch type	140 mW
Operate Time (Excluding bounce)		Approx. 2 ms
Release Time (Excluding bounce)		Approx. 1 ms
Insulation Resistance		1000 M Ω at 500 Vdc
Withstanding	Between open Contacts	1000 Vac (for one minute) 1500 V surge (10 \times 160 μ s *2)
		NK type : Make contact : 1500 Vac (for one minute) 2500 V surge (2 \times 10 μ s *3) Break contact : 1000 Vac (for one minute) 1500 V surge (10 \times 160 μ s *2)
	Between Adjacent Contacts	1000 Vac (for one minute), 1500 V surge (10 \times 160 μ s *2)
	Between Coil to Contact	1500 Vac (for one minute), 2500 V surge, (2 \times 10 μ s *3)
Shock Resistance		735 m / s ² (75G)(misoperating) 980 m / s ² (100G)(destructive failure)
Vibration Resistance		10 to 55 Hz double amplitude 3 mm (misoperation) 10 to 55 Hz, double amplitude 5 mm (destructive failure)
Ambient Temperature		40 to 85°C
Coil Temperature Rise		18 degrees at nominal coil voltage (140 mW)
Running specifications	Nonload	1 \times 10 ⁸ *4 operations (Nonlatch type) 1 \times 10 ⁷ operations (latch type)
	Load	50 Vdc 0.1 A (resistive), 1 \times 10 ⁸ operations at 85°C, 5 Hz
		10 Vdc 10 mA (resistive), 1 \times 10 ⁶ operations at 85°C, 2 Hz
Weight		Approx. 1.9 g

- *1 This value is a reference value in the resistance load.
Minimum capacity changes depending on seitching frequency and environment temperature and the load.
- *2 rise time : 10 μ s, decay time to half crest : 160 μ s
- *3 rise time : 2 μ s, decay time to half crest : 10 μ s
- *4 This shows a number of operation where it can be running by which a fatal defect is not caused, and a number of operation by which a steady characteristic is maintained is 1 \times 10⁷ operations.

Recommended relay drive conditions

Drive under conditions. If it is impossible, please inquire to NEC/TOKIN.

Nonlatch type	Voltage: within \pm 5% at nominal voltage	Ambient temperature 40 to +85°C
Single coil latch type Double coil latch type	Square pulse (rise and fall time is rapidly) Pulse height : within \pm 5% at nominal voltage Pulse width : More than 10 ms	

PRODUCT LINEUP

Non-latch Type

at 20°C

Nominal Coil Voltage (Vdc)	Coil Resistance (Ω) ±10 %	Must Operate Voltage (Vdc)	Must Release Voltage (Vdc)
3	64.3	2.25	0.3
4.5	145	3.38	0.45
5	178	3.75	0.5
6	257	4.5	0.6
9	579	6.75	0.9
12	1028	9	1.2
24	2880	18	2.4

Single-Coil Latch Type

at 20°C

Nominal Coil Voltage (Vdc)	Coil Resistance (Ω) ±10 %	Must Operate Voltage (Vdc)	Must Release Voltage (Vdc)
3	90	2.25	2.25
4.5	202.5	3.38	3.38
5	250	3.75	3.75
6	360	4.5	4.5
9	810	6.75	6.75
12	1440	9	9
24	5760	18	18

Double-Coil Latch Type ** (Can not be driven by reverse polarity for reverse operation.) at 20°C

Nominal Coil Voltage (Vdc)	Coil Resistance (Ω) ±10 %		Must Operate Voltage (Vdc)	Must Release Voltage (Vdc)
	S	R		
3	S	64.3	2.25	2.25
	R	64.3		
4.5	S	145	3.38	3.38
	R	145		
5	S	178	3.75	3.75
	R	178		
6	S	257	4.5	4.5
	R	257		
9	S	579	6.75	6.75
	R	579		
12	S	1028	9	9
	R	1028		
24	S	4114	18	18
	R	4114		

Note * Test by pulse voltage

** S : Set coil (pin No.1... +, pin No.5... -) R : Reset coil (pin No.10... +, pin No.6... -)

The latch type relays should be initialized at appointed position before using, and should be energized to specific polarity by a bone polarity to avoid wrong operation.

Any special coil requirement, please contact NEC/TOKIN for availability.

Nonlatch NKX type (High voltage, high solder joint reliability type)



at 20°C

Nominal Coil Voltage (Vdc)	Coil Resistance (Ω) ±10 %	Must Operate Voltage * (Vdc)	Must Release Voltage * (Vdc)
3	39.1	2.25	0.3
4.5	88.0	3.38	0.45
12	626	9.0	1.2

PERFORMANCE DATA

COIL TEMPERATURE RISE


Temperature is measured by coil resistance.

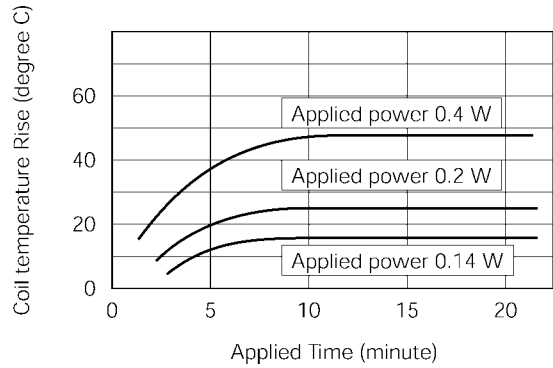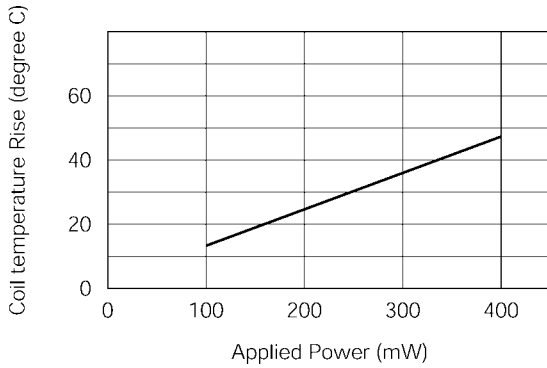

SWITCHING CAPACITY

This is allowed maximum value.


Inquiry for NEC/TOKIN under maximum value at continuous use.

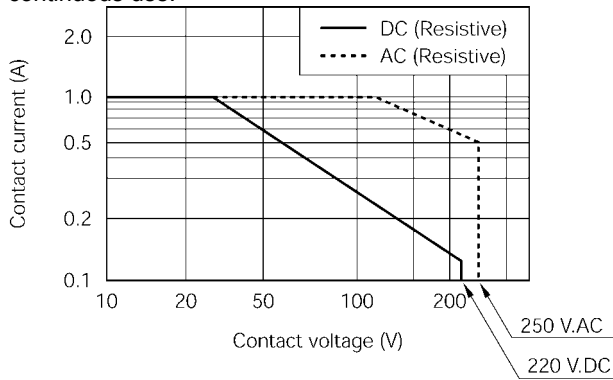



MAXIMUM COIL VOLTAGE

This is maximum value of permissible alteration.

Inquiry for NEC/TOKIN at continuous use.

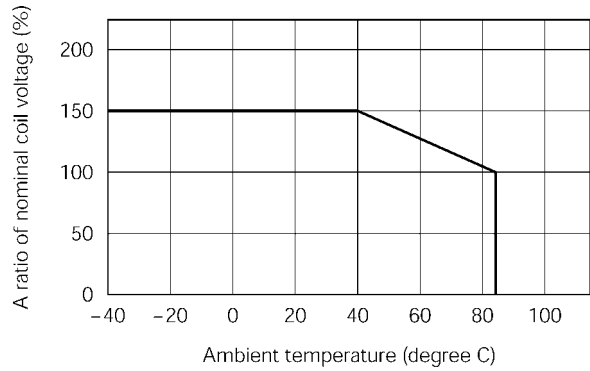


APPLIED VOLTAGE VS. TIMING (Sample: EE2-5NU)

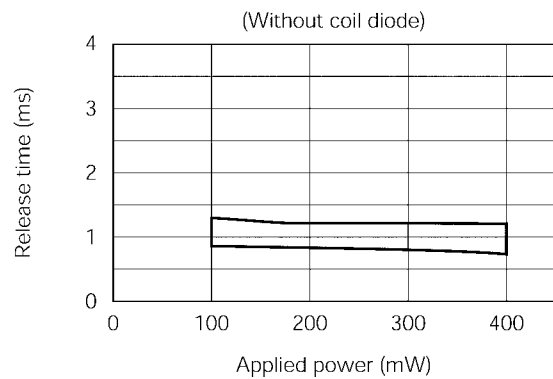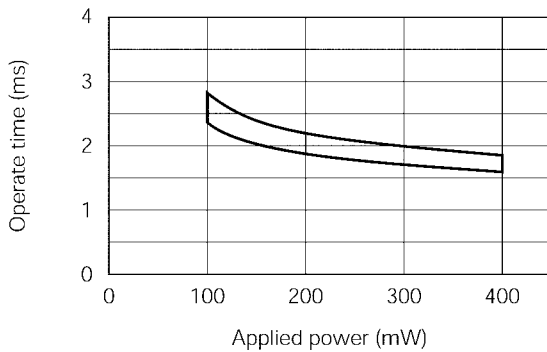



OPERATE AND RELEASE VOLTAGE VS. AMBIENT TEMPERATURE

This shows a typical change of operate (release) voltage. Maximum value of operate estimated, so it must be applied more than this value for safety operation. In case of "hot start operation", please inquiry for NEC/TOKIN.

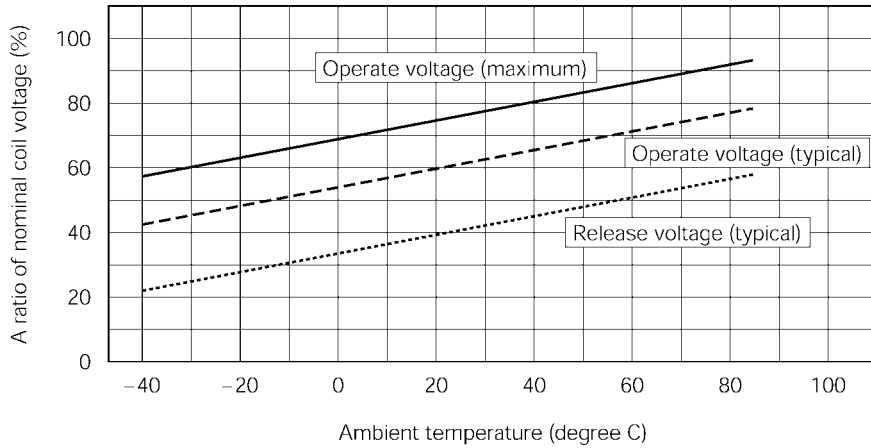



RUNNING TEST (Nonload)

(Load: None, Driving: 5V.DC, 50 Hz, 50% duty, Ambient temperature: Room temperature, Sample: EE2-5NU 20 pieces)

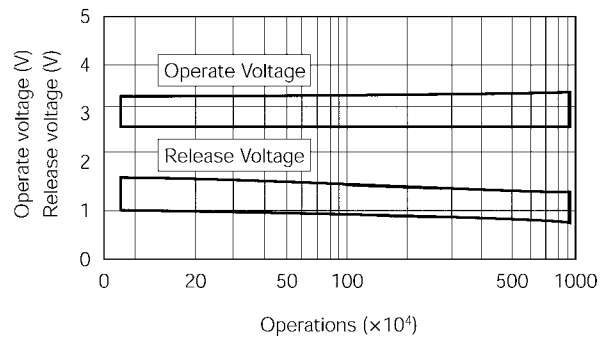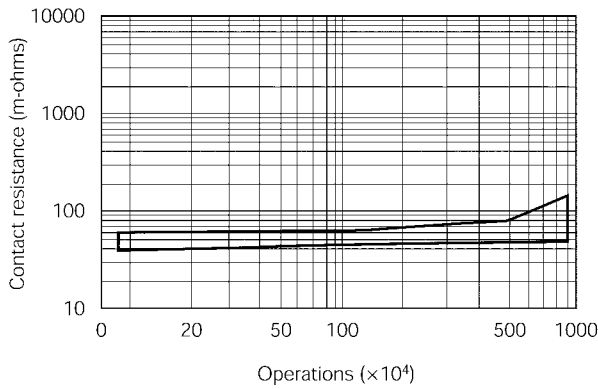


RUNNING TEST (Load)

(Load: 50 V.DC 0.1 A resistive, Driving: 5V.DC, 5 Hz, 50% duty, Ambient temperature: 85 degree C, Sample: EE2-5NU 10 pieces)


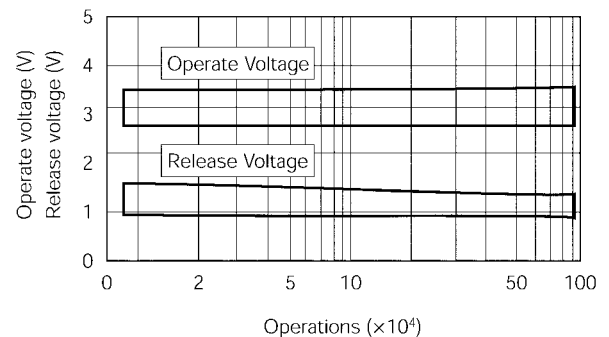
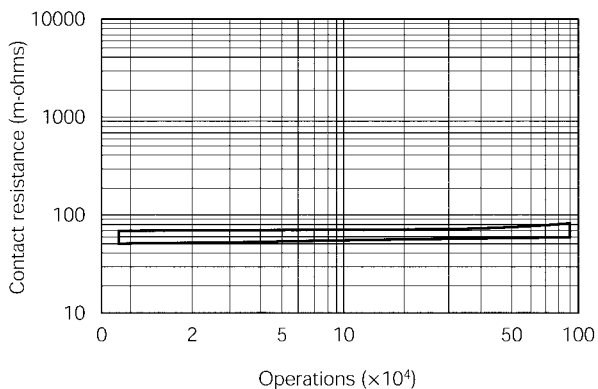


BREAKDOWN VOLTAGE


Sample: EE2-5NU 10 pieces

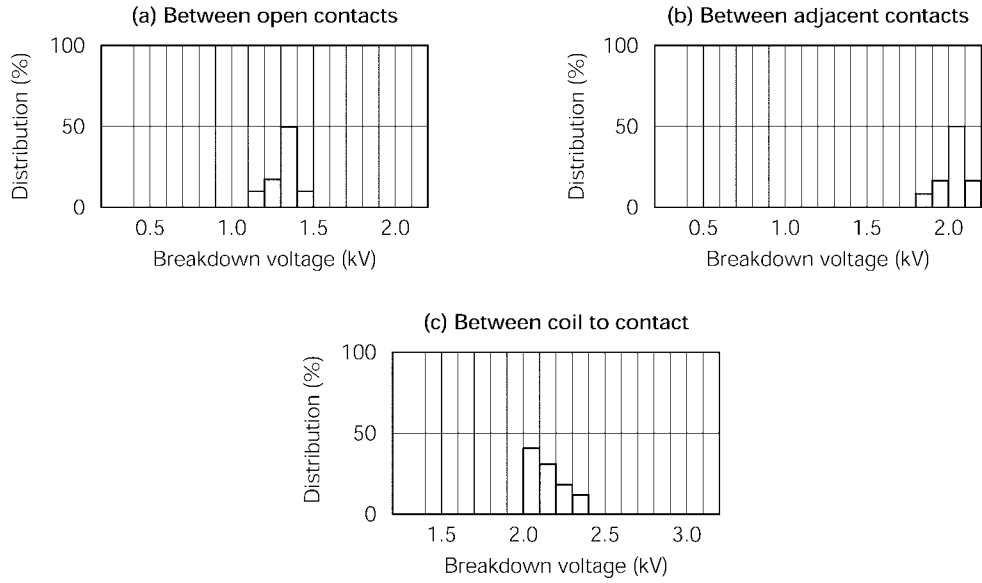

ALTERNATION OF VOLTAGE AT DENSELY MOUNTING (Magnet interference)

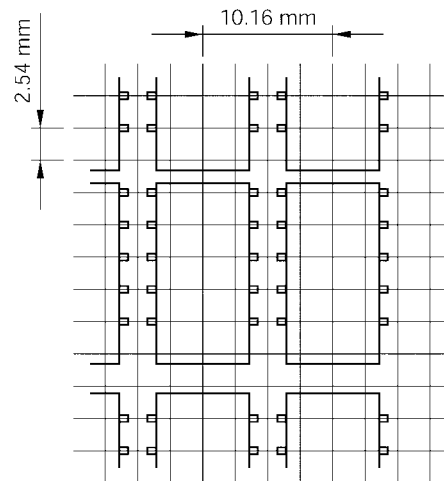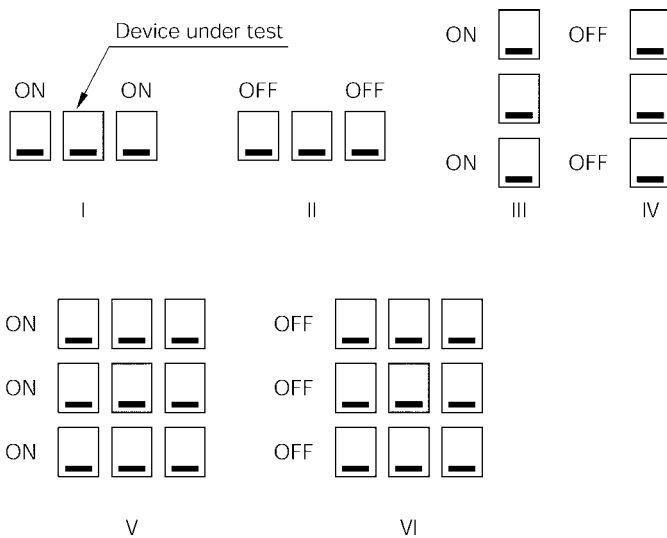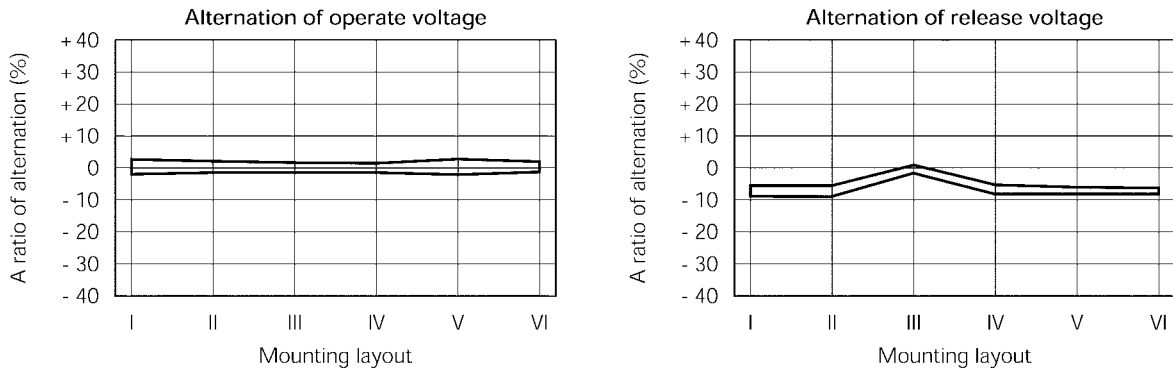

SOLDERING CONDITION

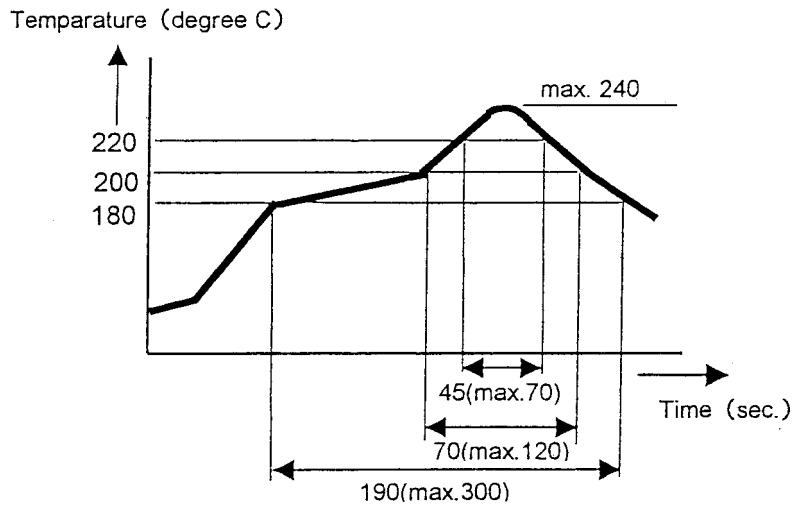



Note:

1. Temperature profile shows printed circuit board surface temperature on the relay terminal portion.
2. Check the actual soldering condition to use other method except above mentioned temperature profiles.

TUBE PACKAGE


Dimension of Package (Unit : mm)

35 pieces / Tube
 Material : Polyvinyl chloride
 (anti-static treated)

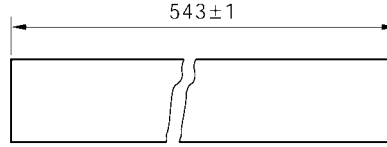


() Reference

Outline of Package

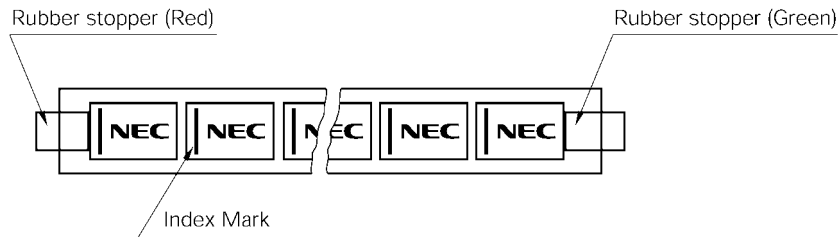


TAPE PACKAGE

APPEARANCE

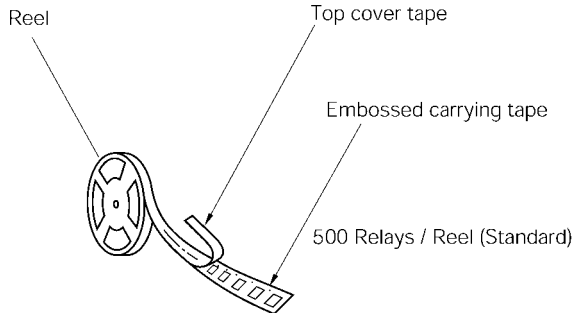


TAPE DIMENSIONS Unit : mm (inch)

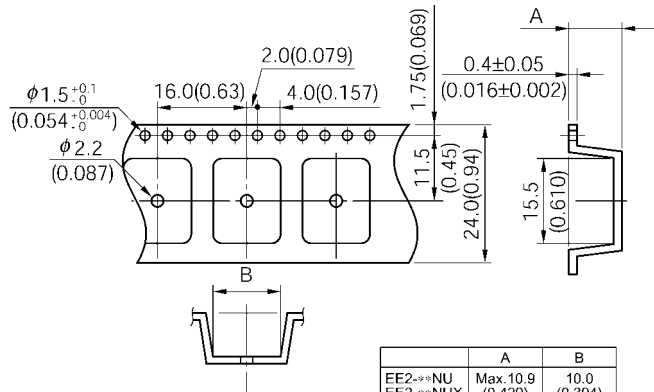

	A	B
EE2-**-NU	Max. 10.9	10.0
EE2-**-NUX	(0.429)	(0.394)
EE2-**-NUH	Max. 11.1	8.0
EE2-**-NUN	(0.437)	(0.315)
EE2-**-NKX		

Relay orientation mark and tape carrying direction.

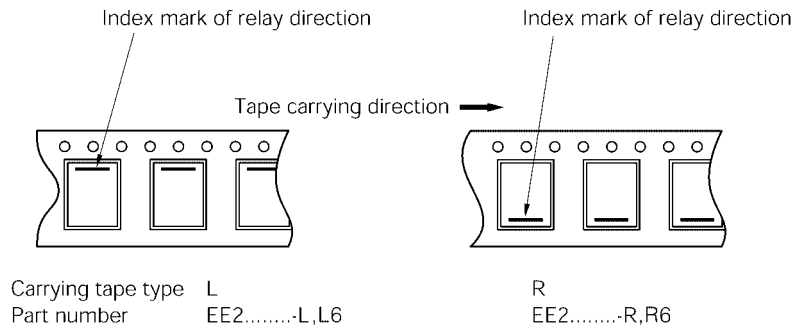

Carrying tape type L
 Part number EE2.....-L,L6

R
 EE2.....-R,R6


Notes on Correct Use

1. Notes on contact load

Make sure that the contact load is within the specified range; otherwise, the lifetime of the contacts will be shortened considerably. Note that the running performance shown is an example, and that it varies depending on parameters such as the type of load, switching frequency, driver circuit, and ambient temperature under the actual operating conditions. Evaluate the performance by using the actual circuit before using the relay.

2. Driving relays


- If the internal connection diagram of a relay shows + and - symbols on the coil, apply the rated voltage to the relay in the specified direction. If a rippled DC current source is used, abnormalities such as beat at the coil may occur.
- The maximum voltage that can be applied to the coil of the relay varies depending on the ambient temperature. Generally, the higher the voltage applied to the coil, the shorter the operating time. Note, however, that a high voltage also increases the bounce of the contacts and the contact opening and closing frequency, which may shorten the lifetime of the contacts.
- If the driving voltage waveform of the relay coil rises and falls gradually, the inherent performance of the relay may not be fully realized. Make sure that the voltage waveform instantaneously rises and falls as a pulse.

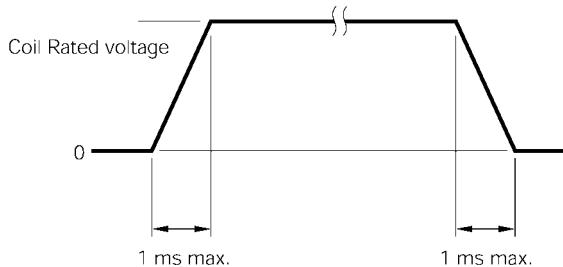

- For a latching relay, apply a voltage to the coil according to the polarity specified in the internal connection diagram of the relay.
- If a current is applied to the coil over a long period of time, the coil temperature rises, promoting generation of organic gas inside the relay, which may result in faulty contacts. In this case, use of a latching relay is recommended.
- The operating time and release time indicate the time required for each contact to close after the voltage has been applied to or removed from the coil. However, because the relay has a mechanical structure, a bounce state exists at the end of the operating and release times. Furthermore, because additional time is required until the contact stabilizes after being in a high-resistance state, care must be taken when using the relay at high speeds.

3. Operating environment

- Make sure that the relay mounted in the application set is used within the specified temperature range. Use of a relay at a temperature outside this range may adversely affect insulation or contact performance.
- If the relay is used for a long period of time in highly humid (RH 85% or higher) environment, moisture may be absorbed into the relay. This moisture may react with the NOx and SOx generated by glow discharges that occur when the contacts are opened or closed,

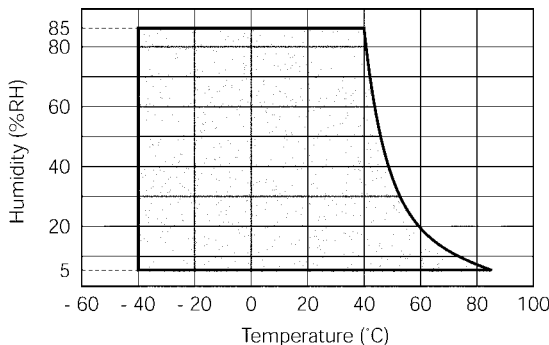

producing nitric or sulfuric acid. If this happens, the acid produced may corrode the metallic parts of the relay, causing operational malfunction.

- Because the operating temperature range varies depending on the humidity, use the relay in the temperature range illustrated in the figure below. Prevent the relay from being frozen and avoid the generation of condensation.
- The relay maintains constant sealability under normal atmospheric pressure (810 to 1,200 hpa). Its sealability may be degraded or the relay may be deformed and malfunction if it is used under barometric conditions exceeding the specified range.
- The same applies when the relay is stored or transported. Keep the upper-limit value of the temperature to which the relay is exposed after it is removed from the carton box to within 50°C.
- If excessive vibration or shock is applied to the relay, it may malfunction and the contacts remain closed. Vibration or shock applied to the relay during operation may cause considerable damage to or wearing of the contacts. Note that operation of a snap switch mounted close to the relay or shock due to the operation of magnetic solenoid may also cause malfunctioning.

4. Notes on mounting relays

- When mounting a relay onto a PC board using an automatic chip mounter, if excessive force is applied to the cover of the relay when the relay is chucked or inserted, the cover may be damaged or the characteristics of the relay degraded. Keep the force applied to the relay to within 1 kg.
- Avoid bending the pins to temporarily secure the relay to the PC board. Bending the pins may degrade sealability or adversely affect the internal mechanism.
- It is recommended to solder the relay onto a PC board under the following conditions:
 - <1> Reflow soldering
Refer to the recommended soldering temperature profile.
 - <2> Flow soldering
Solder temperature: 260°C max., Time: 5 seconds max, Preheating: 100°C max./1 minute max.
 - <3> Manual soldering
Solder temperature: 350°C, Time: 2 to 3 seconds
- Ventilation immediately after soldering is recommended.
- Avoid immersing the relay in cleaning solvent immediately after soldering due to the danger of thermal shock being applied to the relay.
- Use an alcohol-based or water-based cleaning solvent. Never use thinner and benzene because they may damage the relay housing.
- Do not use ultrasonic cleaning because the vibration energy generated by the ultrasonic waves may cause the contacts to remain closed.

5. Handling

- Relays are packaged in magazine cases for shipment. If a space is created in the case after some relays have been removed, be sure to insert a stopper to secure the remaining relays in the case. If relays are not well secured, vibration during transportation may cause malfunctioning of the contacts.
- Exercise care in handling the relay so as to avoid dropping it or allowing it to fall. Do not use a relay that has been dropped.
- If a relay drops from a workbench to the floor, a shock of 9,800 m/s² (1,000 G) or more is applied to the relay, possibly damaging its functions. Even if a light shock has been applied to the relay, thoroughly evaluate its operation before using it.
- Latching relays are factory-set to the reset state for shipment. A latching relay may be set, however, by vibration or shock applied while being transported. Be sure to forcibly reset the relay before using it in the application set. Also note that the relay may be set by unexpected vibration or shock when it is used in a portable set.
- The sealability of a surface-mount relay may be lost if the relay absorbs moisture and is then heated during soldering. When storing relays, therefore, observe the following points:
 - <1> Please use relays within 12 months after delivery. (Storage conditions : 30 degrees C / 60% RH)
 - <2> For MBB packing, Please use relays within 2 years after delivery. (Stronge conditions : 30 degrees C / 60% RH)
- After opening MBB packing, Please use within 3 months. (Storage conditions : 30 degrees C/ 60% RH)

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC/TOKIN Corporation. NEC/TOKIN Corporation assumes no responsibility for any errors which may appear in this document.

NEC/TOKIN Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC/TOKIN Corporation or others. While NEC/TOKIN Corporation has been making continuous effort to enhance the reliability of its electronic components, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC/TOKIN electronic component, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features. NEC/TOKIN devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC/TOKIN devices is "Standard" unless otherwise specified in NEC/TOKIN's Data Sheets or Data Books. If customers intend to use NEC/TOKIN devices for applications other than those specified for Standard quality grade, they should contact an NEC/TOKIN sales representative in advance.

(Note)

- (1) "NEC/TOKIN" as used in this statement means NEC/TOKIN Corporation and also includes its majorityowned subsidiaries.
- (2) "NEC/TOKIN electronic component products" means any electronic component product developed or manufactured by or for NEC/TOKIN (as defined above).

DE0202



EE2 Series

[Features](#) | [Applications](#) | [Specifications](#) | [Dimensions](#) | [Pad Layout](#) | [Markings](#) | [Schematics](#) | [Part Number System](#)
[Nominal Lineup](#) | [Safety Standard and Rating](#) | [Soldering Condition](#) | [Tube Package](#) | [Tape Package](#)

[Download PDF \(100K\)](#)

EC2/EE2 Series Data

Features

The NEC EE2 series relays are low power consumption, low magnetic interference surface mount relays that meet 2500V surge requirements (between coil and contacts). Their compact lightweight design makes them ideal for use in telecommunication equipment. This series complies with FCC Part 68 2500V surge voltage requirements.

The EE2 series is available in 2 form C (DPDT) contact arrangements for all latch types. The EE2 series also offers a minimum foot print design as well as a tape and reel packaging system.



- Compact and lightweight
- 2 form C contact arrangement
- Low power consumption: 100 to 140mW
- Reduced mounting space: 15 mm x 9.5 mm
- High-breakdown voltage of coil to contacts: 1500 Vac, 2500 V (2 x 10 μ s*)
- Capable of high-power switching: 700 Vac, 4.2 A, 4 times in case of accident
- UL recognized (E73266), CSA certified (LR46266)
- Certified to EN 60950
- NKX type guarantees 1.5kVAC withstanding voltage on the normally open contacts

Applications

Electronic switching systems, PBX, terminal equipment, telephone system.

Specifications

Contact Form	2 form C	
Contact Material	Silver alloy with gold alloy overlay	
Contact Ratings	Maximum switching power	60 W, 125 VA
	Maximum switching voltage	220 Vdc, 250 Vac
	Maximum switching current	2 A
	Maximum carrying current	2 A
Minimum Contact Ratings	10 mVdc, 10 μ A (resistive)	
Initial Contact Resistance	75 mOhm max. (Initial)	
Nominal Operating Power	Nonlatch type	140 mW (3 to 12 V), 200 mW (24 V) (NKX type: 230mW)
	Single coil latch type	100 mW
	Double coil latch type	140 mW
Operate Time (Excluding bounce)	Approximately 2 ms	
Release Time (Excluding bounce)	Approximately 1 ms	
Insulation Resistance	1000 MOhm at 500 Vdc	
Breakdown Voltage		1000 Vac (for one minute) 1500 V surge (10 x 160 μ s *2)
	Between open contacts	

		NK type : Make contact : 1500 Vac (for one minute) 2500 V surge (2 x 10 μ s *3) Break contact : 1000 Vac (for one minute) 1500 V surge (10 x 160 μ s *2)
	Between adjacent contacts	1000 Vac (for one minute), 1500 V surge (10 x 160 μ s *2)
	Between coil to contact	1500 Vac (for one minute), 2500 V surge (2 x 10 μ s *3)
Shock Resistance		735 m/s ² (75 G) (misoperating) 980 m/s ² (100G) (destructive failure)
Vibration Resistance		10 to 55 Hz, double amplitude 3 mm (20 G) (misoperating) 10 to 55 Hz, double amplitude 5 mm (30 G) (destructive failure)
Ambient Temperature		-40 to +85°C
Coil Temperature Rise		18°C at nominal coil voltage (140mW)
Running Specifications	Nonload	1 x 10 ⁸ *4 operations (nonlatch type) 1 x 10 ⁷ operations (latch type)
	Load	50 Vdc, 0.1 A (resistive) 1 x 10 ⁶ operations at 85°C, 5 Hz 10 Vdc, 10 mA (resistive) 1 x 10 ⁶ operations at 85°C, 2 Hz
Weight		Approximately 1.9 g

*1 This value is a reference value based upon a resistance load. Minimum capacity changes depending on switching frequency, environment temperature and the contact load.


*2 rise time : 10 μ s, fall time: 160 μ s

*3 rise time : 2 μ s, fall time: 10 μ s

*4 This shows a number of operation where it can be running by which a fatal defect is not caused, and a number of operation by which a steady characteristic is maintained is 1 x 10⁷ operations.


Dimensions

mm (inch)

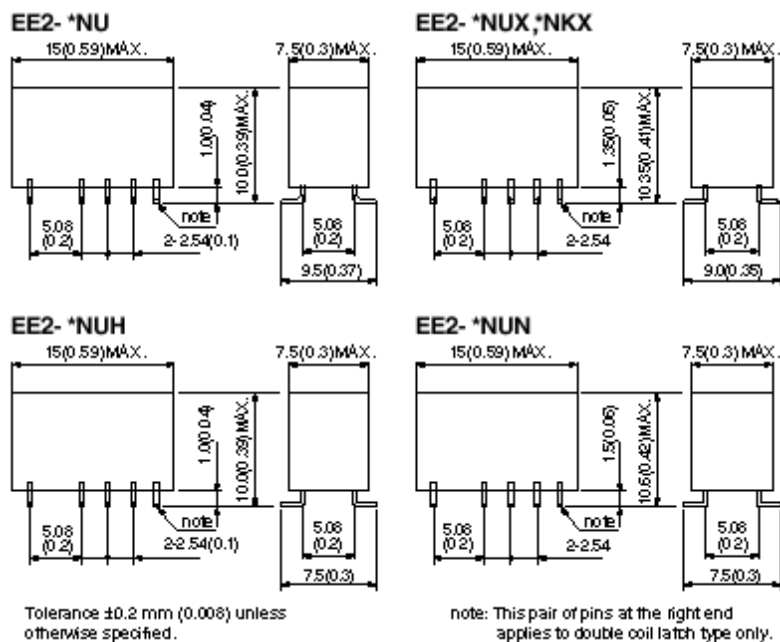

Pad Layout

(bottom view) mm (inch)

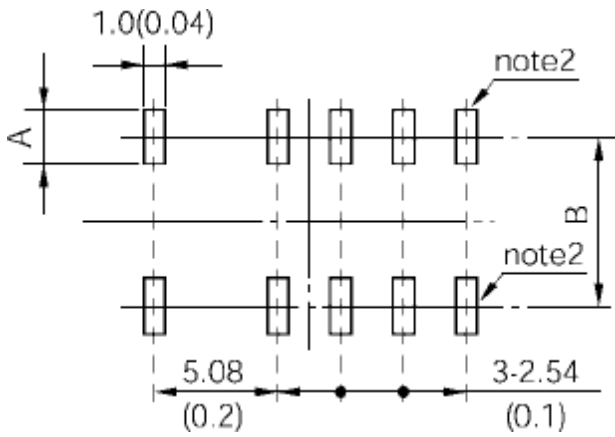


Type	A	B
EE2-*	3.0 (0.118)	7.3 (0.287)
EE2-*NU	3.0 (0.118)	7.3 (0.287)
EE2-*NUX	2.73 (0.107)	7.02 (0.276)
EE2-*NUH	2.0 (0.079)	6.29 (0.248)
EE2-*NUN	2.0 (0.079)	6.29 (0.248)

Note 1. General tolerance: ± 0.1 (± 0.004)


Note 2. This pair of pads at the right end applies to double coil latch type only.

Markings

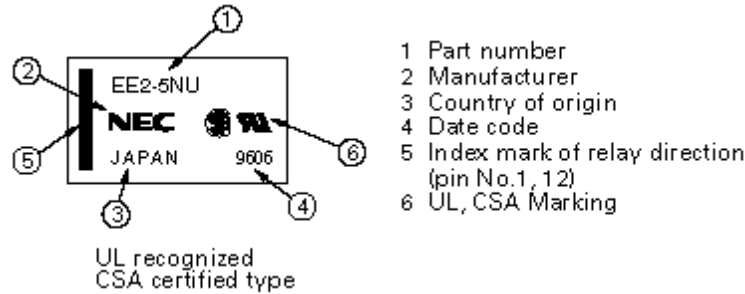

Schematics

(bottom view)

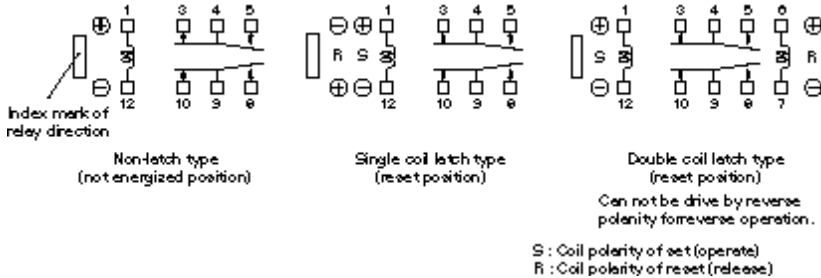

Part Number System

EE2-5 TNU-L

① ②③④ ⑤

① Relay series — surface mount type

② Nominal coil voltage (See nominal lineup)

③ Latch type

Blank: Non-latch type (standard)

S: Single coil latch type

T: Double coil latch type

④ Identifier

NU: Standard type UL recognized, CSA certified type

NUH: Minimum footprint type (UL recognized, CSA certified type)

NUX: High solder joint reliability (UL recognized, CSA certified type)

NUN: High solder joint reliability with minimum footprint type (UL recognized, CSA certified type)

NKX: High withstand voltage, High solder joint reliability (Non latch type only)

⑤ Packaging code

Blank: Tube

L: Embossed carrying tape standard (L type)

Nominal Lineup**Nonlatch Type at 20° C**

	Nominal Coil Voltage (Vdc)	Coil Resistance (Ohm) ±10%	Must Operate Voltage (Vdc)	Must Release Voltage (Vdc)
EE2-3	3	64.3	2.25	0.3
EE2-4.5	4.5	145	3.38	0.45
EE2-5	5	178	3.75	0.5
EE2-6	6	257	4.5	0.6
EE2-9	9	579	6.75	0.9
EE2-12	12	1028	9.0	1.2
EE2-24	24	2880	18.0	2.4

Single Coil Latch Type at 20 °C

	Nominal Coil Voltage (Vdc)	Coil Resistance (Ohm) ±10%	Must Operate Voltage (Vdc)	Must Release Voltage (Vdc)
EE2-3S	3	90	2.25	2.25
EE2-4.5S	4.5	202.5	3.38	3.38
EE2-5S	5	250	3.75	3.75
EE2-6S	6	360	4.5	4.5
EE2-9S	9	810	6.75	6.75
EE2-12S	12	1440	9.0	9.0
EE2-24S	24	5760	18.0	18.0

Double Coil Latch Type (Can not be driven by reverse polarity for reverse operation) at 20 °C**

	Nominal Coil Voltage (Vdc)	Coil Resistance (Ohm) ±10%	Must Operate Voltage (Vdc)	Must Release Voltage (Vdc)
EE2-3T	3	S 64.3	2.25	-
		R 64.3	-	2.25
EE2-4.5T	4.5	S 145	3.38	-
		R 145	-	3.38
EE2-5T	5	S 178	3.75	-
		R 178	-	3.75
EE2-6T	6	S 257	4.5	-
		R 257	-	4.5
EE2-9T	9	S 579	6.75	-
		R 579	-	6.75
EE2-12T	12	S 1028	9.0	-
		R 1028	-	9.0
EE2-24T	24	S 4114	18.0	-
		R 4114	-	18.0

Note

* Test by pulse voltage

** S : Set coil (pin No.1... ⊕, pin No.5... ⊖) R : Reset coil (pin No.10... ⊕, pin No.6... ⊖) The latch type relays should be initialized to the reset position prior to using and should be energized to specific polarity by above polarity to avoid wrong operation.

Any special coil requirement, please contact World Products Inc.

Non Latch NKX Type (High voltage, high solder joint reliability type) at 20°C

	Nominal Coil Voltage (Vdc)	Coil Resistance (Ohm) ±10%	Must Operate Voltage* (Vdc)	Must Release Voltage* (Vdc)
EE2-3NKX	3	39.1	2.25	0.3
EE2-4.5NKX	4.5	88.0	3.38	0.45
EE2-12NKX	12	626	9.0	1.2


Safety Standard and Rating

UL Recognized (UL508)* File No. E73266	CSA Certified (CSA C22.2 No. 14) File No. LR46266
30 Vdc, 2 A (Resistive) 110 Vdc, 0.3 A (Resistive) 125 Vac, 0.5 A (Resistive)	

* Spacing: UL114, UL478

TUV Certificate (EN60255 / IEC60255)
No. R 9751153 (Nonlatch and Single-coil-latch)
Creepage and clearance of coil to contact is more than 2 mm. (According EN60950)
Basic insulation class

Soldering Condition

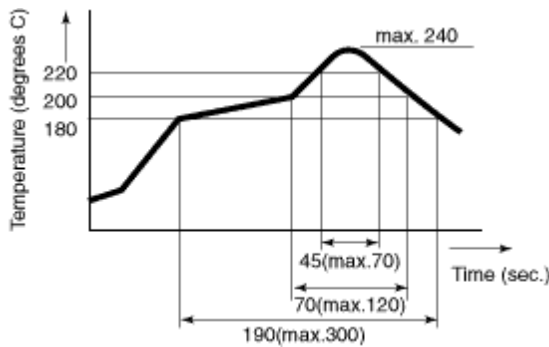

NOTE:



1. Temperature profile shows printed circuit board surface temperature on the relay terminal portion.
2. Please check the actual soldering condition to use other method except above mentioned temperature profiles.

Tube Package

Dimension of Package


(Unit : mm)

35 pieces / Tube
Material : Polyvinyl chloride
(anti-static treated)

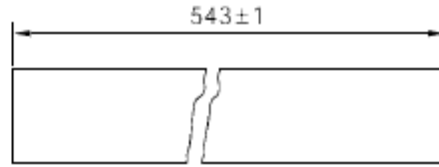


() Reference

Outline of Package

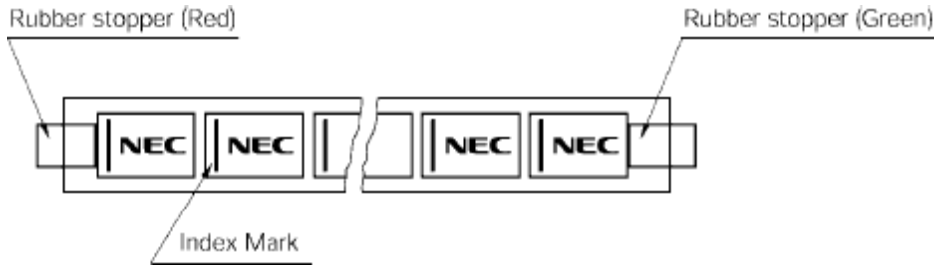


Tape Package

Appearance

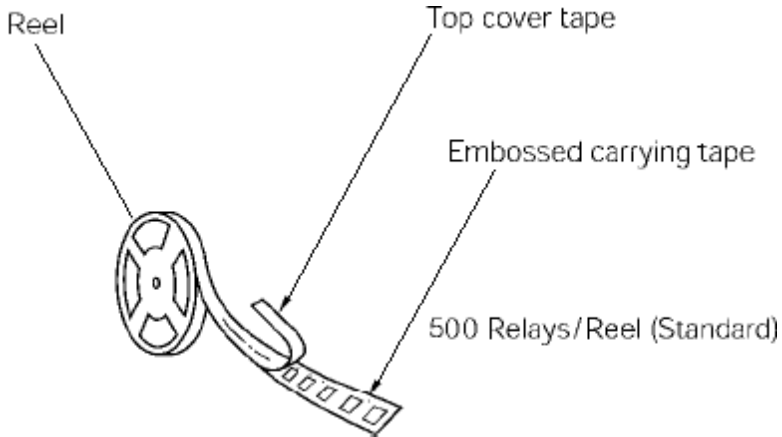


Tape Dimension

(inch)

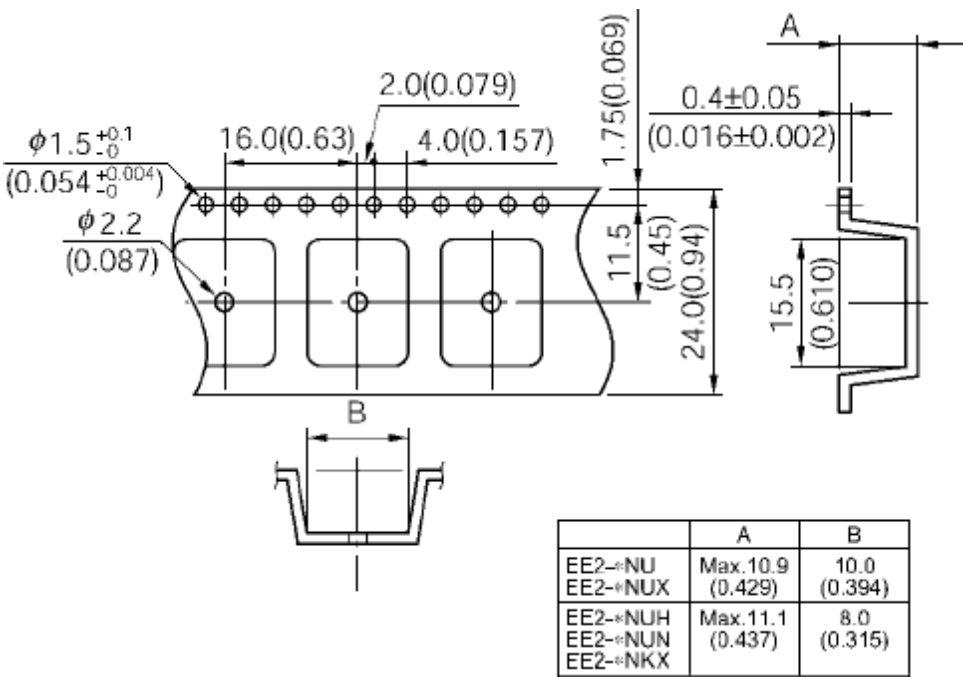

Relay Orientation Mark and Tape Carrying Direction

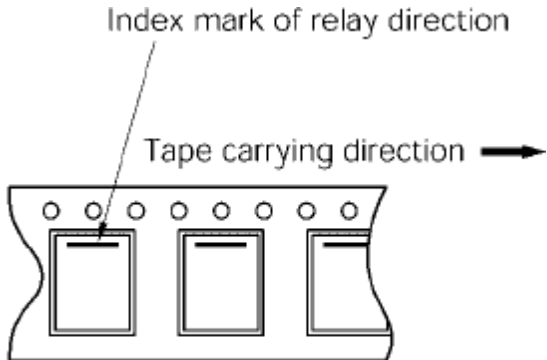

Carrying tape type L
 Part number EE2.....-L,L6

- [EC2/EE2 Series Data](#)
- [Top of page](#)
- [NEC Miniature Signal Relays](#)
- [Notes on Correct Use](#)
- [Home](#)

World Products Inc., 19654 8th St. East, Sonoma, CA 95476 USA
 Phone: (707) 996-5201 Fax: (707) 996-3380 E-mail: sales@worldproducts.com

© 2007 World Products Inc. All rights reserved. [Disclaimer](#).
 Last updated: 9-21-05