

MUSE

Muse represents a new concept of external light: a double modularity that becomes a system that can change and suits the user's needs or project evolution.

MUSE has a soul, it is the modularity that declines in three luminous sources: CAPSULE, STILLA AND SPOT, they can adapt to many accessories that raise the elegance, the function, and the inspiration. The users have the possibility to shape the lighting fixtures at his own will and liking.

The connection of lighting source is made through a spring connector in male/female version present on the accessories, fixed by nuts, and protect with tubber washer to ensure watertightness. Pogo Pins equipped that allow to operate the fixture at 24V. Finishing available are anodized black, bronze and aluminium that exalt the minimalism, the selection of material like copper and borosilicate glass which gives to the collection a contemporary look.



79 Trenton Avenue
Frenchtown, NJ 08825

www.designplan.com

Tel: (908) 996-7710
Fax: (908) 996-7042









COMBINATION CHART

Capsule Mono Emission

Capsule Double Emission



Bollard



•

•

Box Small



•

•

Box Tall



•

•


Wall



•

•

Funis



X

X

Decò Copper



X

X

Decò Bend-Shape



•

•

Decò Stem



•


•

Stilla Short

Stilla Long

Spot

Supply Voltage



●

●

●

220-240V not dimmable/24Vdc (required remote power supply and it is possible to dim on 24Vdc)

X

X

●

220-240V not dimmable

X

X

●

220-240V DALI dimmable (other standards on request)

●

●

●

24Vdc required remote power supply (it is possible to dim on 24Vdc)

●

●

X

24Vdc required remote power supply (it is possible to dim on 24Vdc)

●

●

X

24Vdc required remote power supply (it is possible to dim on 24Vdc)

●

●

X

24Vdc required remote power supply (it is possible to dim on 24Vdc)

●

●

X

24Vdc required remote power supply (it is possible to dim on 24Vdc)

MUSE: MULTI USE




INTERCHANGEABLE SOURCES







DECÒ COPPER

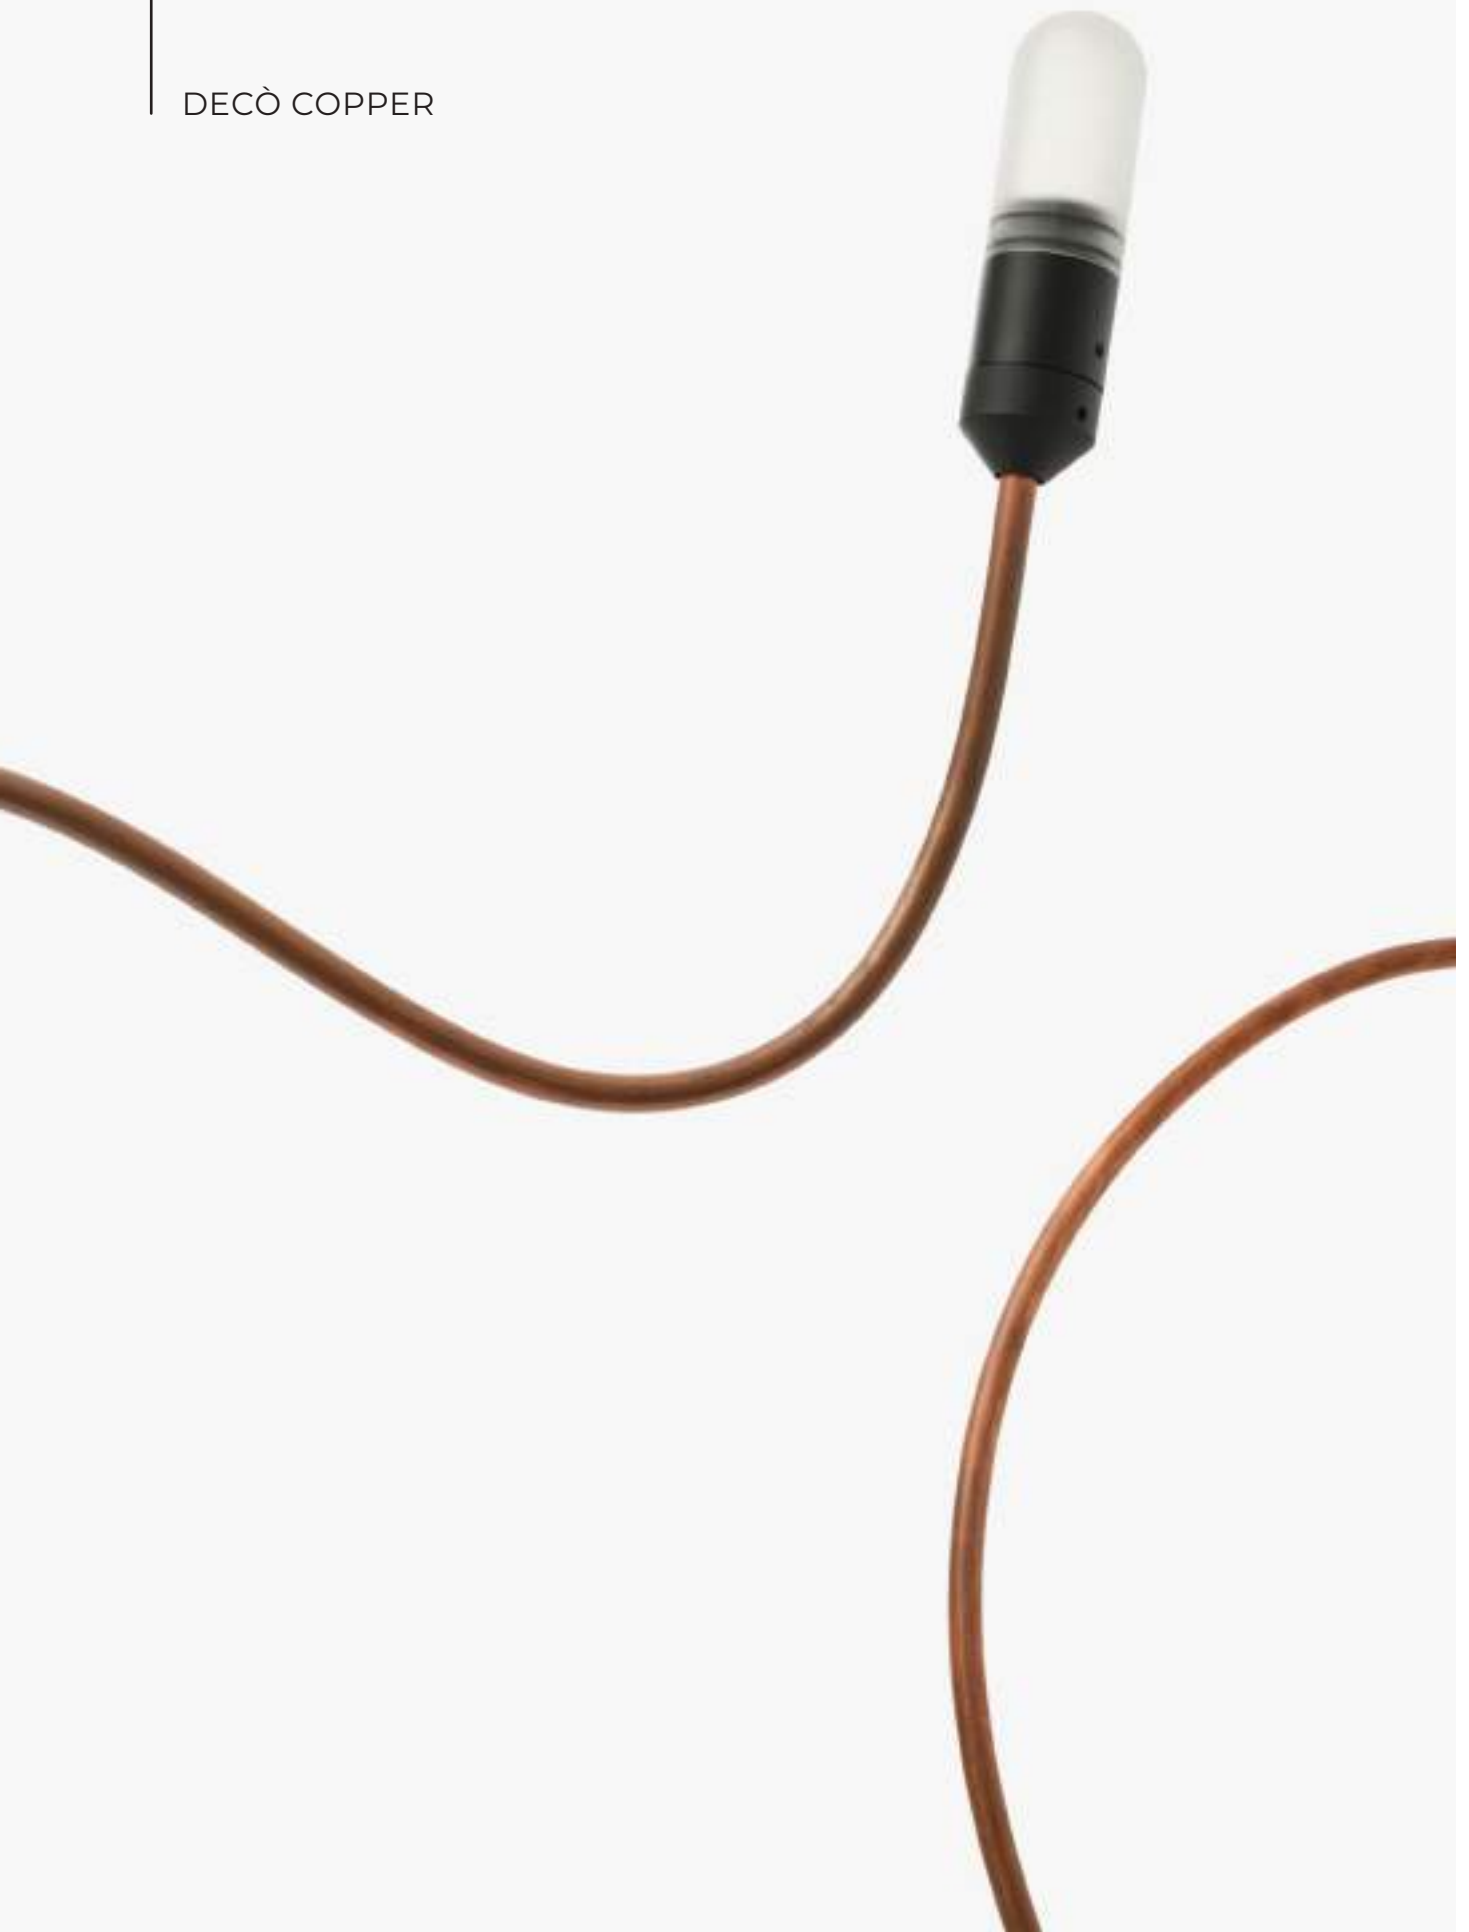



SUPPORT

- **BOLLARD**

Extruded black anodized aluminum, 1.4"x1.4" available in three sizes: 11.8", 19.7", 31.5", with a fixing base of 3.5" of diameter and an aesthetical cover. The bollard can be oriented 360° on the base and fixed to it with nuts. Equipped with a power supply integral or remote 24VDC, the lighting source operates at 24V through a spring connector in male/female version present on the accessories, fixed by nuts, and protect with rubber washer to ensure watertightness and allowing the complete rotation of 360°.

- **SMALL BOX**

Die-cast aluminum polyester powder coated on cataphoresis layer (white, sand, aluminum and black) while the connector is anodized black and supplied with a fixing plate. This box is supplied with integral on/off power supply. The lighting source operates at 24V through a spring connector in male/female version present on the accessories, fixed by nuts, and protect with rubber washer to ensure watertightness and allowing the complete rotation of 360°.

- **BIG BOX**

Die-cast aluminum polyester powder coated on cataphoresis layer (white, sand, aluminum and black) while the connector is anodized black and supplied with a fixing plate. This box is supplied with integral Dali dimmable power supply. The lighting source operates at 24V through a spring connector in male/female version present on the accessories, fixed by nuts, and protect with rubber washer to ensure watertightness and allowing the complete rotation of 360°.

- **WALL**

Wall fixing base aluminum made painted on cataphoresis layer, and anodized turned connector, operating at 24V like the lighting sources through a spring connector in male/female version present on the accessories, fixed by nuts, and protect with rubber washer to ensure watertightness and allowing the complete rotation of 360°.

- **FUNIS (Rope)**

FEP-PVC H2O cable, L118.1" with terminal connector black or bronze anodized. Operating at 24V like the lighting sources through a spring connector in male/female version present on the accessories, fixed by nuts, and protect with rubber washer to ensure watertightness and allowing the complete rotation of 360°.

- **DECO COPPER**

Copper tube adjustable and shapable, L39.4" complete of terminal connector anodized black or bronze, aluminum fixing base or plastic fiberglass reinforced spike, 24V operating. The lighting sources operate through a spring connector in male/female version present on the accessories, fixed by nuts, and protect with rubber washer to ensure watertightness and allowing the complete rotation of 360°.

- **DECO BEND-SHAPE**

Bended steel tube 0.4" diameter, polyester powder painted on cathaphoresis layer, available in two sizes (L19.7", L31.5"). installation through aluminum black base or plastic fiberglass reinforced spike, operating at 24V. The lighting sources operate through a spring connector in male/female version present on the accessories, fixed by nuts, and protect with rubber washer to ensure watertightness and allowing the complete rotation of 360°.

- **DECO STEM**

Steel tube 0.4" diameter, polyester powder painted on cathaphoresis layer, available in two sizes (L19.7", L31.5"). installation through aluminum black base or plastic fiberglass reinforced spike, operating at 24V. The lighting sources operate through a spring connector in male/female version present on the accessories, fixed by nuts, and protect with rubber washer to ensure watertightness and allowing the complete rotation of 360°.

MUSE STILLA

Anodized turned aluminum structure available in two colors: black and bronze; borosilicate glass fixed with silicon glue which grants the IP65 protection. The connection of lighting source is made through a spring connector in male/female version present on the accessories, fixed by nuts, and protect with rubber washer to ensure watertightness.

Pogo Pins equipped that allow to operate the fixture at 24V.

The light source can rotate 360° on the accessory.

Two main version available:




1. SHORT L. 3.9"
2. LONG L. 5.1"

- Mid power LED 3W/24VDC
- IP65
- IK05
- CRI \geq 80






STILLA SHORT & LONG

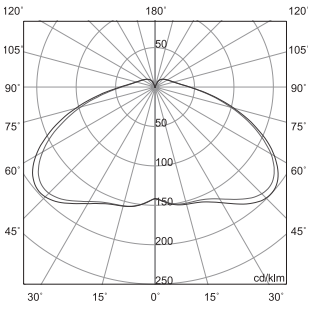

STILLA SHORT

	diffused	3W LED	3W Total	24VDC
				
		<i>bronze</i>	<i>black</i>	
2700K	484lm	D902030029	D902030027	
3000K	510lm	D902010029	D902010027	




STILLA LONG

	diffused	3W LED	3W Total	24VDC
				
		<i>bronze</i>	<i>black</i>	
2700K	484lm	D902030039	D902030037	
3000K	510lm	D902010039	D902010037	

BOLLARD

24VDC

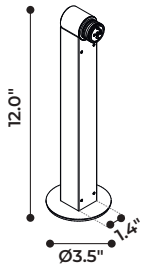


black

H 11.8"	D72007
H 19.7"	D72017
H 31.5"	D72027

WALL

24VDC

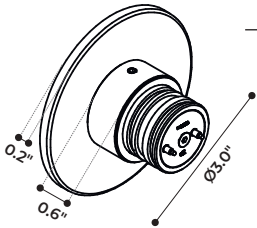


black

D70037

FUNIS (Rope)

24VDC

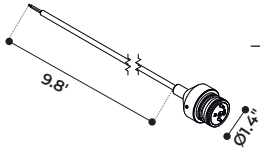


black

D70167



bronze

D70169

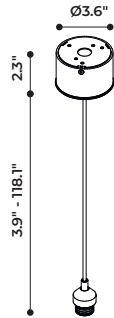

220V-240V





black


D70217



bronze


D70219

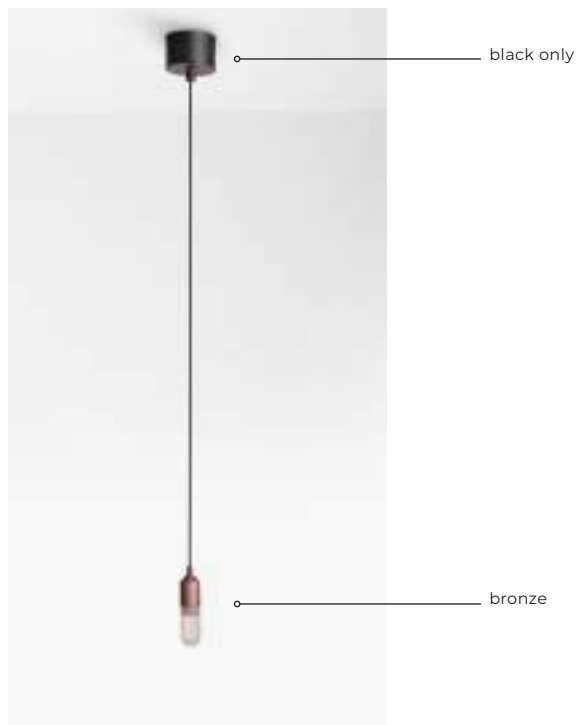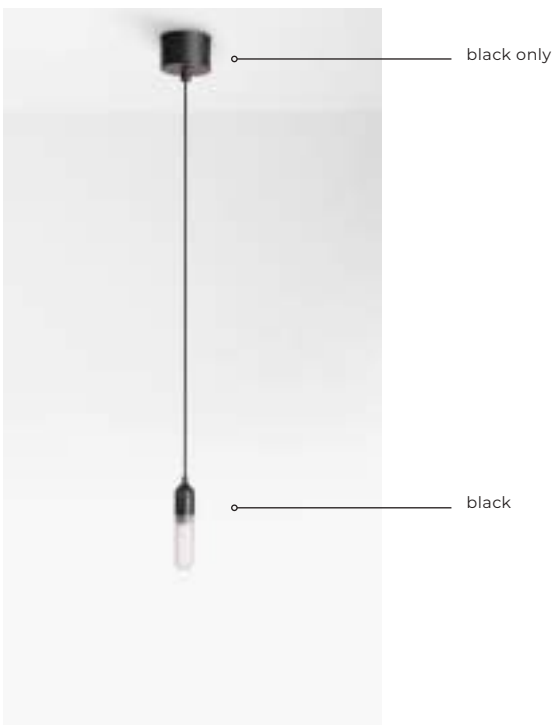

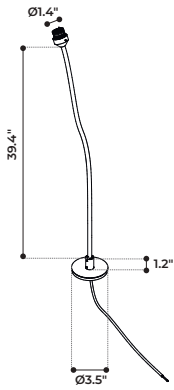

DECÒ COPPER

with base 24VDC



bronze




black

H 39.4"

D70149

D70147

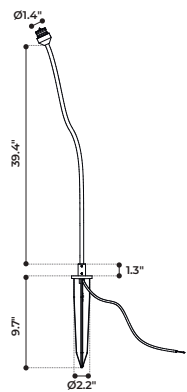

with spike 24VDC



bronze




black

H 39.4"

D70159

D70157

DECÒ BEND-SHAPE STEM

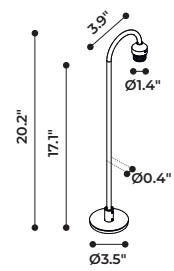

with base 24VDC




black

H 19.7"

D70067

H 31.5"

D70077

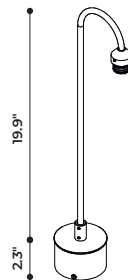


220-240V



black

D70177

D70187

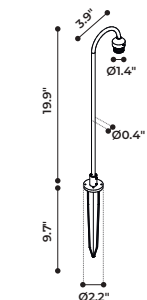

with spike 24VDC



black


H 19.7"

D70087

H 31.5"

D70097

DECÒ STEM

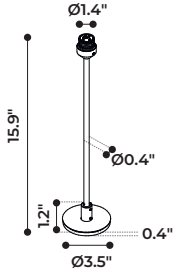


with base 24VDC



black

H 19.7" D70107

H 31.5" D70117

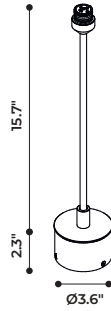


220-240V



black

D70197

D70207

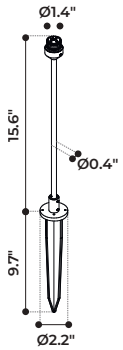

with spike 24VDC



black

H 19.7" D70127

H 31.5" D70137





ACCESSORIES



ANCHOR BOLTS

D9062

MUSE CAPSULE

Anodized turned aluminum structure available in three colors: Aluminum, black and bronze. Mid power LED board is fixed in the white paraboloid fitted a notch along the body and sealed with polyurethane opal resin.



The connection of lighting source is made through a spring connector in male/female version present on the accessories, fixed by nuts, and protect with rubber washer to ensure watertightness. Pogo Pins equipped that allow to operate the fixture at 24V. The light source can rotate 360° on the accessory.

Available in single or double emission.


- MONO EMISSION
- Mid power LED : 5W/24V BI EMISSION: 2x5W/24V
- 2700/2800K
- 3000/3100K
- CRI \geq 80
- IP65
- IK08



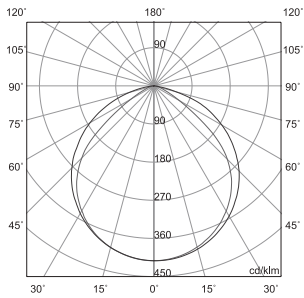

CAPSULE DOUBLE EMISSION

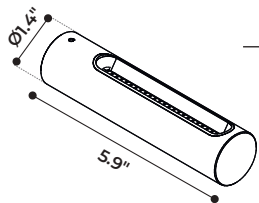


CAPSULE MONO EMISSION




	diffused	5W LED	5W Total	24VDC
				
	<i>bronze</i>	<i>black</i>	<i>aluminum</i>	
2700/2800K	570lm	D902030009	D902030007	D902030006
3000/3100K	600lm	D902010009	D902010007	D902010006

CAPSULE DOUBLE EMISSION

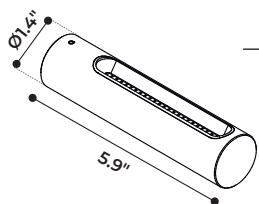

	diffused	2x5W LED	5W Total	24VDC
				
	<i>bronze</i>	<i>black</i>	<i>aluminum</i>	
2700/2800K	2x570lm	D902030019	D902030017	D902030016
3000/3100K	2x600lm	D902010019	D902010017	D902010016

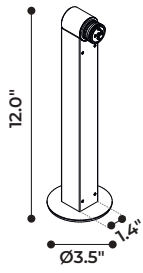




BOLLARD

220V-240V

24VDC



		
	<i>black</i>	<i>black</i>
H300	D70007	D72007
H500	D70017	D72017
H800	D70027	D72027

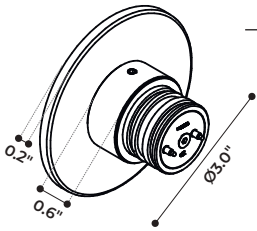

WALL

24VDC



	
	<i>black</i>
	D70037




SMALL BOX

220-240V

max 12W

3.5" X 1.4" X H 4.1"



				
	<i>white</i>	<i>sand</i>	<i>aluminum</i>	<i>black</i>
	D70042	D70043	D70045	D700411



BIG BOX

220-240V

max 16W


DALI

3.5" X 1.4" X H 6.4"



				
	<i>white</i>	<i>sand</i>	<i>aluminum</i>	<i>black</i>
	D70052	D70053	D70055	D700511

DECÒ BEND-SHAPE STEM

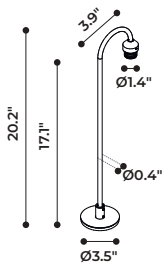


with base 24VDC



black

H 19.7" D70067

H 31.5" D70077

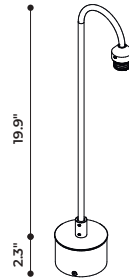

220-240V




black

D70177

D70187

ground



with spike 24VDC




black

H 19.7" D70087

H 31.5" D70097

ground

DECÒ STEM

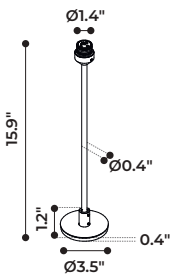


with base 24VDC



black

H 19.7" D70107

H 31.5" D70117

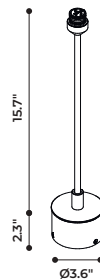

220-240V




black

D70197

D70207



ground



with spike 24VDC



black

H 19.7" D70127

H 31.5" D70137

ACCESSORIES



ANCHOR BOLTS

D9062

MUSE SPOT




Turned aluminum, polyester powder painted (white, sand, aluminum or black) on cathaphoresis treated surface. Tempered transparent glass with black serigraphy diffuser, mechanically sealed with silicon glue to ensure water protection, anodized black heatsink and available with or without honeycomb.

The connection of lighting source is made through a spring connector in male/female version present on the accessories, fixed by nuts, and protect with rubber washer to ensure watertightness. Pogo Pins equipped that allow to operate the fixture at 24V.


- The light source can rotate 360° on the accessory.
- Fasci 15°, 26°, 36°, 60°.
- COB LED 12W/24VDC
- CRI ≥80
- 2700K/3000K
- IP65 IK07




SPOT

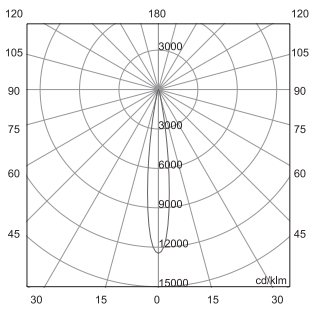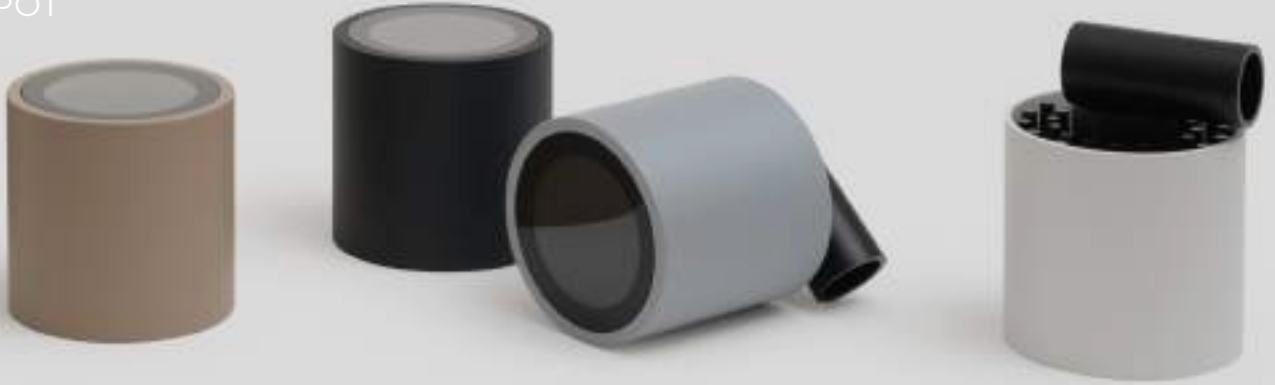


15°

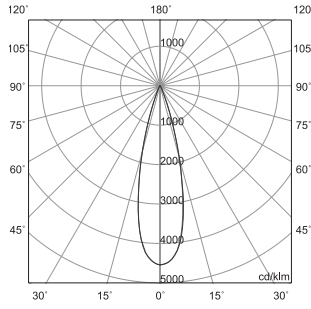

26°

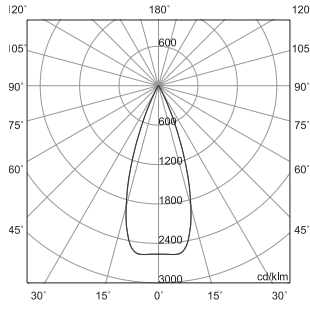

36°

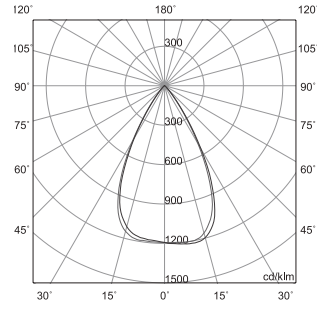

60°

15°

12W LED

14W

Total

24VDC

with honeycomb



white



sand



aluminum



black

2700K

D902030042

D902030043

D902030045

D902030041



3000K




D902010042




D902010043





D902010045





D902010041

26°		12W LED	14W	24VDC	with honeycomb
					
		<i>white</i>	<i>sand</i>	<i>aluminum</i>	<i>black</i>
2700K		D902030052	D902030053	D902030055	D902030051
3000K		D902010052	D902010053	D902010055	D902010051

36°		12W LED	14W	24VDC	with honeycomb
					
		<i>white</i>	<i>sand</i>	<i>aluminum</i>	<i>black</i>
2700K		D902030062	D902030063	D902030065	D902030061
3000K		D902010062	D902010063	D902010065	D902010061


15°		12W LED	14W	24VDC	without honeycomb
					
		<i>white</i>	<i>sand</i>	<i>aluminum</i>	<i>black</i>
2700K	1237lm	D902030082	D902030083	D902030085	D902030081
3000K	1288lm	D902010082	D902010083	D902010085	D902010081

26°		12W LED	14W	24VDC	without honeycomb
					
		<i>white</i>	<i>sand</i>	<i>aluminum</i>	<i>black</i>
2700K	1182lm	D902030092	D902030093	D902030095	D902030091
3000K	1230lm	D902010092	D902010093	D902010095	D902010091

36°		12W LED	14W	24VDC	without honeycomb
					
		<i>white</i>	<i>sand</i>	<i>aluminum</i>	<i>black</i>
2700K	1182lm	D902030102	D902030103	D902030105	D902030101
3000K	1230lm	D902010102	D902010103	D902010105	D902010101

60°		12W LED	14W	24VDC	without honeycomb
					
		<i>white</i>	<i>sand</i>	<i>aluminum</i>	<i>black</i>
2700K	1098lm	D902030072	D902030073	D902030075	D902030071
3000K	1144lm	D902010072	D902010073	D902010075	D902010071

BOLLARD

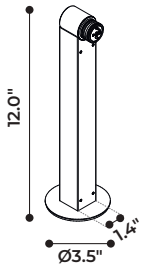

220V-240V

24VDC



black



black

H 11.8" D70007

D72007

H 19.7" D70017

D72017

H 31.5" D70027


D72027



WALL



24VDC

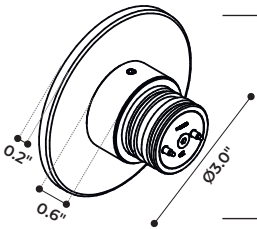

black

D70037


SMALL BOX



220-240V

max 12W

3.5" X 1.4" X H4.1"



white

D70042



sand

D70043



aluminum

D70045



black

D700411


BIG BOX



220-240V

max 16W DALI

3.5" X 1.4" X H6.4"



white

D70052



sand

D70053



aluminum

D70055



black

D700511

ACCESSORIES



ANCHOR BOLTS

D9062