


MUSE is a modular outdoor lamp system that offers multiple lighting solutions based on the needs of the user, by combining one of the 3 emission sources - CAPSULE, STILLA and SPOT - with various installation accessories. MUSE STILLA is an extra resilient sandblasted Pyrex glass cylinder offered in 2 lengths, and 2 standard finishes.

TECHNICAL DATA


Wattage / Input	3W (24VDC)
Power Supply	Remote, not included. See page 4.
Construction	Body: Anodized Turned Aluminum Lens: Borosilicate Glass fixed with Silicon Glue
CCT	2700K, 3000K
CRI	>80
BUG Rating	B0-U2-G1 (3000K)
Delivered Lumens	510 lm (3000K)
Efficacy	170 lm/W (3000K)
Optics	Diffuse - 360° Rotatable
Finishes	Black, Bronze
Fixture Dimensions	Short: Ø1.4" x 3.9" Long: Ø1.4" x 5.1"
Fixture Weight	1.32 lbs
IP Rating	IP65
Impact Resistance	IK05



Fixture Dimensions



SHORT

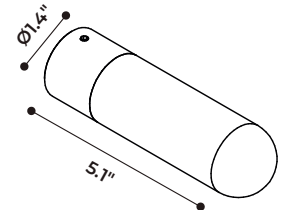

LONG

ORDERING INFORMATION


Example: D902030039.US. See page 2 & 3 for support accessories. Power supplies / accessories sold separately.

D9020			US
Model No.	CCT	Color	US
D9020	3002 - 2700K, 3.9" length 1002 - 3000K, 5.1" length 3003 - 2700K, 3.9" length 1003 - 3000K, 5.1" length	9 - Bronze 7 - Black	US

Job Name/Date:

Fixture Type Designation:





SUPPORT ACCESSORIES - See ordering matrix on page 3

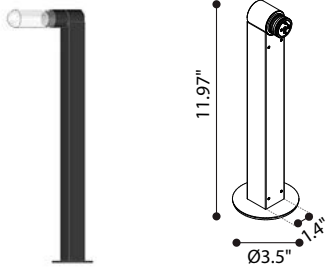


D72007.US
Bollard - 11.8" h - Black

D72017.US
Bollard - 19.7" h - Black


D72027.US
Bollard - 31.5" h - Black

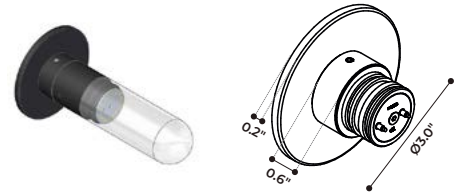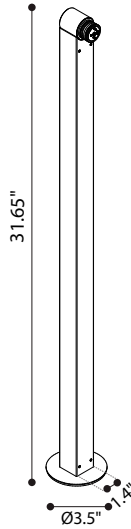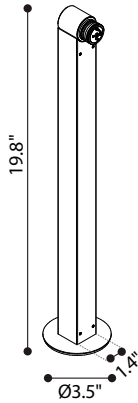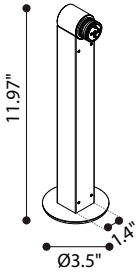


D70037.US
Wall - Black

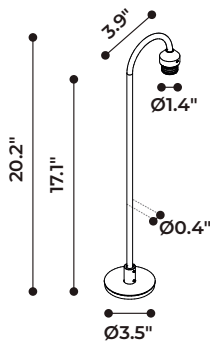


D70067.US
Deco Bend Shape Stem
19.7" h - Black - with Base

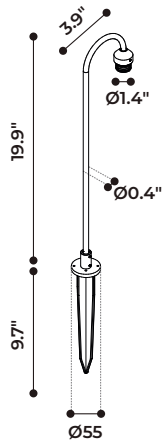

D70087.US
Deco Bend Shape Stem
19.7" h - Black - with Spike

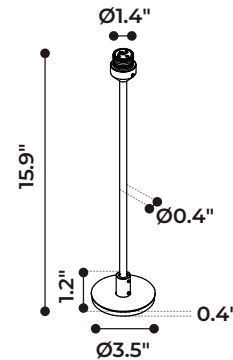

D70107.US
Deco Stem
19.7" h - Black - with Base

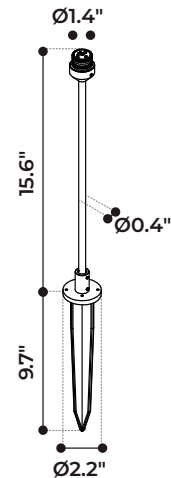

D70127.US
Deco Stem
19.7" h - Black - with Spike

D70077.US
Deco Bend Shape Stem
31.5" h - Black - with Base

D70097.US
Deco Bend Shape Stem
31.5" h - Black - with Spike

D70137.US
Deco Stem
31.5" h - Black - with Spike


More support accessories on page 3

Job Name/Date:

Fixture Type Designation:


SUPPORT ACCESSORIES - See ordering matrix below

INSTALLATION ACCESSORIES

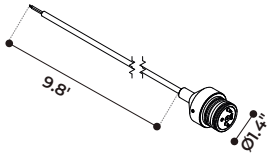


D70167.US
Funis (Rope) - *Black*

D70169.US
Funis (Rope) - *Bronze*

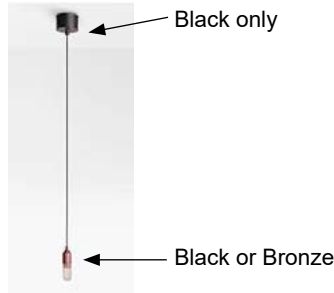


D9062.US
Anchor Bolts

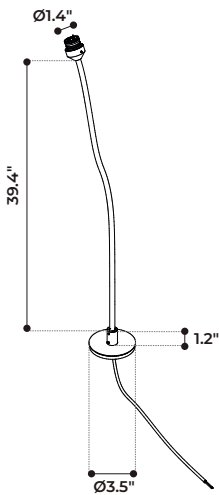

D70149.US
Deco Copper w/ Base - *Bronze*

D70147.US
Deco Copper w/ Base - *Black*

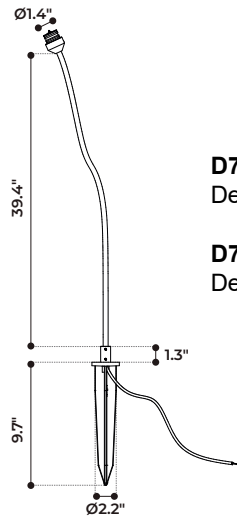

D70159.US
Deco Copper w/ Spike - *Bronze*

D70157.US
Deco Copper w/ Spike - *Black*

SUPPORT ACCESSORIES ORDERING

		US			US
Model #	Description		Model #	Description	
D72007	Bollard - 11.8" h, black		D70107	Deco Stem - 19.7" h, w/ base, black	US
D72017	Bollard - 19.7" h, black		D70127	Deco Stem - 19.7" h, w/ spike, black	
D72027	Bollard - 31.5" h, black		D70137	Deco Stem - 31.5" h, w/ spike, black	
D70037	Wall - black		D70167	Funis (Rope) - black	
D70067	Deco Bend Shape Stem - 19.7" h, w/ base, black		D70169	Funis (Rope) - black	
D70077	Deco Bend Shape Stem - 31.5" h, w/ base, black		D70149	Deco Copper - w/ base, black	
D70087	Deco Bend Shape Stem - 19.7" h, w/ spike, black		D70147	Deco Copper - w/ base, bronze	
D70097	Deco Bend Shape Stem - 31.5" h, w/ spike, black		D70159	Deco Copper - w/ spike, black	
			D70157	Deco Copper - w/ spike, bronze	

Job Name/Date:

Fixture Type Designation:

SUGGESTED POWER SUPPLIES

24VDC

Part Number	Description	Input/Output	# of Fixtures
PPLT00128	MAGTECH Non-Dim	120VAC to 24VDC, 6W, Class 2, IP65	1-1
PPLT00632	0-10V Dimming (Dim to Off)	120-277VAC to 24VDC, 12W, Class 2, IP66	1-3
PPLT00680	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 20W, Class 2, IP66	1-5
PPLT00690	ELV / TRIAC & 0-10V Dimming (100 to 0%)	120-277VAC to 24VDC, 40W, Class 2, IP67	1-10
PPLT00543	0-10V Dimming to 1.0%	120-277VAC to 24VDC, 100W, Class 2	1-26


Suggested Lutron Compatible

Part Number	Option	Lutron SKU	Dim Range	Description	Input/Output	# of Fixtures
PPLT00273	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 40W, Class 2	1-10
PPLT00530	L3DAE / L3DA3W	L3DA	100%-1%	Hi-Lume™ 1% EcoSystem™ or 1% 3-Wire LED Driver	120-277VAC to 24VDC, 96W, Class 2	1-25

For other power supply options consult factory.


PHOTOMETRIC DATA

Maximum Candela = 97.9

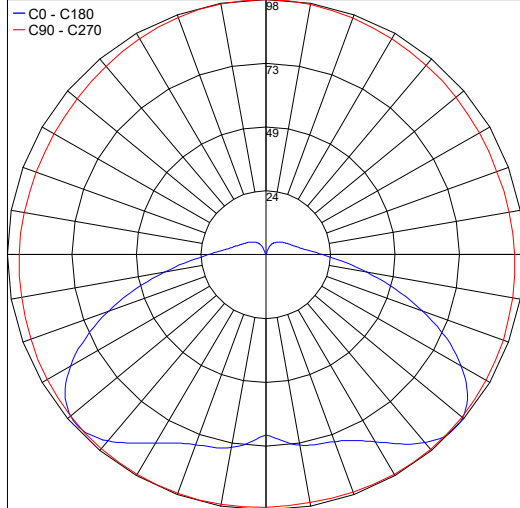

PHOTOMETRIC FILENAME : MUSE-STILLA-2700K-SHORT-GLASS-24V.IES

Maximum Candela = 102

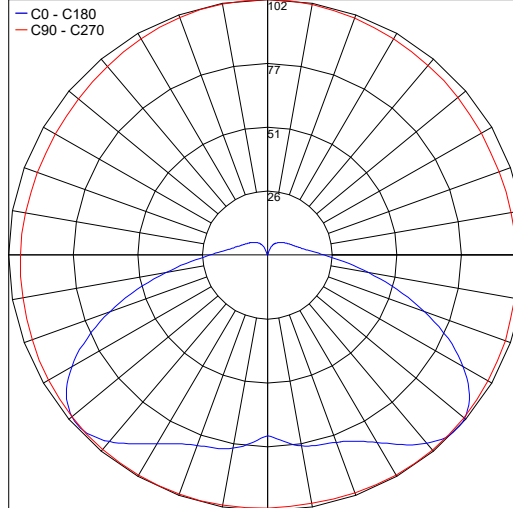

PHOTOMETRIC FILENAME : MUSE-STILLA-3000K-SHORT-GLASS-24V.IES

Job Name/Date:

Fixture Type Designation: