

NETGEAR[®]

BUSINESS

NETGEAR, Inc
408.907.8000
350 E. Plumeria Drive
San Jose, California 95134

Tel: 866-480-2112 Option 2
www.netgear.com/business

Follow us on:

-  [Linkedin.com/company/netgear](https://www.linkedin.com/company/netgear)
-  [Facebook.com/NetgearBiz/](https://www.facebook.com/NetgearBiz/)

NETGEAR[®]

Product Catalog / Volume 22 - 1

NETGEAR[®]
BUSINESS

Product Catalog

Comprehensive
networking solutions
serving the needs of small
and medium businesses

VOLUME 22 - 1



WHO IS NETGEAR?

In business, confidence is everything. When it comes to your network, it's even more important. Whether you're a small business with big dreams or a mid-size business ready to take the next step, you need to share access and ideas safely, connect remote locations securely and give your people the tools to perform. At NETGEAR, we provide networking, storage and security solutions without the cost and complexity of big IT. Our advanced range of reliable, affordable networking products are easy to install and maintain. We deliver solutions you can count on, so you can spend more time on what matters most - growing your business.

MILESTONES

- 2003 First Smart Switch
- 2010 First Lightly Managed Switch
- 2011 First 10G Smart Switch
- 2014 Flexible Mounting Click Switch
- 2017 First App Managed Access Point
First Fully Autonomous Cloud Management Switch
First DIY WiFi Mesh Solution for Business
- 2018 AV-over-IP, SDVoE 48/96p, 10G switch
- 2019 First Business Instant Mesh WiFi
First NETGEAR 100G switches
- 2020 First Ultra60 PoE++ Smart Pro switches
First Cloud managed point-to-point bridge
First Business WiFi 6 AX6000 Tri-band WiFi System
Pre-configured switches engineered for AV over IP
- 2021 Easiest and most affordable WiFi 6 Access Points with the Business Essentials line
- 2022 First Tri-Band WiFi 6E Access Point Targeting Small and Medium Businesses

NETGEAR[®]
BUSINESS

DESIGNED WITH YOUR BUSINESS IN MIND

NETGEAR has pioneered advanced networking technologies for homes, businesses, and service providers around the world.

Since 1996, we've led the industry with a broad range of award-winning products designed to simplify and improve people's lives.

We are dedicated to empowering our customers to collaborate and connect to a world of information by enhancing homes and powering businesses with an unmatched line of the innovative, intelligent, and easy to use WiFi and networking solutions.

Breaking boundaries to power the future.

Patrick Lo


NETGEAR CEO and Co-founder

When we were a startup, 26 years ago, we built our very first hub. We created it to help power the future. To open doors we had only dreamt about. We began to imagine homes without wires or boundaries. Business networking without walls or barriers. Tools and services that make what matters most more secure, scalable, and enjoyable to use. And we built what we imagined.

It earned us awards, a reputation, and respect as a trusted leader in connectivity.



TABLE OF CONTENTS

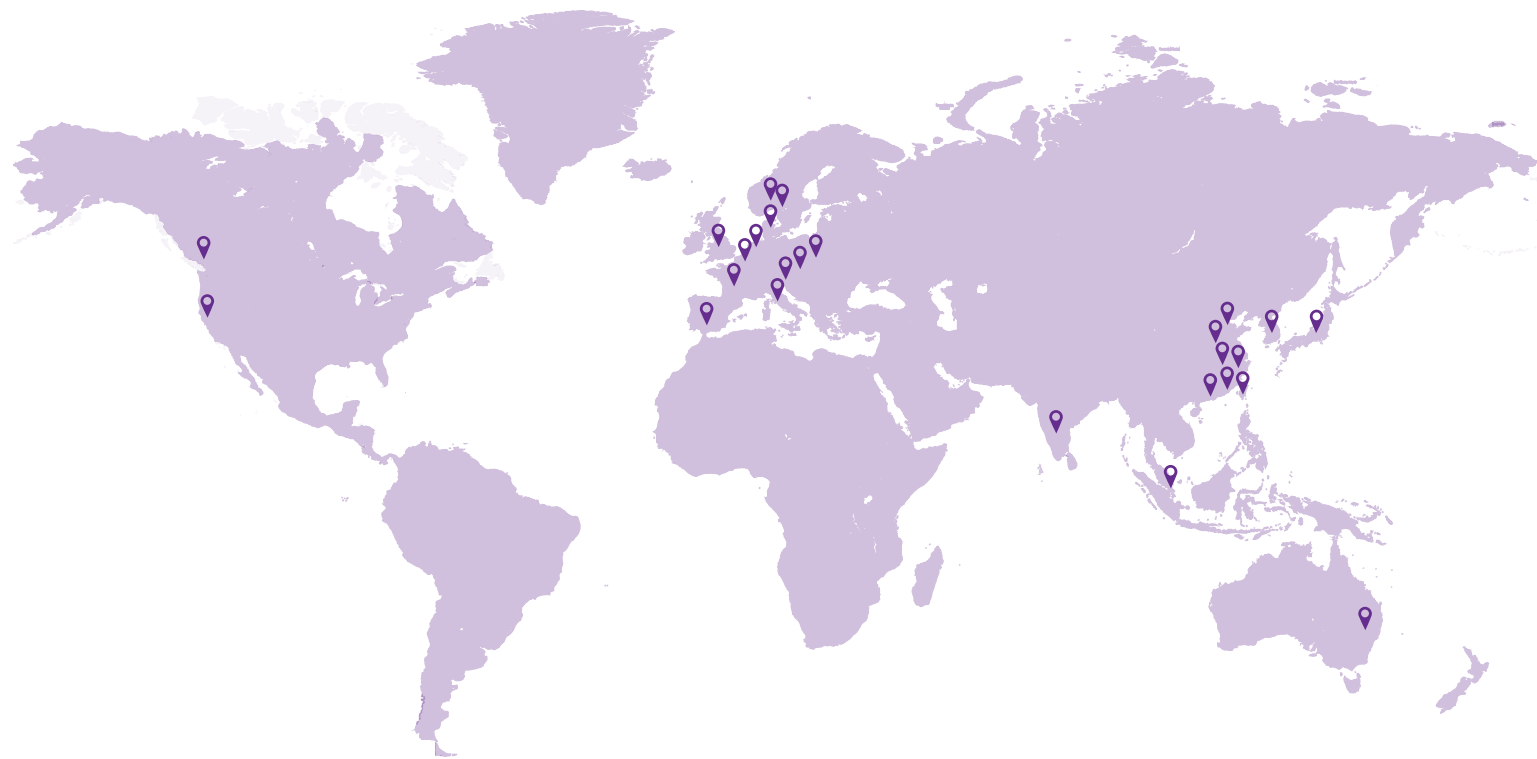

NETGEAR GLOBAL OFFICES

NORTH AMERICA	INDIA
AUSTRALIA	IRELAND
BELGIUM	ITALY
CANADA	JAPAN
CHINA - BEIJING	KOREA
CHINA - DONGGUAN	NETHERLANDS
CHINA - GUANGZHOU	POLAND
CHINA - NANJING	SINGAPORE
CHINA - SHANGHAI	SWITZERLAND
CHINA - SUZHOU	SPAIN
DENMARK	SWEDEN
FRANCE	TAIWAN
GERMANY	UK
HONG KONG	

INTRODUCTION

NETGEAR Introduction	4
Network Solutions	6

NETGEAR INSIGHT

NETGEAR Insight Management Solution	11
-------------------------------------	----

SURVEILLANCE

Surveillance	19
--------------	----

SWITCHES

Switch Introduction	23
Unmanaged Switches	40
Plus Switches	49
Smart Switches	55
Smart Switches with Optional Insight Remote/Cloud Management	63
Fully Managed Switches	71
Modules and Accessories for Switches	80

WIRELESS

Wireless Introduction	85
Business Essentials Access Points	95
Insight Managed Access Points	97
Wireless Mesh Systems	100
Wireless LAN Antennas and Cables	101

BUSINESS ROUTERS

Insight Managed Business Router	103
---------------------------------	-----

MOBILE BROADBAND

Mobile Broadband	106
------------------	-----

SUPPORT

ProSUPPORT for Business	109
-------------------------	-----

CONNECTED HOME PRODUCTS


Connected Home Products	120
-------------------------	-----



Enterprise-class networking for SMB at the right price

NETGEAR has pioneered advanced networking technologies for homes, businesses, and service providers around the world. Since 1996, we've led the industry with a broad range of award-winning products designed to simplify and improve people's lives.

We are dedicated to empowering our customers to collaborate and connect to a world of information by enhancing homes and powering businesses with an unmatched line of the innovative, intelligent, and easy to use WiFi and networking solutions.

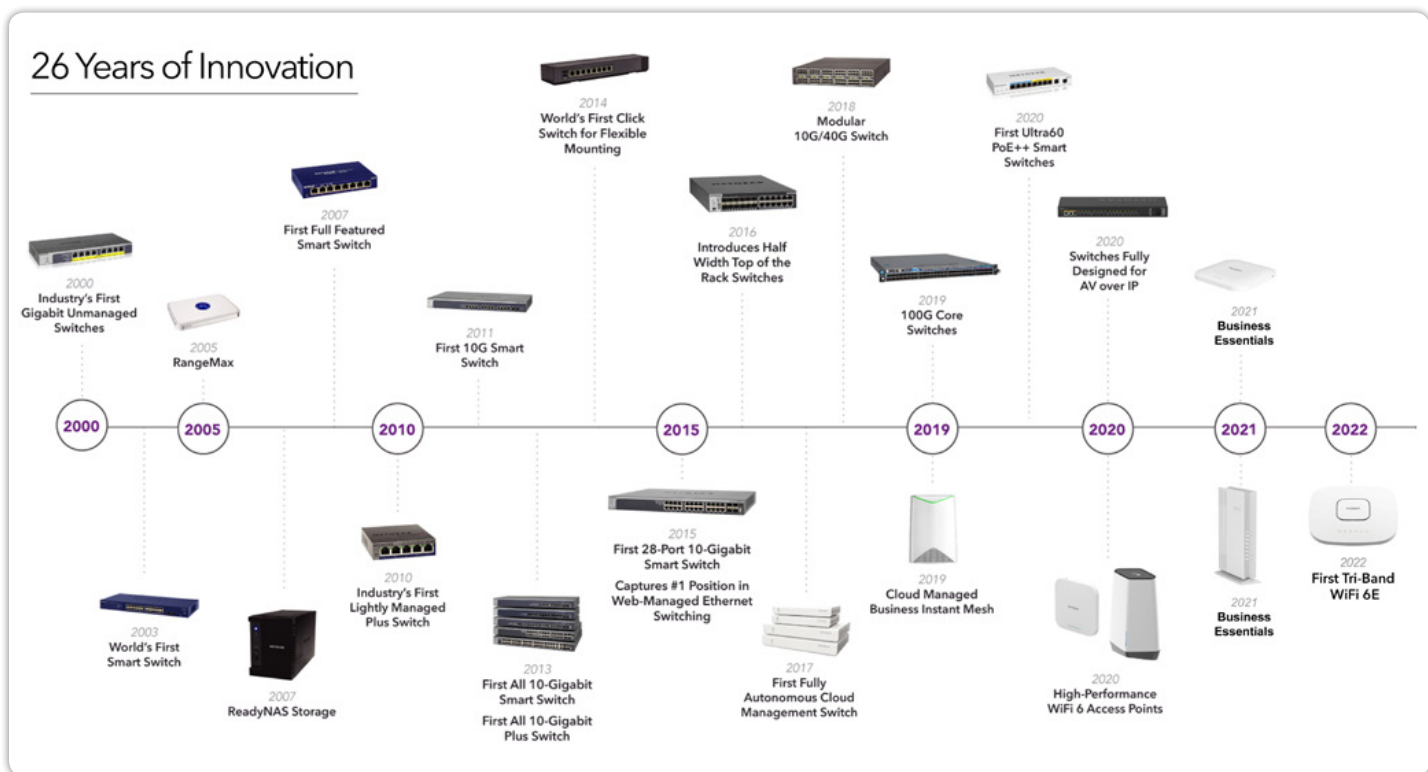

Brand Promise

Powerful connectivity to maximize your productivity, profitability and potential.



Industry-leading innovation



Easy to use



Modern & affordable

INDUSTRY-LEADING EFFICIENT NETWORKING



Flip the switch on costly problems.

From entry-level essentials to fully integrated cloud-managed switches, NETGEAR leads the way by offering the most innovative, comprehensive, scalable, and affordable switching portfolio to fit every business need.



Powerful WiFi with ease.

Cover your growing business with secure, reliable, and blazing fast WiFi. From simple, affordable, DIY WiFi to large, industrial areas, NETGEAR Business' robust line of Wireless products will maximize any network's potential.



Switches Engineered for Pro AV.

NETGEAR Pro AV switches are designed for the unique needs of sending audio, video, and control signals across an Ethernet network. Our Pro AV-focused switches are engineered with the features and industrial design required for successful AV over IP deployments. A range of sizes and PoE power provide the right switch for the right application.




See your network in a whole new way.

NETGEAR is removing the headaches and hassles of IT with the broadest, most cost-effective, and easily scalable network-deployment solution available for businesses. Insight puts a complete, unified network in the palm of your hand. It delivers peace of mind, knowing you can always monitor and control your network devices with ease... anytime, anywhere.

NETWORK SOLUTION FOR SMALL OFFICE AND HOME OFFICE (SOHO) 1-5 USERS

Connection Setup


— Physical Connection
 - - - Management Connection

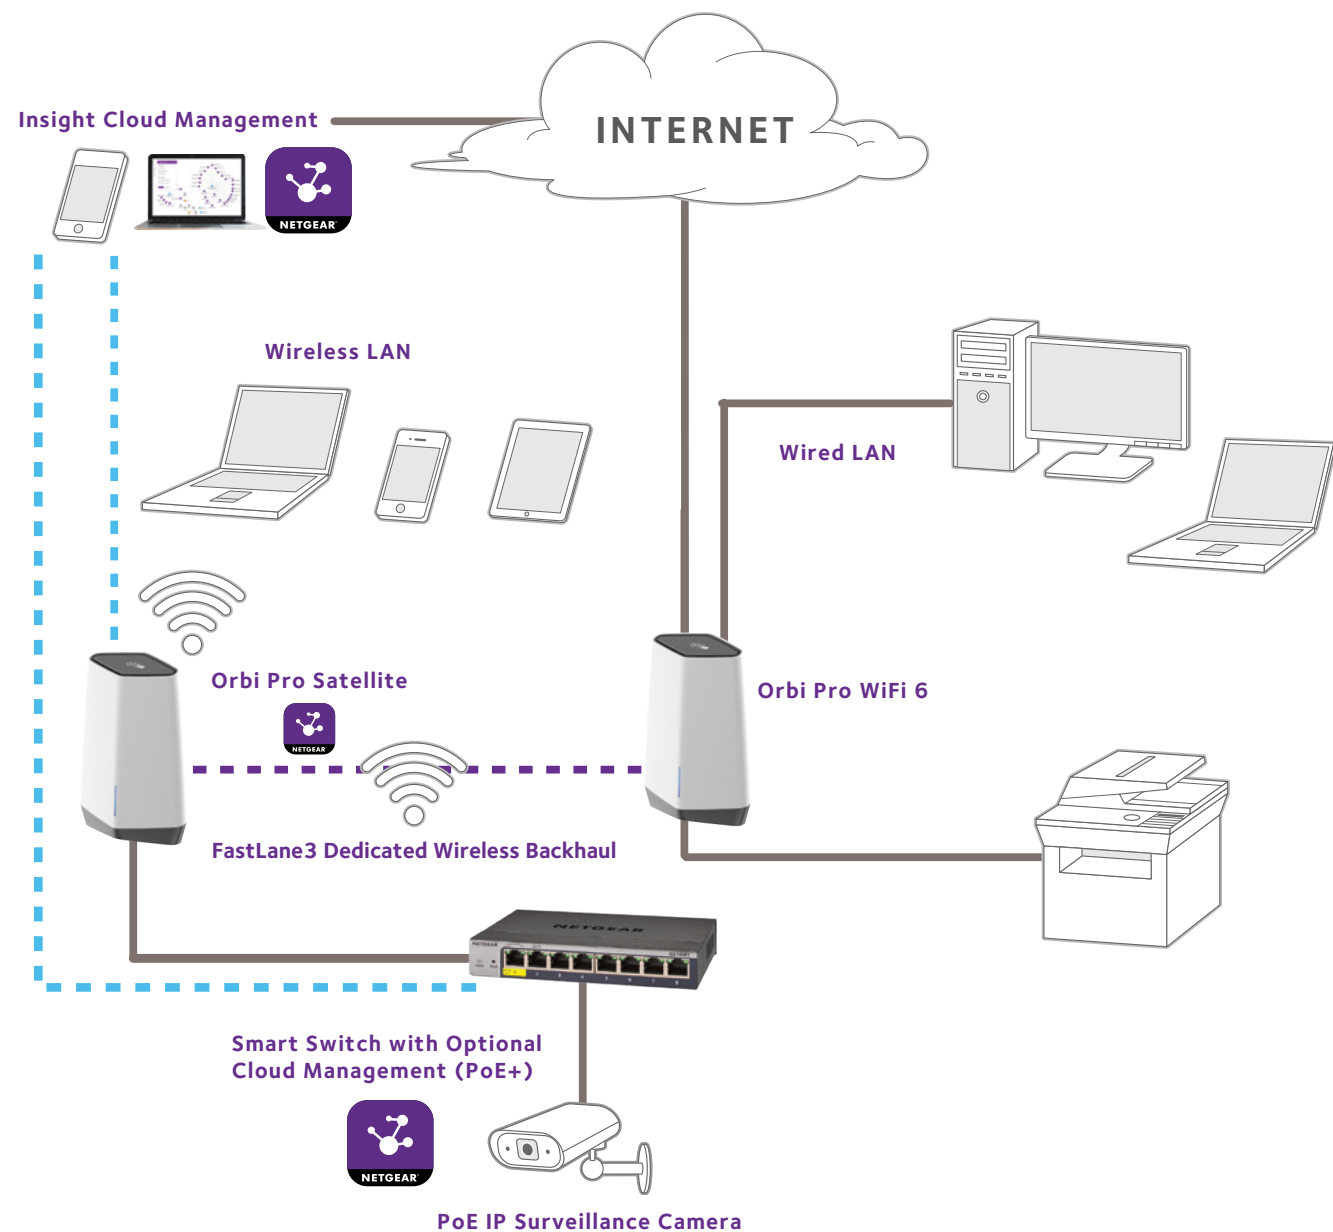

NETWORK SOLUTION FOR WORKING FROM HOME AND SMALL OFFICE 1-5 USERS

Connection Setup

— Physical Connection

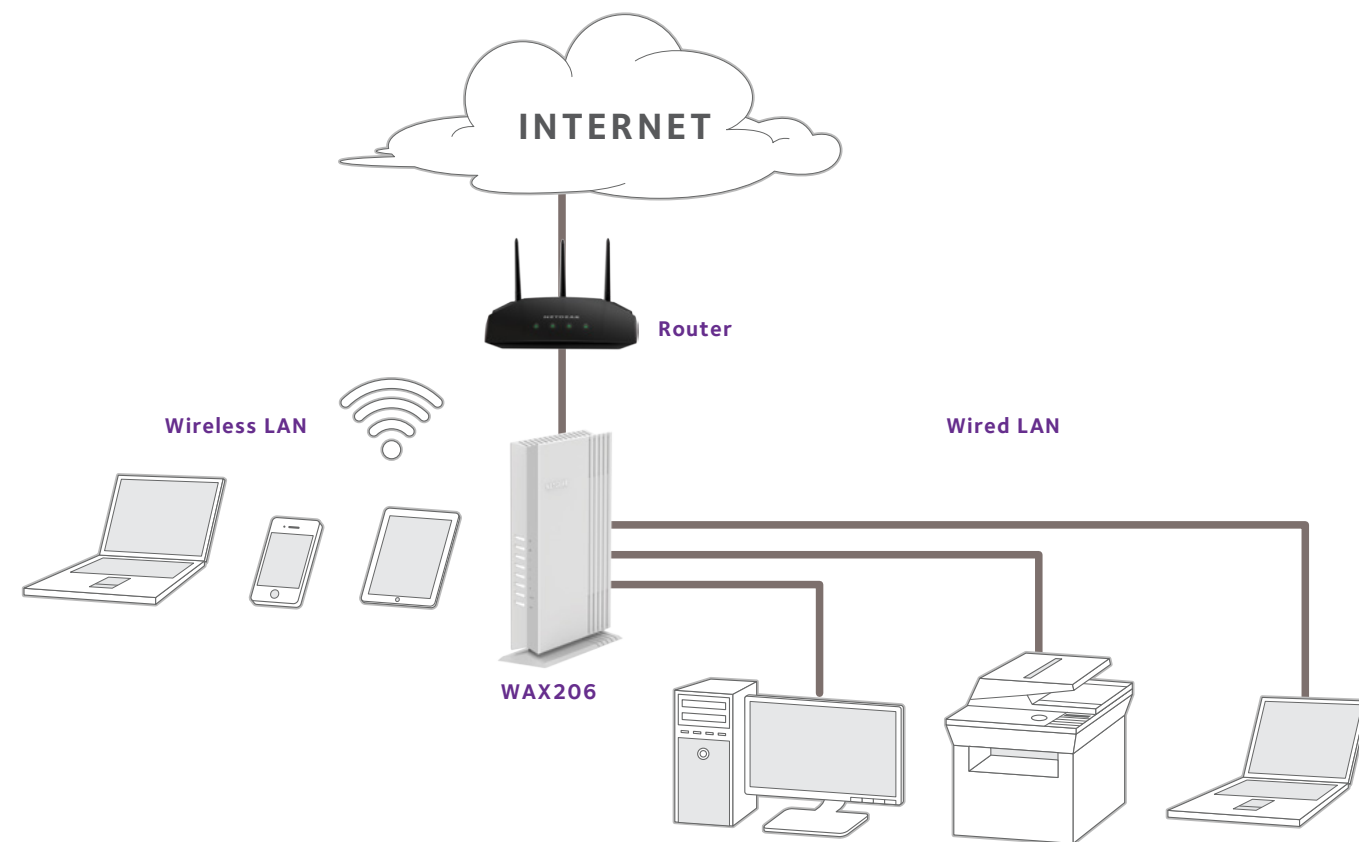




WIRED SOLUTION INSIGHT, 5-150 USERS

Connection Setup


— Physical Connection
 - - - Management Connection

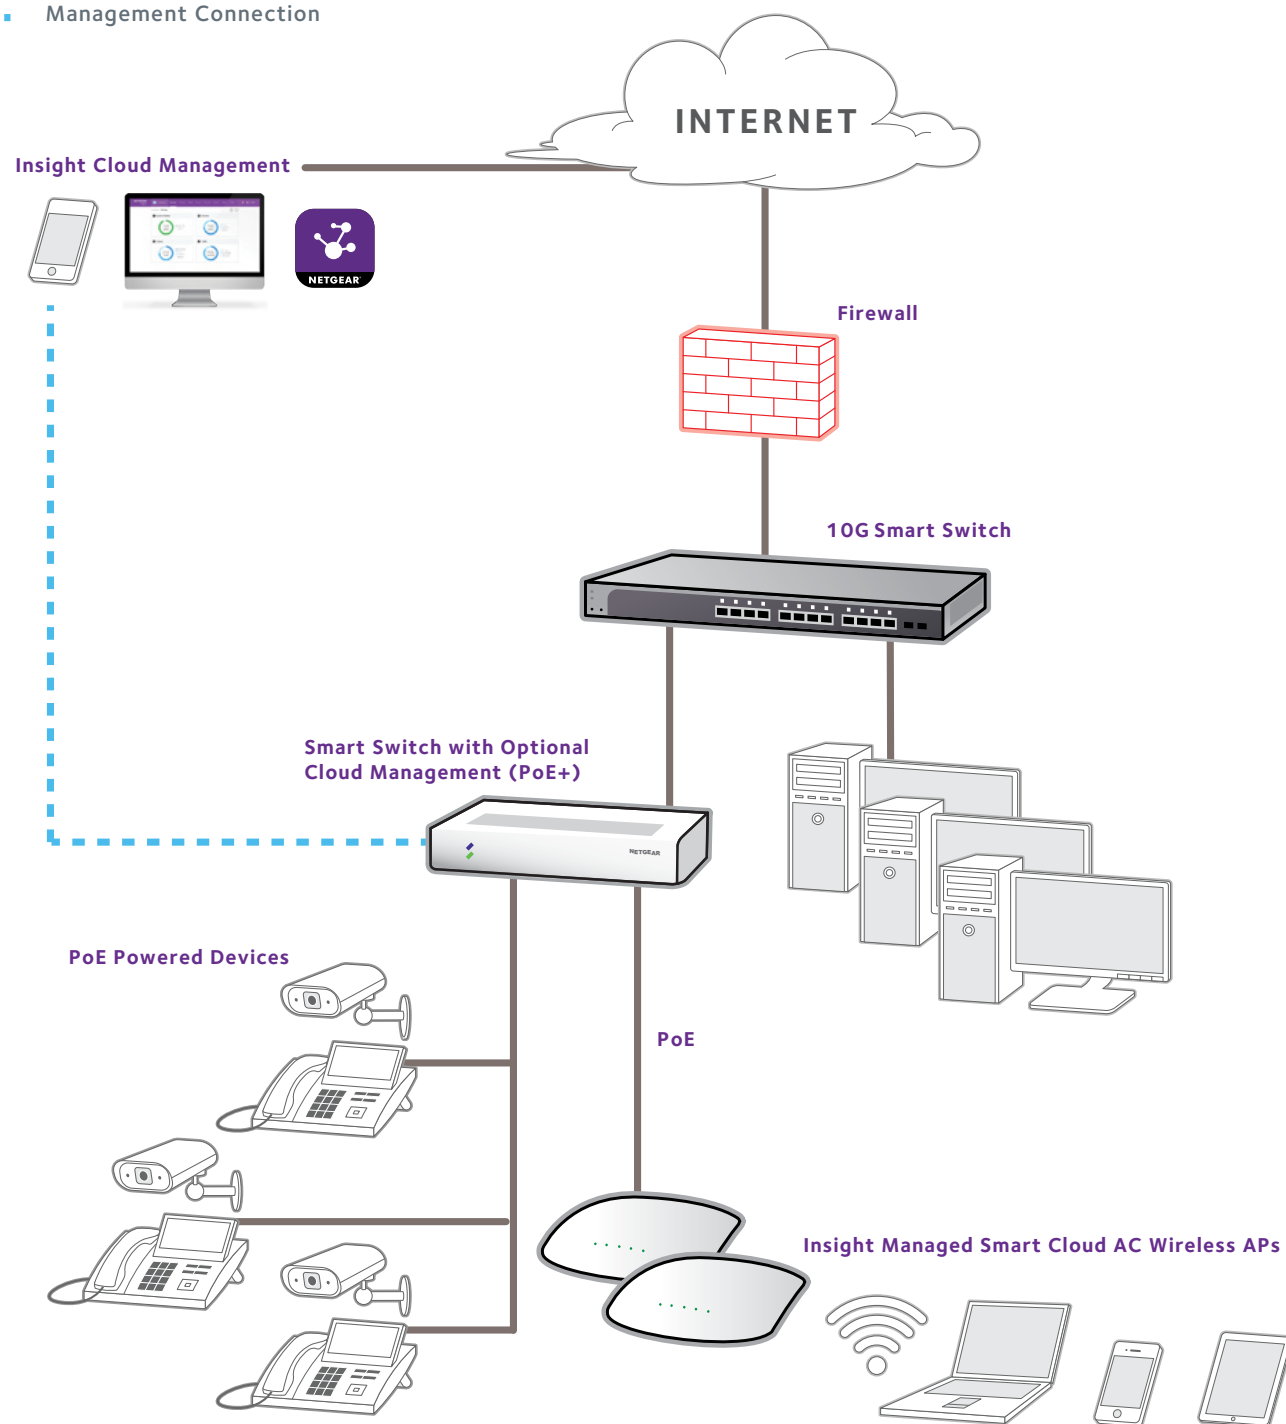


NETWORK SOLUTION FOR A GROWING MID-SIZE BUSINESS, 75-250 + USERS

Connection Setup

— Physical Connection

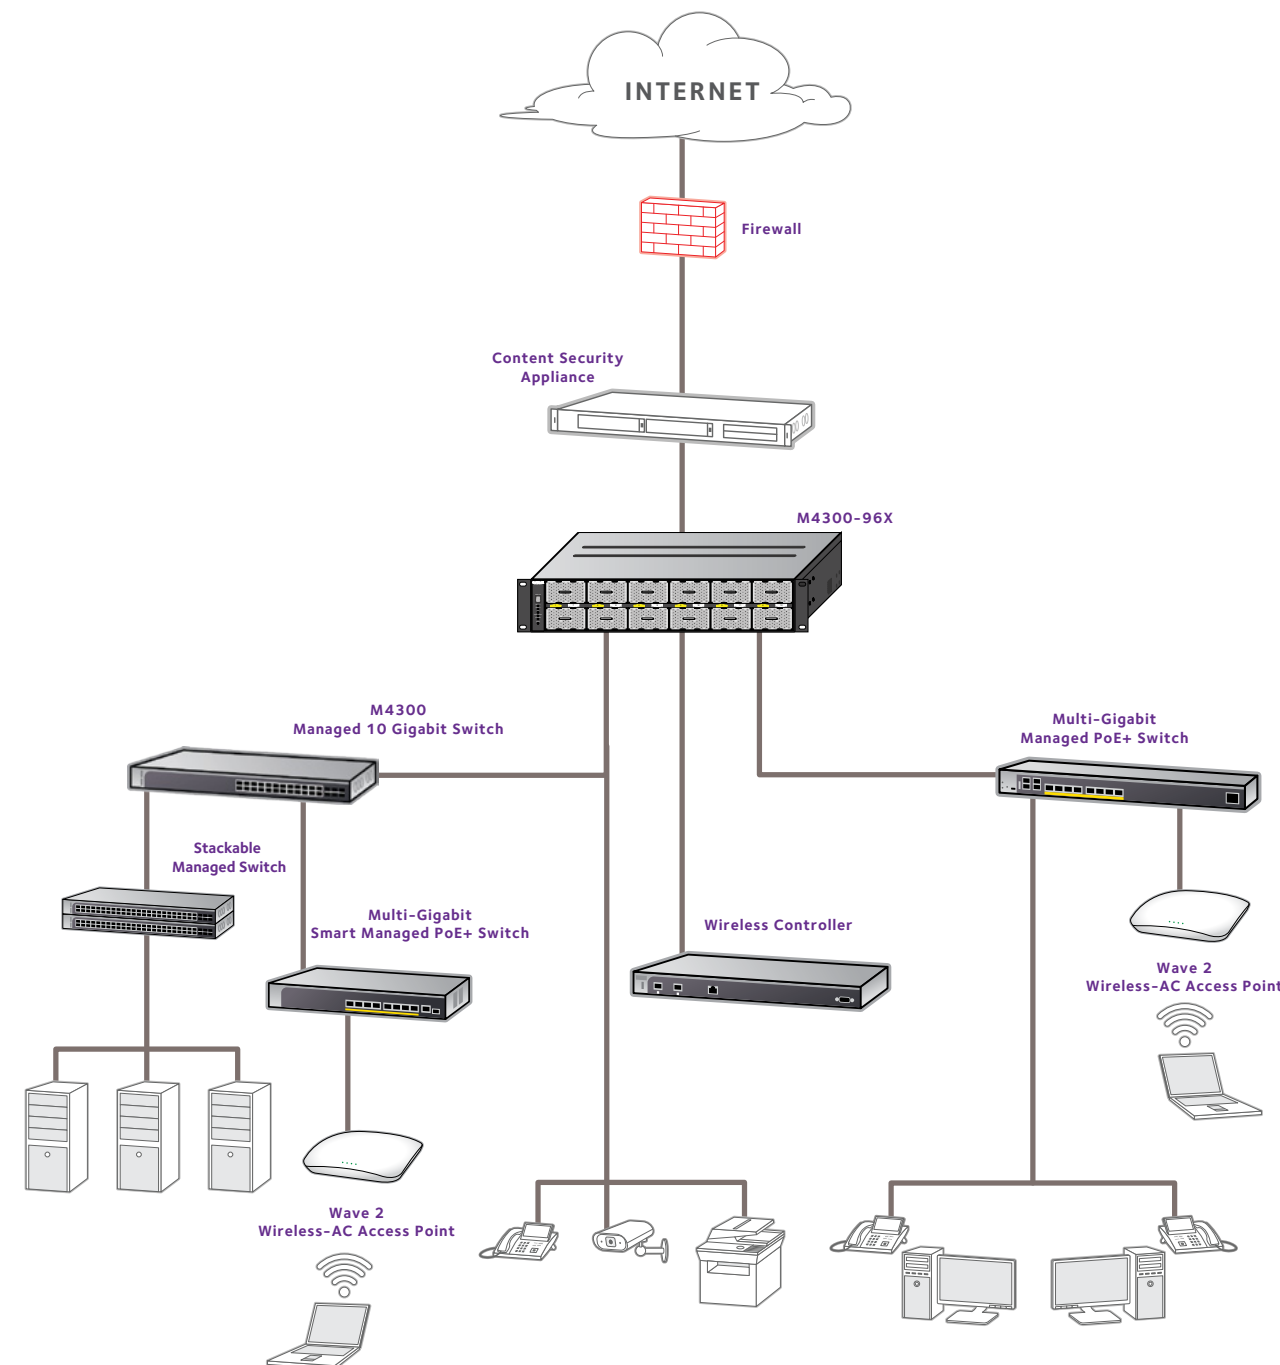

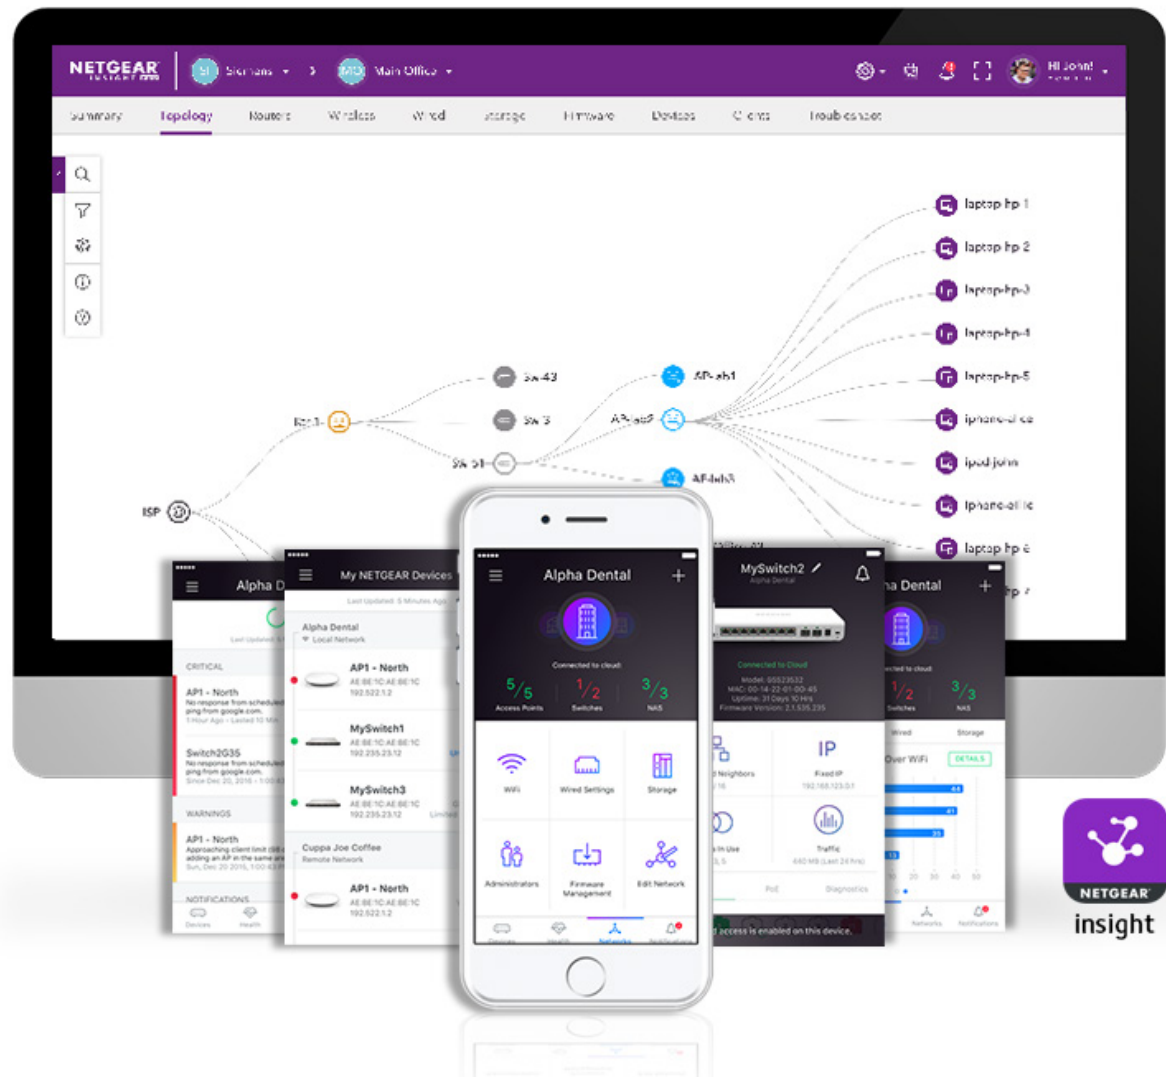

NETGEAR Insight Management Solution

INTRODUCING INSIGHT PRO FOR OUR PARTNERS

Insight Pro is a Cloud platform that makes Network as a Service (NaaS) possible for our partners. NETGEAR now offers the possibility to have both hardware and services that you can manage, monitor 24/7, and provide support for customers.



EASE OF USE, RICH FEATURES AND SECURITY



Multi-tenancy & Multi-location

- One Insight Pro account can centrally manage from a single view
- Roles & responsibilities definition




WiFi roaming & capabilities

- Instant mesh setup for Access Points
- Instant WiFi
- Fast roaming & security
- Captive portal



Automated deployment & updates

- Firmware updates scheduling
- PoE Scheduling
- Network-level setting Save & Copy for speedy deployment of new network locations



Easy configuration & management

- VLANs, LAGs, PoE, SNMP
- WiFi configuration
- Branded automated Custom Reporting specifically tailored for both internal users and end-customers
- Network Cloning



Remote provisioning

- Centralized device configuration
- PoE & port configuration
- Instant VPN to linkup branch offices and multi-sites and provide employees secure remote access




Advanced security

- Two-factor authentication
- Cloud security

UNIQUE EFFICIENT MULTI-TENANT MODEL

Insight Pro is built for scalability and growth. With multi-location & multi-tenant capabilities you can easily set up all the networks for your customers and as an admin give everyone specific rights depending on their role (Manager, Owner).

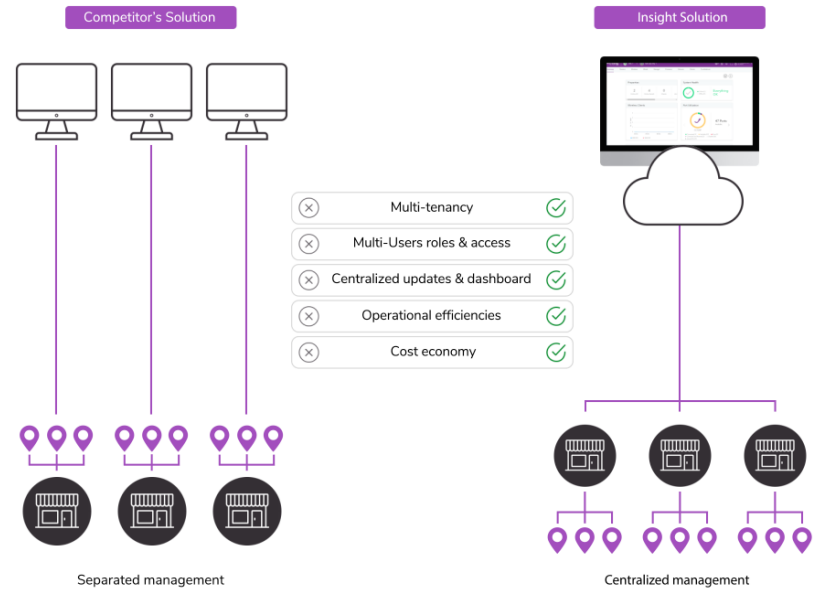


MOVE TO A PROFITABLE RECURRING REVENUE MODEL

Leverage technology to set up 24x7 customer network monitoring & make up for lost hardware margins with increased service revenue

- Move to Recurring Revenue model to raise profitability
- Leverage Cloud technology to reduce investment
- Automate & Replicate low value, mundane tasks to increase efficiency and scale your business
- Get full visibility and proactively react on your customer networks to improve customer satisfaction and customer retention

HOW IT WORKS FOR VARS AND MSPS

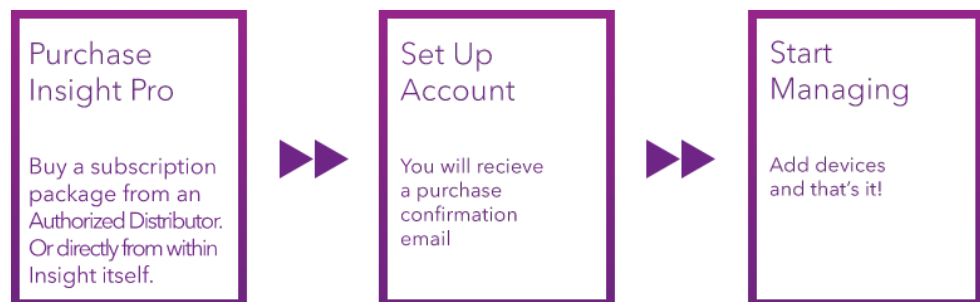

INSIGHT PRO FOR MOBILE HOTSPOTS

Internet access availability from anywhere is essential to be productive - from First Responders to teachers and corporate employees, there is an opportunity for cellular Mobile Hotspots (MHS) to provide simple always-on connectivity using LTE or 5G networks.

INCREASED NEED FOR CONNECTIVITY



Work from Home

Remote Job Sites

On-the-go

Remote Areas

Introducing NETGEAR Insight Pro on the Nighthawk M1 4G LTE Mobile Router (MR1100) and Nighthawk M5 5G WiFi 6 Mobile Router. With NETGEAR Insight Pro, IT managers can centrally monitor and manage M1 and M5 deployment to their team for internet connectivity at worksites, in work-from-home situations and when on-the-go.



NETGEAR mobile hotspots are ready to be managed remotely by Insight right out of the box to provide teams with dedicated internet connectivity.

- Bulk device onboarding and unified device profile setup with easy replication and cloning of profile and policy settings
- Remotely onboard and configure your hotspot with organization-specific policies using the Insight Cloud Portal
- Protect device ownership by organization with secure authenticated device claiming process
- Anytime, anywhere remote access to easily know the status of any device deployed to the field
- Supports multi-tenancy, allowing IT managers and MSPs to logically organize their supported devices
- Remotely view usage statistics, cellular signal strength, and battery levels





NETGEAR INSIGHT SERVICES

NETGEAR Insight is your gateway to easy setup, configuring, monitoring and management of your wired and wireless networks. Get 24/7 access, visibility and control of all your networks. Further enhance your network management with NETGEAR Insight advanced services covering guest Wi-Fi, and security. Get the most of your network in the simplest and fastest way with NETGEAR Insight add-on services.

NETGEAR INSTANT CAPTIVE PORTAL

According to consumer surveys, consumers expect WiFi access at any businesses where they spend over two minutes waiting for service. In exchange of providing free WiFi service, businesses can receive commercial value for owning customer information and having the ability to communicate and engage with customers directly with Instant Captive Portal.

Instant Captive Portal is an organized portal that enhances the business image, credibility and status, and thereby increase the registration and usage rate of the business' "public WiFi". Instant Captive Portal gives maximum flexibility to the business owners to customize the splash pages, based on their business characteristics and the desired outcome of the customer interaction through captive portal and receive real-time visitor data and analytic insights including name, email, demographic info, frequency of visits, etc.

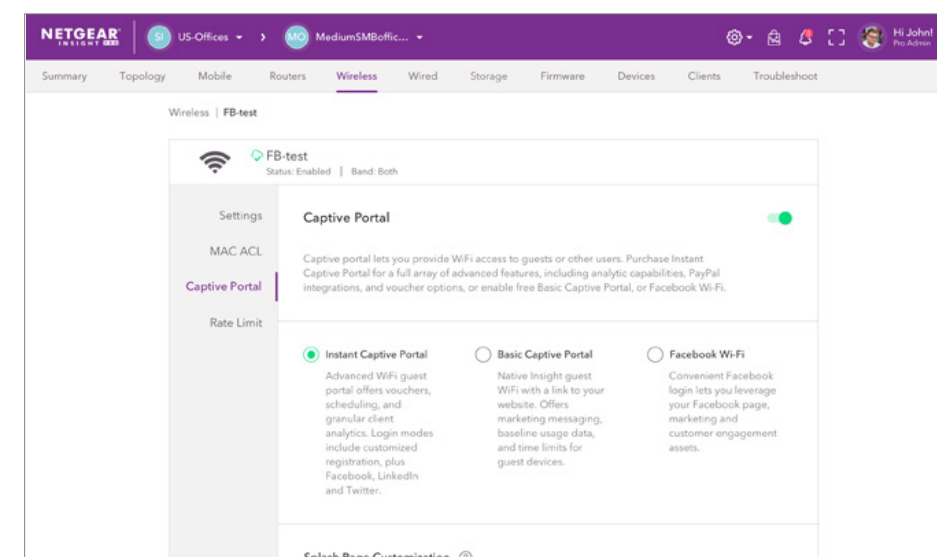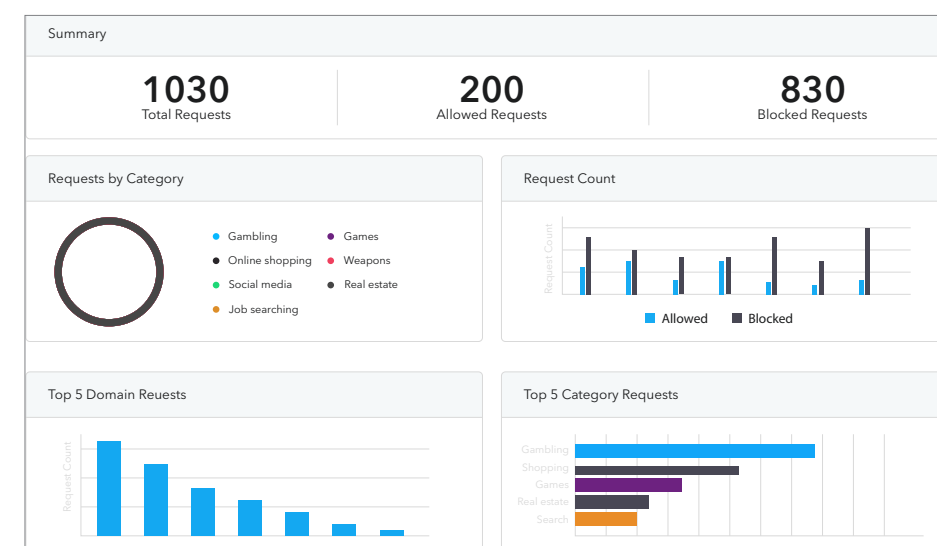



NETGEAR INSIGHT BUSINESS VPN

Now that employees are working remotely or in different locations and the company network is distributed, it is harder to control and protect. This is why small-medium businesses (SMBs) seek more efficient ways to connect everyone and everything. In turn, this has led to a growing interest in virtual private networks (VPN).

Introducing NETGEAR Insight Business VPN, a simple, instant and efficient way to extend an SMB's network to multiple locations, including WFH employees.



NETGEAR Insight Business VPN Features:



- Easy VPN set up through SSID: Once NETGEAR Insight Business VPN is configured, the end user does not have to do anything (no VPN client, 2FA). Just get connected to the existing office SSID and you are on the VPN
- Corporate SSID from home: Connect to the predefined corporate SSID on the Orbi Pro for the employee to be automatically connected to the company VPN, while the rest of the home network traffic is connected to other WiFi SSIDs
- SSID setup support for secure end-device access: Authenticate each end/client device that accesses the SSID through Business VPN. The Admin can authenticate users via both RADIUS integration (if they have the setup) as well as use pre-shared key (WPA2/3 Personal mode) plus MAC ACL
- Create/delete VPN group: Easily administer VPN access on a group level and reduce setup time
- User management: Network management and configurations can be handled easily by administering VPN access on a group level, managing VPN access for users or business sites, and more
- Data analytics and reporting: Receive reports on VPN downtime, VPN access history and more
- Notifications & Alerts: Receive notifications and alerts on Business VPN downtime, new user access and more



Traditional VPN vs. NETGEAR Business

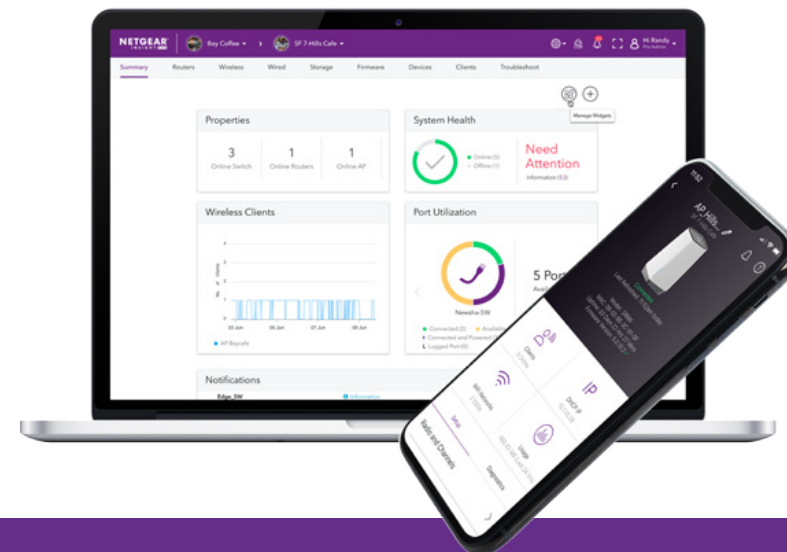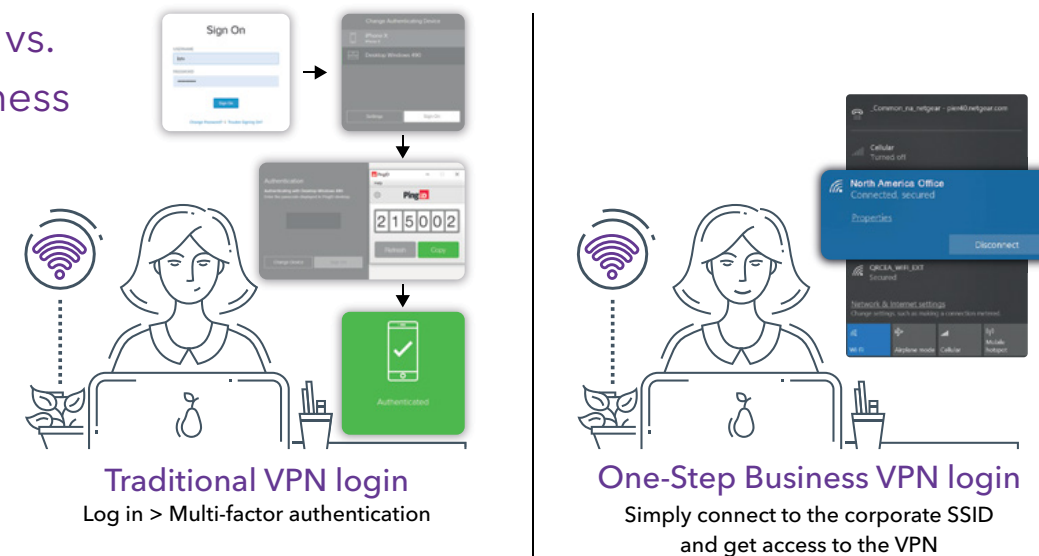


NETGEAR Insight Business VPN Benefits

Employee Benefits:



- ✓ **One-step connection:** Easy connection to all company applications through VPN without switching SSIDs
- ✓ **Constant connection:** Continuous uninterrupted connection through a software only VPN
- ✓ **Improved efficiency:** Authenticate once for all company applications (CRM systems, internal database, etc.)
- ✓ **Secure:** Safely access information from anywhere the Orbi Pro connection reaches

Admin Benefits:

- ✓ **Secure:** Second level of security on top of the authentication with secure end/client device access
- ✓ **Easy to configure and set up:**
 - Simplified and standardized deployment
 - Remote configuration
 - Save time with bundle onboarding and configuration
- ✓ **Improved Support:** Less time spent supporting work-from-home and branch employees
- ✓ **Troubleshooting:** Get clear VPN history on usage and downtime to adjust accordingly



Building a Network Infrastructure for Robust IP Video Surveillance

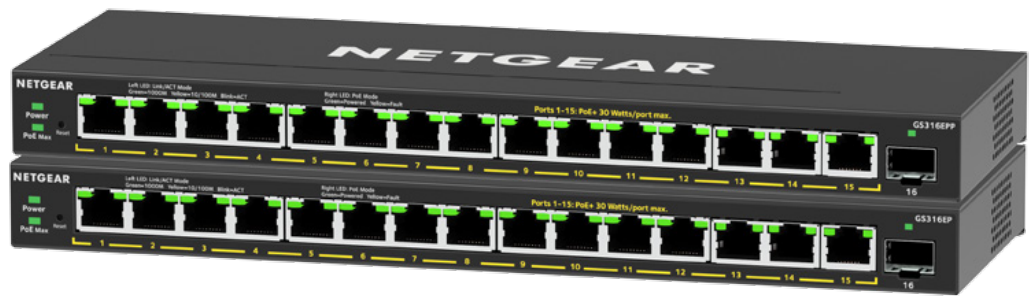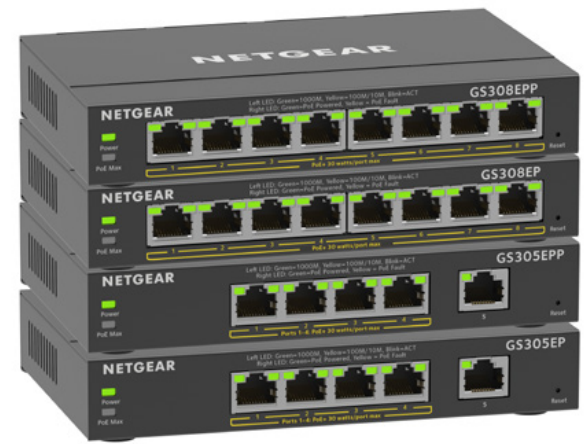




Video surveillance based on digital IP technology has revolutionized the physical security industry. The network is the critical infrastructure in any surveillance installation that enables all the other surveillance functions - transmitting video streams to be viewed, managed and stored as well as carrying power to the cameras using Power over Ethernet (PoE).

Existing networks often lack manageability and serviceability. Such "dark" networks make maintenance and service expensive while predicting and budgeting for network expansion become impossible. NETGEAR is here to help make your IP surveillance network intelligent and still be within your budget.

Factors such as transmission modes and video compression methods can have a significant effect on bandwidth requirements and cost.

NETGEAR understands these needs and provides a range of products with capabilities that match your requirements - the right products at the right price.


How to have a successful surveillance network

-  **Adequate bandwidth** - allow enough bandwidth for high quality footage capture
-  **Resilience** - provide a secondary power source in case of power failure
-  **Security** - prevention from digital and physical hacking

Surveillance



Considerations when building an IP surveillance network:

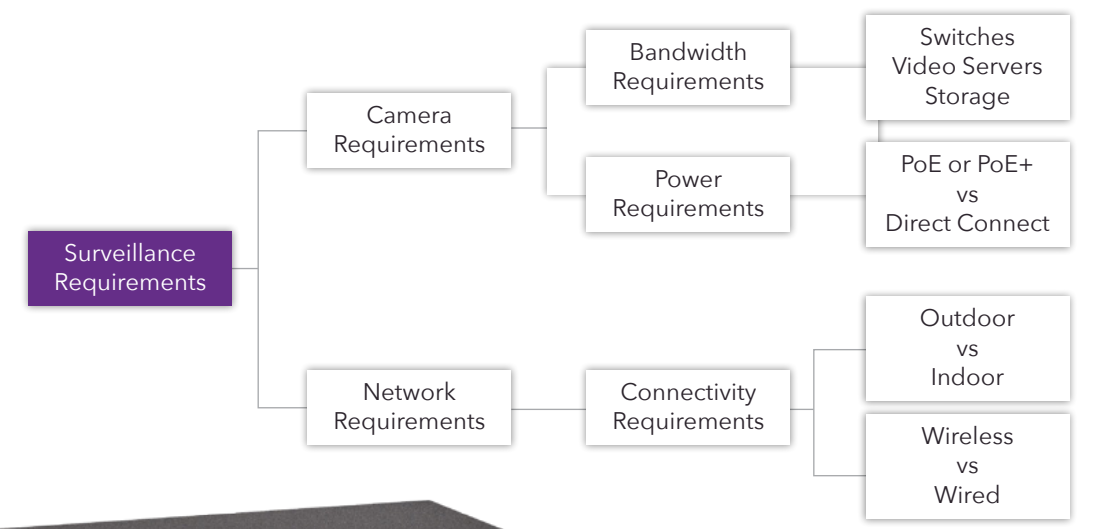

Largest portfolio of Power over Ethernet (PoE) switches



Power over Ethernet (PoE) provides power and network connectivity for PoE-powered devices over a single network cable. It's a 2 in 1 solution, so you don't have to worry about placing your devices next to a power outlet.

Great NETGEAR PoE Switch features for surveillance¹

1. Fanless and whisper-quiet fan designs
2. Desktop, wall mount and rackmount options
3. L3 Lite static routing
4. Management and video network segregation (VLANs, trunking)
5. MAC-based blocked/unblocked lists
6. Support for pre-IEEE standards
7. Exclusive FlexPoE to increase PoE budget by adding larger PSU
8. Advanced controls per port:
 - PoE on/off and power cycle (one-button)
 - PoE budget controls
 - PoE scheduling
 - PoE power auto-balance to dynamically allocate PoE power
 - Uninterrupted PoE during firmware update or software reboot
9. Market-leading warranty and expert support

¹ Features vary by model



LOWER INFRASTRUCTURE AND INSTALLATION COSTS

Fewer, separate power adapters are needed and only one cable run is required rather than two.



NO NEED FOR ELECTRICIANS

Uses existing IT networking infrastructure.



OVERCOMES HARD TO WIRE ENVIRONMENTS

Including old or 'protected' buildings.



CENTRALIZED CONTROL

Manage power to devices from a centralized switch. Power down/up devices as required for energy and cost savings.



EXTENDS WIRED AND WIRELESS NETWORK REACH

Not limited to fixed power outlet placements.



RELIABILITY


Redundant Power Supply (RPS) backup options helps keep devices running even in the event of a power outage. Important for business critical services, such as IP Cameras.

INSIGHT REMOTE MANAGEMENT SOLUTION OPTION

Insight offers plug-and-play setup and management of your business network, using an easy-to-use mobile app or a cloud web portal. The Insight platform allows any business owner or IT professional to discover and setup their NETGEAR devices, and monitor or manage their network, easily. The intuitive mobile app and web interface cover a variety of configuration options and network situations.

Insight Features for Surveillance

- Cloud-based remote management from web and mobile
- Remote device configuration
- Wireless and wired network setup
- Continuous monitoring & alerting of network and device issues
- 24/7 visibility and control
- Easy firmware management, including automated scheduling
- Remote troubleshooting and in-app access to help and support
- Per port PoE enable/disable & scheduling
- Multi-location, multi-site, multi-role
- Secured over the cloud

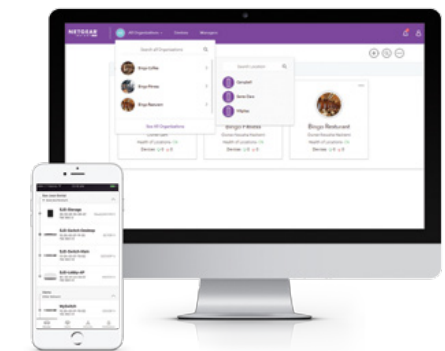

www.netgear.com/insight



NETGEAR understands the need for fast, secure, feature-rich surveillance networking products that perform better and cost less than the competition.

Industry-leading, efficient networking for surveillance.



NETGEAR FEATURES THE MOST COMPREHENSIVE, SCALABLE AND AFFORDABLE SWITCHING PORTFOLIO

NETGEAR offers a uniquely comprehensive portfolio of highly flexible and scalable network switches that fit every business need. From 5 to 144 ports, with Gigabit, Multi-Gigabit or 10-Gigabit copper and/or fiber connectivity, intuitive network management options, including Cloud management with Insight, and advanced L2 and L3 features, comprehensive PoE support and unique form factors, NETGEAR is unrivaled in the switching choice it offers to its business customers. NETGEAR switches also feature business-friendly advanced switching technology packaged in sleek modern designs with innovative options (desk, wall, rack).

UNMANAGED

Plug and Play switching for organizations in need of instant connectivity. No management required.

PLUS

Entry level management for essential services. Set priority for voice, video and other data traffic for enhanced service and performance.

SMART

For growing organizations needing more refined control, incorporating secure setup, access and automated management of prioritized voice, video and data traffic.

SMART W/OPTIONAL REMOTE/CLOUD MANAGEMENT

All of the capabilities of our Smart switches with additional option to remotely manage/monitor using Insight Cloud management.

FULLY MANAGED

For bigger and maturing networks where granular control is key to minimizing traffic congestion and performance bottlenecks for convergence based applications.

Just pick the switch that's best for you!

SWITCHING

	UNMANAGED	PLUS	SMART	W/REMOTE/CLOUD MGMT	FULLY MANAGED
Customer	Small		Mid-sized		Small
Switching	L2			L2/L2+/Lite L3	L2+/L3
1GbE	200/ 600/ 300 100 500	300 100 500	S350 100 500 700 S3300	S3300	M4200/ M4250 M4300
1GbE w/10G SFP+	GS Series			S3300	
1GbE w/10GbE and 10G SFP+				S3300	
10GbE	XS Series		XS Series		M4300
Multi-gig	XSxxxM, MSxxx, GSxxxMX Series	XSxxxEM, MSxxxE, GSxxxEMX Series	MS Series		M4200 /M4250
Management	NA	Local GUI / NMS300 / Insight*		Insight / Local GUI	NMS300

*Insight cloud management available on select Smart models

Switch Naming Convention - How to read the product code

Unmanaged and Plus

Speed	Series (See below for legend)	Ports	Management	Uplinks	Power
FS/JFS Fast Ethernet	1 Series	05 Number of Ports			
GS/JGS Gigabit Ethernet	2	08			
MS Multi-gigabit Ethernet (2.5G, 2.5G/5G, or 5-speed up to 10G)	3	10			
XS 10-Gigabit Ethernet	5	12			
	7				
Management Type	Uplink Type	Power			
E Plus	X 10-Gigabit uplinks	LP Low power PoE or PoE+			
Unmanaged	M Multi-gigabit Ethernet (5-speed, up to 10G) Uplinks (GS-Series) or all ports (XS-Series)	P PoE or PoE+			
		PP High power PoE or PoE+			
		UP Ultra PoE++			

Example

Speed	Series	Ports	Management	Uplinks	Power
GS	1	10	E		MX

Smart and Smart w/Optional Remote/Cloud Switches*

Speed	Series (See below for legend)	Ports	Management	Uplinks	Power	Stacking
FS Fast Ethernet	1 Series	05 Number of Ports				
GS Gigabit Ethernet	2	08				
GC Smart w/Default Remote/Cloud Gigabit Ethernet	3	10				
MS Multi-gigabit Ethernet (2.5G, 2.5G/5G, or 5-speed up to 10G)	5	12				
XS 10-Gigabit Ethernet	7					
Management Type	Uplink Type	Power	Stacking			
T Smart	X 10-Gigabit uplinks	LP Low power PoE	S Hardware Stacking			
	M Multi-gigabit Ethernet (5-speed, up to 10G) uplinks (GS-Series/MS-Series) or all ports (XS-Series)	P PoE or PoE+	Note: GS728TX/XP & GS752TX/XP are also stackable, but do not have "S" in product code.			
		PP High power PoE or PoE+				
		UP Ultra PoE++				

Example

Speed	Series	Ports	Management	Uplinks	Power	Stacking
MS	5	10	T	X		UP

*Note: Optional Remote/Cloud management available on select Smart switches ("T"). All "GC" Switches support Remote/Cloud management by default.

Fully Managed Switches

Speed	Management	Family	Ports	Power	Media	Stacking
GS Gigabit Ethernet	M Fully Managed	42 M4200, M4250	10 Number of Ports			
MS Multi-Gigabit Ethernet (2.5G, 2.5G/5G, or 5 speed up to 10G)		43 M4300	12			
XS 10-Gigabit Ethernet		45 M4500	14			
CS 100-Gigabit Ethernet			16			
Power	Media	Stacking				
P PoE+	C Copper	S Hardware Stacking				
U Ultra PoE++	F Fiber					
UP Ultra PoE++	X 10G Uplinks					

Example

Speed	Management	Family	Ports	Power	Media	Stacking
XS	M	43	16			S

Series Legend (for Unmanaged, Plus, and Smart Switches)

- 1 = Desktop (Metal)
- 2 = Desktop Essentials (Plastic)
- 3 = Desktop or Rackmount (depending on port count) SOHO (Metal)
- 5 = Desktop/Rackmount (13" - 15") (Metal)
- 6 = Desktop Home/Retail (Plastic)
- 7 = Rackmount (17") (Metal)

A SHORT GUIDE TO NETGEAR SWITCHES MANAGEMENT

Just pick the type of management that is right for you

	Unmanaged <small>FOR HOME AND BUSINESS</small>	Plus <small>FOR HOME AND BUSINESS</small>	Smart S350 Series <small>FOR SMB NETWORKS</small>	Smart <small>FOR SMB NETWORKS</small>	Smart with Optional Cloud <small>FOR SMB NETWORKS</small>	Fully Managed <small>FOR SMALL NETWORK CORE, AV OVER IP, AND MID-ENTERPRISE EDGE</small>
Split a Single Ethernet Connection	•	•	•	•	•	•
Plug-and-Play	•	•	•	•	•	•
Easy to Use	•	•	•	•	•	•
Web GUI Management		•	•	•	•	•
Network Control (VLAN, QoS)		•	•	•	•	•
Network Security (Storm Control, Auto DoS)		•	•	•	•	•
Advanced VLAN & QoS		•	•	•	•	•
Advanced Security			•	•	•	•
Higher Performance			•	•	•	•
Static Routing				•	•	•
Advanced L2, L3, L4 Routing and Features				•	•	•
Insight Management					•	•
Remote Cloud Management					•	•
CLI Management						•
API for Third-Party Control						•
BEST HA & Redundancy						•
Premium Performance						•

POWER-OVER-ETHERNET WITH NETGEAR®

From wireless access points to network switches, NETGEAR provides a reliable, affordable, simple PoE solution for your business.

Power-over-Ethernet (PoE) is a revolutionary technology that is quickly being adopted by devices such as VoIP phones, IP video surveillance, and wireless access points. PoE supplies not only data but also power through that same Ethernet cable, allowing for easier deployment of devices and greatly reducing electrical wiring requirements.

Over time, multiple PoE classes were created to satisfy the power needs for different types of PoE devices.

PoE: Delivers 15W per port to power simple IP phones, IP cameras and wireless access points.

PoE+: Delivers 30W per port to power IP phones, WiFi 6 (802.11AX) access points, pan-tilt-zoom cameras, etc.

PoE++: PoE++ enables powerful installations with PoE budgets up to 60 or 90W per port for connections of higher power required devices, such as WiFi 6 (802.11AX) wireless access points, smart building lighting, audio speakers and pan-tilt-zoom cameras. Future proof with PoE++ and help prevent the slowing down of the WiFi 6 performance in WiFi 6 wireless access points.

****NETGEAR's exclusive FlexPoE allows you to increase the PoE budget of the switch simply by purchasing a larger Power Supply.**

PoE CLASS CHART				
PoE Class Chart	Min. power levels the PSE needs to provide	Min/Max power available to the PD ²	Class Description	Powered Devices (PD)
0 ¹	0.44W	0.44W-12.95W	Default power (15.4W)	Any that don't specify their class
1	4.0W	0.44W-3.84W	Very low power	IP Phone
2	7.0W	3.84W-6.49W	Low power	IP Camera
3	15.4W	6.49W-12.95W	Mid power	Wireless Access Point, video phone
4 (PoE+)	30.0W	12.95W-25.50W	High power	PTZ IP camera, dual-band 11ac or 11AX Wireless AP
5/6 (PoE++)	60.0W	25.5W-51W ³	Ultra high power	LED lighting, Audio Speakers, AV encoders, PTZ cameras, Wi-Fi 6 (11AX) high-end Access Points
7/8 (PoE++)	90.0W	25.5W-71W ³		

PD CHART		
PD Product	Product Description	Power Consumption
GS105PE* (PD-Powered Device ONLY)	Gigabit Plus Switch	2W min, 6.5W max
GS108Tv3	Gigabit Smart Switch	5.5W
M4100-D12G (GSM5212)	12 x GbE + 4 Combo SFP Managed Switch	25W
WND930	Outdoor Dual-Band Wireless 11N Access Point	15.2W min, 43.8W max
WAC510	Insight Managed AC WiFi Access Point	9.3W
WAC540	Insight Managed Smart Cloud Tri-Band 4x4 Wireless Access Point	25.5W
WAC720	2 x 2 11ac Access Point	11.0W
WAC730	3 x 3 11ac Access Point	12.9W
WAC740	4 x 4 Wave 2 11ac Access Point	17.9W
WAX610	WiFi 6 AX1800 Dual-Band Multi-Gig Access Point	15.3W
WAX610Y	WiFi 6 AX1800 Dual-Band Multi-Gig Outdoor Access Point	16.1W
WAX620	WiFi 6 AX3600 Dual-Band Multi-Gig Access Point	25.5W
WAX214	WiFi 6 AX1800 Dual-Band Access Point	15.3W
WAX218	WiFi 6 AX3600 Dual-Band Access Point	30W

www.netgear.com/poe

¹ Default if not specified by device

² The maximum power delivered to the device is affected by the length of the Ethernet cable between the switch and the device, which creates losses, hence the difference between the maximum power allocated for the device, and the maximum power delivered to the device.

³ Extended power capability allows PD input power to reach up to 60W for Type 3 and up to 90W for Type 4 if channel length is known.

NETGEAR OFFERS A BROAD SPECTRUM OF POWER-OVER-ETHERNET SWITCHES

NETGEAR Switches with PoE/PoE+/UPoE/Ultra PoE++

Model	Ports	PoE Ports & Type	PoE Budget	PoE Auto-Balance	NETGEAR FlexPoE**
UNMANAGED SWITCHES					
GS305Pv2	5 x GbE	4	63W	Yes	
GS305PP	5 x GbE	4 PoE+	83W	Yes	
GS108LP	8 x GbE	8 (PoE+)	60W** (up to 123W with EPS130W)	Yes	Yes
GS108PP	8 x GbE	8 PoE+	123W**	Yes	Yes
GS308P	8 x GbE	4	53W		
GS308PP	8 x GbE	8 (PoE+)	83W** (up to 123W with EPS130W)	Yes	Yes
GS116LP	16 x GbE	16 PoE+	76W** (up to 183W with EPS200W)	Yes	Yes
GS116PP	16 x GbE	16 PoE+	183W	Yes	Yes
GS316P	16 x GbE	16 (PoE+)	115W** (up to 183W with EPS200W)	Yes	Yes
GS316PP	16 x GbE	16 (PoE+)	183W**	Yes	Yes
GS324P	24 x GbE	16 PoE+	190W	Yes	
GS324PP	24 x GbE	24 PoE+	380W	Yes	
GS348PP	48 x GbE	24 (PoE+)	380W	Yes	
GS516PP	16 x GE	16 PoE+	260W	Yes	
GS516UP	16 x GE	16 PoE+, 8 Ultra60 PoE++	380W	Yes	
GS524PP	24 x GE	24 PoE+	300W	Yes	
GS524UP	24 x GE	24 PoE+, 16 Ultra60 PoE++	480W	Yes	
PLUS SWITCHES					
GS105PE* (PD-Powered Device ONLY - NO AC POWER)	5 x GbE	2 x PoE, 1 x PD	up to 19W with 802.3at power in, up to 7.9W with 802.3af power in	Yes	
GS108PE	8 x GbE	4	53W		
GS305EP	5xGbE	4 (PoE+)	63W	Yes	
GS305EPP	5xGbE	4 (PoE+)	120W	Yes	
GS308EP	8 x GbE	8 (PoE+)	62W	Yes	
GS308EPP	8 x GbE	8 (PoE+)	123W	Yes	
MS108EUP	8x1G, 2.5G	8 PoE+, 4 Ultra60 PoE++	230W	Yes	
GS316EP	15 x GbE + 1G Dedicated SFP	15 (PoE+)	180W	Yes	
GS316EPP	15 x GbE + 1G Dedicated SFP	15 (PoE+)	231W	Yes	
JGS516PE	16 x GbE	8	85W		
JGS524PE	24 x GbE	12	100W		
SMART / SMART CLOUD SWITCHES					
F5728TP	24 x FE + 2 x GbE + 2 x 1G combo SFP	24	192W		
GS110TPv3	8 x GbE + 2 x 1G Dedicated SFP	8 PoE+	55W		
GS110TTP	8 x GbE + 2 x GbE	8 PoE+	120W** (up to 190W with EPS200W)		Yes
GS110TUP	8 x GbE + 1 x GbE + 1 x 1G Dedicated SFP	4 Ultra60 PoE++, 4 PoE+	240W		
GS310TP	8 x GbE + 2 x 1G Dedicated SFP	8 PoE+	55W		
GS510TLP	8 x GbE + 2 x 1G Dedicated SFP	8 PoE+	75W		
GS510TTP	8 x GbE + 2 x 1G Dedicated SFP	8 PoE+	190W		
MS510TXPP	4 x GbE + 2 x 2.5GbE + 2 x 5GbE + 1 x 10GbE + 1 x 10G Dedicated SFP+	8 PoE+	180W		
GS710TUP	8 x GbE + 1 x GbE + 1 x 1G Dedicated SFP	8 Ultra60 PoE++	480W		
GS716TP	16 x GbE + 2 x 1G Dedicated SFP	16 PoE+	180W		
GS716TTP	16 x GbE + 2 x 1G Dedicated SFP	16 PoE+	300W		
GS324TP	24 x GbE + 2 x 1G Dedicated SFP	24 PoE+	190W		
GS724TPv2	24 x GbE + 2 x 1G Dedicated SFP	24 PoE+	190W		
GS724TTP	24 x GbE + 2 x 1G Dedicated SFP	24 PoE+	380W		
GS728TPv2	24 x GbE + 4 x 1G Dedicated SFP	24 PoE+	190W		
GS728TTPv2	24 x GbE + 4 x 1G Dedicated SFP	24 PoE+	380W		
GC728XP	24 x GbE + 2 x 1G Dedicated SFP + 2 x 10G Dedicated SFP+	24 PoE+	390W		
GS752TPv2	48 x GbE + 4 x 1G Dedicated SFP	48 PoE+	380W		
GS752TTP	48 x GbE + 4 x 1G Dedicated SFP	48 PoE+	760W		
GC752XP	48 x GbE + 2 x 1G Dedicated SFP + 2 x 10G Dedicated SFP+	48 PoE+	505W		
MS510TXUP	4 x 2.5G + 4 x 10G + 2 x 10G Dedicated SFP+	8 Ultra60PoE++	295W		Yes
STACKABLE SMART SWITCHES					
S3300-28X-POE+ (GS728TTP)	24 x GbE + 2 x 10GbE + 2 x 10G Dedicated SFP+	24 PoE+	195W and up to 720W with RPS		
GS752TPSB (incl. AGC761 stacking cable)	48 x GbE + 2 x 1G combo SFP + 4 x 1G/2.5G Dedicated SFP	48 (8 PoE+)	384W		
M4200 SERIES INTELLIGENT EDGE MANAGED SWITCHES (L2+ L3 MULTI-GIGABIT)					
M4200-10MG-POE+ (GSM4210P)	8 x 2.5G + 2 x 10GBASE-T	8 (PoE+)	240W		
M4250 AV LINE MANAGED SWITCHES (L2+ L3 REVERSIBLE)					
M4250-10G2F-PoE+ (GSM4212P)	10 x GbE + 2 x 1G Dedicated SFP	8 PoE+	125W		
M4250-10G2XF-PoE+ (GSM4212PX)	10 x GbE + 2 x 10G Dedicated SFP+	8 PoE+	240W		
M4250-10G2XF-PoE++ (GSM4212UX)	10 x GbE + 2 x 10G Dedicated SFP+	8 Ultra90 PoE++	720W		
M4250-26G4F-PoE+ (GSM4230P)	26 x GbE + 4 x 1G dedicated SFP	24 PoE+	300W		
M4250-26G4F-PoE++ (GSM4230UP)	26 x GbE + 4 x 1G dedicated SFP	24 Ultra90 PoE++	1,440W		
M4250-26G4XF-PoE+ (GSM4230PX)	26 x GbE + 4 x 10G dedicated SFP+	24 PoE+	480W		
M4250-40G8F-PoE+ (GSM4248P)	40 x GbE + 8 x 1G dedicated SFP	40 PoE+	480W		
M4250-40G8XF-PoE+ (GSM4248PX)	40 x GbE + 8 x 10G dedicated SFP+	40 PoE+	960W		
M4250-40G8XF-PoE++ (GSM4248UX)	40 x GbE + 8 x 10G dedicated SFP+	40 Ultra90 PoE++	2,880W		
M4300 SERIES INTELLIGENT EDGE MANAGED SWITCHES (L2+ L3 STACKABLE)					
M4300-28G-POE+ (GSM4328PA)	24 x GbE + 2 x 10GBASE-T + 2 x 10GBASE-X SFP+	24 (PoE+)	480W 1 PSU (AP5550W) 720W 2 PSUs		
M4300-28G-POE+ (GSM4328PB)	24 x GbE + 2 x 10GBASE-T + 2 x 10GBASE-X SFP+	24 (PoE+)	630W (110V) 720W (220V) 1 PSU (AP51000W) 720W 2 PSUs		
M4300-52G-POE+ (GSM4352PA)	48 x GbE + 2 x 10GBASE-T + 2 x 10GBASE-X SFP+	48 (PoE+)	480W 1 PSU (AP5550W) 720W 2 PSUs		
M4300-52G-POE+ (GSM4352PB)	48 x GbE + 2 x 10GBASE-T + 2 x 10GBASE-X SFP+	48 (PoE+)	591W (110V) 860W (220V) 1 PSU (AP51000W) 1010W (110V) 1440W (220V) 2 PSUs		
M4300-16X (XSM4316PA)	16 x 100M/1G/2.5G/5G/10GBASE-T	16(PoE+)	199W 1 PSU (AP5299W)		
M4300-16X (XSM4316PB)	16 x 100M/1G/2.5G/5G/10GBASE-T	16(PoE+)	500W 1 PSU (AP5600W)		
M4300-96X (XSM4396K0)	Up to 96 x 100M/1G/2.5G/5G/10GBASE-T or SFP+; up to 24 x QSFP+	48 (PoE+)	484W (110V) 634W (220V) 1 PSU (AP51200W) 1440W (2 PSU) (AP51200W)		

Actual power supplied by the PoE switch may vary due to Ethernet cable length: The switch's PoE budget requirement should be slightly higher than what the PD devices actually consume.


EXPERIENCE THE MOST COMPREHENSIVE AND AFFORDABLE FULL 10-GIGABIT BUSINESS SWITCH PORTFOLIO

Connectivity matters more every day!

Network connectivity is the new utility. As water runs out of the tap flawlessly, network data is expected to do the same. Users want to be able to connect with any device, anywhere and anytime with high quality, super-fast connections and no downtime.

10 drivers for 10-Gigabit networking

Modern applications, wireless device expansion and IT optimization are now moving 10-Gigabit connectivity to the top of Enterprise IT teams' priorities. The increase in mobility, voice and video combined with virtualization and the doubling of data every 2 years are some of the main drivers for bottlenecks that are occurring in parts of the network not previously seen with Gigabit connectivity. 10-Gigabit is the new Gigabit!

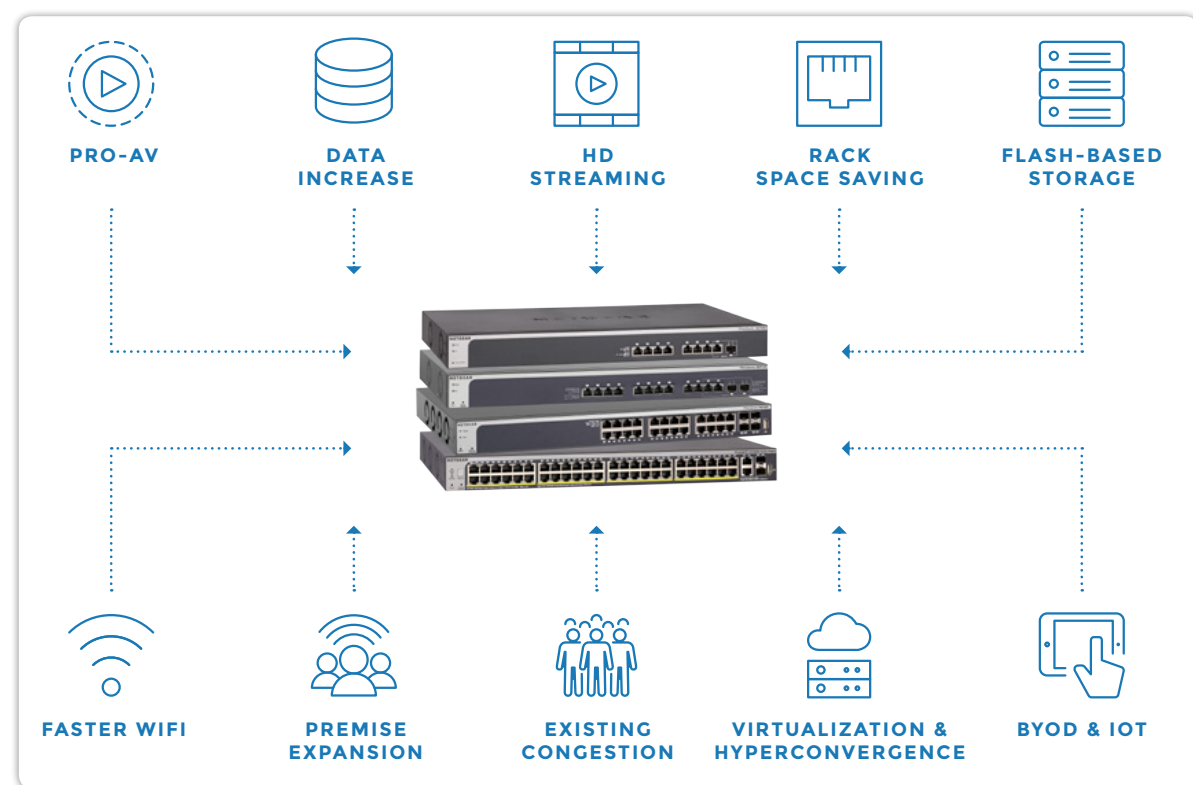

NETGEAR 10-Gigabit Portfolio

NETGEAR is the leader in the 10-Gigabit Enterprise switch market with the most versatile and comprehensive offerings in the market at the most affordable price points. Enjoy the highest security and scalability, massive performance and absolutely no downtime with our high-end 10-Gigabit switches. NETGEAR has you covered with a uniquely comprehensive portfolio of highly flexible and scalable full 10-Gigabit switches that fit every business need. From 8 to 48 ports, featuring both copper and fiber options, 1U full width and 1U half-width (for more efficient use of rack space), NETGEAR is unrivaled in the choice it offers business customers looking for 10-Gigabit switching. The future of networking is now!

Follow the X!

An X in the model name at NETGEAR is your guide to faster speed! An "X" at the beginning = Full 10-Gigabit connectivity! An "X" near the end = 10-Gigabit uplinks on both switches and ReadyNAS. We made them easy to find.



10-Gigabit fully managed switches for IT applications


MODEL NAME	M4300-8X8F	M4300-16X	M4300-12X12F	M4300-24X
Model Number	XSM4316S	XSM4316PA, XSM4316PB	XSM4324S	XSM4324CS
Management	Full	Full	Full	Full
Total 10GB Ports	16	16	24	24
10GB Copper Ports	8	16	12	24
10GB SFP+ Ports	8		12	4 Combo
Fabric	320 Gbps	320 Gbps	480 Gbps	480 Gbps
Half Width	•	•	•	•
Full Width				
PoE+			•	

MODEL NAME	M4300-24XF	M4300-24X24F	M4300-48X	M4300-48XF	M4300-96X
Model Number	XSM4324FS	XSM4348S	XSM4348CS	XSM4348FS	XSM4396K0
Management	Full	Full	Full	Full	Full
Total 10GB Ports	24	48	48	48	Up to 96
10GB Copper Ports	2 Combo	24	48	2 Combo	Up to 96 by multiples of 8
10GB SFP+ Ports	24	24	4 Combo	48	Up to 96 by multiples of 8
Fabric	480 Gbps	960 Gbps	960 Gbps	960 Gbps	1.920 Tbps
Half Width					
Full Width	•	•	•	•	•
PoE+					•

10-Gigabit switches for SMB and IT applications

TYPE	Plus		Smart				
Model Number	XS708Ev2	XS716E	XS708T	XS712T	XS716T	XS728T	XS748T
Management	Basic L2	Basic L2	L2+/L3 Lite	L2+/L3 Lite	L2+/L3 Lite	L2+/L3 Lite	L2+/L3 Lite
Total 10GB Ports	8	16	8	12	16	28	48
1G/10G Copper Ports	8	16	8	12	16	24	48
1G/10GB SFP+ Ports	1	1	2	2	2	4	4
Fabric	160 Gbps	320 Gbps	160 Gbps	240 Gbps	320 Gbps	560 Gbps	960 Gbps
Form Factor	Rackmount	Rackmount	Rackmount	Rackmount	Rackmount	Rackmount	Rackmount

UNLOCK YOUR NETWORK POTENTIAL WITH 5-SPEED NETWORKING!




Modern, high-performance network devices such as 5G network cards, gaming computers, desktop computers, servers, network attached storage (NAS) devices, or IEEE 802.11ac Wave 2 wireless access points are capable of 2.5-Gigabit or 5-Gigabit connectivity. With the existing Gigabit and 10-Gigabit Ethernet standards, these devices' potential is wasted:

- The existing Gigabit and 10-Gigabit Ethernet standards do not allow speeds between 10 Gbps and 1 Gbps. If you connect an 802.11ac Wave 2 wireless access point or other Multi-Gigabit-capable device to a 10-Gigabit switch port, the connection automatically downgrades to 1 Gbps because the device cannot achieve 10 Gbps.
- The existing 10-Gigabit Ethernet standard requires Cat 6A or better Ethernet cable for lengths up to 100 meters (328 feet). However, most existing cabling is only Cat 5e or Cat 6, and re-wiring can be costly.

Multi-Gigabit Ethernet switches solve all these issues, supporting any device attached to the switch, to work at the speed of the port to which it is connected (2.5 Gbps or 5 Gbps). The maximum speed over Cat5e cabling is 5Gb, and 10Gb for Cat6 or better, with backwards-compatibility with 100Mbps and 1Gb. So, a business can easily mix and match different speeds on the same network, to make the most of each connected device's capability and without sacrificing the performance of either.

While it is hard for businesses to predict exactly what Gb speed capacity they are going to need now or in years to come, Multi-Gigabit Ethernet switching gives them a fluid framework that can adapt as demands change, while at the same time squeezing the most out of existing cabling investments, and even reducing the need for extra power outlets. Multigig helps businesses today and creates a flexible future.

Give the speed that your devices need

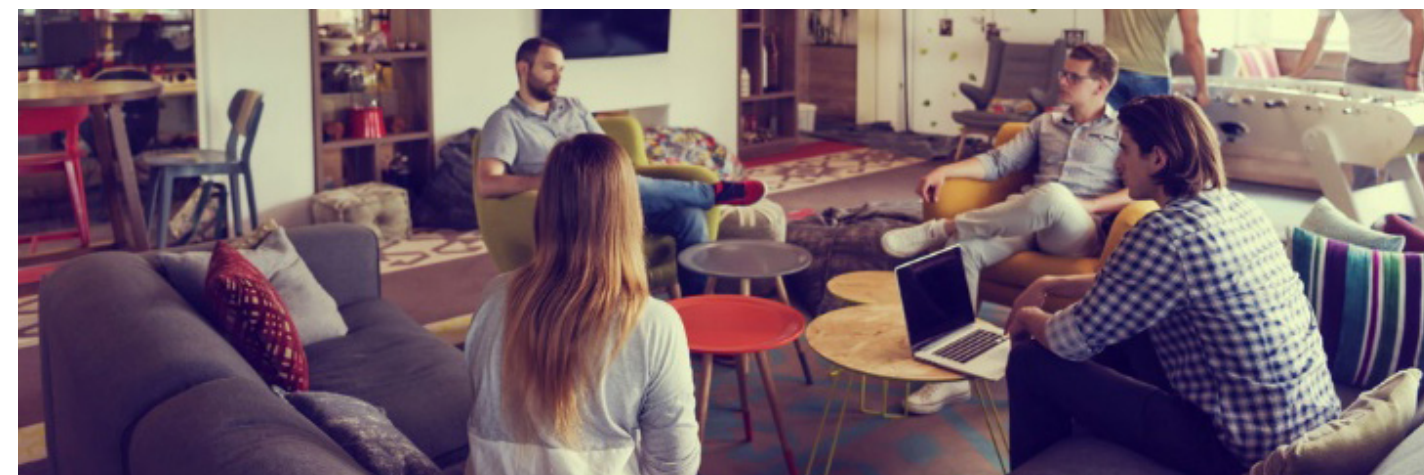

5 TIMES FASTER USING THE SAME CABLING

	1G	2.5G	5G	10G
CAT 5e	✓	✓	✓	
CAT 6	✓	✓	✓	55m Limit
CAT 6A	✓	✓	✓	✓

Multi-Gig vs 5-speed, what is the difference?

MULTI-GIG PORT: intelligent port that automatically adapts to the speed required and can provide 100M/1G and 2.5G and/or 5G connectivity (NBase-T standard)

5-SPEED PORT: intelligent port that automatically adapts to the speed required and can provide either one of the 5 networking speeds: 100M /1G / 2.5G / 5G or 10G.

NETGEAR WIDE PORTFOLIO OF MULTI-GIG/10G (5-SPEED) SWITCHES

	XS505M	XS508M	GS110MX	GS110EMX	MS108EUP	XS512EM	XS724EM	MS510TX	MS510TXM	MS510TXPP	MS510TXUP	M4200-10MG-POE+	M4250-12M2XF	M4300-16X	M4300-96X
# of Ports	5	8	10	10	8	12	24	10	10	10	10	10	14	16	96
# of 1G Ports			8	8				4	4						
# of 1G/2.5G Multi-Gig Ports					8			2	4	2	4	8	12		
# of 1G/2.5G/5G Multi-Gig Ports								2		2					
# of 10G Fiber Ports	1	1				2	2	1	2	1	2	2	2		Up to 96
# of 5-Speed Ports (100M/1G/2.5G/5G/10G)	4	7	2	2		12	24	1	4	1	4			16	Up to 96
PoE+ Ports					4 PoE+					8 PoE+					
PoE++ Ports					4PoE++					8 PoE++		8		16	Up to 48
Type of Management	Unmanaged	Unmanaged	Unmanaged	Plus	Plus	Plus	Plus	Smart	Smart Cloud	Smart	Smart Cloud	Fully Managed	Fully Managed	Fully Managed	Fully Managed
Plug and Play	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Web Interface for Configuration				Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
NETGEAR Insight Remote/Cloud Management									Yes		Yes				

10 REASONS WHY CUSTOMERS LOVE OUR PLUS SWITCHES

Business networks are growing rapidly. Due to the increased use of Voice-over-IP phones, wireless access points, IP cameras for surveillance, and applications like Internet of Things (IoT), networks need to provide businesses with more control, more security, and easier management. To address the industry's need for an integrated solution that can meet businesses' needs, NETGEAR has created Plus switches with PoE+ and management capabilities. These Plus Gigabit switches cost only a little more than Unmanaged switches while offering advanced network management.

We asked our users what makes these switches such a great choice. Here are 10 reasons taken straight from tens of thousands of online customer reviews that gave an average rating of 4.5 out of 5!

The NETGEAR Plus Gigabit series includes the following models: GS105E, GS105PE, GS108E, GS108PE, GS116E, GS305E, GS308E, JGS516PE, JGS524PE, GS750E, GS305EP, GS305EPP, GS308EP, GS308EPP, GS316EP, GS316EPP, and the latest model MS108EUP that launched in January 2022. Finally, if even more advanced performance is needed check out our high-speed 10 Gigabit Plus switches for more.

1. Easy Management

Plus switches provide easy-to-use, fundamental network management features. No need for an IT expert or a complicated user manual. Just configure your network with the user-friendly NETGEAR Plus Web GUI.

2. Best value for a managed switch

Businesses don't always have the budget or advanced network training to work with complex managed switches. The Plus switches are packed with useful features, affordable for a small additional cost above an Unmanaged switch.

3. Ideal for home or office use

These switches are ideal for all uses to add ports to your existing network wherever it is, whether at home or in the office. Port count ranges from 5 to 16, 24, or even 50 ports for all deployment needs. In addition, PoE capabilities, QoS, and VLAN allow for increased management and security for any network. Ideal for VoIP phones, IP cameras, WiFi, and any converged audio/video network applications.

4. Powerful PoE and PoE+ (up to 30W per port) offerings

Either all or half of the ports have support for PoE+, so a single wire can deliver power and network connectivity to PoE+ devices such as wireless access points, IP cameras, VoIP phones, access-controlled security door locks, and other IoT PoE-powered devices.

5. Consumer- and business-friendly local web browser-based GUI with full access

The latest Plus switches (November 2020) boast a very intuitive user interface that allows easy configuration of all features such as VLANs, PoE features, and QoS, among many others.

6. Advanced PoE features with uninterrupted PoE

Manage power for PoE connected devices by enabling and disabling PoE power per port, PoE prioritization, PoE power limit per port, and more. The newest Plus switches also include an Uninterrupted PoE feature that keeps PoE power on even when the switch is updating firmware or performing a software reboot.

7. Fundamental Management with QoS, VLAN, IGMP, and more

Plus switches provide VLANs for more secure and efficient use of network resources, QoS for optimized network performance, and better delivery of mission-critical traffic, port mirroring for troubleshooting, and IGMP Snooping for improved network efficiency on delivering multicast traffic.

8. Fanless or quiet operation and versatile mounting for easy deployment


Plus switches provide completely silent operation on most models within a desktop small form factor. They also have wall-mounting capabilities; even large port-count models can be rack-mounted. Easily set up these switches in any type of environment, even noise-sensitive ones.

9. Easy troubleshooting capabilities with port mirroring and cable testing

No need for expensive troubleshooting tools with the Plus switches. Simply use port mirroring and cable testing integrated features to easily troubleshoot your network.

10. High reliability backed by a segment-leading hardware warranty with Next Business Day replacement

Experience NETGEAR's 25 years of experience with networking with every switch you purchase. Get a 5-year or Limited Lifetime warranty on your Plus switches.

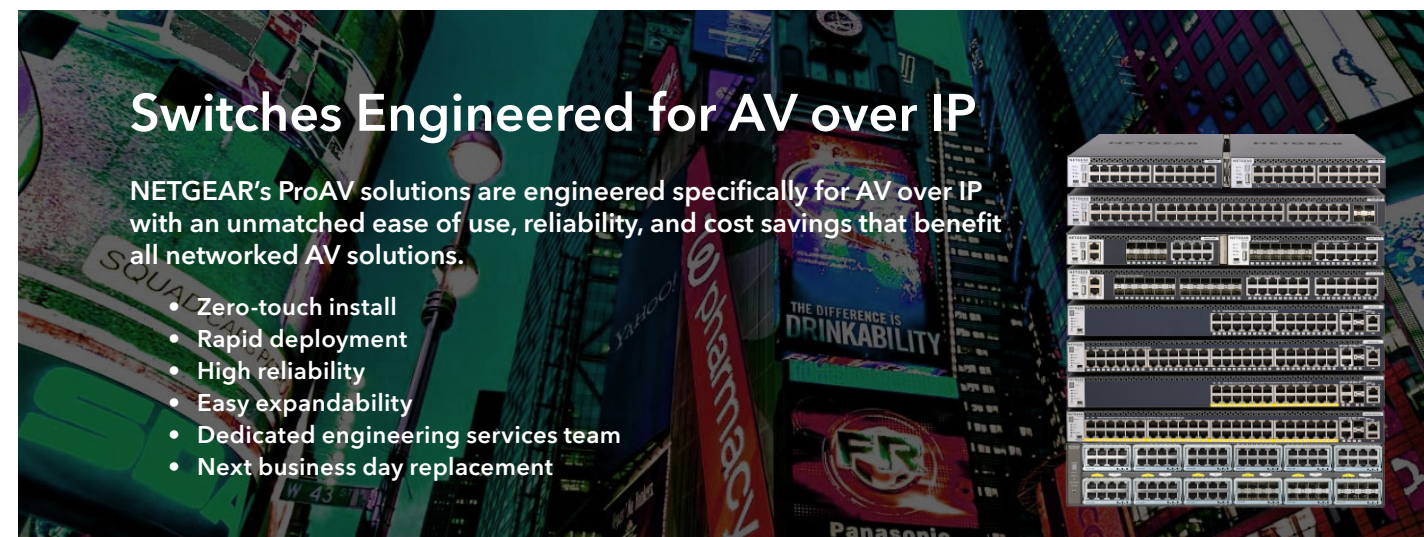

OVERVIEW


NETGEAR's commitment to AV over IP includes a range of products and dedicated support services. Our M4250, M4300 and M4500 series of high-performance, flexible switches are engineered for AV over IP.

NETGEAR Business has led the way for almost 25 years by successfully enabling more than 50 million businesses worldwide. We stand behind our sales partners and their customers through our community and support systems. The quality, reach, and value of our products and services is unmatched.

NETGEAR Business means solutions that fit your needs and your budget. Our comprehensive portfolio of switches enables you to order exactly the combination of fiber or copper ports you need now with room to expand for the future. Providing the ability to connect any type of AV over IP device, NETGEAR switches offer you flexible speed options from 1 Gigabit up to 100 Gigabits per port!

Certified Partners (partial list)



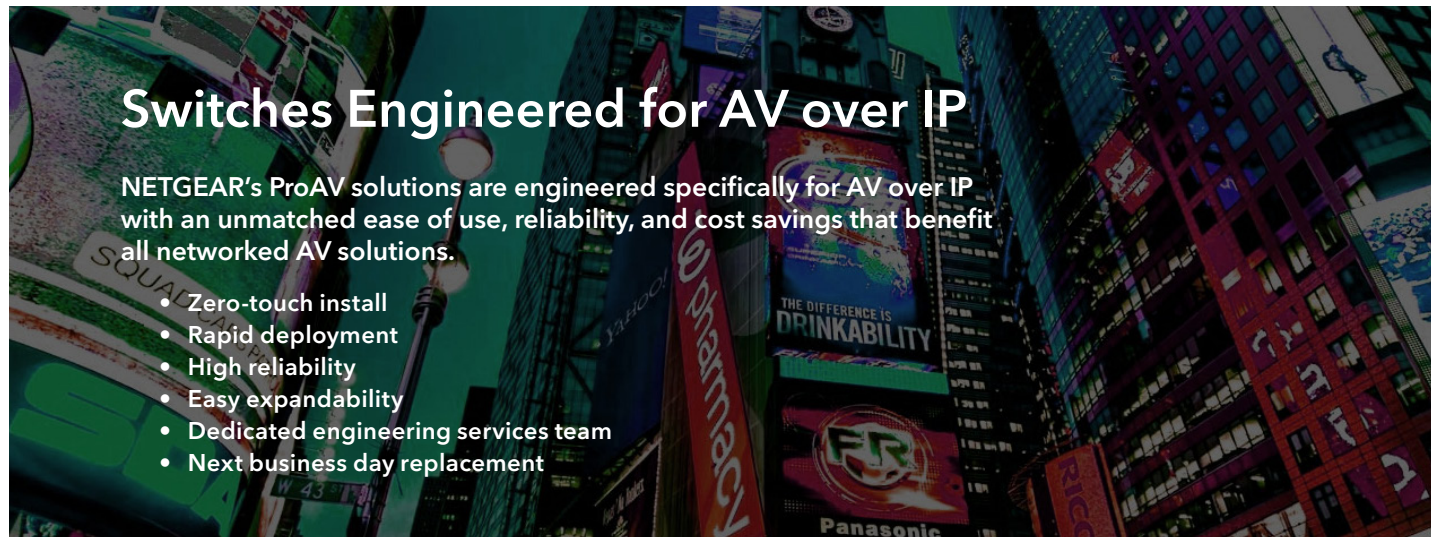

Switches Engineered for AV over IP

NETGEAR's ProAV solutions are engineered specifically for AV over IP with an unmatched ease of use, reliability, and cost savings that benefit all networked AV solutions.

- Zero-touch install
- Rapid deployment
- High reliability
- Easy expandability
- Dedicated engineering services team
- Next business day replacement

APPLICATIONS

Video over IP

NETGEAR recognizes the explosion of video over Ethernet and has specifically designed products for AV over IP installations.

From NETGEAR IGMP Plus™, which allows out-of-the-box functionality for most all multicast installations, to modular switches accommodating copper, fiber, and HDMI inputs, we will work with you to find the right solution at the right price.



Audio over IP

The Pro AV world has adopted IP as their delivery method of choice and NETGEAR is here to help. Our switches provide range of sizes and mounting methods to accommodate any install - from the university campus to touring road show.

If you are using Dante or AVB (license required) in your audio deployment, you can trust that NETGEAR's Pro AV switches are designed to seamlessly integrate into your solution. Easy to use, easy to manage.



NETGEAR is a founding member of the Software Defined Video over Ethernet (SDVoE) alliance. A nonprofit consortium of technology providers collaborating to standardize the adoption of Ethernet to transport AV signals in professional AV environments, and to create an ecosystem around SDVoE technology allowing software to define AV applications.

Our switches are designed to accommodate the high bandwidth required for SDVoE-enabled products transporting high-resolution video, multi-channel audio, and control with negligible latency.

SUPPORT & DESIGN SERVICES

NETGEAR offers free design services to support partners as they design and deploy professional audio and video solutions which require IP networking infrastructure.

This dedicated Pro AV Engineering Services team of experts has been conceived to empower those who are designing and installing AV over IP systems by providing free network design assistance, training, and installation support.



ProSUPPORT for Business

The NETGEAR ProSUPPORT for Business offerings provide you with peace of mind by extending and enhancing the standard warranty or support coverage included with your product purchase.

With ProSUPPORT, you get 24/7 direct access to NETGEAR technical support engineers who can rapidly resolve technical issues both big and small. Connect with the people that have built your products and build the relationship that will contribute to your business success.

Contact the Engineering Services team:
ProAVDesign@netgear.com

PRO AV TECHNICAL TRAINING

At NETGEAR we believe in working with our partners to empower them with the knowledge to create and sell solutions not just products. As part of this commitment, we offer a free 'Switching for AVoIP' training course. The user-paced online version provides an overview of many concepts of networking as it pertains to AV signals. Contact us for the possibility of an in-depth, in-person, learning experience with a qualified instructor.



Attendees will become a certified NETGEAR AVoIP Switch Installation Partner and have the skills necessary to configure and deploy NETGEAR Pro AV switching solutions. Successful completion also provides coveted AVIXA Renewal Credits.

Find out more: www.netgear.com/proav

Signup for training: www.netgear.academy



Pre-configured M4300 Ethernet Switches for AV over IP, the AV Line



MODEL NAME	M4300-8X8F	M4300-16X		M4300-12X12F	M4300-24X
Model Number	XSM4316S	XSM4316PA	XSM4316PB	XSM4324S	XSM4324CS
Management	Full	Full		Full	Full
Total 10GB Ports	16	16		24	24
10GB Copper Ports	8	16		12	24
10GB SFP+ Ports	8			12	4 Combo
Fabric	320 Gbps	320 Gbps		480 Gbps	480 Gbps
Half Width	•	•		•	•
Full Width					
PoE+			•		
SDVoE-Ready	•	•		•	•



MODEL NAME	M4300-28G	M4300-52G	M4300-28G-POE+		M4300-52G-POE+	
Model Number	GSM4328S	GSM4352S	GSM4328PA	GSM4328PB	GSM4352PA	GSM4352PB
10/100/1000 RJ45	24 Ports	48 Ports	24 Ports PoE+		48 Ports PoE+	
10GBASE-T RJ45	2 Ports	2 Ports	2 Ports		2 Ports	
1G/10G SFP+	2 Ports	2 Ports	2 Ports		2 Ports	
Form Factor	Full Width					
Rack Mount	1-Unit in 1U					
Power Supply	Modular 2 Bays					
Included PSU	(1) APS150W		(1) APS550W	(1) APS1000W	(1) APS550W	(1) APS1000W
PoE+			•	•	•	•

Pre-configured M4250 switches engineered for AV over IP, the AV Line



MODEL NAME	M4300-24XF	M4300-24X24F	M4300-48X	M4300-48XF	M4300-96X
Model Number	XSM4324FS	XSM4348S	XSM4348CS	XSM4348FS	XSM4396K0
Management	Full	Full	Full	Full	Full
Total 10GB Ports	24	48	48	48	Up to 96
10GB Copper Ports	2 Combo	24	48	2 Combo	Up to 96 by multiples of 8
10GB SFP+ Ports	24	24	4 Combo	48	Up to 96 by multiples of 8
Fabric	480 Gbps	960 Gbps	960 Gbps	960 Gbps	1.920 Tbps
Half Width					
Full Width	•	•	•	•	•
PoE+					•
SDVoE-Ready	•	•	•	•	•



MODEL NAME	M4250-10G2F-PoE+	M4250-10G2XF-PoE+	M4250-10G2XF-PoE++	M4250-12M2XF	M4250-16XF
Model Number	GSM4212P	GSM4212PX	GSM4212UX	MSM4214X	XSM4216F
Primary Port Speed	1G	1G	1G	2.5G	10G
1G Copper Ports	10	10	10		
2.5G Copper Ports				12	
SFP/SFP+ Ports	2 (SFP)	2 (SFP+)	2 (SFP+)	2 (SFP+)	16 (SFP+)
PoE Type	PoE+	PoE+	Ultra90 PoE++		
PoE Ports	8	8	8		
PoE Budget	125W	240W	720W		
IGMP Plus™ Support	•	•	•	•	•
AVB Support**	•	•	•	•	•
Acoustic Noise***	Fanless, Quiet mode (27.38dBA) or Cool mode (55dBA)	Fanless, Quiet mode (27.4dBA) or Cool mode (56dBA)	Fanless, Quiet mode (250w PoE, 34.57dBA) (380w PoE, 40dBA) (720w PoE, 47.19dBA) or Cool mode (57dBA)	Fanless, Quiet mode (28.5dBA) or Cool mode (55dBA)	Fanless, Quiet mode (27.44dBA) or Cool mode (57dBA)
Management	AV UI, IT GUI, CLI	AV UI, IT GUI, CLI	AV UI, IT GUI, CLI	AV UI, IT GUI, CLI	AV UI, IT GUI, CLI
Warranty	Limited Lifetime*	Limited Lifetime*	Limited Lifetime*	Limited Lifetime*	Limited Lifetime*

** Requires AVB license, sold separately. All other software features are available, license-free.

***Software-controlled fan adjustments enable the fans to be turned off when ambient temperature and PoE loads are appropriate for a totally fanless operation. dBA values are SPL (Sound Pressure Level) values, testing following the ISO-7779 standard. Bystander Mode. Chamber Temp 25°C during testing. Full, 100%, Data and PoE loaded. Worst case.



Pre-configured M4250 switches engineered for AV over IP, the AV Line



MODEL	M4250-26G4F-POE+	M4250-26G4XF-POE+	M4250-26G4F-POE++
SKU	GSM4230P	GSM4230PX	GSM4230UP
Primary Port Speed	1G	1G	1G
1G Copper Ports	26	26	26
2.5G Copper Ports			
SFP/SFP+ Ports	4 (SFP)	4 (SFP+)	4 (SFP)
PoE Type	PoE+	PoE+	Ultra90 PoE++
PoE Ports	24	24	24
PoE Budgets	300W	480W	1,440W
IGMP Plus™ Support	Yes	Yes	Yes
AVB Support**	Yes	Yes	Yes
Acoustic Noise***	Fanless, Quiet mode (200W PoE, 28dBA; 300W PoE, 34dBA) or Cool Mode (57dBA)	Fanless, Quiet mode (350W PoE, 25dBA; 480W PoE, 42dBA) or Cool Mode (67dBA)	Quiet mode (280W PoE, 28dBA; 480W PoE, 47dBA; 1440W PoE, 60dBA) or Cool Mode (69dBA)
Management	AV UI, IT GUI, CLI	AV UI, IT GUI, CLI	AV UI, IT GUI, CLI
Warranty	Limited Lifetime*	Limited Lifetime*	Limited Lifetime*

** Requires AVB license, sold separately. All other software features are available, license-free.

*** Software-controlled fan adjustments enable the fans to be turned off when ambient temperature and PoE loads are appropriate for a totally fanless operation. dBA values are SPL (Sound Pressure Level) values, testing following the ISO-7779 standard. Bystander Mode. Chamber Temp 25°C during testing. Full, 100%, Data and PoE loaded. Worst case.



Pre-configured M4250 switches engineered for AV over IP, the AV Line



MODEL	M4250-40G8F-POE+	M4250-40G8XF-POE+	M4250-40G8XF-POE++
SKU	GSM4248P	GSM4248PX	GSM4248UX
Primary Port Speed	1G	1G	1G
1G Copper Ports	40	40	40
2.5G Copper Ports			
SFP/SFP+ Ports	8 (SFP)	8 (SFP+)	8 (SFP+)
PoE Type	PoE+	PoE+	Ultra90 PoE++
PoE Ports	40	40	40
PoE Budgets	480W	960W	2,880W
IGMP Plus™ Support	Yes	Yes	Yes
AVB Support**	Yes	Yes	Yes
Acoustic Noise***	Fanless, Quiet mode (150W PoE, 30dBA; 340W PoE, 40dBA; 480W PoE, 47dBA) or Cool Mode (68dBA)	Quiet mode (400W PoE, 29dBA; 640W PoE, 48dBA; 960W PoE, 59dBA) or Cool Mode (69dBA)	Quiet mode (160W PoE, 30dBA; 480W PoE, 51dBA; 2880W PoE, 60dBA) or Cool Mode (71dBA)
Management	AV UI, IT GUI, CLI	AV UI, IT GUI, CLI	AV UI, IT GUI, CLI
Warranty	Limited Lifetime*	Limited Lifetime*	Limited Lifetime*

** Requires AVB license, sold separately. All other software features are available, license-free.

*** Software-controlled fan adjustments enable the fans to be turned off when ambient temperature and PoE loads are appropriate for a totally fanless operation. dBA values are SPL (Sound Pressure Level) values, testing following the ISO-7779 standard. Bystander Mode. Chamber Temp 25°C during testing. Full, 100%, Data and PoE loaded. Worst case.

Unmanaged Switches

Unmanaged, L2, Gigabit



MODEL	GS305	GS305P	GS305PP
Port Configuration	10M/100M RJ45 Copper Ports (Auto Uplink)		
	10M/100M/1G RJ45 Copper Ports (Auto Uplink)	5	5
PoE	# of PoE Ports		4
	Power Over Ethernet 802.3af Ports		4
	PoE Plus (30W) 802.3at Ports		4
	Total PoE/PoE+ Budget		63W
Scalability	# MAC Addresses	2K	2K
	MAC Address Aging (sec)	300 sec	300 sec
Quality of Service	Number of Priority Queues		
	Traffic Prioritization	802.1p based QoS/CoS	802.1p based QoS/CoS
Performance	Bandwidth	10 Gbps	10 Gbps
	Buffer Memory	128 KB	128 KB
	Jumbo Frames	9,216 bytes	9,216 bytes
Energy Efficiency	IEEE 802.3az	✓	✓
	Auto Port Power Down	✓	✓
	Max Power Consumption	2.15W	3.41W (no PoE) 67.5W (with PoE max)
Physical	Form-factor/Mounting (Desktop, Wall, Rack)	Desktop, Wallmount	Desktop, Wallmount
	Metal/Plastic Enclosure	Metal	Metal
	MTBF @ 25°C	3,831,422 hrs (437 yrs)	4,105,494 hrs (368 yrs)
	Fan(s)	None	None
	Width x Depth x Height	101 x 94 x 29 mm (4.0 x 3.7 x 1.1 in)	158 x 101 x 29 mm (6.2 x 4.0 x 1.1 in)
	Weight	0.25 kg (0.55 lb)	0.41 kg (0.9 lb)
Electromagnetic Compliance	Class (A or B)	B	A
Warranty Hardware*		3 years	3 years
Warranty Power Supply		3 years	3 years
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0S11 PMB0S31 PMB0S51	PMB0311 PMB0331 PMB0351

Unmanaged Switches

Unmanaged, L2, Gigabit



MODEL	GS308	GS308P
Port Configuration	10M/100M RJ45 Copper Ports (Auto Uplink)	
	10M/100M/1G RJ45 Copper Ports (Auto Uplink)	8
PoE	# of PoE Ports	
	Power Over Ethernet 802.3af Ports	
	PoE Plus (30W) 802.3at Ports	
	Total PoE/PoE+ Budget	53W
Scalability	# MAC Addresses	8K
	MAC Address Aging (sec)	300 sec
Quality of Service	Number of Priority Queues	
	Traffic Prioritization	802.1p based QoS/CoS
Performance	Bandwidth	16 Gbps
	Buffer Memory	128 KB
	Jumbo Frames	9,216 bytes
Energy Efficiency	IEEE 802.3az	✓
	Auto Port Power Down	✓
	Max Power Consumption	3.04W
Physical	Form-factor/Mounting (Desktop, Wall, Rack)	Desktop, Wallmount
	Metal/Plastic Enclosure	Metal
	MTBF @ 25°C	3,711,898 hrs (424 yrs)
	Fan(s)	None
	Width x Depth x Height	158 x 101 x 29 mm (6.2 x 4.0 x 1.1 in)
	Weight	0.39 kg (0.86 lb)
Electromagnetic Compliance	Class (A or B)	B
Warranty Hardware*		3 years
Warranty Power Supply		3 years
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0S11 PMB0S31 PMB0S51

Unmanaged Switches

Unmanaged, L2, Gigabit



MODEL	GS308PPP	GS316	GS316P	GS316PP	
Port Configuration	10M/100M RJ45 Copper Ports (Auto Uplink)				
	10M/100M/1G RJ45 Copper Ports (Auto Uplink)	8	16	16	
PoE	# of PoE Ports	8	16	16	
	Power Over Ethernet 802.3af Ports	8	16	16	
	PoE Plus (30W) 802.3at Ports	8	16	16	
	Total PoE/PoE+ Budget	83W	115W	183W	
Scalability	# MAC Addresses	4K	16K	4K	
	MAC Address Aging (sec)	300 sec	300 sec	300 sec	
Quality of Service	Number of Priority Queues				
	Traffic Prioritization	802.1p based QoS/CoS	802.1p based QoS/CoS	802.1p based QoS/CoS	
Performance	Bandwidth	16 Gbps	32 Gbps	32 Gbps	
	Buffer Memory	192 KB	768 KB	1MB	
	Jumbo Frames	9,216 bytes	9,216 bytes	9,216 bytes	
Energy Efficiency	IEEE 802.3az	✓	✓	✓	
	Auto Power Down	✓	✓	✓	
	Max Power Consumption	3.86W (no PoE) 90W (with PoE max)	8.4W	12.9W (no PoE) 130W (with PoE max)	12.9W (no PoE) 200W (with PoE max)
Physical	Desktop/Rackmount	Desktop, Wallmount	Desktop, Wallmount	Desktop, Wallmount	
	Metal/Plastic Enclosure	Metal	Metal	Metal	
	MTBF @ 25°C	2,752,476 hrs	9,041,798 hrs (1032 yrs)	2,362,192 hrs	2,362,192 hrs
	Fan(s)	None	None	None	None
	Width x Depth x Height	236 x 102 x 27 mm (9.3 x 4 x 1.1 in)	286 x 101 x 26 mm (11.3 x 4.0 x 1.0 in)	286 x 102 x 27 mm (11.3 x 4 x 1.1 in)	286 x 102 x 27 mm (11.3 x 4 x 1.1 in)
	Weight	0.6 kg (1.32 lb)	0.84 kg (1.86 lb)	0.88 kg (1.94 lb)	0.88 kg (1.94 lb)
Electromagnetic Compliance	Class (A or B)	A	A	A	
Warranty Hardware*	3 years	3 years	3 years	3 years	
Warranty Power Supply	3 years	3 years	3 years	3 years	
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0512 PMB0532 PMB0552	PMB0512 PMB0532 PMB0552	PMB0512 PMB0532 PMB0552	

Unmanaged Switches

Unmanaged, L2, Gigabit



MODEL	GS324	GS324P	GS324PP	
Port Configuration	10M/100M RJ45 Copper Ports (Auto Uplink)	0	0	
	10M/100M/1G RJ45 Copper Ports (Auto Uplink)	24	24	
PoE	# of PoE Ports	16	24	
	Power Over Ethernet 802.3af Ports	16	24	
	PoE Plus (30W) 802.3at Ports	16	24	
	Total PoE/PoE+ Budget	190W	380W	
Scalability	# MAC Addresses	8K	8K	
	MAC Address Aging (sec)	300 ~ 600 sec	300-450 sec	
Quality of Service	Number of Priority Queues			
	Traffic Prioritization	802.1p based QoS/CoS	802.1p based QoS/CoS	
Performance	Bandwidth	48 Gbps	48Gbps	
	Buffer Memory	512 KB	192KB	
	Jumbo Frames	9,216 bytes	10,000 bytes	
Energy Efficiency	IEEE 802.3az	✓	✓	
	Auto Power Down	✓	✓	
	Max Power Consumption	11.1W	210W	
Physical	Desktop/Rackmount	Desktop, Wallmount, Rackmount	Desktop, Rackmount	
	Metal/Plastic Enclosure	Metal	Metal	
	MTBF @ 25°C	433,281 hrs (71 yrs)	1,193,574 hrs	
	Fan(s)	None	1	
	Width x Depth x Height	252 x 180 x 44 mm (9.9 x 7.1 x 1.7 in)	330 x 206 x 43 mm (12.99 x 8.12 x 1.69 in)	440 x 204 x 43 mm (17.32 x 8.03 x 1.69 in)
	Weight	1.31 kg (2.90 lb)	2.44 kg (5.28 lb)	3.30 kg (7.26 lb)
Electromagnetic Compliance	Class (A or B)	A	A	
Warranty Hardware*	3 years	3 years	3 years	
Warranty Power Supply	Internal (same as switch)	Internal (same as switch)	Internal (same as switch)	
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0512 PMB0532 PMB0552	PMB0312 PMB0332 PMB0352	

Unmanaged Switches

Unmanaged, L2, Gigabit



MODEL	GS348	GS348PP
Port Configuration	10M/100M RJ45 Copper Ports (Auto Uplink)	
	10M/100M/1G RJ45 Copper Ports (Auto Uplink)	48
PoE	# of PoE Ports	24
	Power Over Ethernet 802.3af Ports	24
	PoE Plus (30W) 802.3at Ports	24
	Total PoE/PoE+ Budget	380W
Scalability	# MAC Addresses	8K
	MAC Address Aging (sec)	300 sec
Quality of Service	Number of Priority Queues	
	Traffic Prioritization	802.1p based QoS/CoS
Performance	Bandwidth	96 Gbps
	Buffer Memory	1.5 MB
	Jumbo Frames	9,216 bytes
Energy Efficiency	IEEE 802.3az	✓
	Auto Power Down	✓
	Max Power Consumption	23W
Physical	Desktop/Rackmount	Desktop, Rackmount
	Metal/Plastic Enclosure	Metal
	MTBF @ 25°C	1,094,297 hrs (125 yrs)
	Fan(s)	None
	Width x Depth x Height	440 x 202 x 43 mm (17.3 x 8.0 x 1.7 in)
	Weight	3.15 kg (6.95 lb)
Electromagnetic Compliance	Class (A or B)	A
Warranty Hardware*	3 years	3 years
Warranty Power Supply	Internal (same as switch)	3 years
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year	PMB0S12
	OnCall 24x7 3-year	PMB0S32
	OnCall 24x7 5-year	PMB0S52

Unmanaged Switches

Unmanaged, L2, Gigabit



MODEL	GS105	GS108	GS108LP	GS108PP	
Port Configuration	10M/100M RJ45 Copper Ports (Auto Uplink)				
	10M/100M/1G RJ45 Copper Ports (Auto Uplink)	5	8	8	
PoE	# of PoE Ports		8	8	
	Power Over Ethernet 802.3af Ports		8	8	
	PoE Plus (30W) 802.3at Ports		✓	✓	
	Total PoE/PoE+ Budget		60W	123W	
Scalability	# MAC Addresses	2K	4K	4K	
	MAC Address Aging (sec)	300 sec	300 sec	300 sec	
Quality of Service	Number of Priority Queues				
	Traffic Prioritization	802.1p based QoS/CoS	802.1p based QoS/CoS	802.1p based QoS/CoS	
Performance	Bandwidth	10 Gbps	16 Gbps	16 Gbps	
	Buffer Memory	128 KB	192 KB	192 KB	
	Jumbo Frames	9,216 bytes	9,216 bytes	9,216 bytes	
Energy Efficiency	IEEE 802.3az	✓	✓	✓	
	Auto Port Power Down	✓	✓	✓	
	Max Power Consumption	2.7W	2.73W	3.86W (no PoE) 67.5W (with PoE max)	3.86W (no PoE) 130W (with PoE max)
Physical	Desktop/Rackmount	Desktop/Wallmount	Desktop/Wallmount	Desktop/Wallmount/Rackmount	
	Metal/Plastic Enclosure	Metal	Metal	Metal	
	MTBF @ 25°C	3,197,945 hrs (365 yrs)	5,095,578 hrs (1110 yrs)	2,752,476 hrs (314 yrs)	2,752,476 hrs (314 yrs)
	Fan(s)	None	None	None	None
	Width x Depth x Height	94 x 100 x 27 mm (3.7 x 3.9 x 1.1 in)	158 x 102 x 27 mm (6.2 x 4.0 x 1.1 in)	236 x 102 x 27 mm (9.3 x 4.0 x 1.1 in)	236 x 102 x 27 mm (9.3 x 4.0 x 1.1 in)
	Weight	0.26 kg (0.57 lb)	0.47 kg (1.04 lb)	0.60 kg (1.32 lb)	0.60 kg (1.32 lb)
Electromagnetic Compliance	Class (A or B)	B	B	A	
Warranty Hardware*		Lifetime* Limited	Lifetime* Limited	Lifetime* Limited	
Warranty Power Supply		2 years	2 years	2 years	
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year	PMB0S11	PMB0S11	PMB0S12	
	OnCall 24x7 3-year	PMB0S31	PMB0S31	PMB0S32	
	OnCall 24x7 5-year	PMB0S51	PMB0S51	PMB0S52	

Unmanaged Switches

Unmanaged, L2, Gigabit



MODEL	GS116	GS116LP	GS116PP	JGS516	JGS524	
Port Configuration	10M/100M RJ45 Copper Ports (Auto Uplink)					
	16	16	16	16	24	
PoE	# of PoE Ports					
		16	16			
	Power Over Ethernet 802.3af Ports					
			16			
PoE Plus (30W) 802.3at Ports	✓					
	Total PoE/PoE+ Budget					
		76W	183W			
	# MAC Addresses					
Scalability	8K	4K	4K	8K	8K	
	MAC Address Aging (sec)					
	300 sec	300 sec	300 sec	300 sec	300 sec	
Quality of Service	Number of Priority Queues					
	Traffic Prioritization					
	802.1p based QoS/CoS	802.1p based QoS/CoS	802.1p based QoS/CoS	802.1p based QoS/CoS	802.1p based QoS/CoS	
Performance	Bandwidth					
	32 Gbps	32 Gbps	32 Gbps	32 Gbps	48 Gbps	
	Buffer Memory					
	256 KB	1 MB	1 MB	256 KB	256 KB	
Energy Efficiency	Jumbo Frames					
	9,216 bytes	9,216 bytes	9,216 bytes	9,216 bytes	9,216 bytes	
	IEEE 802.3az					
		none	✓	✓	✓	✓
Physical	Auto Port Power Down					
		✓	✓	✓	✓	
	Max Power Consumption					
		9.5W	12.9W (no PoE) 90W (with PoE max)	12.9W (no PoE) 200W (with PoE max)	11.8W	17.9W
	Desktop/Rackmount					
		Desktop, Wallmount	Desktop/Wallmount/ Rackmount	Desktop/Wallmount/ Rackmount	Desktop/Rackmount	Desktop/Rackmount
	Metal/Plastic Enclosure					
	Metal	Metal	Metal	Metal	Metal	
MTBF @ 25°C						
	554,582 hrs (63 yrs)	2,362,192 hrs (270 yrs)	2,362,192 hrs (270 yrs)	441,123 hrs (50 yrs)	238,872 hrs (27 yrs)	
Fan(s)						
	None	None	None	None	None	
Width x Depth x Height						
	286 x 100 x 27 mm (11.3 x 3.9 x 1.1 in)	286 x 102 x 27 mm (11.3 x 4.0 x 1.1 in)	286 x 102 x 27 mm (11.3 x 4.0 x 1.1 in)	328 x 169 x 43 mm (12.9 x 6.7 x 1.7 in)	328 x 169 x 43 mm (12.9 x 6.7 x 1.7 in)	
Weight						
	0.90 kg (1.98 lb)	0.88 kg (1.94 lb)	0.88 kg (1.94 lb)	1.47 kg (3.57 lb)	1.65 kg (3.64 lb)	
Electromagnetic Compliance	Class (A or B)					
	A	A	A	A	A	
Warranty	Hardware/Switch					
	Lifetime* Limited	Lifetime* Limited	Lifetime* Limited	Lifetime* Limited	Lifetime* Limited	
ProSUPPORT Maintenance Contracts***	Power Supply					
	Internal (same as switch)	Internal (same as switch)	Internal (same as switch)	Internal (same as switch)	Internal (same as switch)	
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year					
	PMB0512	PMB0512	PMB0512	PMB0512	PMB0512	
	OnCall 24x7 3-year	PMB0532	PMB0532	PMB0532	PMB0532	
OnCall 24x7 5-year	PMB0552	PMB0552	PMB0552	PMB0552	PMB0552	

Unmanaged Switches

Unmanaged, L2, Gigabit



MODEL	GS516PP	GS516UP	GS524PP	GS524UP
Port Configuration	10M/100M/1G RJ45 Copper Ports (Auto Uplink)			
	16	16	24	24
PoE	100M/1G/2.5G/5G/10G RJ45 Copper Ports (Auto Uplink)			
	# of PoE ports			
	16	16	24	24
	Power Over Ethernet 802.3af Ports			
	16	16	24	24
PoE Plus (30W) 802.3at Ports	16			
	Ultra60 PoE++ (60W) 802.3bt Ports			
		8		16
	Total PoE/PoE+ Budget			
	260W	380W	300W	16
Scalability	# MAC Addresses			
	8K	8K	8K	8K
MAC Address Aging (typical, sec)				
	300-450 sec	300-450 sec	300-450 sec	300-450 sec
Quality of Service	Traffic Prioritization			
	802.1p based QoS/CoS	802.1p based QoS/CoS	802.1p based QoS/CoS	802.1p based QoS/CoS
Performance	Bandwidth			
	32 Gbps	32 Gbps	48 Gbps	48 Gbps
	Buffer Memory			
	192 KB	192 KB	192 KB	192 KB
Energy Efficiency	Jumbo Frames			
	9,216 bytes	9,216 bytes	9,216 bytes	9,216 bytes
	IEEE 802.3az			
	✓	✓	✓	✓
Auto Port Power Down				
	✓	✓	✓	✓
Max Power Consumption				
	316.1W	456.8W	359.5W	578.8W
Physical	Desktop/Rackmount			
	Desktop/ Rackmount	Desktop/ Rackmount	Desktop/ Rackmount	Desktop/ Rackmount
	Metal/Plastic Enclosure			
	Metal	Metal	Metal	Metal
	MTBF @ 25°C			
	2415334 hrs	1213791 hrs	1457063 hrs	809853 hrs
	Fan(s)			
2	3	2	2	
Width x Depth x Height				
330 x 207 x 43 mm (12.99 in. x 8.15 in. x 1.7 in.)	330 x 207 x 43 mm (12.99 in. x 8.15 in. x 1.7 in.)	390 x 220 x 43 mm (15.4 in. x 8.7 in. x 1.7 in.)	390 x 220 x 43 mm (15.4 in. x 8.7 in. x 1.7 in.)	
Weight				
2.30kg (5.07 lb)	2.60kg (5.73 lb)	2.89kg (6.37 lb)	3.10kg (6.83 lb)	
Electromagnetic Compliance	(Class A or B)			
	A	A	A	A
Warranty	Hardware/Switch			
	Lifetime* Limited	Lifetime* Limited	Lifetime* Limited	Lifetime* Limited
ProSUPPORT Maintenance Contracts***	Power Supply			
	Internal (same as switch)	Internal (same as switch)	Internal (same as switch)	Internal (same as switch)
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year			
	PMB0311-10000S	PMB0311-10000S	PMB0311-10000S	PMB0311-10000S
	OnCall 24x7 3-year	PMB0331-10000S	PMB0331-10000S	PMB0331-10000S
OnCall 24x7 5-year	PMB0351-10000S	PMB0351-10000S	PMB0351-10000S	PMB0351-10000S

Unmanaged Switches

Unmanaged, L2, 10G/Multi-Gig Switches



MODEL	XS505M	XS508M	GS110MX
Port Configuration	10M/100M/1G RJ45 Copper Ports (Auto Uplink)		8
	100M/1G/2.5G/5G/10G RJ45 Copper Ports (Auto Uplink)	4	8
	10G SFP+ Fiber Ports	1 SFP+ (dedicated)	1 Combo SFP+ (10G)
PoE	# of PoE ports		
	# PoE+ 802.3at Ports		
	# of PD port		
	Total PoE/PoE+ Budget		
Scalability	# MAC Addresses	2K	2K
	MAC Address Aging (typical, sec)	300 sec	300 sec
Quality of Service	802.1p-based QoS/CoS	✓	✓
Performance	Total Bandwidth (Non-Blocking Fabric) (Gbps)	10 Gbps	10 Gbps
	Buffer Memory (Packet Buffer Size)	125 KB	125 KB
	Jumbo Frames	9,216 bytes	9,216 bytes
Energy Efficiency	IEEE 802.3az	✓	✓
	Auto Port Power Down	✓	✓
	Short Cable Detection/Power Saving	✓	✓
	Max Power Consumption	22.5W	39W
Physical	Desktop/Rackmount	Desktop/Wallmount	Desktop/Wallmount
	Metal/Plastic Enclosure	Metal	Metal
	MTBF @ 25°C	1,093,237 hrs (125 yrs)	1,145,157 hrs (131 yrs)
	Fan(s)	1	1
	Acoustic Noise @ 25°C	22.5dBA	22.5dBA
	Width x Depth x Height	328 x 169 x 43 mm (12.9 x 6.7 x 1.7 in)	328 x 169 x 43 mm (12.9 x 6.7 x 1.7 in)
	Weight	1.38 kg (3.04 lb)	1.49 kg (3.28 lb)
Electromagnetic Compliance	(Class A or B)	B	B
Warranty	Hardware/Switch	Lifetime* Limited	Lifetime* Limited
	Power Supply	Internal (same as switch)	Internal (same as switch)
Modules	AGM731/AGM732F/AGM734/AXC761 AXC763/AXM761/AXM762/AXM763/AXM764	AGM731/AGM732F/AGM734/AXC761 AXC763/AXM761/AXM762/AXM763/AXM764	
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0311 PMB0331 PMB0351	PMB0512 PMB0532 PMB0552

Plus Switches - Plug-and-Play, Basic Network Control, and Web Management

Plus, L2, Gigabit



MODEL	GS105E	GS105PE	GS108E	GS116E
Port Configuration	10M/100M/1G RJ45 Copper Ports (Auto Uplink)	5	5	8
PoE	PoE (15.4W) 802.3af Ports			2
	Total PoE/PoE+ Budget			PoE pass-thru: - With AT in: 19.0W - With AF in: 7.9W
Scalability	# MAC Addresses	2K	2K	4K
	Dynamic MAC	✓	✓	✓
System Management	Single IP Management	✓	✓	✓
	Web Managed/GUI	✓	✓	✓
Quality of Service	DHCP (Client/Server)	DHCP Client	DHCP Client	DHCP Client
	Port Mirroring	Many-to-One	Many-to-One	Many-to-One
	Number of Priority Queues	4	4	4
Multicast Filtering	Traffic Prioritization	802.1p, Port-based and DSCP	802.1p, Port-based and DSCP	802.1p, Port-based and DSCP
	Auto Voice VLAN			
Performance	IGMP Snooping Version	v1, v2 and v3	v1, v2 and v3	v1, v2 and v3
	Bandwidth	10 Gbps	10 Gbps	16 Gbps
Traffic Management	Buffer Memory	128 KB	128 KB	192 KB
	Jumbo Frames	9,216 bytes	9,216 bytes	9,720 bytes
	Number of 802.1q VLAN/Number of VLAN Group	64	64	32
Energy Efficiency	Port Trunking/Link Aggregation (Manual Static LAGs)			Static LAG
	Rate Limiting	✓	✓	✓
	Broadcast Storm Control	✓	✓	✓
	IEEE 802.3az	✓	✓	✓
Physical	Auto Port Power Down	✓	✓	✓
	Dynamic Power Consumption			
Electromagnetic Compliance	Max Power Consumption	2.6W	2W (no PoE) 22W (with PoE max)	4.5W
	Desktop/Rackmount	Desktop, Wallmount	Desktop, Wallmount	Desktop, Wallmount
	Metal/Plastic Enclosure	Metal	Metal	Metal
	MTBF @ 25°C	2,531,294 hrs (290 yrs)	1,685,972 hrs (193 yrs)	2,525,259 hrs (289 yrs)
	Fan(s)	None	None	None
	Acoustic Noise at 25°C	0dB	0dB	0dB
	Width x Depth x Height	94 x 100 x 27 mm (3.7 x 3.9 x 1.1 in)	158 x 100 x 27 mm (6.2 x 3.9 x 1.1 in)	158 x 101 x 29 mm (6.2 x 4.0 x 1.1 in)
Weight	0.25 kg (0.55 lb)	0.49 kg (1.08 lb)	0.50 kg (1.10 lb)	
Warranty Hardware*	Class (A or B)	B	B	A
ProSUPPORT Maintenance Contracts***	Warranty Power Supply	Lifetime* Limited	Lifetime* Limited	Lifetime* Limited
	Warranty Hardware*	2 years	2 years	2 years
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year	PMB0511	PMB0511	PMB0511
	OnCall 24x7 3-year	PMB0531	PMB0531	PMB0531
	OnCall 24x7 5-year	PMB0551	PMB0551	PMB0551

Plus Switches

Plus, L2, Gigabit



MODEL		GS305E	GS308E	GS305EP	GS305EPP
Port Configuration	10M/100M/1G RJ45 Copper Ports (Auto Uplink)	5	8	5	5
PoE	PoE (15.4W) 802.3af Ports				
	Total PoE/PoE+ Budget			4	4
Scalability	# MAC Addresses	2K	4K	4K	4K
	Dynamic MAC			✓	✓
System Management	Single IP Management	✓	✓		
	Web Managed/GUI	✓	✓		
	DHCP (Client/Server)	DHCP Client	DHCP Client	DHCP Client	DHCP Client
	Port Mirroring	Many-to-One	Many-to-One	One-to-One	One-to-One
Quality of Service	Number of Priority Queues	4	4	4	4
	Traffic Prioritization	802.1p, Port-based (CoS)	802.1p, Port-based (CoS)	802.1p, Port-based (CoS)	802.1p, Port-based (CoS)
	Auto Voice VLAN				
Multicast Filtering	IGMP Snooping Version	v1, v2 and v3	v1, v2 and v3	v1, v2 and v3	v1, v2 and v3
Performance	Bandwidth	10 Gbps	16 Gbps	16 Gbps	16 Gbps
	Buffer Memory	128 KB	192 KB	192 KB	192 KB
	Jumbo Frames	9,216 bytes	9,720 bytes	9,216 bytes	9,216 bytes
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	64	32	64	64
	Port Trunking/Link Aggregation (Manual Static LAGs)			Static LAG	Static LAG
	Rate Limiting	✓	✓	✓	✓
	Broadcast Storm Control	✓	✓	✓	✓
Energy Efficiency	IEEE 802.3az	✓	✓	✓	✓
	Auto Port Power Down			✓	✓
	Dynamic Power Consumption			✓	✓
	Max Power Consumption	2.6W	4.45W	6.0W (no PoE) 74.4W (with PoE max)	5.9W (no PoE) 141.4W (with PoE max)
Physical	Desktop/Rackmount	Desktop, Wallmount	Desktop, Wallmount	Desktop, Wallmount	Desktop, Wallmount
	Metal/Plastic Enclosure	Metal	Metal	Metal	Metal
	MTBF @ 25°C	2,531,294 hrs	2,525,259 hrs	859,126 hrs	842,428 hrs
	Fan(s)	None	None	None	None
	Acoustic Noise at 25°C	0dB	0dB	0dB	0dB
	Width x Depth x Height	94 x 100 x 27 mm (3.7 x 3.9 x 1.1 in)	158 x 101 x 29 mm (6.2 x 4 x 1.1 in)	158 x 101 x 27 mm (6.2 x 4.0 x 1.1 in)	158 x 101 x 27 mm (6.2 x 4.0 x 1.1 in)
	Weight	0.25 kg (0.55 lb)	0.50 kg (1.10 lb)	0.49 kg (1.08lb)	0.49 kg (1.08lb)
Electromagnetic Compliance	Class (A or B)	B	B		
Warranty Hardware*		5 years	5 years	5 years	5 years
Warranty Power Supply		External (same as switch)	External (same as switch)	2 years	2 years
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0511-10000S PMB0531-10000S PMB0551-10000S	PMB0511-10000S PMB0531-10000S PMB0551-10000S	PMB0511-10000S PMB0531-10000S PMB0551-10000S	PMB0511-10000S PMB0531-10000S PMB0551-10000S

Plus Switches

Plus, L2, Gigabit



MODEL		GS308EP	GS308EPP	GS316EP	GS316EPP
Port Configuration	10M/100M/1G RJ45 Copper Ports (Auto Uplink)	8	8	16	16
PoE	PoE (15.4W) 802.3af Ports			15	15
	Total PoE/PoE+ Budget	8	8	180W	231W
Scalability	# MAC Addresses	4K	4K	4K	4K
	Dynamic MAC	✓	✓	✓	✓
System Management	Single IP Management				
	Web Managed/GUI				
	DHCP (Client/Server)	DHCP Client	DHCP Client	DHCP Client	DHCP Client
	Port Mirroring	One-to-One	One-to-One	One-to-One	One-to-One
Quality of Service	Number of Priority Queues	4	4	4	4
	Traffic Prioritization	802.1p, Port-based (CoS)	802.1p, Port-based (CoS)	802.1p, Port-based (CoS)	802.1p, Port-based (CoS)
	Auto Voice VLAN				
Multicast Filtering	IGMP Snooping Version	v1, v2 and v3	v1, v2 and v3	v1, v2 and v3	v1, v2 and v3
Performance	Bandwidth	10 Gbps	10 Gbps		
	Buffer Memory	192 KB	192 KB	192 KB	192 KB
	Jumbo Frames	9,216 bytes	9,216 bytes	10000 bytes	10000 bytes
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	64	64	64	64
	Port Trunking/Link Aggregation (Manual Static LAGs)	Static LAG	Static LAG	Static LAG	Static LAG
	Rate Limiting	✓	✓	✓	✓
	Broadcast Storm Control	✓	✓	✓	✓
Energy Efficiency	IEEE 802.3az	✓	✓	✓	✓
	Auto Port Power Down	✓	✓	✓	✓
	Dynamic Power Consumption	✓	✓	✓	✓
	Max Power Consumption	4.9W (no PoE) 74.7W (with PoE max)	4.5W (no PoE) 137.8W (with PoE max)	10.09W (no PoE) 198.72W (with PoE MAX)	10.2W (no PoE) 250.56W (with PoE MAX)
Physical	Desktop/Rackmount	Desktop, Wallmount	Desktop, Wallmount	Desktop, Wallmount	Desktop, Wallmount
	Metal/Plastic Enclosure	Metal	Metal	Metal	Metal
	MTBF @ 25°C	1,164,104 hr	853,770 hr	784,742 hrs	570,435 hrs
	Fan(s)	None	None	None	None
	Acoustic Noise at 25°C	0dB	0dB	0dB	0dB
	Width x Depth x Height	158 x 101 x 27 mm (6.2 x 4.0 x 1.1 in)	158 x 101 x 27 mm (6.2 x 4.0 x 1.1 in)	286 x 102 x 27 mm (11.26 x 4.02 x 1.06 in)	286 x 102 x 27 mm (11.26 x 4.02 x 1.06 in)
	Weight	0.39 kg (0.86lb)	0.40 kg (0.88lb)	0.883 kg (1.95 lb)	0.883 kg (1.95 lb)
Electromagnetic Compliance	Class (A or B)				
Warranty Hardware*		5 years	5 years	5 years	5 years
Warranty Power Supply		2 years	2 years	2 years	2 years
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0511-10000S PMB0531-10000S PMB0551-10000S	PMB0511-10000S PMB0531-10000S PMB0551-10000S	PMB0511-10000S PMB0531-10000S PMB0551-10000S	PMB0511-10000S PMB0531-10000S PMB0551-10000S

Plus Switches

Plus, L2, Gigabit



MODEL	JGS516PE	JGS524E	JGS524PE	GS750E	
Port Configuration	10M/100M/1G RJ45 Copper Ports (Auto Uplink)	16	24	24	
	10G SFP+ Fiber Ports			2 Combo SFP	
PoE	PoE (15.4W) 802.3af Ports	8		12	
	Total PoE/PoE+ Budget	85W		100W	
Scalability	# MAC Addresses	16K	16K	16K	
	Dynamic MAC	✓	✓	✓	
System Management	Single IP Management	✓	✓	✓	
	Web Managed/GUI	✓	✓	✓	
	DHCP (Client/Server)	DHCP Client	DHCP Client	DHCP Client	
	Port Mirroring	Many-to-One	Many-to-One	Many-to-One	
Quality of Service	Number of Priority Queues	4	4	8	
	Traffic Prioritization	802.1p, Port-based (CoS)	802.1p, Port-based (CoS)	802.1p, Port-based (CoS)	
	Auto Voice VLAN			✓	
Multicast Filtering	IGMP Snooping Version	v1, v2 and v3	v1, v2 and v3	v1, v2 and v3	
Performance	Bandwidth	32 Gbps	48 Gbps	48 Gbps	
	Buffer Memory	768 KB	768 KB	768 KB	
	Jumbo Frames	9,216 bytes	9,216 bytes	9,216 bytes	
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	100	100	4096	
	Port Trunking/Link Aggregation (Manual Static LAGs)	Static LAG	Static LAG	Static LAG	
	Rate Limiting	✓	✓	✓	
	Broadcast Storm Control	✓	✓	✓	
	Energy Efficiency	IEEE 802.3az	✓	✓	✓
Energy Efficiency	Auto Port Power Down	✓	✓	✓	
	Dynamic Power Consumption	✓	✓	✓	
	Max Power Consumption	25W (no PoE) 110W (with PoE max)	13.8W	23W (no PoE) 123W (with PoE max)	30W
Physical	Desktop/Rackmount	Desktop, Rackmount	Desktop, Rackmount	Desktop, Rackmount	
	Metal/Plastic Enclosure	Metal	Metal	Metal	
	MTBF @ 25°C	840,354 hrs (96 yrs)	243,476 hrs (28 yrs)	643,506 hrs (74 yrs)	1,055,076 hrs (121 yrs)
	Fan(s)	1	None	1	None
	Acoustic Noise at 25°C	24.5dB	0dB	24.5dB	0dB
	Width x Depth x Height	328 x 170 x 43 mm (12.9 x 6.7 x 1.7 in)	328 x 170 x 43 mm (12.9 x 6.9 x 1.7 in)	328 x 169 x 43 mm (12.9 x 6.7 x 1.7 in)	440 x 204 x 43 mm (17.3 x 8.0 x 1.7 in)
Weight	1.67 kg (3.68 lb)	1.4 kg (3.09 lb)	1.84 kg (4.06 lb)	3.25 kg (7.17 lb)	
Electromagnetic Compliance	Class (A or B)	A	A	A	
Warranty Hardware*	Lifetime* Limited	Lifetime* Limited	Lifetime* Limited	Lifetime* Limited	
Warranty Power Supply	Internal (same as switch)	Internal (same as switch)	Internal (same as switch)	Internal (same as switch)	
Modules				AGM731F/AGM732F/AGM734	
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0512 PMB0532 PMB0552	PMB0512 PMB0532 PMB0552	PMB0512 PMB0532 PMB0552	

Plus Switches

Plus, L2, Gigabit with 10G/Multi-Gig Uplinks | Smart Managed Plus, L2, Multi-Gig | Plus, L2, 10G/Multigig



MODEL	GS110EMX	MS108EUP	XS512EM	XS724EM
Port Configuration	10M/100M/1G RJ45 Copper Ports (Auto Uplink)	8		
	1G/2.5GBASE-T RJ45 Copper Ports (Auto Uplink)		8	
	100M/1G/2.5G/5G/10G RJ45 Copper Ports (Auto Uplink)			12
PoE	10G SFP+ Fiber Ports			2 Combo SFP+ (10G)
	PoE+ (30W) 802.3at Ports		4	
	Ultra60 PoE++(60W) 802.3bt Type3 Ports		4	
Scalability	Total PoE Budget (Watt)		230W	
	# MAC Addresses	16K	16K	32K
System Management	Dynamic MAC	✓	✓	✓
	Single IP Management	✓	✓	✓
	Web Managed/GUI	✓	✓	✓
	DHCP (Client/Server)	DHCP Client	DHCP Client	DHCP Client
Quality of Service	Port Mirroring	Many-to-One	One-to-One	Many-to-One
	Number of Priority Queues	8	8	8
	Traffic Prioritization	802.1p, Port-based (CoS)	802.1p, Port-based (CoS)	802.1p, Port-based (CoS)
Multicast Filtering	IGMP Snooping Version	v1, v2 and v3	v1, v2 and v3	v1, v2 and v3
Performance	Bandwidth	56 Gbps	40 Gbps	240 Gbps
	Buffer Memory	2 MB	1.5 MB	3 MB
	Jumbo Frames	10,240 bytes	12,000 bytes	9,216 bytes
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	64	64	64
	Port Trunking/Link Aggregation (Manual Static LAGs)	Static, LACP	Static, LACP	Static, LACP
	Rate Limiting	✓	✓	✓
	Broadcast Storm Control	✓	✓	✓
Energy Efficiency	IEEE 802.3az	✓	✓	✓
	Auto Port Power Down	✓	✓	
	Dynamic Power Consumption	✓	✓	
Energy Efficiency	Max Power Consumption	15.6W	16.58W(no PoE) 270.5W(with PoE MAX)	75.6W
	Physical	Desktop/Rackmount	Desktop, Rackmount	Desktop, Rackmount
	Desktop/Rackmount	Desktop, Rackmount	Desktop, Rackmount	Desktop, Rackmount
Physical	Metal/Plastic Enclosure	Metal	Metal	Metal
	MTBF @ 25°C	1,572,337 hrs (180 yrs)	373,643.7 hrs (42.62 yrs)	1,113,477 hrs (127 yrs)
	Fan(s)	None	None	2
	Acoustic Noise at 25°C	0dB	0dB	Idle : 29.13dB@25dC/ Full load: 40.85dB@55dC
	Width x Depth x Height	236 x 102 x 27 mm (9.3 x 4.0 x 1.1 in)	210 x 140 x 40 mm (8.27 x 5.51 x 1.58 in)	328 x 204 x 43 mm (12.9 x 8.0 x 1.7 in)
	Weight	0.75 kg (1.65 lb)	0.90 kg (1.98 lb)	2.51 kg (5.54 lb)
Electromagnetic Compliance	Class (A or B)	B	A	A
Warranty Hardware*	Lifetime* Limited	Lifetime* Limited	Lifetime* Limited	Lifetime* Limited
Warranty Power Supply	2 years	2 years	Internal (same as switch)	Internal (same as switch)
Modules			AGM731F/AGM732F/AGM734 AXM761/AXM762/AXM763 AXM764/AXC753 /AXC761 AXC763	AGM731F/AGM732F/AGM734 AXM761/AXM762/AXM763 AXM764/AXC753 /AXC761 AXC763
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0512 PMB0532 PMB0552	PMB0312 PMB0332 PMB0352	PMB0512 PMB0532 PMB0552

Plus Switches

Plus, L2, 10G Ethernet



MODEL	XS708EV2	XS716E
Port Configuration	10M/100M/1G RJ45 Copper Ports (Auto Uplink)	
	1G/10GBASE-T RJ45 Copper Ports (Auto Uplink)	8
	10G SFP+ Fiber Ports	1 Combo SFP+ (10G)
PoE	PoE (15.4W) 802.3af Ports	
	Total PoE/PoE+ Budget	
Scalability	# MAC Addresses	16K
	Web Managed/GUI	✓
System Management	Single IP Management	✓
	Web Managed/GUI	✓
	DHCP (Client/Server)	DHCP Client
	Port Mirroring	Many-to-one
Quality of Service	Number of Priority Queues	4
	Traffic Prioritization	802.1p, Port-based (CoS)
	Auto Voice VLAN	
Multicast Filtering	IGMP Snooping Version	v1, v2
	IGMP Snooping Querier	✓
	Auto Voice VLAN	✓
Performance	Bandwidth	160 Gbps
	Buffer Memory	16 MB
	Jumbo Frames	9,216 bytes
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	64
	Port Trunking/Link Aggregation (Manual Static LAGs)	
	Rate Limiting	✓
	Broadcast Storm Control	✓
Energy Efficiency	IEEE 802.3az	✓
	Auto Port Power Down	✓
	Dynamic Power Consumption	
	Max Power Consumption	44W
Physical	Desktop/Rackmount	Desktop, Rackmount
	Metal/Plastic Enclosure	Metal
	MTBF @ 25°C	397,731 hrs (45 yrs)
	Fan(s)	2
	Acoustic Noise at 25°C	36.7dB
	Width x Depth x Height	440 x 204 x 43 mm (17.3 x 8.0 x 1.7 in)
	Weight	2.80 kg (6.17 lb)
Electromagnetic Compliance	Class (A or B)	A
Warranty Hardware*	Lifetime* Limited	Lifetime* Limited
Warranty Power Supply	Internal (same as switch)	Internal (same as switch)
Modules	AGM731F/AGM732F/AGM734 AXM761/AXM762/AXM763 AXM764/AXC753/AXC761 AXC763	AGM731F/AGM732F/AGM734 AXM761/AXM762/AXM763 AXM764/AXC753/AXC761 AXC763
ProSUPPORT Maintenance Contracts***	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0311 PMB0331 PMB0351

Smart Switches - Advanced Network Control & Security with Web Management

Smart, L2, 10/100 Fast Ethernet and 1G Ethernet



MODEL	FS728TPv2	GS308T	GS310TP
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	24	
	10/100/1000 RJ45 Ports (Auto Uplink)	4	8
	Fiber Ports	2 SFP	2 SFP
PoE	Power Over Ethernet 802.3af Ports	24	
	PoE Plus (30W) 802.3at Ports		8
Scalability	Total PoE Budget	192W	55 Watts
	# MAC Addresses	4,000	8000
System Management	# ACL Rules	128	100
	Web Managed/GUI	✓	✓
Quality of Service	SNMP Version	v1, v2c, v3	v1, v2c, v3
	RMON Group	1,2,3,9	1,2,3,9
	DHCP (Client/Server)	Client	Client
	Port Mirroring	Many-to-One	Many-to-One
	IPv6 full set	✓	✓
Multicast Filtering	IGMP Snooping Version	v1, v2, v3	v1, v2, v3
	IGMP Snooping Querier	✓	✓
	Auto Voice VLAN	✓	✓
Performance	Bandwidth	12.8 Gbps	16 Gbps
	Buffer Memory	1 MB Per System	512 KB Per Unit
	Jumbo Frames	9,216	10,000
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s
	RPS Redundant Power Supply		
Traffic Management	Modular Power Supply		
	Number of 802.1q VLAN/Number of VLAN Group	128	64
	Link Aggregation 802.3ad/LACP	✓	✓
	Discovery Protocol LLDP 802.1ab	✓	✓
	Rate Limiting	✓	✓
L3 Routing	Broadcast Storm Control	✓	✓
	IPv4 Static Routing		
	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP		
	IPv6 Static Routing, IPv6 OSPFv3		
Security	IPv4 / IPv6 Multicast Routing PIM-SM/DM		
	IEEE 802.1x (RADIUS)	✓	✓
	ACL - Access Control Lists	MAC, IP	MAC, IP
	SSL/SSH & HTTPS	✓	HTTPS
	Guest VLAN	✓	✓
Energy Efficiency	DHCP Snooping/IP Source Guard/ARP Guard	✓	✓
	TACACS+	✓	✓
	IEEE 802.3az	✓	✓
	Auto Port Power Down	✓	✓
Physical	Dynamic Power Consumption	✓	✓
	Max Power Consumption	256W	6.4 Watts
	Desktop/Rackmount	Rackmount	Desktop
	Metal/Plastic Enclosure	Metal	Metal
	MTBF @ 25°C	237,497 hrs (27 yrs)	2,957,592 hrs (337 yrs)
	Fan(s)	1	None
	Acoustic Noise @ 25°C	38.1dBA	0 dBA
Electromagnetic Compliance	Width x Depth x Height	440 x 257 x 43 mm (17.3 x 10.1 x 1.7 in)	158 x 101 x 30 mm (6.2 x 4.0 x 1.2 in)
	Weight	3.60 kg (7.92 lb)	0.41kg (0.9 lb)
Warranty Hardware	Class (A or B)	A	B
Warranty Power Supply	Lifetime	5 year	5 year
Modules	Lifetime	2 year	2 year
ProSUPPORT Maintenance PKGS	AGM731F/732F	AGM731F/732F	AGM731F/AGM732F/AGM734
	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0311 PMB0331 PMB0351	PMB0531 PMB0532

Smart Switches

Smart, L2, 10/100 Fast Ethernet



MODEL	GS324T	GS324TP
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	
	10/100/1000 RJ45 Ports (Auto Uplink)	24
	Fiber Ports	2 SFP
	10Gig Module Bays	
PoE	Power Over Ethernet 802.3af Ports	
	PoE Plus (30W) 802.3at Ports	24
	Total PoE Budget	190 Watts
Scalability	# MAC Addresses	16000
	ARP Table - Size of	
	# Routing Entries	
	# ACL Rules	100
System Management	Single IP Management	
	Web Managed/GUI	✓
	Command Line Interface/RS232 Console/Telnet	
	SNMP Version	v1, v2c, v3
	RMON Group	1,2,3,9
	DHCP (Client/Server)	Client
	Port Mirroring	Many-to-One
Quality of Service	IPv6 full set	
	Number of Priority Queues	4
	Traffic Prioritization	802.1p, DSCP, Diffserv
	Auto Voice VLAN	✓
Multicast Filtering	IGMP Snooping Version	v1, v2, v3
	IGMP Snooping Querier	✓
Performance	Bandwidth	52 Gbps
	Buffer Memory	512 KB Per Unit
	Jumbo Frames	9,216
	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s
Availability	Number of 802.1q VLAN/ Number of VLAN Group	64
	Link Aggregation 802.3ad/LACP	✓
	Discovery Protocol LLDP 802.1ab	✓
	Rate Limiting	✓
	Broadcast Storm Control	✓
	IPV4 Static Routing	✓
Security	IEEE 802.1x (RADIUS)	✓
	ACL - Access Control Lists	MAC, IP
	SSL/SSH & HTTPS	HTTPS
	Guest VLAN	✓
	DHCP Snooping/IP Source Guard/ARP Guard	✓
	TACACS+	✓
Energy Efficiency	IEEE 802.3az	✓
	Auto Port Power Down	✓
	Dynamic Power Consumption	✓
	Max Power Consumption	13.5 Watts
	Desktop/Rackmount	Rackmount
Physical	Metal/Plastic Enclosure	Metal
	MTBF @ 25°C	1,999,946.7 hrs (228 yrs)
	Fan(s)	None
	Acoustic Noise @ 25°C	0 dBA
	Width x Depth x Height	328 x 169 x 43 mm (12.9 x 6.7 x 1.7 in)
	Weight	1.62 kg (3.57 lb)
	Class (A or B)	B
	Warranty Hardware*	5 year
Warranty Power Supply	5 year	
Modules	AGM731F AGM732F AGM734	AGM731F AGM732F AGM734
ProSUPPORT Maintenance PKGS***	OnCall 24x7 3-year PMB0532	PMB0331

Smart Switches

Smart, L2, Gigabit

Smart, L2+ with static routing, Gigabit



MODEL	GS716Tv3	GS510TLP	GS510TPP
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	16	8
	Fiber Ports	2 dedicated SFP	2
PoE	Power Over Ethernet 802.3af Ports		
	PoE Plus (30W) 802.3at Ports		8
	Total PoE Budget		75W
Scalability	# MAC Addresses	16,000	16K
	ARP Table - Size of	512	479
	# Routing Entries	32	32
	# ACL Rules	100	100
System Management	Web Managed/GUI	✓	✓
	Insight Management		Yes
	SNMP Version	v1, v2c, v3	v1, v2c, v3
	RMON Group	1,2,3,9	Yes
	DHCP (Client/Server)	Client	Client
	Port Mirroring	Many-to-One	Yes
	IPv6 full set	✓	Yes
Quality of Service	Number of Priority Queues	8	8
	Traffic Prioritization	802.1p, DSCP, Diffserv	802.1p, DSCP, Diffserv
	Auto Voice VLAN	✓	✓
Multicast Filtering	IGMP Snooping Version	v1, v2, v3	v1, v2, v3
	IGMP Snooping Querier	✓	✓
Performance	Bandwidth	32 Gbps	20 Gbps
	Buffer Memory	2 MB Per System	1.5 MB per system
	Jumbo Frames	9,216	9,216
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	256	
	Link Aggregation 802.3ad/LACP	✓	✓
	Discovery Protocol LLDP 802.1ab	✓	✓
	Rate Limiting	✓	✓
	Broadcast Storm Control	✓	✓
	IPv4 Static Routing	✓	✓
L3 Routing	IEEE 802.1x (RADIUS)	✓	✓
	ACL - Access Control Lists	MAC, IP	MAC, IP, TCP
	SSL/SSH & HTTPS	SSL/HTTPS	SSL/HTTPS
	Guest VLAN	✓	✓
	DHCP Snooping/IP Source Guard/ARP Guard	✓	✓
	TACACS+	✓	✓
Energy Efficiency	IEEE 802.3az	✓	✓
	Auto Port Power Down	✓	✓
	Dynamic Power Consumption	✓	✓
	Max Power Consumption	14.4W	101W
	Desktop/Rackmount	Rackmount	Desktop/Rackmount
Physical	Metal/Plastic Enclosure	Metal	Metal
	MTBF @ 25°C	726,612 hrs (83 yrs)	913,368 hrs (104 yrs)
	Fan(s)	None	None
	Acoustic Noise @ 25°C	0dBA	0dBA
	Width x Depth x Height	440 x 204 x 43 mm (1.7 x 17.3 x 8.0 in)	328 x 169 x 43 mm (12.9 x 6.7 x 1.7 in)
	Weight	2.72 kg (5.99 lb)	1.74 kg (3.84 lb)
	Class (A or B)	A	A
Electromagnetic Compliance	Class (A or B)	A	A
Warranty Hardware	Lifetime	Lifetime	Lifetime
Warranty Power Supply	Lifetime	Lifetime	Lifetime
Modules	AGM731F/732F	AGM731F/AGM732F/AGM734	AGM731F/AGM732F/AGM734
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0512 PMB0532 PMB0552	PMB0311 PMB0331 PMB0351

Smart Switches

Smart, L2+ with static routing, Gigabit



MODEL	GS724Tv4	GS748Tv5	
Port Configuration	10/100 RJ45 Ports (Auto Uplink)		
	10/100/1000 RJ45 Ports (Auto Uplink)	24	
	Fiber Ports	2 dedicated SFP	
PoE	Power Over Ethernet 802.3af Ports		
	PoE Plus (30W) 802.3at Ports		
	Total PoE Budget	384W	
Scalability	# MAC Addresses	16,000	
	ARP Table - Size of	512	
	# Routing Entries	32	
	# ACL Rules	100	
	Single IP Management	✓	
System Management	Web Managed/GUI	✓	
	Insight Cloud Management Option	✓	
	Command Line Interface/RS232 Console/Telnet		
	SNMP Version	v1, v2c, v3	
	RMON Group	1,2,3,9	
	DHCP (Client/Server)	Client	
	Port Mirroring	Many-to-One	
	IPv6 full set	✓	
	Optional Unified Network Management	Discovery, setup, monitoring and management via NETGEAR Insight mobile app or Insight Cloud Portal	
	Optional Discovery, Setup, Monitoring & Management	Remote/Cloud management	
Centralized network configuration (policies) across Insight Managed Switches, Wireless Access Points, and Business-class ReadyNAS Storage			
Additional devices auto-join and inherit network configuration (zero-touch provisioning)			
Quality of Service	Number of Priority Queues	8	
	Traffic Prioritization	802.1p, DSCP, Diffserv	
	Auto Voice VLAN	✓	
Multicast Filtering	IGMP Snooping Version	v1, v2, v3	
	IGMP Snooping Querier	✓	
Performance	Bandwidth	48 Gbps	
	Buffer Memory	2 MB Per System	
	Jumbo Frames	9,216	
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	256	
	Link Aggregation 802.3ad/LACP	✓	
	Discovery Protocol LLDP 802.1ab	✓	
	Rate Limiting	✓	
	Broadcast Storm Control	✓	
L3 Routing	IPv4 Static Routing	✓	
Security	IEEE 802.1x (RADIUS)	✓	
	ACL - Access Control Lists	MAC, IP	
	SSL/SSH & HTTPS	SSL/HTTPS	
	Guest VLAN	✓	
	DHCP Snooping/IP Source Guard/ARP Guard	✓	
	TACACS+	✓	
	IEEE 802.3az	✓	
Energy Efficiency	Auto Port Power Down	✓	
	Dynamic Power Consumption	✓	
	Max Power Consumption	17.4W	
	Desktop/Rackmount	Rackmount	
	Metal/Plastic Enclosure	Metal	
Physical	MTBF @ 25°C	567,680 hrs (65 yrs)	
	Fan(s)	None	
	Acoustic Noise @ 25°C	0dBA	
	Width x Depth x Height	440 x 204 x 43 mm (1.7 x 17.3 x 8.0 in)	
	Weight	2.87 kg (6.33 lb)	
	Electromagnetic Compliance	Class (A or B)	
	Warranty Hardware	Lifetime	
Warranty Power Supply	Lifetime		
Modules	AGM731F/AGM732F/AGM734	AGM731F/AGM732F/AGM734 (for combo port only)	
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year	PMB0311	
	OnCall 24x7 3-year	PMB0331	
	OnCall 24x7 5-year	PMB0351	

Smart Switches

Smart, L2+ with static routing, Stackable, Gigabit



MODEL	GS752TSB	GS752TPSB	
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	48	
	Fiber Ports	4 SFP	
PoE	Power Over Ethernet 802.3af Ports	48	
	PoE Plus (30W) 802.3at Ports	8	
	Total PoE Budget	384W	
Stacking	Number of Dedicated Stacking Ports	2 SFP (2.5G)	
	Stacking Bandwidth	10 Gbps	
	Stacking (maximum capacity)	6 units or 300 ports	
Scalability	Stacking Compatibility	GS7XXTSB/GSXXTPSB	
	# MAC Addresses	16,000	
	ARP Table - Size of	1,024	
	# Routing Entries	32	
System Management	# ACL Rules	100	
	Single IP Management	✓	
	Web Managed/GUI	✓	
	SNMP Version	v1, v2c, v3	
	RMON Group	1,2,3,9	
	DHCP (Client/Server/Relay)	Client	
	Port Mirroring	Many-to-One	
	IPv6 full set	✓	
	Quality of Service	Number of Priority Queues	8
	Multicast Filtering	Traffic Prioritization	802.1p
Auto Voice VLAN		✓	
Performance	IGMP Snooping Version	v1, v2, v3	
	IGMP Snooping Querier	✓	
Availability	Bandwidth	104 Gbps	
	Buffer Memory	16 MB Per System	
	Jumbo Frames	9,216	
Traffic Management	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	
	Number of 802.1q VLAN/Number of VLAN Group	256	
	Link Aggregation 802.3ad/LACP	✓	
	Discovery Protocol LLDP 802.1ab	✓	
	Rate Limiting	✓	
Security	Broadcast Storm Control	✓	
	IPv4 Static Routing	✓	
	IEEE 802.1x (RADIUS)	✓	
	ACL - Access Control Lists	MAC, IP	
	SSL/SSH & HTTPS	HTTPS	
	Guest VLAN	✓	
	DHCP Snooping/IP Source Guard/ARP Guard	✓	
TACACS+	✓		
Energy Efficiency	Auto Port Power Down	✓	
	Dynamic Power Consumption	✓	
	Max Power Consumption	77W	
	Desktop/Rackmount	Rackmount	
	Metal/Plastic Enclosure	Metal	
Physical	MTBF @ 25°C	303,219 hrs (35 yrs)	
	Fan(s)	2	
	Acoustic Noise @ 25°C	34.8dBA	
	Width x Depth x Height	440 x 257 x 43 mm (17.3 x 11.8 x 1.7 in)	
	Weight	4.31 kg (11.38 lb)	
	Electromagnetic Compliance	Class (A or B)	
	Warranty Hardware	Lifetime	
Warranty Power Supply	Lifetime		
Modules	AGM731F/AGM732F/AGM734/AGC761	AGM731F/AGM732F/AGM734/AGC761	
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year	PMB0312	
	OnCall 24x7 3-year	PMB0332	
	OnCall 24x7 5-year	PMB0352	

Smart Switches

Smart, L2+ with static routing, Stackable, Gigabit



MODEL	S3300-28X (GS728TX)	S3300-52X (GS752TX)	S3300-28X-POE+ (GS728TXP)
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	24 / 2 10GBase-T	48 / 2 10GBase-T
	Fiber Ports	2 SFP+ (10G)	2 SFP+ (10G)
PoE	Power Over Ethernet 802.3af Ports		24
	PoE Plus (30W) 802.3at Ports		24
	Total PoE Budget		195W/up to 740W with RPS
Stacking	Number of Dedicated Stacking Ports	Up to 2 10G ports	Up to 2 10G ports
	Stacking Bandwidth	40 Gbps	40 Gbps
	Stacking (maximum capacity)	6 units or 300 ports	6 units or 300 ports
	Stacking Compatibility	S3300 series, M4300-12X12F, M4300-24X	S3300 series, M4300-12X12F, M4300-24X
Scalability	# MAC Addresses	16,000	16,000
	ARP Table - Size of	512	512
	# Routing Entries	32	32
	# ACL Rules	100	480
System Management	Single IP Management	✓	✓
	Web Managed/GUI	✓	✓
	SNMP Version	v1, v2c, v3	v1, v2c, v3
	RMON Group	1,2,3,9	1,2,3,9
	DHCP (Client/Server/Relay)	Client/L2 Relay	Client/L2 Relay
	Port Mirroring	Many-to-One	Many-to-One
	IPv6 full set	✓	✓
	Quality of Service	Number of Priority Queues	8
Multicast Filtering	Traffic Prioritization	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP
	Auto Voice VLAN	✓	✓
Performance	IGMP Snooping Version	v1, v2, v3	v1, v2, v3
	IGMP Snooping Querier	✓	✓
Availability	Bandwidth	128 Gbps	176 Gbps
	Buffer Memory	2 MB Per System	2 MB Per System
Traffic Management	Jumbo Frames	9,216	9,216
	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s
L3 Routing	Number of 802.1q VLAN/Number of VLAN Group	256	256
	Link Aggregation 802.3ad/LACP	✓	✓
Security	Discovery Protocol LLDP 802.1ab	✓	✓
	Rate Limiting	✓	✓
Energy Efficiency	Broadcast Storm Control	✓	✓
	IPv4 Static Routing	✓	✓
Physical	IEEE 802.1x (RADIUS)	✓	✓
	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP
Electromagnetic Compliance	SSL/SSH & HTTPS	HTTPS	HTTPS
	Guest VLAN	✓	✓
Warranty Hardware	DHCP Snooping/IP Source Guard/ARP Guard	✓	✓
	TACACS+	✓	✓
Warranty Power Supply	IEEE 802.3az	✓	✓
	Auto Port Power Down	✓	✓
Modules	Dynamic Power Consumption	✓	✓
	Max Power Consumption	28.18W	748.18W
ProSUPPORT Maintenance PKGS	Desktop/Rackmount	Rackmount	Rackmount
	Metal/Plastic Enclosure	Metal	Metal
Physical	MTBF @ 25°C	278,559 hrs (32 yrs)	147,965 hrs (17 yrs)
	Fan(s)	2	2
Electromagnetic Compliance	Acoustic Noise @ 25°C	40dBA	39dBA
	Width x Depth x Height	440 x 257 x 43 mm (17.3 x 10.1 x 1.7 in)	440 x 257 x 43 mm (17.3 x 10.1 x 1.7 in)
Warranty Hardware	Weight	3.55 kg (7.80 lb)	3.67 kg (8.10 lb)
	Class (A or B)	A	A
Warranty Power Supply	Class (A or B)	A	A
	Class (A or B)	A	A

Smart Switches

Smart, L2+ with static routing, Multi-Gigabit



MODEL	MS510TX	MS510TXPP
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	N/A
	10/100/1000 RJ45 Ports (Auto Uplink)	4x1G/2x2.5G/2x5G/1x10GBase-T
PoE	Fiber Ports	1 SFP+ (10G)
	Power Over Ethernet 802.3af Ports	
	PoE Plus (30W) 802.3at Ports	
Stacking	Ultra60 PoE++ (60W) 802.3bt Ports	8 (PoE+)
	Total PoE Budget	180W
	Number of Dedicated Stacking Ports	
	Stacking Bandwidth	
Scalability	Stacking (maximum capacity)	
	Stacking Compatibility	
	# MAC Addresses	16,000
	ARP Table - Size of	512
System Management	# Routing Entries	32
	# ACL Rules	164
Optional Unified Network Management	Single IP Management	✓
	Web Managed/GUI	✓
	Insight Cloud Management Option	
	Command Line Interface/RS232 Console/Telnet	N/A
	SNMP Version	v1, v2c, v3
	RMON Group	1,2,3,9
	DHCP (Client/Server/Relay)	Client/L2 Relay
	Port Mirroring	Many-to-One
IPv6 full set	✓	
Optional Discovery, Setup, Monitoring & Management	Discovery, setup, monitoring and management via NETGEAR Insight mobile app or Insight Cloud Portal	
	Remote/Cloud management	
Quality of Service	Centralized network configuration (policies) across Insight Managed Switches, Wireless Access Points, and Business-class ReadyNAS Storage	
	Additional devices auto-join and inherit network configuration (zero-touch provisioning)	
Multicast Filtering	Multi-site, multi-network management in a single pane-of-glass view	
	Number of Priority Queues	8
Performance	Traffic Prioritization	802.1p; Diffserv; TCP/UDP
	Auto Voice VLAN	✓
Availability	IGMP Snooping Version	v1, v2, v3
	IGMP Snooping Querier	✓
Traffic Management	Bandwidth	78 Gbps
	Buffer Memory	1.5 MB Per System
L3 Routing	Jumbo Frames	10,240
	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s
Security	RPS Redundant Power Supply	N/A
	Number of 802.1q VLAN/Number of VLAN Group	256
Energy Efficiency	Link Aggregation 802.3ad/LACP	✓
	Discovery Protocol LLDP 802.1ab	✓
Physical	Rate Limiting	✓
	Broadcast Storm Control	✓
Electromagnetic Compliance	IPv4 Static Routing	✓
	IEEE 802.1x (RADIUS)	✓
Warranty Hardware	ACL - Access Control Lists	MAC, IP, TCP
	SSL/SSH & HTTPS	HTTPS
Warranty Power Supply	Guest VLAN	✓
	DHCP Snooping/IP Source Guard/ARP Guard	✓
Modules	TACACS+	✓
	EEE 802.3az	✓
ProSUPPORT Maintenance PKGS	Auto Port Power Down	✓
	Dynamic Power Consumption	✓
Physical	Max Power Consumption	26.1W
	Desktop/Rackmount	Desktop/Rackmount
Electromagnetic Compliance	Metal/Plastic Enclosure	Metal
	MTBF @ 25°C	1,078,683 hrs (123 yrs)
Warranty Hardware	Fan(s)	1
	Acoustic Noise @ 25°C	21dBA
Warranty Power Supply	Width x Depth x Height	328 x 169 x 43 mm (12.9 x 6.7 x 1.7 in)
	Weight	1.42 kg (3.13 lb)
Modules	Class (A or B)	A
	Class (A or B)	A
ProSUPPORT Maintenance PKGS	Lifetime	Lifetime
	Lifetime	Lifetime

Smart Switches

Smart, L2+ with static routing, 10-Gigabit



MODEL	XS708T	XS712Tv2	XS716T	XS728T	XS748T	
Port Configuration	10/100 RJ45 Ports (Auto Uplink)					
	10/100/1000 RJ45 Ports (Auto Uplink)					
	Fiber Ports	2 Combo SFP+ (10G)	2 Combo SFP+ (10G)	2 Combo SFP+ (10G)	4 SFP+ (10G)	4 SFP+ (10G)
PoE	Power Over Ethernet 802.3af Ports					
	PoE Plus (30W) 802.3at Ports					
	Total PoE Budget					
Scalability	# MAC Addresses	16,000	16,000	16,000	32,000	32,000
	ARP Table - Size of	738	738	738	1,024	1,024
	# Routing Entries	32	32	32	64	64
	# ACL Rules	100	100	100	164	164
	Single IP Management	✓	✓	✓	✓	✓
System Management	Web Managed/GUI	✓	✓	✓	✓	✓
	Command Line Interface/RS232 Console/Telnet		N/A			
Quality of Service	SNMP Version	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3
	RMON Group	1,2,3,9	1,2,3,9	1,2,3,9	1,2,3,9	1,2,3,9
	DHCP (Client/Server/Relay)	Client/L2 Relay	Client/L2 Relay	Client/L2 Relay	Client/L2 Relay	Client/L2 Relay
	Port Mirroring	Many-to-One	Many-to-One	Many-to-One	Many-to-One	Many-to-One
	IPv6 full set	✓	✓	✓	✓	✓
	Number of Priority Queues	8	8	8	8	8
Multicast Filtering	Traffic Prioritization	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP
	Auto Voice VLAN	✓	✓	✓	✓	✓
Performance	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3	v1, v2, v3
	IGMP Snooping Querier	✓	✓	✓	✓	✓
	Bandwidth	160Gbps	320 Gbps	320 Gbps	560 Gbps	960 Gbps
Availability	Buffer Memory	2 MB Per System	2 MB Per System	2 MB Per System	3 MB Per System	3 MB Per System
	Jumbo Frames	9,216	9,216	9,216	10,240	10,240
Traffic Management	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s	802.1d, .1w, .1s	802.1d, .1w, .1s	802.1d, .1w, .1s
	RPS Redundant Power Supply					
L3 Routing	Number of 802.1q VLAN/Number of VLAN Group	256	256	256	512	512
	Link Aggregation 802.3ad/LACP	✓	✓	✓	✓	✓
	Discovery Protocol LLDP 802.1ab	✓	✓	✓	✓	✓
	Rate Limiting	✓	✓	✓	✓	✓
	Broadcast Storm Control	✓	✓	✓	✓	✓
Security	IPv4 Static Routing	✓	✓	✓	✓	✓
	IEEE 802.1x (RADIUS)	✓	✓	✓	✓	✓
Energy Efficiency	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP	MAC, IP, TCP	MAC, IP, TCP	MAC, IP, TCP
	SSL/SSH & HTTPS	HTTPS	HTTPS	HTTPS	HTTPS	HTTPS
	Guest VLAN	✓	✓	✓	✓	✓
	DHCP Snooping/IP Source Guard/ARP Guard	✓	✓	✓	✓	✓
	TACACS+	✓	✓	✓	✓	✓
	Auto Port Power Down	✓	✓	✓	✓	✓
Physical	Dynamic Power Consumption	✓	✓	✓	✓	✓
	Max Power Consumption	49.5W	75.3W	96.0W	134.9W	262.8W
	Desktop/Rackmount	Rackmount	Rackmount	Rackmount	Rackmount	Rackmount
	Metal/Plastic Enclosure	Metal	Metal	Metal	Metal	Metal
	MTBF @ 25°C	276,197 hrs (32 yrs)	938,178 hrs (107 yrs)	276,832 hrs (32 yrs)	514,977 hrs (59 yrs)	483,808 hrs (55 yrs)
	Fan(s)	2	2	2	4	4
	Acoustic Noise @ 25°C	27.4dBA	29.1dBA	29.1dBA	41.6dBA	47.8dBA
Electromagnetic Compliance	Width x Depth x Height	440 x 204 x 43 mm (17.3 x 8.0 x 1.7 in)	440 x 204 x 43 mm (17.3 x 8.0 x 1.7 in)	440 x 204 x 43 mm (17.3 x 8.0 x 1.7 in)	440 x 310 x 43 mm (17.3 x 12.2 x 1.7 in)	440 x 347 x 43 mm (17.3 x 13.7 x 1.7 in)
	Weight	2.61 kg (5.76 lb)	2.87 kg (6.33 lb)	2.98 kg (6.57 lb)	5.04 kg (11.11 lb)	6.25 kg (13.78 lb)
	Class (A or B)	A	A	A	A	A
Warranty Hardware	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	
Warranty Power Supply	Lifetime	Lifetime	Lifetime	Lifetime	Lifetime	
Modules	AGM731F/.../AGM732F/AGM734/AXM761/AXM762/AXM763/AXM764/AXC761/AXC763	AGM731F/AGM732F/AGM734/AXM761/AXM762/AXM763/AXM764/AXC761/AXC763	AGM731F/AGM732F/AGM734/AXM761/AXM762/AXM763/AXM764/AXC761/AXC763	AGM731F/AGM732F/AGM734/AXM761/AXM762/AXM763/AXM764/AXC761/AXC763	AGM731F/AGM732F/AGM734/AXM761/AXM762/AXM763/AXM764/AXC761/AXC763	AGM731F/AGM732F/AGM734/AXM761/AXM762/AXM763/AXM764/AXC761/AXC763
	ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0311 PMB0331 PMB0351	PMB0312 PMB0332 PMB0352	PMB0313 PMB0333 PMB0353	PMB0314 PMB0334 PMB0354

Smart Switches with Optional Insight Remote/Cloud Management

Smart with Cloud, L2/L2+/L3 Lite, Gigabit



MODEL	GS108Tv3	GS110TPv3	GS110TPP	
Port Configuration	10/100 RJ45 Ports (Auto Uplink)			
	10/100/1000 RJ45 Ports (Auto Uplink)			
	Fiber Ports	8	2 SFP	10
PoE	Power Over Ethernet 802.3af Ports			
	PoE Plus (30W) 802.3at Ports			
	Total PoE Budget	55 Watts	8	120 Watts ¹
Scalability	# MAC Addresses	8,000	8,000	8,000
	ARP Table - Size of	512	512	512
	# Routing Entries	32	32	32
	# ACL Rules	100	100	100
	Single IP Management	✓	✓	✓
System Management	Web Managed/GUI	✓	✓	✓
	Insight Cloud Management Option	✓	✓	✓
Optional Unified Network Management	Command Line Interface/RS232 Console/Telnet			
	SNMP Version	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3
	RMON Group	1,2,3,9	1,2,3,9	1,2,3,9
	DHCP (Client/Server/Relay)	Client	Client	Client
	Port Mirroring	Many-to-One	Many-to-One	Many-to-One
	IPv6 full set	✓	✓	✓
Optional Discovery, Setup, Monitoring & Management	Discovery, setup, monitoring and management via NETGEAR Insight mobile app or Insight Cloud Portal	✓	✓	✓
	Remote/Cloud management	✓	✓	✓
	Centralized network configuration (policies) across Insight Managed Switches, Wireless Access Points, and Business-class ReadyNAS Storage	✓	✓	✓
	Additional devices auto-join and inherit network configuration (zero-touch provisioning)	✓	✓	✓
Quality of Service	Multi-site, multi-network management in a single pane-of-glass view	✓	✓	✓
	Number of Priority Queues	8	8	8
	Traffic Prioritization	802.1p, DSCP, Diffserv, TCP/UDP	802.1p, DSCP, Diffserv, TCP/UDP	802.1p, DSCP, Diffserv, TCP/UDP
Multicast Filtering	Auto Voice VLAN	✓	✓	✓
	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	v1, v2, v3
	IGMP Snooping Querier	✓	✓	✓
Performance	Bandwidth	16 Gbps	20 Gbps	20 Gbps
	Buffer Memory	512 KB Per Unit	512 KB Per Unit	512 KB Per Unit
	Jumbo Frames	10,000	10,000	10,000
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s	802.1d, .1w, .1s
	RPS Redundant Power Supply			
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	64	64	64
	Link Aggregation 802.3ad/LACP	✓	✓	✓
	Discovery Protocol LLDP 802.1ab	✓	✓	✓
	Rate Limiting	✓	✓	✓
	Broadcast Storm Control	✓	✓	✓
L3 Routing	IPv4 Static Routing	✓	✓	✓
	IEEE 802.1x (RADIUS)	✓	✓	✓
Security	ACL - Access Control Lists	MAC, IP	MAC, IP	MAC, IP
	SSL/SSH & HTTPS	HTTPS	HTTPS	HTTPS
	Guest VLAN	✓	✓	✓
	DHCP Snooping/IP Source Guard/ARP Guard	✓	✓	✓
	TACACS+	✓	✓	✓
	Auto Port Power Down	✓	✓	✓
Energy Efficiency	Dynamic Power Consumption	✓	✓	✓
	Max Power Consumption	5.75 Watts if powered by PoE via port 5.5 Watts (DC)	69.5W (with PoE max)	141.3W (with PoE max)
	Desktop/Rackmount	Desktop	Desktop	Desktop
Physical	Metal/Plastic Enclosure	Metal	Metal	Metal
	MTBF @ 25°C	2,388,657 hrs (273 yrs)	1,200,041 hrs (137 yrs)	646,773.4 hrs (74 yrs)
	Fan(s)	None	None	None
	Acoustic Noise @ 25°C	0 dBA	0 dBA	0 dBA
	Width x Depth x Height	158 x 101 x 27 mm (6.2 x 4.0 x 1.1 in)	236 x 101 x 27 mm (9.3 x 4.0 x 1.1 in)	236 x 101 x 27 mm (9.3 x 4.0 x 1.1 in)
	Weight	0.43 kg (0.94 lb)	0.61 kg (1.34 lb)	0.64kg (1.41 lb)
	Class (A or B)	B	B	B
Warranty Hardware	Lifetime	Lifetime	Lifetime	
Warranty Power Supply	2 yrs	2 yrs	2 yrs	
Modules	AGM731F/AGM732F/AGM734/ AXM765 (1G mode only)			
	ProSUPPORT Maintenance PKGS	On Call 3-year 24 x 7	PMB0531	PMB0532

Smart Switches with Optional Insight Remote/Cloud Management

Smart with Cloud, L2/L2+/L3 Lite, Gigabit



MODEL	GS110TUP	GS710TUP
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	10/100/1000 RJ45 Ports (Auto Uplink)
	9	9
	Fiber Ports	1 dedicated SFP
	1 dedicated SFP	1 dedicated SFP
PoE	Power Over Ethernet 802.3af Ports	8
	8	8
	PoE Plus (30W) 802.3at Ports	8
	4	8
	Ultra60 PoE+ (60W) 802.3bt Ports	4
	240W	480W
	Uninterrupted PoE	✓
Scalability	# MAC Addresses	8,000
	512	512
	ARP Table - Size of	32
	100	100
	# Routing Entries	100
	# ACL Rules	100
System Management	Single IP Management	✓
	Web Managed/GUI	✓
	Insight Cloud Management Option	✓
	Command Line Interface/RS232 Console/Telnet	✓
	SNMP Version	v1, v2c, v3
	1,2,3,9	1,2,3,9
	RMON Group	Client
	DHCP (Client/Server/Relay)	Client
	Port Mirroring	Many-to-One
	IPv6 full set	✓
Optional Unified Network Management	Discovery, setup, monitoring and management via NETGEAR Insight mobile app or Insight Cloud Portal	✓
Optional Discovery, Setup, Monitoring & Management	Remote/Cloud management	✓
	Centralized network configuration (policies) across Insight Managed Switches, Wireless Access Points, and Business-class ReadyNAS Storage	✓
	Additional devices auto-join and inherit network configuration (zero-touch provisioning)	✓
	Multi-site, multi-network management in a single pane-of-glass view	✓
Quality of Service	Number of Priority Queues	8
	Traffic Prioritization	802.1p, DSCP, Diffserv, TCP/UDP
	Auto Voice VLAN	✓
Multicast Filtering	IGMP Snooping Version	v1, v2, v3
	IGMP Snooping Querier	✓
Performance	Bandwidth	20 Gbps
	Buffer Memory	0.5 MB Per System
	Jumbo Frames	10,000
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	64
	Link Aggregation 802.3ad/LACP	✓
	Discovery Protocol LLDP 802.1ab	✓
	Rate Limiting	✓
	Broadcast Storm Control	✓
L3 Routing	IPv4 Static Routing	✓
Security	IEEE 802.1x (RADIUS)	✓
	ACL - Access Control Lists	MAC, IP, TCP
	SSL/SSH & HTTPS	HTTPS
	Guest VLAN	✓
	DHCP Snooping/IP Source Guard/ARP Guard	✓
	TACACS+	✓
Energy Efficiency	EEE 802.3az	✓
	Auto Port Power Down	✓
	Dynamic Power Consumption	✓
	Max Power Consumption	276.8 Watts
Physical	Desktop/Rackmount	Desktop, Wallmount, Rackmount
	Metal/Plastic Enclosure	Metal
	MTBF @ 25°C	695507.7 hrs (32 yrs)
	Fan(s)	None
	Acoustic Noise @ 25°C	0 dBA
	Width x Depth x Height	236 x 101 x 27 mm (9.3 x 4.0 x 1.1 in)
	Weight	0.63kg (1.39lb)
Electromagnetic Compliance	Class (A or B)	
Warranty Hardware	Lifetime	Lifetime
Warranty Power Supply	2 yrs	Lifetime
Modules	AGM731F/AGM732F/AGM734	AGM731F/AGM732F/AGM734
ProSUPPORT Maintenance PKGS	On Call 3-year 24 x 7	PMB0331

Smart Switches with Optional Insight Remote/Cloud Management

Smart with Cloud, L2, Gigabit



MODEL	GS716TP	GS716TPP
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	10/100/1000 RJ45 Ports (Auto Uplink)
	16	16
	Fiber Ports	2 dedicated SFP
	2 dedicated SFP	2 dedicated SFP
	10Gig Module Bays	
PoE	Power Over Ethernet 802.3af Ports	16
	16	16
	PoE Plus (30W) 802.3at Ports	16
	180 Watts	300 Watts
	Total PoE Budget	16,000
Scalability	# MAC Addresses	16,000
	ARP Table - Size of	100
	# Routing Entries	100
	# ACL Rules	100
System Management	Single IP Management	✓
	Web Managed/GUI	✓
	Insight Cloud Management Option	✓
	Command Line Interface/RS232 Console/Telnet	✓
	SNMP Version	v1, v2c, v3
	RMON Group	1,2,3,9
	DHCP (Client/Server)	Client
	Port Mirroring	Many-to-One
	IPv6 full set	✓
Optional Unified Network Management	Discovery, setup, monitoring and management via NETGEAR Insight mobile app or Insight Cloud Portal	✓
Optional Discovery, Setup, Monitoring & Management	Remote/Cloud management	✓
	Centralized network configuration (policies) across Insight Managed Switches, Wireless Access Points, and Business-class ReadyNAS Storage	✓
	Additional devices auto-join and inherit network configuration (zero-touch provisioning)	✓
	Multi-site, multi-network management in a single pane-of-glass view	✓
Quality of Service	Number of Priority Queues	8
	Traffic Prioritization	802.1p, DSCP, Diffserv, TCP/UDP
	Auto Voice VLAN	✓
Multicast Filtering	IGMP Snooping Version	v1, v2, v3
	IGMP Snooping Querier	✓
Performance	Bandwidth	36 Gbps
	Buffer Memory	1.5 MB Per System
	Jumbo Frames	9,216
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	64
	Link Aggregation 802.3ad/LACP	✓
	Discovery Protocol LLDP 802.1ab	✓
	Rate Limiting	✓
	Broadcast Storm Control	✓
L3 Routing	IPv4 Static Routing	✓
Security	IEEE 802.1x (RADIUS)	✓
	ACL - Access Control Lists	MAC, IP, TCP
	SSL/SSH & HTTPS	HTTPS
	Guest VLAN	✓
	DHCP Snooping/IP Source Guard/ARP Guard	✓
	TACACS+	✓
Energy Efficiency	IEEE 802.3az	✓
	Auto Port Power Down	✓
	Dynamic Power Consumption	✓
	Max Power Consumption	17.01 Watts (no PoE) 193.9 Watts (with PoE max)
Physical	Desktop/Rackmount	Rackmount
	Metal/Plastic Enclosure	Metal
	MTBF @ 25°C	1,186,673 hrs (135yrs)
	Fan(s)	1
	Acoustic Noise @ 25°C	27.3 dBA
	Width x Depth x Height	440 x 204 x 43 mm (17.3 x 8 x 1.7 in)
	Weight	3.00 kg (6.61 lb)
Electromagnetic Compliance	Class (A or B)	
Warranty Hardware	Lifetime	Lifetime
Warranty Power Supply	Lifetime	Lifetime
Modules	AGM731F/AGM732F/AGM734	AGM731F/AGM732F/AGM734
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0311 PMB0331 PMB0351

Smart Switches with Optional Insight Remote/Cloud Management

Smart with Cloud, L2, Gigabit



MODEL	GS724TPV2	GS724TPP
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	
	10/100/1000 RJ45 Ports (Auto Uplink)	24
	Fiber Ports	2 dedicated SFP
PoE	Power Over Ethernet 802.3af Ports	24
	PoE Plus (30W) 802.3at Ports	24
	Ultra60 PoE++ (60W) 802.3bt Ports	
	Total PoE Budget	190 Watts
Scalability	Uninterrupted PoE	
	# MAC Addresses	8,000
	ARP Table - Size of	
	# Routing Entries	100
System Management	# ACL Rules	100
	Single IP Management	✓
	Web Managed/GUI	✓
	Insight Cloud Management Option	✓
	Command Line Interface/RS232 Console/Telnet	
	SNMP Version	v1, v2c, v3
	RMON Group	1,2,3,9
	DHCP (Client/Server/Relay)	Client
	Port Mirroring	Many-to-One
	IPv6 full set	✓
Optional Unified Network Management	Discovery, setup, monitoring and management via NETGEAR Insight mobile app or Insight Cloud Portal	✓
Optional Discovery, Setup, Monitoring & Management	Remote/Cloud management	✓
	Centralized network configuration (policies) across Insight Managed Switches, Wireless Access Points, and Business-class ReadyNAS Storage	✓
	Additional devices auto-join and inherit network configuration (zero-touch provisioning)	✓
	Multi-site, multi-network management in a single pane-of-glass view	✓
Quality of Service	Number of Priority Queues	8
	Traffic Prioritization	802.1p, DSCP, Diffserv, TCP/UDP
	Auto Voice VLAN	✓
Multicast Filtering	IGMP Snooping Version	v1, v2, v3
	IGMP Snooping Querier	✓
Performance	Bandwidth	52 Gbps
	Buffer Memory	0.5 MB Per System
	Jumbo Frames	9,216
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s
	Number of 802.1q VLAN/Number of VLAN Group	64
Traffic Management	Link Aggregation 802.3ad/LACP	✓
	Discovery Protocol LLDP 802.1ab	✓
	Rate Limiting	✓
	Broadcast Storm Control	✓
	IPv4 Static Routing	✓
	Security	IEEE 802.1x (RADIUS)
Energy Efficiency	ACL - Access Control Lists	MAC, IP, TCP
	SSL/SSH & HTTPS	HTTPS
	Guest VLAN	✓
	DHCP Snooping/IP Source Guard/ARP Guard	DHCP Snooping Only
	TACACS+	✓
	EEE 802.3az	✓
	Auto Port Power Down	✓
Physical	Dynamic Power Consumption	✓
	Max Power Consumption	228.5 Watts
	Desktop/Rackmount	Rackmount
	Metal/Plastic Enclosure	Metal
	MTBF @ 25°C	1,051,375 hrs (120 yrs)
	Fan(s)	2
	Acoustic Noise @ 25°C	32.4 dBA
	Width x Depth x Height	440 x 204 x 43 mm (17.3 x 8.0 x 1.7 in)
	Weight	3.15 kg (6.96 lb)
	Electromagnetic Compliance	Class (A or B)
Warranty Hardware	Lifetime	
Warranty Power Supply	Lifetime	
Modules	AGM731F/AGM732F/AGM734	
ProSUPPORT Maintenance PKGS	On Call 3-year 24 x 7	

Smart Switches with Optional Insight Remote/Cloud Management

Smart with Cloud, L2/L2+/L3 Lite, Gigabit



MODEL	GS728TPv2	GS728TPPv2	
Port Configuration	10/100 RJ45 Ports (Auto Uplink)		
	10/100/1000 RJ45 Ports (Auto Uplink)	24	
	Fiber Ports	4 dedicated SFP	
PoE	Power Over Ethernet 802.3af Ports	24	
	PoE Plus (30W) 802.3at Ports	24	
	Total PoE Budget	190 Watts	
	# MAC Addresses	16,000	
Scalability	ARP Table - Size of	512	
	# Routing Entries	32	
	# ACL Rules	100	
	Single IP Management	✓	
System Management	Web Managed/GUI	✓	
	Insight Cloud Management Option	✓	
	Command Line Interface/RS232 Console/Telnet		
	SNMP Version	v1, v2c, v3	
	RMON Group	1,2,3,9	
	DHCP (Client/Server/Relay)	Client	
	Port Mirroring	Many-to-One	
	IPv6 full set	✓	
	Optional Unified Network Management	Discovery, setup, monitoring and management via NETGEAR Insight mobile app or Insight Cloud Portal	✓
	Optional Discovery, Setup, Monitoring & Management	Remote/Cloud management	✓
Centralized network configuration (policies) across Insight Managed Switches, Wireless Access Points, and Business-class ReadyNAS Storage		✓	
Additional devices auto-join and inherit network configuration (zero-touch provisioning)		✓	
Multi-site, multi-network management in a single pane-of-glass view		✓	
Quality of Service	Number of Priority Queues	8	
	Traffic Prioritization	802.1p ; Diffserv ; TCP/UDP	
	Auto Voice VLAN	✓	
Multicast Filtering	IGMP Snooping Version	v1, v2, v3	
	IGMP Snooping Querier	✓	
Performance	Bandwidth	56 Gbps	
	Buffer Memory	1.5 MB Per System	
	Jumbo Frames	10,000	
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	
	Number of 802.1q VLAN/Number of VLAN Group	256	
Traffic Management	Link Aggregation 802.3ad/LACP	✓	
	Discovery Protocol LLDP 802.1ab	✓	
	Rate Limiting	✓	
	Broadcast Storm Control	✓	
	IPv4 Static Routing	✓	
	Security	IEEE 802.1x (RADIUS)	✓
Energy Efficiency	ACL - Access Control Lists	MAC, IP, TCP	
	SSL/SSH & HTTPS	HTTPS	
	Guest VLAN	✓	
	DHCP Snooping/IP Source Guard/ARP Guard	✓	
	TACACS+	✓	
	EEE 802.3az	✓	
	Auto Port Power Down	✓	
Physical	Dynamic Power Consumption	✓	
	Max Power Consumption	226 Watts	
	Desktop/Rackmount	Rackmount	
	Metal/Plastic Enclosure	Metal	
	MTBF @ 25°C	1,250,365 hrs (143 yrs)	
	Fan(s)	2	
	Acoustic Noise @ 25°C	31 dBA	
	Width x Depth x Height	440 x 257 x 43 mm (17.3 x 10.1 x 1.7 in)	
	Weight	3.78 kg (8.3lb)	
	Electromagnetic Compliance	Class (A or B)	
Warranty Hardware	Lifetime		
Warranty Power Supply	Lifetime		
Modules	AGM731F/AGM732F/AGM734		
ProSUPPORT Maintenance PKGS	On Call 3-year 24 x 7		

* This product is currently not available in EMEA region.

Smart Switches with Optional Insight Remote/Cloud Management

Smart with Cloud, L2/L2+/L3 Lite, Gigabit



MODEL	GS752TPv2	GS752TPP
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	
	10/100/1000 RJ45 Ports (Auto Uplink)	24
	Fiber Ports	4 dedicated SFP
PoE	Power Over Ethernet 802.3af Ports	24
	PoE Plus (30W) 802.3at Ports	24
	Total PoE Budget	380 Watts
Scalability	# MAC Addresses	16,000
	ARP Table - Size of	512
	# Routing Entries	32
	# ACL Rules	100
System Management	Single IP Management	✓
	Web Managed/GUI	✓
	Insight Cloud Management Option	✓
	Command Line Interface/RS232 Console/Telnet	
	SNMP Version	v1, v2c, v3
	RMON Group	1,2,3,9
	DHCP (Client/Server/Relay)	Client
	Port Mirroring	Many-to-One
	IPv6 full set	✓
	Optional Unified Network Management	Discovery, setup, monitoring and management via NETGEAR Insight mobile app or Insight Cloud Portal
Optional Discovery, Setup, Monitoring & Management	Remote/Cloud management	✓
	Centralized network configuration (policies) across Insight Managed Switches, Wireless Access Points, and Business-class ReadyNAS Storage	✓
	Additional devices auto-join and inherit network configuration (zero-touch provisioning)	✓
	Multi-site, multi-network management in a single pane-of-glass view	✓
Quality of Service	Number of Priority Queues	8
	Traffic Prioritization	802.1p; Diffserv; TCP/UDP
	Auto Voice VLAN	✓
Multicast Filtering	IGMP Snooping Version	v1, v2, v3
	IGMP Snooping Querier	✓
Performance	Bandwidth	104 Gbps
	Buffer Memory	1.5 MB Per System
	Jumbo Frames	10,000
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	256
	Link Aggregation 802.3ad/LACP	✓
	Discovery Protocol LLDP 802.1ab	✓
	Rate Limiting	✓
	Broadcast Storm Control	✓
		✓
L3 Routing	IPv4 Static Routing	✓
Security	IEEE 802.1x (RADIUS)	✓
	ACL - Access Control Lists	MAC, IP, TCP
	SSL/SSH & HTTPS	HTTPS
	Guest VLAN	✓
	DHCP Snooping/IP Source Guard/ARP Guard	✓
	TACACS+	✓
Energy Efficiency	EEE 802.3az	✓
	Auto Port Power Down	
	Dynamic Power Consumption	✓
	Max Power Consumption	446 Watts
Physical	Desktop/Rackmount	Rackmount
	Metal/Plastic Enclosure	Metal
	MTBF @ 25°C	1,737,411 hrs (198 yrs)
	Fan(s)	2
	Acoustic Noise @ 25°C	38 dBA
	Width x Depth x Height	440 x 310 x 43 mm (17.3 x 12.2 x 1.7 in)
	Weight	4.93 kg (10.90 lb)
Electromagnetic Compliance	Class (A or B)	A
Warranty Hardware	Lifetime	Lifetime
Warranty Power Supply	Lifetime	Lifetime
Modules	AGM731F/AGM732F/AGM734	AGM731F/AGM732F/AGM734
ProSUPPORT Maintenance PKGS	On Call 3-year 24 x 7	PMB0332

Smart Switches with Optional Insight Remote/Cloud Management

Smart with Cloud, L2/L2+/L3 Lite, multi-Gigabit



MODEL	MS510TXM	MS510TXUP
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	
	10/100/1000 RJ45 Ports (Auto Uplink)	4x1G/2.5G, 4x 1G/2.5G/5G/10G
	Fiber Ports	2 dedicated 10G SFP+
PoE	Power Over Ethernet 802.3af Ports	8
	PoE Plus (30W) 802.3at Ports	8
	Ultra60 PoE+ (60W) 802.3bt Ports	8
Scalability	Total PoE Budget	295 Watts
	# MAC Addresses	32,000
	ARP Table - Size of	512
	# Routing Entries	32
System Management	# ACL Rules	100
	Single IP Management	✓
	Web Managed/GUI	✓
	Insight Cloud Management Option	✓
	Command Line Interface/RS232 Console/Telnet	
	SNMP Version	v1, v2c, v3
	RMON Group	1,2,3,9
	DHCP (Client/Server/Relay)	Client
	Port Mirroring	Many-to-One
	IPv6 full set	✓
Optional Unified Network Management	Discovery, setup, monitoring and management via NETGEAR Insight mobile app or Insight Cloud Portal	✓
Optional Discovery, Setup, Monitoring & Management	Remote/Cloud management	✓
	Centralized network configuration (policies) across Insight Managed Switches, Wireless Access Points, and Business-class ReadyNAS Storage	✓
	Additional devices auto-join and inherit network configuration (zero-touch provisioning)	✓
	Multi-site, multi-network management in a single pane-of-glass view	✓
Quality of Service	Number of Priority Queues	8
	Traffic Prioritization	802.1p; Diffserv; TCP/UDP
	Auto Voice VLAN	✓
Multicast Filtering	IGMP Snooping Version	v1, v2, v3
	IGMP Snooping Querier	✓
Performance	Bandwidth	140 Gbps
	Buffer Memory	2 MB Per System
	Jumbo Frames	10,000
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	256
	Link Aggregation 802.3ad/LACP	✓
	Discovery Protocol LLDP 802.1ab	✓
	Rate Limiting	✓
	Broadcast Storm Control	✓
		✓
L3 Routing	IPv4 Static Routing	✓
Security	IEEE 802.1x (RADIUS)	✓
	ACL - Access Control Lists	MAC, IP, TCP
	SSL/SSH & HTTPS	HTTPS
	Guest VLAN	✓
	DHCP Snooping/IP Source Guard/ARP Guard	✓
	TACACS+	✓
Energy Efficiency	EEE 802.3az	✓
	Auto Port Power Down	
	Dynamic Power Consumption	✓
	Max Power Consumption	47 Watts
Physical	Desktop/Rackmount	Rackmount
	Metal/Plastic Enclosure	Metal
	MTBF @ 25°C	1,059,519hrs (121 yrs)
	Fan(s)	2
	Acoustic Noise @ 25°C	25 dBA
	Width x Depth x Height	330 x 206 x 43mm (13.0 x 8.12 x 1.7 in)
	Weight	2.08 kg (4.59lb)
Electromagnetic Compliance	Class (A or B)	A
Warranty Hardware	Lifetime	Lifetime
Warranty Power Supply	Lifetime	Lifetime
Modules	AGM731F/AGM732F/AGM734/AXM761/AXM762/AXM764/AXC761/AXC763	AGM731F/AGM732F/AGM734/AXM761/AXM762/AXM764/AXC761/AXC763
ProSUPPORT Maintenance PKGS	On Call 3-year 24 x 7	PMB0331

Smart Switches with Optional Insight Remote/Cloud Management

Insight Managed Smart Cloud, L2+/L3 Lite, Gigabit/10G SFP+

MODEL	GC728XP	GC752XP	
Unified Network Management	Discovery, setup, monitoring and management	NETGEAR Insight mobile app on phone or tablet, or Insight Cloud Portal from PC, Mac, or tablet web browser	
Discovery, Setup, Monitoring & Management	Remote/Cloud management	Anywhere, anytime, from the palm of your hand using Insight mobile app or from any PC, Mac, or tablet web browser using the Insight Cloud Portal	
	Centralized network configuration (policies)	Centralized network configuration (policies) across Insight Managed Switches, Wireless Access Points, and Business-class ReadyNAS Storage for VLANs, ACLs, QoS, and LAGs	
	Device auto-join and configure (zero-touch provisioning)	Additional Insight Managed devices added to the network automatically inherit the network configuration	
Port Configuration	Multi-site, multi-network single pane-of-glass view	Manage multiple sites, locations, and networks in a single view using the Insight app or Cloud Portal	
	10/100/1000 RJ45 Ports (Auto Uplink)	24	48
	1G SFP Fiber Ports	2 dedicated	2 dedicated
	10G SFP+ Fiber Ports	2 dedicated	2 dedicated
PoE (Power over Ethernet)	PoE (15.4W) 802.3af Ports	24	48
	PoE+ (30W) 802.3at Ports		
	Total PoE Budget*	390W	505W
	Advanced per-port PoE controls (enable/disable/power limit)	Yes	Yes
	Advanced per-port PoE scheduling	Yes	Yes
LEDs	Front (per device) (applicable models)	Cloud/Internet Connection, Power, PoE Max, Fan Status	Cloud/Internet Connection, Power, PoE Max, Fan Status
	Front (per device) (applicable models)		
Scalability	Front (per device) (applicable models)	Speed/Link/Activity (left), PoE Power (right)	Speed/Link/Activity (left), PoE Power (right)
	# MAC Addresses	16,000	16,000
	ARP Table / NDP Table - Size of	384 ARP / 128 NDP	384 ARP / 128 NDP
	# Routing Entries	32 IPv4 / 31 IPv6	32 IPv4 / 31 IPv6
	# ACL Rules (Shared for MAC, IP and IPv6 ACLs)	100	100
System Management	Cloud/Remote Management	Yes	Yes
	Mobile app and Cloud Portal management	Yes	Yes
	uPnP Discovery & Bonjour Discovery	Yes	Yes
	Centralized network configuration (policies)	Yes	Yes
	Device auto-join and configure (zero-touch provisioning)	Yes	Yes
	Multi-site, multi-network single pane-of-glass view	Yes	Yes
	Multi-switch, multi-port concurrent configuration	Yes	Yes
	Network/global password (for all Insight Managed devices on a network)	Yes	Yes
	Local-only Web Browser-Based Managed/GUI	Yes	Yes
	SNMP Version	v1, v2c, v3	v1, v2c, v3
	RMON Group	1,2,3,9	1,2,3,9
	DHCP (Client/Server/Relay)	Client	Client
	Port Mirroring	Many-to-One	Many-to-One
	IPv6 Management	Yes	Yes
	Firmware upgrade direct from Cloud (via mobile device)	Yes	Yes
Quality of Service	Number of Priority Queues	8	8
	Traffic Prioritization	802.1p, DSCP, Diffserv	802.1p, DSCP, Diffserv
	Auto Voice VLAN	Yes	Yes
Multicast Filtering	IGMP Snooping Version	v1, v2, v3	v1, v2, v3
	IGMP Snooping Querier	Yes	Yes
Performance	Bandwidth	92 Gbps	140 Gbps
	Buffer Memory	1.5 MB Per System	1.5 MB Per System
	Jumbo Frames	9,216	9,216
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s	802.1d, .1w, .1s
	Number of 802.1q VLAN/Number of VLAN Group	256	256
Traffic Management	Link Aggregation 802.3ad/LACP	Yes	Yes
	Discovery Protocol LLDP 802.1ab	Yes	Yes
	Rate Limiting	Yes	Yes
	Broadcast Storm Control	Yes	Yes
	IPv4/IPv6 Static Routing	Yes	Yes
	IPv4 / IPv6 Multicast Routing PIM-SM/DM	Yes	Yes
L3 Routing	IPv4 Static Routing	Yes	Yes
	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	RIP v1, v2	RIP v1, v2
	IPv6 Static Routing, IPv6 OSPFv3	Static Routing	Static Routing
	IEEE 802.1x (RADIUS)	Yes	Yes
	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP
Security	SSL/SSH & HTTPS	SSL/HTTPS	SSL/HTTPS
	Guest VLAN	Yes	Yes
	DHCP Snooping/IP Source Guard	Yes	Yes
	TACACS+	Yes	Yes
	IEEE 802.3az	Yes	Yes
Energy Efficiency	Auto Port Power Down	Yes	Yes
	Dynamic Power Consumption	Yes	Yes
	Max Power Consumption	437.1W (full PoE)	623.6W (full PoE)
	Desktop/Wallmount (VESA)/Rackmount	Desktop/Rackmount	Desktop/Rackmount
	Metal/Plastic Enclosure	Metal	Metal
Physical	MTBF @ 25°C	629,962 hrs (72 yrs)	455,682 hrs (50 yrs)
	Fan(s)	2 (dynamic)	3 (dynamic)
	Acoustic Noise @ 25°C	39dBA	33dBA
	Width x Depth x Height	440 x 224 x 44 mm (17.3 x 8.8 x 1.7 in)	440 x 320 x 44 mm (17.3 x 12.6 x 1.7 in)
	Weight	3.79 kg (8.36 lb)	4.79 kg (10.56 lb)
Electromagnetic Compliance	Class (A or B)	A	A
Warranty Switch*	5 years	5 years	5 years
Modules	AGM731F, AGM732F, AGM734, AXM761, AXM762, AXM763, AXM764, AXM765, AXC761, AXC763	AGM731F, AGM732F, AGM734, AXM761, AXM762, AXM763, AXM764, AXM765, AXC761, AXC763	AGM731F, AGM732F, AGM734, AXM761, AXM762, AXM763, AXM764, AXM765, AXC761, AXC763
ProSUPPORT Maintenance Pkgs***	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	Category 1: PMB0311 (1 yr.) PMB0331 (3 yrs.) PMB0351 (5 yrs.)	Category 2: PMB0312 (1 yr.) PMB0332 (3 yrs.) PMB0352 (5 yrs.)

* NETGEAR's exclusive FlexPoE option allows for upgrading your PoE budget in the future via NETGEAR optional power adapters.

Fully Managed Switches

Fully Managed, AV Line M4250 series (L3 Lite), Gigabit and 10-Gigabit

MODEL	M4250-10G2F-POE+ (GSM4212P)	M4250-10G2XF-POE+ (GSM4212PX)		
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	10	10	
	10/100/1000 RJ45 Ports (Auto Uplink)	10	10	
	Fiber Ports	2 SFP	2 SFP+ (10G)	
PoE	Power Over Ethernet 802.3af Ports	8	8	
	PoE Plus (30W) 802.3at Ports	8	8	
	Total PoE Budget	125W	240W	
Scalability	# MAC Addresses	16,000	16,000	
	ARP Table - Size of	4,096	4,096	
	# Routing Entries	894	894	
	# ACL Rules	16,384 (ingress, egress)	16,384 (ingress, egress)	
System Management	Web Managed/GUI	IT GUI, AV GUI	IT GUI, AV GUI	
	Command Line Interface/RS232 Console/Telnet	✓	✓	
	SNMP Version	v1, v2c, v3	v1, v2c, v3	
	RMON Group	1, 2, 3, 9	1, 2, 3, 9	
	DHCP (Client/Server/Relay)	Client/Server/L3 Relay	Client/Server/L3 Relay	
	Port Mirroring	Many-to-One; RSPAN	Many-to-One; RSPAN	
	IPv6 full set	✓	✓	
	Quality of Service	Number of Priority Queues	8	8
		Traffic Prioritization	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP
		Auto Voice VLAN	✓	✓
Multicast Filtering	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	
	IGMP Snooping Querier	✓	✓	
Performance	Bandwidth	24Gbps	60Gbps	
	Buffer Memory	16Mb	16 Mb	
	Jumbo Frames	12,270	12,270	
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s; PV(R)STP	802.1d, .1w, .1s; PV(R)STP	
	RPS Redundant Power Supply	✓	✓	
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	4,093 / 4,093	4,093 / 4,093	
	Link Aggregation 802.3ad/LACP	✓	✓	
	Discovery Protocol LLDP 802.1ab	✓	✓	
	Rate Limiting	✓	✓	
	Broadcast Storm Control	✓	✓	
	IPv4 Static Routing	✓	✓	
L3 Routing	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	RIP v1, v2	RIP v1, v2	
	IPv6 Static Routing, IPv6 OSPFv3	Static Routing	Static Routing	
	IEEE 802.1x (RADIUS)	✓	✓	
Security	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP	
	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS	
	Guest VLAN	✓	✓	
	DHCP Snooping/IP Source Guard/ARP Guard	✓	✓	
	TACACS+	✓	✓	
Energy Efficiency	IEEE 802.3az	✓	✓	
	Auto Port Power Down	✓	✓	
	Dynamic Power Consumption	✓	✓	
	Power Consumption	163.9W	306.4W	
Physical	Desktop/Rackmount	R (reversible)	R (reversible)	
	Metal/Plastic Enclosure	M	M	
	MTBF @ 25°C	778,769 hours	576,889 hours	
	Fan(s)	Side to side	Side to side	
	Acoustic Noise @ 25°C	Fanless, Quiet mode (27.38dBA) or Cool mode (55dBA)	Fanless, Quiet mode (27.38dBA) or Cool mode (55dBA)	
	Width x Depth x Height	440 x 200 x 43.2 (17.32 x 7.87 x 1.70 in)	440 x 200 x 43.2 (17.32 x 7.87 x 1.70 in)	
Weight	2.850 kg (6.28 lb)	2.900 kg (6.39 lb)		
Electromagnetic Compliance	Class (A or B)	A	A	
Warranty Hardware	Lifetime	Lifetime	Lifetime	
Warranty Power Supply	Lifetime	Lifetime	Lifetime	
Modules	AGM731F/AGM732F/AGM734	AGM731F/AGM732F/AGM734	AGM731F/AGM732F/AGM734/AXM761/AXM762/AXM763/AXM764/AXM765	
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0312 PMB0332 PMB0352	PMB0312 PMB0332 PMB0352	

Fully Managed Switches

Fully Managed, AV Line M4250 series (L3 Lite), Gigabit and 10-Gigabit



MODEL	M4250-10G2XF-POE++ (GSM4212UX)	M4250-12M2XF (MSM4214X)	M4250-16XF (XSM4216F)		
Port Configuration	10/100 RJ45 Ports (Auto Uplink)				
	10/100/1000 RJ45 Ports (Auto Uplink)	10	12 x 2.5G		
	Fiber Ports	2 SFP+ (10G)	2 SFP+ (10G)	16 SFP+ (10G)	
PoE	Power Over Ethernet 802.3af Ports	8			
	PoE Plus (30W) 802.3at Ports	8 PoE++ 802.3at 90W			
	Total PoE Budget	720W			
Scalability	# MAC Addresses	16,000	16,000	16,000	
	ARP Table - Size of	4,096	4,096	4,096	
	# Routing Entries	894	894	894	
	# ACL Rules	16,384 (ingress, egress)	16,384 (ingress, egress)	16,384 (ingress, egress)	
	Web Managed/GUI	IT GUI, AV GUI	IT GUI, AV GUI	IT GUI, AV GUI	
System Management	Command Line Interface/RS232 Console/Telnet	✓	✓	✓	
	SNMP Version	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	
	RMON Group	1, 2, 3, 9	1, 2, 3, 9	1, 2, 3, 9	
	DHCP (Client/Server/Relay)	Client/Server/L3 Relay	Client/Server/L3 Relay	Client/Server/L3 Relay	
	Port Mirroring	Many-to-One; RSPAN	Many-to-One; RSPAN	Many-to-One; RSPAN	
	IPv6 full set	✓	✓	✓	
	Quality of Service	Number of Priority Queues	8	8	8
		Traffic Prioritization	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP
		Auto Voice VLAN	✓	✓	✓
	Multicast Filtering	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	v1, v2, v3
IGMP Snooping Querier		✓	✓	✓	
Performance	Bandwidth	60Gbps	100Gbps	320Gbps	
	Buffer Memory	16Mb	16Mb	16Mb	
	Jumbo Frames	12,270	12,270	12,270	
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s; PV(R)STP	802.1d, .1w, .1s; PV(R)STP	802.1d, .1w, .1s; PV(R)STP	
	RPS Redundant Power Supply	✓	✓	✓	
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	4,093 / 4,093	4,093 / 4,093	4,093 / 4,093	
	Link Aggregation 802.3ad/LACP	✓	✓	✓	
	Discovery Protocol LLDP 802.1ab	✓	✓	✓	
	Rate Limiting	✓	✓	✓	
	Broadcast Storm Control	✓	✓	✓	
L3 Routing	IPv4 Static Routing	✓	✓	✓	
	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	RIPv1/v2	RIPv1/v2	RIPv1/v2	
	IPv6 Static Routing, IPv6 OSPFv3	Static Routing	Static Routing	Static Routing	
	IPv4 / IPv6 Multicast Routing PIM-SM/DM	✓	✓	✓	
Security	IEEE 802.1x (RADIUS)	✓	✓	✓	
	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP	MAC, IP, TCP	
	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS	
	Guest VLAN	✓	✓	✓	
	DHCP Snooping/IP Source Guard/ARP Guard	✓	✓	✓	
	TACACS+	✓	✓	✓	
	Energy Efficiency	IEEE 802.3az	✓	✓	✓
Auto Port Power Down		✓	✓	✓	
Dynamic Power Consumption		✓	✓	✓	
Power Consumption		837.7W	37.9W	47.84W	
Physical		Desktop/Rackmount	R (reversible)	R (reversible)	R (reversible)
	Metal/Plastic Enclosure	M	M	M	
	MTBF @ 25°C	947,871 hours	720,892 hours	844,633 hours	
	Fan(s)	Side to side	Side to side	Side to side	
	Acoustic Noise @ 25°C	Fanless, Quiet mode (250w PoE, 34.57dBA) (380w PoE, 40dBA) (720w PoE, 47.19dBA) or Cool mode (57dBA)	Fanless, Quiet mode (28.5dBA) or Cool mode (55dBA)	Fanless, Quiet mode (27.44dBA) or Cool mode (57dBA)	
	Width x Depth x Height	440 x 257 x 43.2 (17.32 x 10.12 x 1.70 in)	440 x 100 x 43.2 (17.32 x 3.94 x 1.70 in)	440 x 200 x 43.2 (17.32 x 7.87 x 1.70 in)	
	Weight	3.830 kg (8.44 lb)	1.745 kg (3.85 lb)	2.800 kg (6.17 lb)	
	Electromagnetic Compliance	Class (A or B)	A	A	
	Warranty Hardware	Lifetime	Lifetime	Lifetime	
	Warranty Power Supply	Lifetime	Lifetime	Lifetime	
Modules	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765		
	ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0312 PMB0332 PMB0352	PMB0312 PMB0332 PMB0352	

Fully Managed Switches

Fully Managed, AV Line M4250 series



MODEL	M4250-26G4F-POE+ (GSM4230P)	M4250-26G4XF-POE+ (GSM4230PX)	M4250-26G4F-POE++ (GSM4230UP)		
Port Configuration	10/100 RJ45 Ports (Auto Uplink)				
	10/100/1000 RJ45 Ports (Auto Uplink)	26	26		
	Fiber Ports	4 SFP	4 SFP+ (10G)	4 SFP	
PoE	PoE (15W) 802.3af Ports				
	PoE+ (30W) 802.3at Ports	24	24		
	PoE++ (90W) 802.3at Ports			24	
Scalability	Total PoE Budget	300W	480W	1,4440W	
	# MAC Addresses	16,000	16,000	16,000	
	ARP Table - Size of	4,096	4,096	4,096	
	# Routing Entries	894	894	894	
	# ACL Rules	16,384 (ingress, egress)	16,384 (ingress, egress)	16,384 (ingress, egress)	
System Management	Web Managed/GUI	IT GUI, AV GUI	IT GUI, AV GUI	IT GUI, AV GUI	
	Command Line Interface/RS232 Console/Telnet	✓	✓	✓	
	SNMP Version	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	
	RMON Group	1, 2, 3, 9	1, 2, 3, 9	1, 2, 3, 9	
	DHCP (Client/Server/Relay)	Client/Server/L3 Relay	Client/Server/L3 Relay	Client/Server/L3 Relay	
	Port Mirroring	Many-to-One; RSPAN	Many-to-One; RSPAN	Many-to-One; RSPAN	
	IPv6 full set	✓	✓	✓	
	Quality of Service	Number of Priority Queues	8	8	8
		Traffic Prioritization	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP
		Auto Voice VLAN	✓	✓	✓
Multicast Filtering	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	v1, v2, v3	
	IGMP Snooping Querier	✓	✓	✓	
Performance	Bandwidth	60Gbps	132Gbps	60Gbps	
	Buffer Memory	16Mb	16Mb	16Mb	
	Jumbo Frames	12,270	12,270	12,270	
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s; PV(R)STP	802.1d, .1w, .1s; PV(R)STP	802.1d, .1w, .1s; PV(R)STP	
	RPS Redundant Power Supply	✓	✓	✓	
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	4,093 / 4,093	4,093 / 4,093	4,093 / 4,093	
	Link Aggregation 802.3ad/LACP	✓	✓	✓	
	Discovery Protocol LLDP 802.1ab	✓	✓	✓	
	Rate Limiting	✓	✓	✓	
	Broadcast Storm Control	✓	✓	✓	
L3 Routing	IPv4 Static Routing	✓	✓	✓	
	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	RIPv1/v2	RIPv1/v2	RIPv1/v2	
	IPv6 Static Routing, IPv6 OSPFv3	Static Routing	Static Routing	Static Routing	
	IPv4 / IPv6 Multicast Routing PIM-SM/DM	✓	✓	✓	
Security	IEEE 802.1x (RADIUS)	✓	✓	✓	
	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP	MAC, IP, TCP	
	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS	
	Guest VLAN	✓	✓	✓	
	DHCP Snooping/IP Source Guard/ARP Guard	✓	✓	✓	
	TACACS+	✓	✓	✓	
	Energy Efficiency	IEEE 802.3az	✓	✓	✓
Auto Port Power Down		✓	✓	✓	
Dynamic Power Consumption		✓	✓	✓	
Power Consumption		401W	614W	1734W	
Physical		Desktop/Rackmount	R (reversible)	R (reversible)	R (reversible)
	Metal/Plastic Enclosure	M	M	M	
	MTBF @ 25°C	511,054 hours	491,282 hours	509,057 hours	
	Fan(s)	Side to side	Side to side	Side to side	
	Acoustic Noise @ 25°C	Fanless, Quiet mode (200W PoE, 28dBA; 300W PoE, 34dBA) or Cool Mode (57dBA)	Fanless, Quiet mode (350W PoE, 25dBA; 480W PoE, 42dBA) or Cool Mode (67dBA)	Quiet mode (280W PoE, 28dBA; 480W PoE, 42dBA; 1440W PoE, 60dBA) or Cool Mode (69dBA)	
	Width x Depth x Height	440 x 257 x 43.2 mm (17.32 x 10.12 x 1.70 in)	440 x 400 x 43.2 mm (17.32 x 15.75 x 1.70 in)	440 x 400 x 43.2 mm (17.32 x 15.75 x 1.70 in)	
	Weight	4.300 kg (9.47 lb)	5.453 kg (12.02 lb)	6.746 kg (14.87 lb)	
	Electromagnetic Compliance	Class (A or B)	A	A	
	Warranty Hardware	Lifetime	Lifetime	Lifetime	
	Warranty Power Supply	Lifetime	Lifetime	Lifetime	
Modules	AGM731F/AGM732F/AGM734	AGM731F/AGM732F/AGM734	AGM731F/AGM732F/AGM734		
	ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0312 PMB0332 PMB0352	PMB0312 PMB0332 PMB0352	

Fully Managed Switches

Fully Managed, AV Line M4250 series



MODEL	M4250-40G8F-POE+ (GSM4248P)	M4250-40G8XF-POE+ (GSM4248PX)	M4250-40G8XF-POE++ (GSM4248UX)
Port Configuration	10/100 RJ45 Ports (Auto Uplink)	40	40
	10/100/1000 RJ45 Ports (Auto Uplink)	40	40
	Fiber Ports	8 SFP	8 SFP+ (10G)
PoE	PoE (15W) 802.3af Ports	40	40
	PoE+ (30W) 802.3at Ports	40	40
	PoE++ (90W) 802.3bt Ports		40
	Total PoE Budget	480W	960W
Scalability	# MAC Addresses	16,000	16,000
	ARP Table - Size of	4,096	4,096
	# Routing Entries	894	894
	# ACL Rules	16,384 (ingress, egress)	16,384 (ingress, egress)
System Management	Web Managed/GUI	IT GUI, AV GUI	IT GUI, AV GUI
	Command Line Interface/RS232 Console/Telnet	✓	✓
	SNMP Version	v1, v2c, v3	v1, v2c, v3
	RMON Group	1, 2, 3, 9	1, 2, 3, 9
	DHCP (Client/Server/Relay)	Client/Server/L3 Relay	Client/Server/L3 Relay
	Port Mirroring	Many-to-One; RSPAN	Many-to-One; RSPAN
	IPv6 full set	✓	✓
Quality of Service	Number of Priority Queues	8	8
	Traffic Prioritization	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP
	Auto Voice VLAN	✓	✓
Multicast Filtering	IGMP Snooping Version	v1, v2, v3	v1, v2, v3
	IGMP Snooping Querier	✓	✓
Performance	Bandwidth	96Gbps	240Gbps
	Buffer Memory	32Mb	32Mb
	Jumbo Frames	12,270	12,270
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s; PV(R)STP	802.1d, .1w, .1s; PV(R)STP
	RPS Redundant Power Supply	✓	✓
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	4,093 / 4,093	4,093 / 4,093
	Link Aggregation 802.3ad/LACP	✓	✓
	Discovery Protocol LLDP 802.1ab	✓	✓
	Rate Limiting	✓	✓
	Broadcast Storm Control	✓	✓
L3 Routing	IPv4 Static Routing	✓	✓
	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	RIPv1/v2	RIPv1/v2
	IPv6 Static Routing, IPv6 OSPFv3	Static Routing	Static Routing
	IPv4 / IPv6 Multicast Routing PIM-SM/DM	✓	✓
Security	IEEE 802.1x (RADIUS)	✓	✓
	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP
	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS
	Guest VLAN	✓	✓
	DHCP Snooping/IP Source Guard/ARP Guard	✓	✓
	TACACS+	✓	✓
	IEEE 802.3az	✓	✓
Energy Efficiency	Auto Port Power Down	✓	✓
	Dynamic Power Consumption	✓	✓
	Power Consumption	624.8W	1197W
			3523W
Physical	Desktop/Rackmount	R (reversible)	R (reversible)
	Metal/Plastic Enclosure	M	M
	MTBF @ 25°C	341,680 hours	487,900 hours
	Fan(s)	Side to side	Side to side
	Acoustic Noise @ 25°C	Fanless, Quiet mode (150W PoE, 30dBA; 340W PoE, 40dBA; 480W PoE, 47dBA) or Cool Mode (68dBA)	Quiet mode (400W PoE, 29dBA; 640W PoE, 48dBA; 960W PoE, 59dBA) or Cool Mode (69dBA)
	Width x Depth x Height	440 x 400 x 43.2 mm (17.32 x 15.75 x 1.70 in)	440 x 400 x 43.2 mm (17.32 x 15.75 x 1.70 in)
	Weight	5.852 kg (12.90 lb)	6.312 kg (13.91 lb)
Electromagnetic Compliance	Class (A or B)	A	A
Warranty Hardware	Lifetime	Lifetime	Lifetime
Warranty Power Supply	Lifetime	Lifetime	Lifetime
Modules	AGM731F/AGM732F/AGM734	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0313 PMB0333 PMB0353	PMB0313 PMB0333 PMB0353

Fully Managed Switches

Fully Managed, M4300 series (L3), Gigabit and 10-Gigabit



MODEL	M4300-28G (GSM4328S)	M4300-52G (GSM4352S)
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	24 / 2 10GBase-T
	Fiber Ports	2 SFP+ (10G)
	10Gig Module Bays	
PoE	Power Over Ethernet 802.3af Ports	
	PoE Plus (30W) 802.3at Ports	
	Total PoE Budget	
Stacking	Number of Dedicated Stacking Ports	Up to 4 10G ports
	Stacking Bandwidth	80 Gbps
	Stacking (maximum capacity)	8 switches
Scalability	Stacking Compatibility	M4300 series
	# MAC Addresses	16,000
	ARP Table - Size of	888
	# Routing Entries	12,000
System Management	# ACL Rules	16,384 (ingress, egress)
	Single IP Management	✓
	Web Managed/GUI	✓
	Command Line Interface/RS232 Console/Telnet	✓
	SNMP Version	v1, v2c, v3
	RMON Group	1, 2, 3, 9
	DHCP (Client/Server/Relay)	Client/Server/L3 Relay
Quality of Service	Port Mirroring	Many-to-One; RSPAN
	IPv6 full set	✓
	Number of Priority Queues	8
Multicast Filtering	Traffic Prioritization	802.1p; Diffserv; TCP/UDP
	Auto Voice VLAN	✓
Performance	IGMP Snooping Version	v1, v2, v3
	IGMP Snooping Querier	✓
	Bandwidth	128 Gbps
Availability	Buffer Memory	16 Mb
	Jumbo Frames	9,198
	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s; PV(R)STP
Traffic Management	RPS Redundant Power Supply	Second optional APS150W
	Modular Power Supply	APS150W
	Number of 802.1q VLAN/Number of VLAN Group	4,093/4,093
	Link Aggregation 802.3ad/LACP	✓
L3 Routing	Discovery Protocol LLDP 802.1ab	✓
	Rate Limiting	✓
	Broadcast Storm Control	✓
	IPv4 Static Routing	✓
	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	✓
	IPv6 Static Routing, IPv6 OSPFv3	✓
	IPv4 / IPv6 Multicast Routing PIM-SM/DM	✓
Security	IEEE 802.1x (RADIUS)	✓
	ACL - Access Control Lists	MAC, IP, TCP
	SSL/SSH & HTTPS	SSL/SSH & HTTPS
	Guest VLAN	✓
	DHCP Snooping/IP Source Guard/ARP Guard	✓
	TACACS+	✓
	IEEE 802.3az	✓
Energy Efficiency	Auto Port Power Down	✓
	Dynamic Power Consumption	✓
	Power Consumption	34.5W
		47.4W
Physical	Desktop/Rackmount	Rackmount
	Metal/Plastic Enclosure	Metal
	MTBF @ 25°C	1,328,968 hrs
	Fan(s)	Front to back
	Acoustic Noise @ 25°C	30.3dBA
	Width x Depth x Height	440 x 310 x 44 mm (17.32 x 12.2 x 1.73 in)
	Weight	4.91 kg (10.81 lb)
Electromagnetic Compliance	Class (A or B)	A
Warranty Hardware	Lifetime	Lifetime
Warranty Power Supply	Lifetime	Lifetime
Modules	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0313 PMB0333 PMB0353

Fully Managed Switches - Advanced Network Control with Remote Cloud Management

Fully Managed, M4300 series (L3), Gigabit and 10-Gigabit



MODEL	M4300-28G-POE+ (GSM4328PA OR GSM4328PB)	M4300-52G-POE+ (GSM4352PA OR GSM4352PB)	
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	48 / 2 10GBase-T	
	Fiber Ports	2 SFP+ (10G)	
	10Gig Module Bays	2 SFP+ (10G)	
PoE	Power Over Ethernet 802.3af Ports	24	
	PoE Plus (30W) 802.3af Ports	24	
	Total PoE Budget	480W (PA)/630W (PB) Up to 720W with second PSU	
Stacking	Number of Dedicated Stacking Ports	Up to 4 10G ports	
	Stacking Bandwidth	80 Gbps	
	Stacking (maximum capacity)	8 switches	
	Stacking Compatibility	M4300 series	
Scalability	# MAC Addresses	16,000	
	ARP Table - Size of	888	
	# Routing Entries	12,000	
	# ACL Rules	16,384 (ingress, egress)	
System Management	Single IP Management	✓	
	Web Managed/GUI	✓	
	Command Line Interface/RS232 Console/Telnet	✓	
	SNMP Version	v1, v2c, v3	
	RMON Group	1, 2, 3, 9	
	DHCP (Client/Server/Relay)	Client/Server/L3 Relay	
	Port Mirroring	Many-to-One; RSPAN	
	IPv6 full set	✓	
	Quality of Service	Number of Priority Queues	8
		Traffic Prioritization	802.1p; Diffserv; TCP/UDP
		Auto Voice VLAN	✓
	Multicast Filtering	IGMP Snooping Version	v1, v2, v3
IGMP Snooping Querier		✓	
Performance	Bandwidth	128 Gbps	
	Buffer Memory	16 Mb	
	Jumbo Frames	9,198	
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s; PV(R)STP	
	RPS Redundant Power Supply	Second optional APS550W (PA) Second optional APS1000W (PB)	
	Modular Power Supply	APS550W (PA) or APS1000W (PB)	
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	4,093/4,093	
	Link Aggregation 802.3ad/LACP	✓	
	Discovery Protocol LLDP 802.1ab	✓	
	Rate Limiting	✓	
	Broadcast Storm Control	✓	
L3 Routing	IPv4 Static Routing	✓	
	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	✓	
	IPv6 Static Routing, IPv6 OSPFv3	✓	
	IPv4 / IPv6 Multicast Routing PIM-SM/DM	✓	
Security	IEEE 802.1x (RADIUS)	✓	
	ACL - Access Control Lists	MAC, IP, TCP	
	SSL/SSH & HTTPS	SSL/SSH & HTTPS	
	Guest VLAN	✓	
	DHCP Snooping/IP Source Guard/ARP Guard	✓	
Energy Efficiency	TACACS+	✓	
	IEEE 802.3az	✓	
	Auto Port Power Down	✓	
	Dynamic Power Consumption	✓	
	Power Consumption	577W (PA 1 PSU) 833.2W (PB 1 PSU)	
Physical	Desktop/Rackmount	Rackmount	
	Metal/Plastic Enclosure	Metal	
	MTBF @ 25°C	1,189,685 hrs	
	Fan(s)	Front to back	
	Acoustic Noise @ 25°C	39.8dBA	
	Width x Depth x Height	440 x 310 x 44 mm (17.32 x 12.2 x 1.73 in)	
	Weight	5.09 kg (11.21 lb)	
	Electromagnetic Compliance	Class (A or B)	
	Warranty Hardware	Lifetime	
	Warranty Power Supply	Lifetime	
Modules	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	
	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0313 PMB0333 PMB0353	

Fully Managed Switches

Fully Managed, M4300 series (L3), Gigabit and 10-Gigabit



MODEL	M4300-8X8F (XSM4316S)	M4300-16X (XSM4316PA OR XSM4316PB)	M4300-12X12F (XSM4324S)	M4300-24X (XSM4324CS)	
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	8 10GBase-T	16 10GBase-T	24 10GBase-T	
	Fiber Ports	8 SFP+ (10G)	12 SFP+ (10G)	4 combo SFP+ (10G)	
	10Gig Module Bays				
PoE	Power Over Ethernet 802.3af Ports	16			
	PoE Plus (30W) 802.3af Ports	16			
	Total PoE Budget		199W (PA)/500W (PB) APS199W or APS600W		
Stacking	Number of Dedicated Stacking Ports	Up to 16 10G ports	Up to 16 10G ports	Up to 16 10G ports	
	Stacking Bandwidth	320 Gbps	320Gbps	320 Gbps	
	Stacking (maximum capacity)	8 switches	8 switches	8 switches	
	Stacking Compatibility	M4300 series	M4300 series	M4300 series	
Scalability	# MAC Addresses	16,000	16,000	16,000	
	ARP Table - Size of	888	888	888	
	# Routing Entries	12,000	12,000	12,000	
	# ACL Rules	16,384 (ingress, egress)	16,384 (ingress, egress)	16,384 (ingress, egress)	
System Management	Single IP Management	✓	✓	✓	
	Web Managed/GUI	✓	✓	✓	
	Command Line Interface/RS232 Console/Telnet	✓	✓	✓	
	SNMP Version	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3	
	RMON Group	1, 2, 3, 9	1, 2, 3, 9	1, 2, 3, 9	
	DHCP (Client/Server/Relay)	Client/Server/L3 Relay	Client/Server/L3 Relay	Client/Server/L3 Relay	
	Port Mirroring	Many-to-One; RSPAN	Many-to-One; RSPAN	Many-to-One; RSPAN	
	IPv6 full set	✓	✓	✓	
	Quality of Service	Number of Priority Queues	8	8	8
		Traffic Prioritization	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP
	Multicast Filtering	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	v1, v2, v3
		IGMP Snooping Querier	✓	✓	✓
Performance	Bandwidth	320 Gbps	320 Gbps	480 Gbps	
	Buffer Memory	16 Mb	16 Mb	32 Mb	
	Jumbo Frames	9,198	9,198	9,198	
Availability	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s; PV(R)STP	802.1d, .1w, .1s; PV(R)STP	802.1d, .1w, .1s; PV(R)STP	
	RPS Redundant Power Supply	APS250W	APS199W (PA) or APS600W (PB)	APS250W	
Traffic Management	Number of 802.1q VLAN/Number of VLAN Group	4,093/4,093	4,093/4,093	4,093 / 4,093	
	Link Aggregation 802.3ad/LACP	✓	✓	✓	
	Discovery Protocol LLDP 802.1ab	✓	✓	✓	
	Rate Limiting	✓	✓	✓	
	Broadcast Storm Control	✓	✓	✓	
L3 Routing	IPv4 Static Routing	✓	✓	✓	
	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	✓	✓	✓	
	IPv6 Static Routing, IPv6 OSPFv3	✓	✓	✓	
	IPv4 / IPv6 Multicast Routing PIM-SM/DM	✓	✓	✓	
Security	IEEE 802.1x (RADIUS)	✓	✓	✓	
	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP	MAC, IP, TCP	
	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS	
	Guest VLAN	✓	✓	✓	
	DHCP Snooping/IP Source Guard/ARP Guard	✓	✓	✓	
Energy Efficiency	TACACS+	✓	✓	✓	
	IEEE 802.3az	✓	✓	✓	
	Auto Port Power Down	✓	✓	✓	
	Dynamic Power Consumption	✓	✓	✓	
	Power Consumption	49W	308.7W (PA) 610W (PB)	97W	
Physical	Desktop/Rackmount	Rackmount	Rackmount	Rackmount	
	Metal/Plastic Enclosure	Metal	Metal	Metal	
	MTBF @ 25°C	196,120 hrs	690,301 hours	192,898 hrs	
	Fan(s)	Front to back	Front to back	Front to back	
	Acoustic Noise @ 25°C	36.9dBA	35dBA	36.9dBA	
	Width x Depth x Height	Half-Width: 212 x 345 x 44 mm (8.35 x 13.58 x 1.73 in)	Half-Width: 212 x 345 x 44 mm (8.35 x 13.58 x 1.73 in)	Half-Width: 212 x 345 x 44 mm (8.35 x 13.58 x 1.73 in)	
	Weight	3.32kg (7.31 lb)	3.22 kg (7.11 lb)	3.69 kg (8.14 lb)	
	Electromagnetic Compliance	Class (A or B)	A	A	
	Warranty Hardware	Lifetime	Lifetime	Lifetime	
	Warranty Power Supply	Lifetime	Lifetime	Lifetime	
Modules	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	
	OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0313 PMB0333 PMB0353	PMB0313 PMB0333 PMB0353	PMB0314 PMB0334 PMB0354	

Fully Managed Switches

Fully Managed, M4300 series (L3), Gigabit and 10-Gigabit

MODEL	M4300-24XF (XSM4324FS)	M4300-24X24F (XSM4348S)	M4300-48X (XSM4348CS)	M4300-48XF (XSM4348FS)
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	2 combo 10GBase-T	24 10GBase-T	48 10GBase-T
	Fiber Ports	24 SFP+ (10G)	24 SFP+ (10G)	48 SFP+ (10G)
PoE	10Gig Module Bays			
	Power Over Ethernet 802.3af Ports			
Stacking	PoE Plus (30W) 802.3at Ports			
	Total PoE Budget			
Scalability	Number of Dedicated Stacking Ports	Up to 16 10G ports	Up to 16 10G ports	Up to 16 10G ports
	Stacking Bandwidth	320 Gbps	320 Gbps	320 Gbps
	Stacking (maximum capacity)	8 switches	8 switches	8 switches
	Stacking Compatibility	M4300 series	M4300 series	M4300 series
System Management	# MAC Addresses	16,000	128,000	128,000
	ARP Table - Size of	888	8,192	8,192
	# Routing Entries	12,000	12,000	12,000
	# ACL Rules	16,384 (ingress, egress)	16,384 (ingress, egress)	16,384 (ingress, egress)
Quality of Service	Single IP Management	✓	✓	✓
	Web Managed/GUI	✓	✓	✓
	Command Line Interface/RS232 Console/Telnet	✓	✓	✓
	SNMP Version	v1, v2c, v3	v1, v2c, v3	v1, v2c, v3
	RMON Group	1, 2, 3, 9	1, 2, 3, 9	1, 2, 3, 9
	DHCP (Client/Server/Relay)	Client/Server/L3 Relay	Client/Server/L3 Relay	Client/Server/L3 Relay
	Port Mirroring	Many-to-One; RSPAN	Many-to-One; RSPAN	Many-to-One; RSPAN
	IPv6 full set	✓	✓	✓
	Number of Priority Queues	8	8	8
	Traffic Prioritization	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP
Multicast Filtering	Auto Voice VLAN	✓	✓	✓
	IGMP Snooping Version	v1, v2, v3	v1, v2, v3	v1, v2, v3
Performance	IGMP Snooping Querier	✓	✓	✓
	Bandwidth	480 Gbps	960 Gbps	960 Gbps
	Buffer Memory	32 Mb	56 Mb	56 Mb
Availability	Jumbo Frames	9,198	9,198	9,198
	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s; PV(R)STP	802.1d, .1w, .1s; PV(R)STP	802.1d, .1w, .1s; PV(R)STP
Traffic Management	RPS Redundant Power Supply	Second optional APS250W	Second optional APS250W	Second optional APS250W
	Modular Power Supply	APS250W	APS250W	APS250W
	Number of 802.1q VLAN/Number of VLAN Group	4,093 / 4,093	4,093 / 4,093	4,093 / 4,093
	Link Aggregation 802.3ad/LACP	✓	✓	✓
L3 Routing	Discovery Protocol LLDLP 802.1ab	✓	✓	✓
	Rate Limiting	✓	✓	✓
	Broadcast Storm Control	✓	✓	✓
	IPv4 Static Routing	✓	✓	✓
Security	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	✓	✓	✓
	IPv6 Static Routing, IPv6 OSPFv3	✓	✓	✓
	IPv4 / IPv6 Multicast Routing PIM-SM/DM	✓	✓	✓
	IEEE 802.1x (RADIUS)	✓	✓	✓
Energy Efficiency	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP	MAC, IP, TCP
	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH & HTTPS
	Guest VLAN	✓	✓	✓
	DHCP Snooping/IP Source Guard/ARP Guard	✓	✓	✓
Physical	TACACS+	✓	✓	✓
	IEEE 802.3az	✓	✓	✓
	Auto Port Power Down	✓	✓	✓
	Dynamic Power Consumption	✓	✓	✓
Electromagnetic Compliance	Power Consumption	125W	161W	237.2W
	Desktop/Rackmount	Rackmount	Rackmount	R
	Metal/Plastic Enclosure	Metal	Metal	Metal
	MTBF @ 25°C	968,447 hours	133,176 hrs	249,393 hrs
Warranty Hardware	Fan(s)	Front to back	Front to back	Front to back
	Acoustic Noise @ 25°C	39.07dBA	35.8dBA	40.3dBA
	Width x Depth x Height	Half-Width: 212 x 345 x 44 mm (8.35 x 13.58 x 1.73 in)	440 x 345 x 44 mm (17.32 x 13.58 x 1.73 in)	440 x 345 x 44 mm (17.32 x 13.58 x 1.73 in)
	Weight	3.56kg (7.85lb)	6.12 kg (13.48 lb)	6.55 kg (14.44 lb)
Warranty Power Supply	Class (A or B)	A	A	A
	Lifetime	Lifetime	Lifetime	Lifetime
Modules	Lifetime	Lifetime	Lifetime	Lifetime
	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year	PMB0314	PMB0314	PMB0314
	OnCall 24x7 3-year	PMB0334	PMB0334	PMB0334
ProSUPPORT Maintenance PKGS	OnCall 24x7 5-year	PMB0354	PMB0354	PMB0354




Fully Managed Switches



Fully Managed, M4300 series (L3), Gigabit and 10-Gigabit Fully Managed, M4500 series (L3), 10, 25, 50 and 100-Gigabit






MODEL	M4300-96X (XSM4396K0 OR K1)	M4500-32C (CSM4532)	M4500-48XF8C (XSM4556)
Port Configuration	10/100/1000 RJ45 Ports (Auto Uplink)	Up to 96 10GBaseT	48 SFP28 (10/25G) / 8 QSFP28 (100G)
	Fiber Ports	Up to 96 SFP+ / 24 QSFP+	32 QSFP28 (100G)
PoE	10Gig Module Bays		
	Power Over Ethernet 802.3af Ports	Up to 48	
Stacking	PoE Plus (30W) 802.3at Ports	Up to 48	
	Total PoE Budget	Up to 1,440W	
Scalability	Number of Dedicated Stacking Ports	Up to 16 10G or 40G ports	
	Stacking Bandwidth	320 Gbps	
	Stacking (maximum capacity)	8 switches	
	Stacking Compatibility	M4300 series	MLAG (M4500 Series)
System Management	# MAC Addresses	256,000	32,000
	ARP Table - Size of	8,192	8,192
	# Routing Entries	12,000	32,000
	# ACL Rules	16,384 (ingress, egress)	16,384 (ingress, egress)
Quality of Service	Single IP Management	✓	✓
	Web Managed/GUI	✓	✓
	Command Line Interface/RS232 Console/Telnet	✓	✓
	SNMP Version	v1, v2c, v3	v1, v2c, v3
	RMON Group	1, 2, 3, 9	1, 2, 3, 9
	DHCP (Client/Server/Relay)	Client/Server/L3 Relay	Client/Server/L3 Relay
	Port Mirroring	Many-to-One; RSPAN	Many-to-One; RSPAN
	IPv6 full set	✓	✓
	Number of Priority Queues	8	8
	Traffic Prioritization	802.1p; Diffserv; TCP/UDP	802.1p; Diffserv; TCP/UDP
Multicast Filtering	Auto Voice VLAN	✓	✓
	IGMP Snooping Version	v1, v2, v3	v1, v2, v3
Performance	IGMP Snooping Querier	✓	✓
	Bandwidth	1.920 Tbps	6.4 Tbps
	Buffer Memory	96 Mb	256Mb
Availability	Jumbo Frames	9,198	9,198
	Spanning Tree 802.1d/RSTP .1w/MSTP .1s	802.1d, .1w, .1s; PV(R)STP	802.1d, .1w, .1s
Traffic Management	RPS Redundant Power Supply	Second optional APS600W or APS1200W	Second APS750W (included)
	Modular Power Supply	APS600W or APS1200W	APS750W
	Number of 802.1q VLAN/Number of VLAN Group	4,093 / 4,093	4,093 / 4,093
	Link Aggregation 802.3ad/LACP	✓	✓
L3 Routing	Discovery Protocol LLDLP 802.1ab	✓	✓
	Rate Limiting	✓	✓
	Broadcast Storm Control	✓	✓
	IPv4 Static Routing	✓	✓
Security	IPv4 RIPv1/2, OSPFv1/2, VRRP, EMCP	✓	OSPFv2, VRRP, EMCP, BGP4
	IPv6 Static Routing, IPv6 OSPFv3	✓	OSPFv2, VRRP, EMCP, BGP4
	IPv4 / IPv6 Multicast Routing PIM-SM/DM	✓	PIM-SM/SSM
	IEEE 802.1x (RADIUS)	✓	PIM-SM/SSM
Energy Efficiency	ACL - Access Control Lists	MAC, IP, TCP	MAC, IP, TCP
	SSL/SSH & HTTPS	SSL/SSH & HTTPS	SSL/SSH
	Guest VLAN	✓	✓
	DHCP Snooping/IP Source Guard/ARP Guard	✓	✓
Physical	TACACS+	✓	✓
	IEEE 802.3az	✓	✓
	Auto Port Power Down	✓	✓
	Dynamic Power Consumption	✓	✓
Electromagnetic Compliance	Power Consumption	566W (without PoE)	426 Watts
	Desktop/Rackmount	R	R
	Metal/Plastic Enclosure	Metal	Metal
	MTBF @ 25°C	519,784 hrs	281,359 hours
Warranty Hardware	Fan(s)	Front to back	Front to back
	Acoustic Noise @ 25°C	35.8dBA (no PoE); 66.8dBA (max PoE)	64dBA
	Width x Depth x Height	440 x 535 x 88 mm (17.32 x 21.08 x 3.47 in)	440 x 508 x 43 mm (17.32 x 20 x 1.7 in)
	Weight	16.28 kg (35.86 lb) (K1)	9.78kg (21.54lb)
Warranty Power Supply	Class (A or B)	A	A
	Lifetime	Lifetime	Lifetime
Modules	Lifetime	Lifetime	Lifetime
	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765; AXLC761/AXLC763 AXLM761/AXLM762	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765; AXLC761/3; ACC761/3 AXLM761/AXLM762; ACM761/ACM762	AGM731F/AGM732F; AXC761/3/5/7/10/15/20 AXM761/AXM762/AXM763/AXM764/AXM765; AXLC761/3; ACC761/3 AXLM761/AXLM762; ACM761/ACM762
ProSUPPORT Maintenance PKGS	OnCall 24x7 1-year	PMB0314	PMB0314
	OnCall 24x7 3-year	PMB0334	PMB0334
ProSUPPORT Maintenance PKGS	OnCall 24x7 5-year	PMB0354	PMB0354

Modules and Accessories for Switches

For use with managed switches






Gigabit Fiber Modules			
			
MODEL	AGM731F	AGM732F	AGM734
Product Description	SFP Transceiver 1000BASE-SX	SFP Transceiver 1000BASE-LX	SFP Transceiver 1000BASE-T
Distance	Up to 550m	Up to 10km	Up to 100m
Cabling Type	IEEE 802.3z 1000BASE-SX	IEEE 802.3z 1000BASE-LX	1000BASE-T
Connector	LC duplex	LC duplex	RJ45
Interface (Bus) Type	Small Form Factor Pluggable (SFP)	Small Form Factor Pluggable (SFP)	Small Form Factor Pluggable (SFP)
Form Factor	Plug-in module	Plug-in module	Plug-in module
Data Transfer Rate	1 Gbps	1 Gbps	1 Gbps
Hot-Swappable	✓	✓	✓
Fiber Cable Support	50µm OM4 multimode (1000m); 50µm OM3 multimode (550m); 62.5µm OM1/OM2 multimode (275m)	9µm single mode (10km)	Copper CAT5E or better (1000 Mbps Full Duplex only)
Switch Compatibility	Select Plus, Smart, Fully Managed Switches	Select Plus, Smart, Fully Managed Switches	Select Plus, Smart, Fully Managed Switches
Warranty	5 years	5 years	5 years




10-Gigabit Copper and Fiber Modules	
	
MODEL	AXM761
Product Description	SFP+ Transceiver 10GBASE-SR
Distance	Up to 500m
Cabling Type	10GBASE-SR "Short Reach"
Connector	LC duplex
Interface (Bus) Type	10-Gigabit Small Form Factor Pluggable (SFP+)
Form Factor	Plug-in SFP+
Data Transfer Rate	10 Gbps
Hot-Swappable	✓
Fiber Cable Support	50µm OM4 multimode (500m); 50µm OM3 multimode (300m); 62.5µm OM1/OM2 multimode (33m)
Switch Compatibility	Select Plus, Smart, Fully Managed Switches
Warranty	5 years





10-Gigabit Copper and Fiber Modules					
					
MODEL	AXM763	AXM764	AXM765	AXC761	AXC763
Product Description	SFP+ Transceiver 10GBASE-LRM	SFP+ Transceiver 10GBASE-LR Lite	SFP+ Transceiver 10GBASE-T	Passive SFP+ DAC 1m	Passive SFP+ DAC 3m
Distance	Up to 260m	Up to 2km	Up to 30m	1m	3m
Cabling Type	10GBASE-LRM Long Reach Multimode	10GBASE-LR "Lite"	10GBASE-T	Direct Attach Cable	Direct Attach Cable
Connector	LC duplex	LC duplex	RJ45	SFP+	SFP+
Interface (Bus) Type	10-Gigabit Small Form Factor Pluggable (SFP+)	10-Gigabit Small Form Factor Pluggable (SFP+)	10-Gigabit Small Form Factor Pluggable (SFP+)	10-Gigabit Small Form Factor Pluggable (SFP+)	10-Gigabit Small Form Factor Pluggable (SFP+)
Form Factor	Plug-in SFP+	Plug-in SFP+	Plug-in SFP+	SFP+ Cable	SFP+ Cable
Data Transfer Rate	10 Gbps	10 Gbps	10 Gbps	10 Gbps	10 Gbps
Hot-Swappable	✓	✓	✓	✓	✓
Fiber Cable Support	62.5µm OM1/50µm OM2 multimode (220m); 50µm OM3/OM4 multimode (260m)	9µm single mode (2km)	CAT6a / CAT7 (Copper)	NA	NA
Switch Compatibility	Select Unmanaged, Plus, Smart, Fully Managed Switches	Select Unmanaged, Plus, Smart, Fully Managed Switches	Select Unmanaged, Plus, Smart, Fully Managed Switches	Select Unmanaged, Plus, Smart, Fully Managed Switches	Select Unmanaged, Plus, Smart, Fully Managed Switches
Warranty	5 years	5 years	5 years	5 years	5 years





Modules and Accessories for Switches

For use with managed switches

10-Gigabit Copper and Fiber Modules					
					
MODEL	AXC765	AXC767	AXC7610	AXC7615	AXC7620
Product Description	Active SFP+ DAC 5m	Active SFP+ DAC 7m	Active SFP+ DAC 10m	Active Optical SFP+ DAC 15m	Active Optical SFP+ DAC 20m
Distance	5m	7m	10m	15m	20m
Cabling Type	Direct Attach Cable	Direct Attach Cable	Direct Attach Cable	Direct Attach Cable	Direct Attach Cable
Connector	SFP+	SFP+	SFP+	SFP+	SFP+
Interface (Bus) Type	10 Gigabit Small Form Factor Pluggable (SFP+)	10 Gigabit Small Form Factor Pluggable (SFP+)	10 Gigabit Small Form Factor Pluggable (SFP+)	10 Gigabit Small Form Factor Pluggable (SFP+)	10 Gigabit Small Form Factor Pluggable (SFP+)
Form Factor	SFP+ Cable	SFP+ Cable	SFP+ Cable	SFP+ Cable	SFP+ Cable
Data Transfer Rate	10 Gbps	10 Gbps	10 Gbps	10 Gbps	10 Gbps
Hot-Swappable	✓	✓	✓	✓	✓
Fiber Cable Support	NA	NA	NA	NA	NA
Switch Compatibility	Select Unmanaged, Plus, Smart, Fully Managed Switches	Select Unmanaged, Plus, Smart, Fully Managed Switches	Select Unmanaged, Plus, Smart, Fully Managed Switches	Select Unmanaged, Plus, Smart, Fully Managed Switches	Select Unmanaged, Plus, Smart, Fully Managed Switches
Warranty	5 year	5 year	5 year	5 year	5 year

40-Gigabit Copper and Fiber Modules			
			
MODEL	AXLC761	AXLC763	AXLM762
Product Description	Passive QSFP+ DAC 1m	Passive QSFP+ DAC 3m	QSFP+ Transceiver 40GBASE-LR4
Distance	1m	3m	Up to 10km
Cabling type	Direct Attach Cable	Direct Attach Cable	40GBASE-LR4
Connector	QSFP+	QSFP+	LC duplex
Interface (Bus) type	40 Gigabit Small Form Factor Pluggable (QSFP+)	40 Gigabit Small Form Factor Pluggable (QSFP+)	40 Gigabit Small Form Factor Pluggable (QSFP+)
Form Factor	QSFP+ Cable	QSFP+ Cable	Plug-in QSFP+
Data transfer Rate	40 Gbps	40 Gbps	40 Gbps
Hot-Swappable	✓	✓	✓
Fiber Cable support	NA	NA	9µm single mode (10km)
Switch Compatibility	M4300-96X, M4500 Switches	M4300-96X, M4500 Switches	M4300-96X, M4500 Switches
Warranty	5 Year	5 Year	5 Year

100-Gigabit Copper and Fiber Modules				
				
MODEL	ACC761	ACC763	ACM761	ACM762
Product Description	Passive QSFP28 DAC 1m	Passive QSFP28 DAC 3m	QSFP28 Transceiver 100GBASE-SR4	QSFP28 Transceiver 100GBASE-LR4
Distance	1m	3m	Up to 100m	Up to 10km
Cabling type	Direct Attach Cable	Direct Attach Cable	100GBASE-SR4 (4 MMF links)	100GBASE-LR4 (1 SMF link)
Connector	QSFP28	QSFP28	MTP/MPO connector	LC duplex
Interface (Bus) type	100 Gigabit Small Form Factor Pluggable (QSFP28)	100 Gigabit Small Form Factor Pluggable (QSFP28)	100 Gigabit Small Form Factor Pluggable (QSFP28)	100 Gigabit Small Form Factor Pluggable (QSFP28)
Form Factor	QSFP28 Cable	QSFP28 Cable	Plug-in QSFP28	Plug-in QSFP28
Data transfer Rate	100 Gbps	100 Gbps	100 Gbps	100 Gbps
Hot-Swappable	✓	✓	✓	✓
Fiber Cable support	NA	NA	50µm OM4 multimode (100m); 50µm OM3 multimode (100m)	9µm single mode (10km)
Switch Compatibility	M4500 Switches	M4500 Switches	M4500 Switches	M4500 Switches
Warranty	5 Year	5 Year	5 Year	5 Year

Modular Power Supply				
				
MODEL	APS150W	APS250W	APS299W	APS550W
Product Description	150-Watt Modular Power Supply	250-Watt Modular Power Supply	299-Watt Modular Power Supply	550-Watt Modular Power Supply
Hot-Swappable	When 2 PSUs	When 2 PSUs	-	When 2 PSUs
Switch Compatibility	M4300 series (1G non-PoE models)	M4300 series (10G models)	M4300-16X (PA)	M4300 series (PoE PA models)
Warranty	5 year	5 year	5 year	5 year

Modules and Accessories for Switches

For use with managed switches

MODEL	APS600W	APS750W	APS1000W	APS1200W	RPS4000v2
Product Description	600-Watt Modular Power Supply	750-Watt Modular Power Supply	1,000-Watt Modular Power Supply	1,200-Watt Modular Power Supply	Redundant/External Power Supply (RPS/EPs for up to 4 switches)
Hot-Swappable	When 2 PSUs	When 2 PSUs	When 2 PSUs	When 2 PSUs	
Switch Compatibility	M4300-16X (PB), M4300-96X	M4500 series	RPS4000v2, M4300 series (PoE PB models), M6100	M4300-96X	S3300 (PoE), M4100, M4300 (48p PoE models), M5300, M6100
Warranty	5 year	5 year	5 year	5 year	5 year

Third-Party Modules

ZeeVee HDMI Module for M4300-96X



MFG: ZEEVEE
Model No: ZyPer4K Quad Encoder
Description: 4x HDMI Input module for M4300-96X, on-board SDVoE encoder
Contact ZeeVee for details: https://www.zeevee.com/zyper4k-hdmi-module/

DVIGear HDMI Module for M4300-96X



MFG: DVIGEAR
Model No: DN-150-TX-Quad
Description: 4x HDMI Input module for M4300-96X, on-board SDVoE encoder
Contact DVIGear for details: https://www.dvigeear.com/displaynet-dn-150-tx-quad.html

Modules and Accessories for Switches

Accessory Power Adapters

Increase or decrease your PoE budget anytime by simply upgrading your switch Power Supply, without having to purchase a new switch. Future-proof your PoE budget with GS108LP or GS116LP. And if you have power-hungry devices and directly need a high power PoE switch, buy GS108PP or GS116PP. This unique combination from NETGEAR Business makes these switches the most adaptive in the market.

The following table describes the Accessory Power Adapters which are sold separately and is only compatible with NETGEAR products for GS108LP, GS108PP, GS116LP and GS116PP only.

SWITCH MODEL	POWER ADAPTER MODEL	POWER ADAPTER WATTAGE	PoE+ POWER WATTAGE
GS108LP (Comes w/67.5W PA)	EPS90W EPS130W	90W 130W	83W 123W
GS108PP (Comes w/130W PA)	EPS90W EPS130W	90W 130W	83W 123W
GS116LP (Comes w/90W PA)	EPS90W EPS130W EPS200W	90W 130W 200W	76W 115W 183W
GS116PP (Comes w/200W PA)	EPS90W EPS130W EPS200W	90W 130W 200W	76W 115W 183W



	EPS90W	EPS130W	EPS200W
Input	110V-240V ~ 50/60Hz	110V-240V ~ 50/60Hz	110V-240V ~ 50/60Hz
Output	54V @ 1.66A	54V @ 2.4A	54V @ 3.7A
Weight	0.88 lb (0.40 kg)	0.43 lb (0.43 kg)	1.87 lb (0.85 kg)
Dimension L x W x H	5.65 x 2.55 x 1.27 in	5.91 x 2.55 x 1.27 in	7.78 x 3.50 x 1.54 in
Cord Length	6 feet (180 cm)		
Power Adapters Warranty	2-years		
Technical Support	90 days of free technical support from purchase date		
ProSUPPORT Maintenance Contracts***	PMB0S11-10000S OnCall 24x7 1-year Category S1 PMB0S31-10000S OnCall 24x7 3-year Category S1 PMB0S51-10000S OnCall 24x7 5-year Category S1		

WIRELESS PRODUCT CATEGORIES



Business Essentials

- Instant setup
- Single room usage
- Dual band equipped
- Great price/performance
- Separate guest access



Orbi Pro Mesh Systems

- Whole office coverage
- Mesh wire-free installation
- Home office/Micro business
- Dedicated backhaul
- Performance
- Remote management
- Easy installation



Managed Access Points

- Local or Remote management
- Wired installation with PoE
- Small and Medium businesses
- Advanced WiFi with roaming, load balancing
- Performance and coverage
- Multiple AP deployments



WIRELESS



BUSINESS ESSENTIALS - WIFI THAT JUST WORKS: AFFORDABLY, EASILY, POWERFULLY.

Many small businesses need high-performance, problem-free WiFi, but they also often have tight budgets, so they want to limit their WiFi investment. Too much to ask to have both? We don't think so, which is why we created the Business Essentials range.

Designed specifically for small businesses – such as home offices, retail outlets, clinics, workshops – Business Essentials is a growing family of value-for-money wireless access points. They provide excellent speed and comprehensive coverage, combined with easy set-up and management. All the basic features that users need are included, but without paying for those that are not (though we've managed to squeeze in some extras within the price point).

Business Essentials are all about instantly and easily dealing with typical problems and hurdles that microbusinesses may face, such as: spotty or dropped connectivity, network congestion, slow speeds, lack of security, complicated installation and on-going management. These affordable, standalone wireless access points deliver fast bandwidth, reliable and safe performance, plus make it easy to expand WiFi coverage.



Fuss-free

No one wants to waste valuable time setting-up and managing WiFi, which is why the design team behind the Business Essentials range prioritized effort-free installation and easy on-going maintenance. Just two straightforward installation steps are required through an intuitive web-interface, and then the units are ready to go. While 'set-and-forget', the user interface also supports any future management or troubleshooting. If needed, users get 90 days phone and chat support (plus a 3 year hardware warranty).

Within the range, there are a variety of options such as: WiFi 5 or WiFi 6; the ability to create sub-networks or not; Power-over-Ethernet (PoE) or no PoE; and desktop, wall or ceiling-mounted. The compact and attractive design of the product family means that they can fit neatly into just about any environment, whether on display or hidden from sight.

Use cases

Here are some examples of typical Business Essentials users and situations:

Dedicated home office WiFi – whether for business owners sheltering-in-place or working permanently at home.

Remote teaching – from arithmetic to yoga, connecting tutors with pupils.

College students' dorm rooms – with guest access for work and entertainment.

Small business and retail shops – with distinctly separate customer-facing and back-office spaces within the same unit.

Dental office or workshops – with a lobby area for visitors: instead of adding to the existing system, simply install a standalone Business Essentials access point (connected to a router).



Meet the family

New models are going to be added to Business Essentials on a regular basis, but so far, the family has five members: the WAC104 and WAC124 – both of which are based on WiFi 5 – and the WAX202, WAX204, WAX206, WAX214, WAX218, all of which work on WiFi 6.

The WAX218 deserves a quick shout-out of its own, because this outstanding dual-band, eight-stream (4x4 + 4x4) access point provides an unrivalled specification within this price range, including double the throughput – 3.6 Gbps – than comparable alternatives.

Beyond the WAX218, all members of the Business Essentials range each bring their own individual benefit. For instance, different models feature:

Separate and secure wireless sub-networks – so a home, retail or other small business could have separate networks for different categories of user: parents, kids, guests, staff, patients and pupils. WAP3 and a DHCP NAT server for firewall security.

Power over Ethernet – PoE using a single cable for both power and data, eliminating the need for an electrical outlet near the access point, which means fewer messy cables and no need to call in the services of a qualified electrician.

2.5Gb Ethernet – direct wired connection to printers, TV, storage or games consoles for even faster performance.

WiFi 6 – this brings 40% more speed and support for quadruple the number of concurrent connected devices (when compared to WiFi 5 on the same radio configuration).

It's also important to understand what the Business Essentials range is not: these are not WiFi extenders, they don't daisy-chain together like mesh systems can, and they don't include remote cloud-based management. For users that need more than just basic but great standalone WiFi, then it is time to look at other NETGEAR ranges.

But for many microbusinesses and home workers, Business Essentials is going to give them what they need right now. Sometimes, less really is more.

NETGEAR BUSINESS ESSENTIALS ACCESS POINTS PORTFOLIO

	WAC124	WAX202	WAX204	WAX206	WAX214	WAX218
Typical Deployment	Designed for SOHO applications customers	Work from home, dorm room	Small offices, health clinics, small hotels	Work from home, home-based business	Micro businesses, health clinics, small hotels	Small businesses, health clinics, work shops
Wireless Standard	801.11AC Wave 2	802.11ax	802.11b/g/n/ac/ax	802.11ax	802.11b/g/n/ac/ax	802.11b/g/n/ac/ax
Dual Band	Concurrent	Concurrent	Concurrent	Concurrent	Concurrent	Concurrent
Max # of Concurrent Clients (standalone)	32	64	64	128	128	256
# of Ethernet Ports	4+1 (LAN, WAN)	3+1 (LAN, WAN)	5	4+1 (LAN, WAN)	1	1
PoE					✓	✓
Mounting Options	Desk standable/Wallmount	Desk standable	Desk standable	Desk standable	Ceiling/Wallmount	Ceiling/Wallmount
# of SSIDs	3	3	3	3	4	4

Business Essentials



WAX204

The NETGEAR WiFi 6 AX1800 Dual Band Wireless Access Point (AP) delivers 802.11ax high performance wireless connectivity for Small Office and Home Office (SOHO) deployments and supports dual band concurrent WiFi 6 operations at 2.4GHz and 5GHz with a combined throughput of 1.8Gbps (600Mbps at 2.4GHz and 1200Mbps at 5GHz).



WAX214

The NETGEAR WiFi 6 AX1800 PoE Wireless Access Point (AP) delivers 802.11ax high performance wireless connectivity for Small Office and Home Office (SOHO) deployments and supports dual band concurrent WiFi 6 operations at 2.4GHz and 5GHz with a combined throughput of 1.8Gbps (600Mbps at 2.4GHz and 1200Mbps at 5GHz).



WAX218

The NETGEAR WiFi 6 AX3600 PoE Wireless Access Point (AP) delivers 802.11ax high performance wireless connectivity for Small Office and Home Office (SOHO) deployments and supports dual band concurrent WiFi 6 operations at 2.4GHz and 5GHz with a combined throughput of 3.6Gbps (1200Mbps at 2.4GHz and 2400Mbps at 5GHz).



Orbi Pro WiFi 6 (SXK80)

Orbi Pro WiFi 6 is the most powerful Mesh WiFi system on the market. Whether you are looking to meet the high-demand needs of your home [office] or small business, with Orbi Pro WiFi 6 you will experience unprecedented WiFi speed and area coverage, connection capacity, and management flexibility and control for today and tomorrow.

The ultimate WiFi 6 experience for home or office

Orbi Pro WiFi6 for better WiFi Mesh


- Now all the devices connected to your WiFi will operate at optimum speed. No more slow video streaming or conferencing,
- With WiFi 6 you can get ultra-fast connections to all your devices consistently.
- Coverage up to 3000 sq. ft. per unit
- 2.5Gbps Ethernet ports to support WiFi 6 throughputs in excess of 1 Gigabit - 1 on router and 1 on each satellite
- 4 gigabit Ethernet ports for wired network connectivity
- Create up to 4 individual wireless networks (SSIDs and VLAN) or manage network remotely with the Insight app
- Dedicated backhaul - A dedicated band between router and satellite frees up the other two bands for maximum speed to your devices.
- Direct wired connection between devices means even more bandwidth becomes available for fast WiFi usage to your devices



INTRODUCING ONE-TOUCH WIRELESS VISIBILITY & MANAGEMENT

NETGEAR introduces the new IT revolution for small businesses with “One-touch connectivity” with Insight management app. Experience easy set-up, remote management and full control of your wireless network. With 20 years of experience in small & medium business networking, NETGEAR is now delivering wireless connectivity that “just works” at your fingertips.

NETGEAR Insight enables multi-device configuration of your NETGEAR Insight Managed wireless access points, either locally or remotely. It provides network management, monitoring and service deployment across multiple remote and local sites for the easiest and most user-friendly wireless networking experience. Anywhere management also includes Insight Managed switches and Business-Class ReadyNAS on top of Insight Managed Wireless Access points, enabling whole network visibility and management. Insight app also allows you discover select wired and wireless devices from your local or remote network.

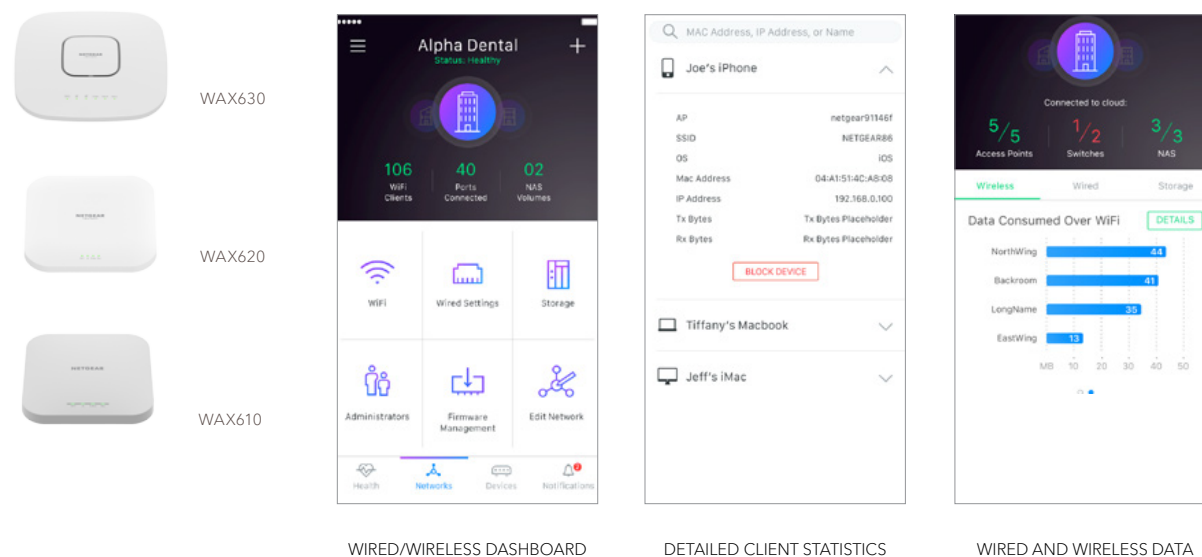

WIRED/WIRELESS DASHBOARD

DETAILED CLIENT STATISTICS

WIRED AND WIRELESS DATA

BUSINESS FEATURES FOR HIGHER SPEED, GREATER COVERAGE AND HIGHER DENSITY WIFI

Business class WiFi with superior WiFi 6 802.11ax performance and range

2x2 and 4x4 with multiple streams of data for aggregate throughput of up to 1.8Gbps for WAX610 and 6.0Gbps for WAX630

Multi-User Multiple In Multiple Out (MU-MIMO) avoids congestion and ensures performance in high client density deployments like public WiFi hotspots

One Ethernet port, with Power-over-Ethernet (PoE) for ease of deployment (PoE switch & AC/DC power adapter are sold separately)

One-touch network visibility. Anywhere. - Smart Cloud remote app management for unrivaled mobile management experience of your wireless network

App managed, through NETGEAR Insight app for one-touch installation and management of all your Access Points, no additional hardware needed

Market leading 5-year warranty with 24x7 chat support for peace of mind



WiFi 6E by numbers vs. WiFi 5:

x4
MORE DEVICES THAT CAN BE CONNECTED SIMULTANEOUSLY

x3
FASTER

x3.5
MORE CHANNELS

WiFi 6E is the key to taking business connectivity to a whole new level.

WiFi 6E

It is estimated that WiFi capacity worldwide will double in 2022, to keep pace with the explosion of online traffic and the number of connected devices, there is a new type of WiFi in town, WiFi 6E. This breakthrough in network capacity means that a much larger volume of devices can be connected via wireless, even in very dense usage areas, without compromising performance.

With WiFi 6E, there is less competition and interference between WiFi equipment, dramatically reduced network congestion, as well as smoother, faster connectivity without worrying about everything freezing or slowing down. This new industry standard builds on the existing WiFi 6 standard (the 'E' stands for extended), taking it into the much wider 6GHz radio spectrum. Nothing else operates on 6GHz: no other WiFi standards, no radar airports, nearby TV stations, nothing.

WiFi 6E Applications

- High density, high volume - lots of users and connected devices nearby needing WiFi
- WiFi 6E Devices - Samsung Galaxy S21 Ultra, Google Pixel 6 and Pixel 6 Pro, Intel Xeon, Windows 11, Galaxy Z Fold 3 5G
- Collaboration and video conferencing - consistent access is essential to the user experience



WiFi 6E and NETGEAR

The industry's first Tri-Band WiFi 6E access point for SMBs, WAX630E, delivers up to 7.8Gbps, by combining speeds across those three bands. It is also designed to take advantage of multi-gigabit connectivity (2.5GbE), leading to better streaming, conferencing, and collaboration.

The WiFi 6 difference

Increased speed, coverage, and capacity for today's WiFi demands



Speed

Up to 70% faster speeds on both bands

Coverage

Up to 50% more coverage, with no dead zones

Device Capacity

More simultaneous users, with high WiFi quality for everyone



WAX610

Perfect for high density client environments such as schools, hotels, restaurants and conference centers with speeds up to 1.8Gbps. It provides enterprise grade WiFi network security combined with Insight management that allows it to immediately integrate with your current NETGEAR Insight managed switches.

WAX610Y

The WAX610Y is the outdoor version of the WAX610. It's waterproof, dustproof and protected by a P2i nano-coating that meets the IP55 rating to withstand rain and outdoor atmosphere.

WAX620

WAX620 is a high-performance dual band 4x4 WiFi 6 access point with speeds up to 3.6Gbps. It provides enterprise grade WiFi network security combined with Insight management that allows it to immediately integrate with your current NETGEAR Insight managed switches.

WAX630

WAX630 is a superior tri-band WiFi 6 access point with fast and reliable speeds up to 6.0Gbps. It provides enterprise grade WiFi network security combined with Insight management that allows it to immediately integrate with your current NETGEAR Insight managed switches.

WAX630E

NETGEAR Insight Managed Wireless Access Point WAX630E is the first business-grade Tri-Band WiFi 6E access point. With WiFi 6E, a new 6GHz band has been added to WiFi 6 making it the fastest WiFi available.



WiFi 6 for business and home office

NETGEAR has been at the forefront of innovation and cutting-edge solution for more than 20 years, providing innovative and ground-breaking network solutions which include a suite of advanced WiFi 6 products - giving you access to the most advanced WiFi on the planet.

WiFi 6 overcomes these challenges

- Coverage and range, especially through walls in blind spots
- Need for faster and easier set up
- Network and per device speed, especially with more devices
- Demand for security and access control
- Need for smooth configuration and firmware updates

WiFi 6 for business

Why are businesses adopting WiFi 6?

- Best WiFi Speed - 70% more throughput than WiFi 5
- Connect More Devices - optimized speed even in high density areas
- Improved Coverage
- Future-Proofing
- Compatibility
- Battery Efficiency
- Seamless Roaming
- Faster Backbone with 2.5G - Multi-gig networking and connectivity
- High Density IoT
- Safer Networks



Remote WiFi 6 management

Most NETGEAR WiFi 6 business access points include NETGEAR Insight, the award-winning remote cloud management solution for easy installation, monitoring, and management from anywhere.

NETGEAR Insight is an industry first in network management, providing easy plug-and-play setup and management. Its cloud portal can be accessed via an intuitive web interface or the Insight mobile app. Insight offers a wide variety of configuration options for the most basic networks to multi-tenancy and multi-roles.

NETGEAR Insight enables easy configuration, monitoring, and management of your wireless access points together with Insight-managed switches and storage. Wireless management features include: Instant WiFi for automatic wireless configuration to limit interferences, frequency band selection, VLAN creation and association with SSID, WiFi security configuration, visibility into WiFi clients, reporting, and many more.

Learn more: <https://www.netgear.com/business/services/insight/>

Use cases

Who is upgrading to WiFi 6?



HOME OFFICE

Sharing a WiFi connection with the rest of the family as people are working from home, video calling or downloading large files can slow everyone down. WiFi 6 is optimized for concurrent users.



RETAIL

As wireless handheld Point of Sale devices increase in use so does the need for sufficient bandwidth and total site coverage. WiFi 6 can meet those growing demands.



MANUFACTURING

From AI assembly line robots to autonomous delivery trucks, most or all new machinery and IoT will require high bandwidth and capacity.



HEALTH CARE

As medicine moves toward more innovative technologies for imaging, record storage, and telehealth, it requires more bandwidth. Upgrading to WiFi 6 helps ease high demand and provide efficiency.



PUBLIC SECTOR

Libraries, city halls, police offices and the public sector in general are becoming more technologically advanced and reliant on WiFi and need the bandwidth capacity and efficiency it offers.



FINANCE

Finance companies need high bandwidth and zero-delay streaming to meet the needs of daily stock market traders and demanding finance apps. WiFi 6 can keep up with these demands.




HOSPITALITY

Older, legacy WiFi systems have slow bandwidth, lack device capacity and less secure connections. WiFi 6 can meet growing demand for connectivity across all the technology and devices the industry depends on.



EDUCATION

The increase in video streaming, online classes, and other internet-based instruction have huge demands for bandwidth and capacity that older legacy WiFi technologies cannot provide. Future-proofing schools and institutions with WiFi 6 greatly improve student's and teacher's educational experiences.

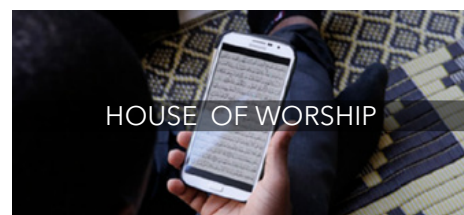

HOUSE OF WORSHIP

Houses of worship need great network connectivity to make sure everything runs smoothly for the team and improve the congregation's experience. Reliability, simplicity and affordability are high priorities. WiFi 6 checks all those boxes.

Wireless Access Points

Business Essentials



MODEL	WAC104	WAC124	WAX202
Product Description	Dual Band 802.11ac Wireless Access Point	Dual Band 4x4 Wireless Access Point	WiFi 6 AX1800 Dual Band Wireless Access Point
Typical Deployment	High performance small and home office	Designed for SOHO applications customers	Small office and home office (SOHO)
WIRELESS			
Standard	802.11ac	802.11ac Wave 2	802.11ax
Dual Band	concurrent	concurrent	concurrent
2.4 GHz	✓	✓	✓
5 GHz	✓	✓	✓
TX by Rx	2 x 2 (2.4GHz)	2 x 2 (2.4GHz) 4x4 (5GHz)	
Throughput per Radio	300Mbps @ 2.4GHz 867Mbps @ 5.0GHz	300Mbps @ 2.4GHz 1732Mbps @ 5.0GHz	600Mbps @ 2.4GHz 1200Mbps @ 5.0GHz
Max # of Concurrent Clients (standalone)	24	32	128
HARDWARE			
# of Ethernet Ports	4+1 (LAN, WAN)	4+1 (LAN, WAN)	4
Speed of Ethernet Ports	10/100/1000 Mbps	10/100/1000 Mbps	
PoE			
Antenna Type	External	External/Internal	External
Antenna Gain	3dBi	3dBi	
Physical Size	240 x 181 x 41 mm	236 x 151 x 55 mm	170 x 63 x 242mm
Enclosure Material	Plastic	Plastic	Plastic
Kensington Lock			
Ceiling/Wall Mounting	✓	✓	
Power Consumption (W) Max	8.1W	16.2W	18W
MANAGEMENT			
Deployment Options	Standalone	Standalone	Standalone, Web UI
FEATURES			
# of SSIDs	1	3	3
WEP	✓		
WPA-PSK/TKIP	✓	✓	
WPA2-PSK/AES	✓	✓	
802.1X			
Rogue AP Detection			
WIDS/WIPS			
Wireless Distribution Systems	✓	Client mode	
Repeater			
Point-to-Point/Multi-Point	✓	✓	
Simultaneous Bridge/Client Association	✓	✓	
Captive Portal			
VLANs			
MAC ACL	✓	✓	
802.11e/WMM	✓	✓	
Rate Limiting			
Bandwidth Management			
Beamforming		✓	
Bandsteering	✓	✓	
ORDERING			
Warranty	3 years	3 years	3 years
Product Ordering SKU	WAC104-100NAS WAC104-100AUS WAC104-100PES WAC104-100UKS WAC104-100INS	WAC124-100NAS WAC124-100PES WAC124-100UKS WAC124-100CNS	WAX202-100NAS WAX202-100EUS WAX202-100AUS
ProSUPPORT Maintenance PKGS			
OnCall 24x7 1-year	PMB0511	PMB0311	PMB0512
OnCall 24x7 3-year	PMB0531	PMB0331	PMB0532
OnCall 24x7 5-year	PMB0551	PMB0351	PMB0552

Wireless Access Points

Business Essentials



MODEL	WAX204	WAX206	WAX214	WAX218
Product Description	WiFi 6 AX1800 Dual Band Wireless Access Point	WiFi 6 AX3200 Dual Band Wireless Access Point	WiFi 6 AX1800 PoE Access Point	WiFi 6 AX3600 PoE Access Point
Typical Deployment	Small offices, health clinics, small hotels	Small office and home office (SOHO)	Micro businesses, health clinics, small hotels	Small businesses, health clinics, work shops
WIRELESS				
Standard	802.11b/g/n/ac/ax	802.11ax	802.11b/g/n/ac/ax	802.11b/g/n/ac/ax
Single Band				
Dual Band	Concurrent	Concurrent	Concurrent	Concurrent
2.4 GHz	✓	✓	✓	✓
5 GHz	✓	✓	✓	✓
TX by Rv	2 x 2		2 x 2	2 x 2
Throughput per Radio	600Mbps @ 2.4GHz 1200Mbps @ 5GHz	800Mbps @ 2.4GHz 2400Mbps @ 5.0GHz	600Mbps @ 2.4GHz 1200Mbps @ 5GHz	1200Mbps @ 2.4GHz 2400Mbps @ 5GHz
Max # of Clients	64	128	128	256
HARDWARE				
# of Ethernet Ports	5	5	1	1
Speed of Ethernet Ports	1Gbps		1Gbps	2.5Gbps
PoE			✓	✓
Antenna Type	External	Internal	Internal	Internal
Antenna Gain	3dBi (2.4GHz) 3dBi (5GHz)		3dBi (2.4GHz) 3dBi (5GHz)	5dBi (2.4GHz) 5dBi (5GHz)
Additional External Antenna Connectors				
Plenum				
Physical Size	9.27 x 7.26 x 2.25 in (236 x 184 x 57 mm)	170 x 63 x 242 mm 6.69 x 2.48 x 9.52 in	6.33 x 6.33 x 1.31 in 160.9 x 160.9 x 33.28 mm	8.11 x 8.11 x 1.37 in 205.73 x 205.73 x 34.75 mm
Form Factor	Desktop	Desktop	Ceiling/wall-mount	Ceiling/wall-mount
MANAGEMENT				
Administrative Management	Local admin		Local admin	Local admin
FEATURES				
# of SSIDs	3	3	4	4
WEP	✓		✓	✓
WPA-PSK/TKIP	✓		✓	✓
WPA2-PSK/AES	✓		✓	✓
WPA3-Personal[SAE]	✓		✓	✓
802.1X			✓	✓
Rogue AP Detection			✓	✓
WIDS/WIPS	✓		✓	✓
Wireless Distribution Systems (WDS)			✓	✓
Repeater			✓	✓
Point-to-Point/Multi-Point			✓	✓
Simultaneous Bridge /Client Association			✓	✓
Captive Portal			✓	✓
VLANs	✓		✓	✓
MAC ACL	✓		✓	✓
802.11e/WMM	✓		✓	✓
Rate Limiting			✓	✓
Bandwidth Management			✓	✓
Beamforming			✓	✓
IPv6			✓	✓
Bandsteering	✓		✓	✓
ORDERING				
Warranty	3 years	3 years	3 years	3 years
Product Ordering SKU	WAX204-100NAS WAX204-100EUS	WAX206-100NAS WAX206-100EUS	WAX214-100NAS WAX214PA-100NAS WAX214-100EUS	WAX218-100NAS WAX218PA-100NAS WAX218-100EUS
ProSUPPORT Maintenance PKGS				
OnCall 24x7 1-year	PMB0512	PMB0311	PMB0512	PMB0311
OnCall 24x7 3-year	PMB0532	PMB0331	PMB0532	PMB0331
OnCall 24x7 5-year	PMB0552	PMB0351	PMB0552	PMB0351

Wireless Access Points

Insight Managed Access Points



MODEL	WAC510	WAC540
Product Description	AC WiFi Business AP with NETGEAR® Insight app for easy management	AC WiFi Business AP with NETGEAR Insight app for easy management
Typical Deployment	Small to Mid-size customers for ease of deployment	
WIRELESS		
Standard	802.11 a/b/g/n/ac	802.11ac Wave 2
Dual Band	concurrent	Tri band
2.4 GHz	✓	✓
5 GHz	✓	✓
TX by Rv	2 x 2	4x4 @5GHz, 2x2 @5GHz, 2x2 @2.4GHz
Throughput per Radio	300/867 Mbps	400/867/1733 Mbps
Max # of Concurrent Clients (standalone)	200	600
HARDWARE		
# of Ethernet Ports	2	2
Speed of Ethernet Ports	10/100/1000 Mbps	10/100/1000 Mbps
PoE	✓	PoE+ (25.5w)
Antenna Type	Internal	Internal
Antenna Gain	3dBi (2.4GHz) 6dBi (5GHz)	3dBi (2.4GHz) 4dBi (5GHz)
Physical Size	197x 197 x 37 mm	242 x 242 x 40 mm
Enclosure Material	Plastic	Plastic
Kensington Lock	✓	
Ceiling/Wall Mounting	✓	✓
Power Consumptions (W) Max	9W	25.5W
MANAGEMENT		
Deployment Options	Standalone / Insight	Standalone/Insight
FEATURES		
# of SSIDs	8	8
WEP	✓	✓
WPA-PSK/TKIP	✓	✓
WPA2-PSK/AES	✓	✓
802.1X	✓	✓
Rogue AP Detection	✓	✓
WIDS/WIPS	✓	✓
Wireless Distribution Systems	✓	✓
Repeater	✓	✓
Point-to-Point/Multi-Point	✓	✓
Simultaneous Bridge/Client Association	✓	✓
Captive Portal	✓	✓
VLANs	✓	✓
MAC ACL	✓	✓
802.11e/WMM	✓	✓
Rate Limiting	✓	✓
Bandwidth Management	✓	✓
Beamforming	✓	✓
Bandsteering	✓	✓
ORDERING		
Warranty	5 years	5 years
Product Ordering SKU	WAC510-10000S WAC510-100NAS	WAC540-100NAS WAC540-10000S WAC540PA-100NAS
ProSUPPORT Maintenance		
PKGSOnCall 24x7 1-year	PMB0512	
OnCall 24x7 3-year	PMB0532	
OnCall 24x7 5-year	PMB0552	

Wireless Access Points

Insight Managed Access Points



MODEL	WAX610	WAX610Y	WAX620
Product Description	Insight Managed WiFi 6 Dual Band AP	Insight Managed WiFi 6 AX1800 Dual Band Outdoor PoE AP	Insight Managed WiFi 6 AX3600 Dual Band AP
Typical Deployment	Small to Mid-size customers for ease of deployment	Outdoor deployment for schools, hotels, Small and medium enterprise	Small to Mid-size customers for ease of deployment
WIRELESS			
Standard	802.11 a/g/n/ac/ax	802.11 a/g/n/ac/ax	802.11a/g/n/ac/ax
Single Band			
Dual Band	✓	✓	✓
Tri-Band			
2.4 GHz	✓	✓	✓
5 GHz	✓	✓	✓
6 GHz			
TX by Rv	2 x 2	2 x 2	4 x 4
Throughput per Radio	600/1200 Mbps	600/1200 Mbps	1200/2400 Mbps
Max # of Concurrent Clients (standalone)	30	30	75
Max # of Concurrent Clients (managed)	250	250	250
HARDWARE			
# of Ethernet Ports	1	1	1
Speed of Ethernet Ports	100/1000/2500 Mbps	100/1000/2500 Mbps	100/1000/2500Mbps
PoE	✓	✓	✓
Antenna Type	Internal	Internal	Internal
Antenna Gain	Internal 3.8/4.5dBi (2.4GHz/5GHz)	Internal 3.8/4.5dBi (2.4GHz/5GHz)	3.1/4.3dBi (2.4GHz/5GHz)
Additional External Antenna Connectors	No	No	No
Plenum		IP55	
Physical Size	160.9 x 160.9 x 33.25 mm	181 x 305 x 34 mm	205.7 x 205.7 x 34.3 mm
Enclosure Material	Plastic Front/Metal Back	Plastic	Plastic Front/Metal Back
Kensington Lock			
Ceiling/Wall Mounting	Wall, Ceiling	Wall, ceiling, and pole mounting	Wall, Ceiling
Power Consumptions (W) Max	15.3W	16.1W	25.5W
MANAGEMENT			
Deployment Options	Standalone/Insight	Standalone/Insight	Standalone/Insight
FEATURES			
# of SSIDs	8	8	8
WEP			
WPA-PSK/TKIP	✓	✓	✓
WPA2-PSK/AES	✓	✓	✓
WPA3-Personal[SAE]	✓	✓	✓
802.1X	✓	✓	✓
Rogue AP Detection	No	No	No
WIDS/WIPS	No	No	No
Wireless Distribution Systems (WDS)	✓	✓	✓
Repeater	✓	✓	✓
Point-to-Point/Multi-Point	✓	✓	✓
Simultaneous Bridge /Client Association	✓	✓	✓
Captive Portal	Yes	Yes	Yes
VLANs	✓	✓	✓
MAC ACL	✓	✓	✓
802.11e/WMM	✓	✓	✓
Rate Limiting	✓	✓	✓
Bandwidth Management	✓	✓	✓
Beamforming	✓	✓	✓
IPv6	✓	✓	✓
Bandsteering	✓	✓	✓
ORDERING			
Warranty	5 years	5 years	5 years
Product Ordering SKU	WAX610-100NAS WAX610-100EUS WAX610PA-100NAS (power adapter included)	WAX610Y-100NAS WAX610Y-100EUS	WAX620-100NAS WAX620-100EUS WAX620PA-100EUS
ProSUPPORT Maintenance PKGS	PMB0311-10000S OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0311-10000S PMB0331-10000S PMB0351-10000S	PMB0311-10000S PMB0331-10000S PMB0351-10000S

Wireless Access Points

Insight Managed Access Points



MODEL	WAX630	WAX630E
Product Description	Insight Managed WiFi 6 AX6000 Tri-Band AP	Insight Managed WiFi 6E AX7800 Tri-Band AP
Typical Deployment	Small to Mid-size customers for ease of deployment	Small to Mid-size customers for ease of deployment
WIRELESS		
Standard	802.11a/g/n/ac/ax	802.11a/g/n/ac/ax
Single Band		
Dual Band	✓	
Tri-Band		✓
2.4 GHz	✓	✓
5 GHz	✓	✓
6 GHz		✓
TX by Rv	4 x 4	2 x 4 x 2e
Throughput per Radio	1200/2400/2400 Mbps	600/4800/2400 Mbps
Max # of Concurrent Clients (standalone)	100	100
Max # of Concurrent Clients (managed)	250	456
HARDWARE		
# of Ethernet Ports	2	2
Speed of Ethernet Ports	100/1000/2500Mbps and 100/1000Mbps (2 ports)	100/1000/2500Mbps and 100/1000Mbps (2 ports)
PoE	✓	✓
Antenna Type	Internal	Internal
Antenna Gain	Internal 2.86/4.41/4.98 dBi (2.4GHz/5GHz L/5GHz H)	Internal 4.4/6.3/3.1dBi (2.4GHz/5GHz/6GHz)
Additional External Antenna Connectors	No	No
Plenum		
Physical Size	266.61 x 268.29 x 55.5 mm	266.6 x 268.3 x 55.5 mm
Enclosure Material	Plastic Front/Metal Back	Plastic Front/Metal Back
Kensington Lock		
Ceiling/Wall Mounting	Wall, Ceiling	Wall, Ceiling
Power Consumptions (W) Max	30.1W	27.64W
MANAGEMENT		
Deployment Options	Standalone/Insight	Standalone/Insight
FEATURES		
# of SSIDs	8	8
WEP		
WPA-PSK/TKIP	✓	✓
WPA2-PSK/AES	✓	✓
WPA3-Personal[SAE]	✓	✓
802.1X	✓	✓
Rogue AP Detection	No	No
WIDS/WIPS	No	No
Wireless Distribution Systems (WDS)	✓	✓
Repeater	✓	✓
Point-to-Point/Multi-Point	✓	✓
Simultaneous Bridge /Client Association	✓	✓
Captive Portal	Yes	Yes
VLANs	✓	✓
MAC ACL	✓	✓
802.11e/WMM	✓	✓
Rate Limiting	✓	✓
Bandwidth Management	✓	✓
Beamforming	✓	✓
IPv6	✓	✓
Bandsteering		
ORDERING		
Warranty	5 years	5 years
Product Ordering SKU	WAX630-100NAS WAX630-100EUS WAX630PA-100NAS	WAX630E-100NAS WAX630E-100EUS WAX630EP-100NAS
ProSUPPORT Maintenance PKGS	PMB0312-10000S OnCall 24x7 1-year OnCall 24x7 3-year OnCall 24x7 5-year	PMB0312-10000S PMB0332-10000S PMB0352-10000S

Wireless Access Points

Wireless Mesh Systems



MODEL	SXX30	SXX50	SXX80
Product Description	AX1800 Dual-band WiFi System	AX5400 Tri-Band WiFi System	AX6000 Tri-band WiFi System
Typical Deployment	SMB business and SOHO	SMB Business	SMB business
WIRELESS			
Standard	802.11ax	802.11ax	802.11ax
Dual Band	Dual band	Tri band	Tri band
2.4 GHz	✓	✓	✓
5 GHz	✓	✓	✓
TX by Rv		Two 2x2 (5GHz)	Two 4x4 (5GHz)
Throughput per Radio	1200 + 600 (2.4GHz, 5GHz)	2402 + 2402 + 573 (5GHz, 5GHz, 2.4GHz)	2400 + 2400 + 1200 (5GHz, 5GHz, 2.4GHz)
Max # of Concurrent Clients (standalone)	40	75	100
HARDWARE			
# of Ethernet Ports	4	4	5
Speed of Ethernet Ports		4 x 10/100/1000 Mbps	1 x 1000/2500 Mbps 4 x 10/100/1000 Mbps
PoE			
Antenna Type	Two (2) high-performance antennas with high-power amplifiers		Eight (8) high-performance antennas with high-power amplifiers
Antenna Gain			3dBi (2.4GHz) 4dBi (5GHz)
Physical Size	148 x 68 x 189 mm (5.8 x 2.7 x 7.4 in)	6.5 x 2.9 x 8.8 (167mm x x 75.6mm x 224.5mm)	174 x 85 x 247 mm (6.8 x 3.3 x 9.7 in)
Enclosure Material	Plastic	Plastic	Plastic
Desktop/Wall Mounting	Desktop/Wall	Desktop/Wall	Desktop/Wall
MANAGEMENT			
Deployment Options	Standalone/Insight	Standalone/Insight	Standalone/Insight
FEATURES			
# of SSIDs	4	4	4
WEP			✓
WPA-PSK/TKIP	✓		✓
WPA2-PSK/AES/WPA3	✓		✓
802.1X	✓	✓	✓
Rogue AP Detection			
WIDS/WIPS			
Wireless Distribution Systems			
Repeater			
Point-to-Point/Multi-Point			
Simultaneous Bridge/Client Association			
Captive Portal		✓	✓
VLANs		✓	✓
MAC ACL		✓	✓
802.11e/WMM		✓	✓
Rate Limiting		✓	✓
Bandwidth Management		✓	✓
Beamforming	✓	✓	✓
Bandsteering		✓	✓
ORDERING			
Warranty	5 years		5 years
Product Ordering SKU	SXX30-100NAS/SXX30B3-100NAS/ SXX30B4-100NAS/SXR30-100NAS/ SXS30-100NAS		SXX80-100NAS / SXX80-100AUS SXX80-100JPS / SXX80B3-100NAS SXX80B3-100ELUS / SXX80B4-100NAS SXX80B4-100ELUS / SXS80-100NAS SXS80-100AUS / SXS80-100JPS
ProSUPPORT Maintenance PKGS			
OnCall 24x7 1-year	PMB0312-10000S		PMP0312-10000S
OnCall 24x7 3-year	PMB0332-10000S		PMP0332-10000S
OnCall 24x7 5-year	PMB0352-10000S		PMP0352-10000S

WIRELESS LAN ANTENNAS AND CABLES

NETGEAR wireless antennas can be used in conjunction with Wireless Access Points to boost wireless signals across a building or campus. NETGEAR low-loss cables with 2 Reverse SMA Connectors extend the length between NETGEAR wireless access points or routers and the external antenna without sacrificing range. NETGEAR low-loss cables with 2 Reverse SMA Connectors extend the length between NETGEAR wireless access points or routers and the external antenna without sacrificing range.



MODEL	ANT24501B	ANT224D10	ANT2409	ANT2511AC
Description	NETGEAR Outdoor Dual Band Omni Antenna Bundle Kit	10dBi 2x2 indoor/outdoor directional antenna -ANT224D10	9dBi Omni-directional Antenna - ANT2409	Wireless AC Dual Band Antenna
Wireless Mode	IEEE 802.11 a/b/g/n	IEEE 802.11n	IEEE 802.11g	IEEE 802.11 a/b/g/n/ac
Typical Application	Outdoor for wireless client access	Indoor/Outdoor	Any 11n Indoor Access Point	External antenna for 700 series wireless access points
Recommended Access Point	WND930 Outdoor AP	Any 11n Indoor Access Point	WAG302, WG302, WG102, FWG114Pv2, FWG114P, and DG824M	WAC720, WAC730, WAC740
Maximum Outdoor Range	1.6 km (1 mile)	8.5 km (5.28 miles) ¹	11.5 km (7.2 miles) ²	
Frequency Range	2400 - 2500MHz 4900 - 5850MHz	2400 - 2500MHz	2400 - 2485MHz	2.4 to 2.5 GHz and 4.9 to 5.85 GHz
Gain	5dBi (2.4GHz) 7dBi (5GHz)	10dBi ³	9dBi ³	2.5dBi (2.4 GHz) and 4dBi (5 GHz)
Beam Width	Horizontal 360° Vertical 11°	Horizontal 33° Vertical 32°	Horizontal 360° Vertical 30°	Horizontal 360° Vertical 75° (2.4 GHz) and Horizontal 360° Vertical 22.5° (5 GHz)
Polarization	Linear; Vertical	Linear; Vertical	Vertical	Linear; Vertical
Operational Temperature	-20° to +60°C (-4° to 140°F)	-30° to 80°C (-22° to 176°F)	-30° to 80°C (-22° to 176°F)	-20°C to +60°C
Dimensions	215 x 22 x 11 mm (8.5 x 0.9 x 0.4 in)	240 x 240 x 40 mm (9.45 x 9.45 x 1.57 in)	625 x 75 x 56 mm (24.6 x 2.95 x 2.2 in)	185 x 36.2 x 12.7 mm (7.283 x 1.425 x 0.5 in)
Weight	.2 kg (0.4 lb)	.7 kg (1.54 lb)	.9 kg (2 lb)	0.025 kg (0.055116 lb)
Connectors	N-Plug Male	· Antenna - N Jack Male · Lightning arrestor - N Jack Male to N Jack Male · Extended Cable - N Plug Female	· Antenna - Reverse N female · Lightning arrestor - Reverse N female · Adapter - Reverse SMA	RP SMA-PlugZ (SMA Male Reverse)
Package Contents	· 2 x 2.4GHz omni directional antennas · 2 x 5GHz omni directional antennas · Installation guide	· NETGEAR Indoor/ Outdoor 10dBi 2x2 Directional Antenna ANT224D10 · 2 lightning arrestors with 30 cm low-loss cables · 2 reverse N/SMA adapters · Wall mount and pole mounting hardware · Installation Guide and Warranty/ Support card	· Indoor/Outdoor 9dBi Omni-directional · Antenna - ANT2409 (cable required, sold separately) · Wall and pole mount brackets and hanging materials · One reverse N type to reverse SMA adapter · 2 m low-loss antenna cable (connection for lightning arrestor) · Lightning arrestor · Installation guide and Warranty/support card	· 1 x 2.4/5GHz omni directional antenna · Installation guide
Warranty*	2 years			
Ordering Information (all regions)	ANT24501B-10000S	ANT224D10-10000S	ANT2409-20000S	ANT2511AC-10000S

¹ Range estimation is based on FCC-compliant operation of two (2) 802.11 APs each with two (2) ANT24D18 antennas, 3 m antenna cables, and lightning arrestors installed. With the antennas positioned 26 m above the ground, data rate should sustain 1 Mbps under ideal line-of-sight conditions.
² Range estimation is based on FCC-compliant operation of two (2) 802.11 APs each with two (2) ANT2409 antennas, 1 m antenna cables, and lightning arrestors installed. With the antennas positioned 27 m above the ground, data rate should sustain 1 Mbps under ideal line-of-sight conditions.
³ Gain: A ratio of decibels to an isotropic antenna that is commonly used to measure antenna coverage.

MODEL	ACC-10314-01	ACC-10314-03	ACC-10314-04
Cable Length	1.5m (4.9ft)	5m (16.4ft)	10m (32.8ft)
Maximum Cable Loss with Connectors	1.4dB	3.7dB	7.0dB
Weight	50g (1.76oz)	225g (7.94oz)	440g (15.53oz)
Attenuation	0.21dB/ft maximum or .659dB/m maximum at 2.5GHz		
Operating Temperature	-40° to 75°C (-40° to 167°F)		
Minimum Ben Radius	26 mm (1 in)		
Connectors	Reverse SMA female (both ends)		
Package Size	450 x 280 x .12 mm (17.72 x 11.02 x .004 in)		
Warranty*	2 years		
Ordering Information (all regions)	1.5 meter cable ACC-10314-01	5 meter cable ACC-10314-03	10 meter cable ACC-10314-04


*2 years Warranties cover hardware, fans, and internal power supplies - not external power supplies or software. Warranty is only valid for the original purchaser, and modifications to product may void the warranty. See <http://www.netgear.com/about/warranty/> for details. Basic phone support for 90 days from purchase and lifetime online chat support when purchased from a NETGEAR authorized reseller.

INSIGHT MANAGED BUSINESS ROUTER


Introducing an affordable security router for SMBs



Site-to-Site VPN

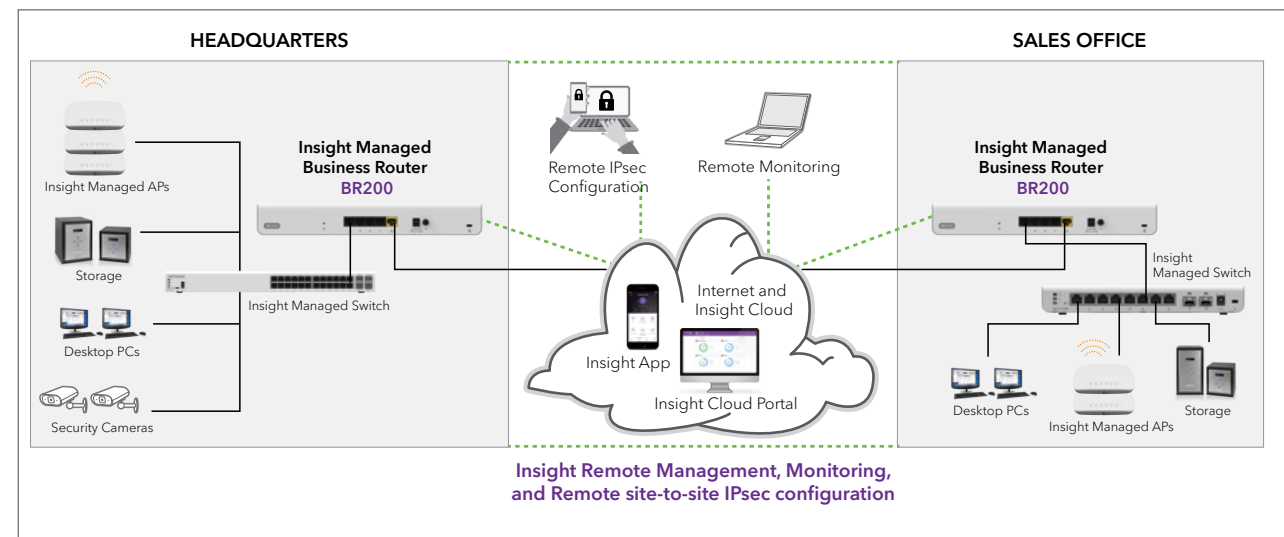

Full monitoring and management through NETGEAR Insight app or Cloud Portal

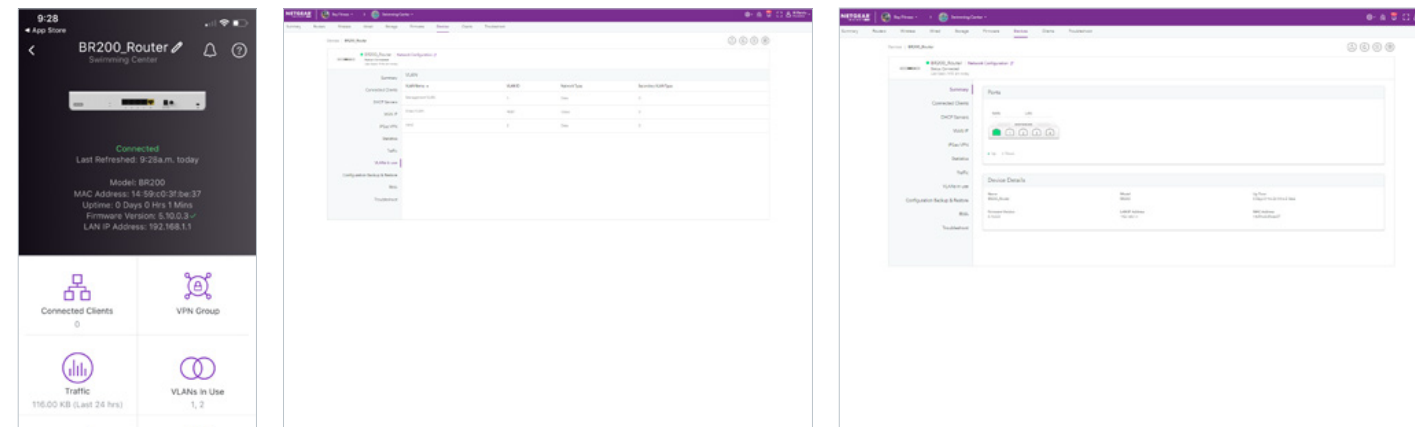

BUSINESS ROUTERS

BUSINESS ROUTERS



MODEL	BR200
Product Description	Insight Managed Business Router
Typical Deployment	High performance small to medium-size businesses
CONNECTIVITY	
Gigabit Ports WAN/LAN	1/4
DMZ Interfaces (Configurable)	1
PERFORMANCE	
LAN-to-WAN Throughput ¹	924 Mbps
Maximum Number of VLANs	256
SECURITY	
Firewall Functions	Stateful Packet Inspection (SPI), Port/Service Blocking, Denial-of-service (DoS) Prevention, Stealth Mode, Block TCP Flood, Block UDP Flood, WAN/LAN Ping Response Control
Content Filtering (HTTP Only)	Web Keyword Blocking, Trusted Domains
VoIP SIP ALG	Yes
NETWORKING	
ISP Address Assignment	DHCP, Static IP Assignment, PPPoE, PPTP
NAT Modes	1-1, NAT
Routing	Static, Dynamic, RIPv1, RIPv2
DHCP	DHCP Server (limit is 4), DHCP Relay, DNS Proxy
DDNS	NETGEAR, No-IP.com, Dyn.com
VLANs	802.1Q
Essential Networking Features	Port Range Forwarding, Port Triggering, DNS proxy, MAC Address Cloning/spoofing, NTP Support, UPnP, Auto Uplink on Switch Ports, L3 Quality of Service (QoS), LAN-to-WAN and WAN-to-LAN (ToS), Bandwidth Profiling
VPN	
IPsec Encryption/Authentication	56-bit DES, 168-bit 3DES, AES(128, 192, 256 bit)/SHA-1, MD5
Key Exchange	IKE, IKEv1, IKEv2, Manual Key, Pre-shared Key, PKI, X.509v3
Access Modes	Insight remote access
SSL Version Support	SSLv3, TLS1.0
SSL Encryption Support	DES, 3DES, ARC4, AES(ECB, CBC, XCBC, CNTR)128, 256 bit
SSL Message Integrity	MD5, SHA-1, MAC-MD5/SHA-1, HMAC-MD5/SHA-1
SSL Certificate Support	RSA, Diffie-Hellman, Self
L2TP Server	Yes
PPTP Server	Yes
MANAGEMENT	
Management Options	Insight Cloud
Logging	Accepted Packets, Dropped Packets, System, Source MAC filter, Session Limit, Bandwidth Limit, IPsec VPN
Log Delivery	Insight logging
Diagnostics	Ping, DNS Lookup, Trace Route
Maintenance	Save/restore Configuration, Restore to Factory Defaults, Firmware Upgrades via Web Browser, Display Statistics
HARDWARE	
Processor	Dual-core 1.7GHz CPU with additional dual-core Network Switching Subsystem (NSS) processors
Flash Memory/RAM	128 MB/1 GB
Major Regulatory Compliance	Environment: RoHS Safety: CE/LVD, cUL EMI: FCC Part 15 Class B, CE mark, C-Tick Class B, VCCI
Temperatures	Operating Temperature: 0° - 45°C (32°-113° F) Storage Temperature: -20° - 70° C (-4° - 158° F)
Humidity	Operating humidity 90% maximum relative humidity, non-condensing Storage humidity 95% maximum relative humidity, non-condensing
Electrical Specifications	Power adapter Input localized to regions Output: DC 12V/1.5A
Dimensions (W x D x H) cm	31.4 x 18.75 x 4.365
Dimensions (W x D x H) in	12.36 x 7.38 x 1.72
Weight kg/lb	1.55/3.41
System Requirements	Cable or DSL Broadband Modem, Internet Service, Windows Client Device, Internet Explorer/Firefox/Chrome/Safari Web Browser
WARRANTY	
Hardware Warranty*	2 years
Technical Support*	90 days
Next Business Day Replacement	2 years
Professional Configuration and Setup Support (remote)	PSB0304-100005
ORDERING	
Package Contents	(1) Insight Managed Business Router, (1) Ethernet Cable, (1) Installation Guide, (1) Warranty Card
Product Ordering SKU	North America: BR200-100NAS Europe: BR200-100PES, BR200-100UKS Asia Pacific: BR200-100JPS



MOBILE BROADBAND

4G LTE & 5G MOBILE DEVICES FOR INSTANT CONNECTIVITY ANYWHERE



TRI-BAND MESH WIFI WITH 5G OR LTE

5G or LTE Internet for entire workspace
Always-on WiFi for Internet failover
Expandable coverage with Orbi AX or AC Satellites



4G LTE AND 5G PORTABLE WIFI

Secure, portable WiFi for working anywhere
WiFi offloading
Connect up to 32 devices



ALWAYS-ON BROADBAND CONNECTION

Fail-safe connectivity solutions
Ideal for remote locations
Easy Installation

SECURITY AND CONNECTIVITY FOR YOUR BUSINESS



4G LTE & 5G Portable WiFi

Nighthawk® Mobile Routers deliver gigabit 4G LTE or 5G speeds, enabling mobile businesses to efficiently operating anywhere, regardless of whether it is at a temporary or permanent location.

- Dedicated hotspot device to connect up to 32 WiFi devices to 4G LTE speeds.
- Utilize waiting time efficiently while in-transit.
- Download or upload information for file sharing or collaboration.
- Maintain data security and employee usage accountability, avoiding the risk of using unprotected public WiFi.



LTE & 5G Home Office WiFi

Orbi 5G and 4G LTE Advanced Tri-band Mesh WiFi Router delivers fast Internet speeds from the 5G or 4G LTE mobile network. Access 5G or LTE as your primary Internet connection, or count on 5G or LTE as your reliable failover solution.

- Insert a Nano SIM card from your preferred provider. Certified with AT&T, T-Mobile, and Verizon; not compatible with Sprint.
- Maintain business continuity when wired Internet such as fibre, cable or DSL are unavailable or disrupted. Seamlessly switch to 5G or LTE.
- NETGEAR Armor™ to guard your business network and connected devices with advanced cyber threat protection.



4G LTE Hotspots

NETGEAR Mobile Hotspots are secure, compact and easy to use, making them the ideal work companions that let you connect up to 32 WiFi devices to the Internet anywhere mobile coverage is available. NETGEAR mobile hotspots let you be productive anywhere you need to be.

- 2930mAh battery that lasts up to 11 hours of continuous use.
- Block unwanted devices or turn on a secure Guest Wi-Fi to safely share Internet access for temporary use among your teams, clients or guests.
- Get instant Wi-Fi connection where you want, when you want.



LTE Modems

The NETGEAR 4G LTE Modems provide instant 4G LTE connectivity for all your devices and equipment in temporary worksites, or can act as a backup to your primary broadband network for avoiding service disruptions when your fixed wireline connection goes down.

- LTE connectivity for business needs:
- Interim solution to fixed line service.
 - Retail locations with payment processing.
 - Temporary offices such as construction sites.
 - Enterprise server room.
 - WAN port feature will be enabled with future firmware upgrade.
 - Certified with AT&T, T-Mobile, and Verizon. Not compatible with Sprint.



SUPPORT

ProSUPPORT for Business

COMPREHENSIVE SUPPORT PLANS FOR MAXIMUM NETWORK UPTIME AND BUSINESS PEACE OF MIND

- 24/7 live technical support and consultation
- Direct, scheduled access to product experts to help in configuration

More Than Just Support – A Business Partnership

NETGEAR's ProSUPPORT for Business offerings provide you with peace of mind by extending and enhancing the standard warranty or support coverage included with your product purchase. With ProSUPPORT, you get 24/7 direct access to NETGEAR technical support engineers who can rapidly resolve technical issues both big and small. Connect with the people that have built your products and build the relationship that will contribute to your business success.

OnCall 24x7 Tech Support

NETGEAR extends your initial 90-day technical support with the OnCall 24x7 Tech Support package. OnCall 24x7 services are conducted by phone, chat and email, to solve any of your technical challenges.

With an OnCall 24x7 Tech Support contract, customers will have a dedicated ProSUPPORT Hotline to call for high priority service, with a less than four-hour[†] response or call-back time. Technical support requests receive high priority escalations for issue resolution.

Please note that OnCall 24x7 Tech Support contract purchases are **non-refundable**.

Professional Configuration and Setup Assistance

Schedule an appointment for a live consultation by an expert to configure, set up, or re-configure your device.

ZERO COST - INCLUDED WITH HARDWARE PURCHASE ¹	WITH OPTIONAL PROSUPPORT ONCALL 24X7 CONTRACT
Hardware Warranty ^{1,2} - Varies by product	Hardware Warranty ^{1,2} - Varies by product
NBD Replacement during Hardware Warranty Period - Select NETGEAR Business Products	NBD Replacement during Hardware Warranty Period - Select NETGEAR Business Products
90-Day 24x7 Free Technical Support ³	Extended 24x7 Technical Support ^{3,5}
Support by Email	Support by Email
Support by Chat	Support by Chat
Support by Phone	Support by Phone
24x7 Online Chat Tech Support ^{3,4} - Select NETGEAR Business Products	24x7 Online Chat Tech Support ^{3,4} - For length of contract

[†] Except in cases of force majeure events such as war, natural disaster, strike, and other circumstances beyond reasonable control. During local non-business operating hours, English-only speaking personnel may provide the technical support.

¹ NETGEAR SMB products come with a limited warranty that is valid only if purchased from a NETGEAR authorized reseller, and covers unmodified hardware, fans and internal power supplies. Requires product registration within 90 days of purchase; see <https://www.netgear.com/about/warranty> for details. Void if product has been modified or damaged in any way. Does not apply to software or external power adapters.

² Limited Lifetime Hardware Warranty and 24/7 Online Chat Support ends 5 years after product EOL date. Does not cover software. Does not apply to external power adapters.

³ 24x7 technical support is offered in English only; all other regions follow local business hours.

⁴ 24x7 Online Chat Tech Support duration varies by product. For Limited Lifetime Warranty products, online chat support duration ends with latter of hardware warranty or paid ProSUPPORT OnCall 24/7 contract expiration.

⁵ Varies according to the duration of the ProSUPPORT contract.

⁶ Products that contain multiple units may require separate and potentially different "Category" contracts for each unit. Refer to the specific product datasheet for more details.

NETGEAR ProSUPPORT

ProSUPPORT SKU

Services	ProSUPPORT Category	ProSUPPORT Part Number	Contract
OnCall 24x7	Category S1	PMB0S11-10000S	1 year
		PMB0S31-10000S	3 year
		PMB0S51-10000S	5 year
	Category S2	PMB0S12-10000S	1 year
		PMB0S32-10000S	3 year
		PMB0S52-20000S	5 year
Category 1	PMB0311-10000S	1 year	
	PMB0331-10000S	3 year	
	PMB0351-10000S	5 year	
Category 2	PMB0312-10000S	1 year	
	PMB0332-10000S	3 year	
	PMB0352-10000S	5 year	
Category 3	PMB0313-10000S	1 year	
	PMB0333-10000S	3 year	
	PMB0353-10000S	5 year	
Category 4	PMB0314-10000S	1 year	
	PMB0334-10000S	3 year	
	PMB0354-10000S	5 year	
Professional Setup and Configuration (Remote)††	N/A	PSB0304-10000S	

†† Initial consultation and follow-up installation and setup appointment (maximum 2-hours total, additional 2-hour increments available for purchase). NETGEAR requests customers allow for up to 48-hours between initial consultation and scheduled setup/configuration call.

Availability by Product

Product Category	Product Family	Hardware Warranty ^{1,2} (yrs)	90-Days FREE 24x7 Tech Support ³	Limited Lifetime 24/7 Online Chat Tech Support ^{3,4,5}	NBD Replacement During HW Warranty Period	Extended ProSUPPORT Category ⁶
Unmanaged Essentials Switches	FS205	1 yr	Y	N	N	Category S1
	FS208	1 yr	Y	N	N	Category S1
	GS205	1 yr	Y	N	N	Category S1
	GS208	1 yr	Y	N	N	Category S1
	GS605	2 yr	Y	N	N	Category S1
	GS608	2 yr	Y	N	N	Category S1
Unmanaged SOHO Switches	GS305	3 yr	Y	N	N	Category S1
	GS305P	3 yr	Y	N	N	Category S1
	GS305PP	3 yr	Y	N	N	Category S1
	GS308	3 yr	Y	N	N	Category S1
	GS308	3 yr	Y	N	N	Category S1
	GS308P	3 yr	Y	N	N	Category S1
	GS308PP	3 yr	Y	N	N	Category S1
	GS316	3 yr	Y	N	N	Category S2
	GS316P	3 yr	Y	N	N	Category S2
	GS316PP	3 yr	Y	N	N	Category S2

NETGEAR ProSUPPORT

Availability by Product (continued)

Product Category	Product Family	Hardware Warranty ^{1,2} (yrs)	90-Days FREE 24x7 Tech Support ³	Limited Lifetime 24/7 Online Chat Tech Support ^{3,4,5}	NBD Replacement During HW Warranty Period	Extended ProSUPPORT Category ⁶
Unmanaged SOHO Switches	GS324	3 yr	Y	N	N	Category S2
	GS324P	3 yr	Y	N	N	Category 2
	GS324PP	3 yr	Y	N	N	Category 2
	GS348	3 yr	Y	N	N	Category S2
	GS348PP	3 yr	Y	N	N	Category 2
Unmanaged Business Switches	FS108	Limited Lifetime ¹	Y	Y	Y	Category S1
	JFS524	Limited Lifetime ¹	Y	Y	Y	Category S2
	GS105	Limited Lifetime ¹	Y	Y	Y	Category S1
	GS108	Limited Lifetime ¹	Y	Y	Y	Category S1
	GS116	Limited Lifetime ¹	Y	Y	Y	Category S2
	GS108LP	Limited Lifetime ¹	Y	Y	Y	Category S2
	GS108PP	Limited Lifetime ¹	Y	Y	Y	Category S2
	GS116LP	Limited Lifetime ¹	Y	Y	Y	Category S2
	GS116PP	Limited Lifetime ¹	Y	Y	Y	Category S2
	JGS516	Limited Lifetime ¹	Y	Y	Y	Category S2
	GS516PP	Limited Lifetime ¹	Y	Y	Y	Category 1
	GS516UP	Limited Lifetime ¹	Y	Y	Y	Category 1
	JGS524	Limited Lifetime ¹	Y	Y	Y	Category S2
	GS524PP	Limited Lifetime ¹	Y	Y	Y	Category 1
	GS524UP	Limited Lifetime ¹	Y	Y	Y	Category 1
	GS110MX	Limited Lifetime ¹	Y	Y	Y	Category S2
XS505M	Limited Lifetime ¹	Y	Y	Y	Category 3	
XS508M	Limited Lifetime ¹	Y	Y	Y	Category 3	
Plus SOHO Switches	GS305E	5 yr	Y	Y	N	Category S1
	GS308E	5 yr	Y	Y	N	Category S1
	GS305EP	5 yr	Y	Y	N	Category S1
	GS305EPP	5 yr	Y	Y	N	Category S1
	GS308EP	5 yr	Y	Y	N	Category S1
	GS308EPP	5 yr	Y	Y	N	Category S1
	GS316EP	5 yr	Y	Y	N	Category S1
	GS316EPP	5 yr	Y	Y	N	Category S1

NETGEAR ProSUPPORT

Availability by Product (continued)

Product Category	Product Family	Hardware Warranty ^{1,2} (yrs)	90-Days FREE 24x7 Tech Support ^{3,3}	Limited Lifetime 24/7 Online Chat Tech Support ^{3,4,5}	NBD Replacement During HW Warranty Period	Extended ProSUPPORT Category ⁶
Plus Switches	GS105E	Limited Lifetime ¹	Y	Y	Y	Category S1
	GS105PE	Limited Lifetime ¹	Y	Y	Y	Category S1
	GS108E	Limited Lifetime ¹	Y	Y	Y	Category S1
	GS108PE	Limited Lifetime ¹	Y	Y	Y	Category S1
	GS110EMX	Limited Lifetime ¹	Y	Y	Y	Category 1
	GS116E	Limited Lifetime ¹	Y	Y	Y	Category S2
	GS750E	Limited Lifetime ¹	Y	Y	Y	Category 1
	JGS516PE	Limited Lifetime ¹	Y	Y	Y	Category S2
	JGS524E	Limited Lifetime ¹	Y	Y	Y	Category S2
	JGS524PE	Limited Lifetime ¹	Y	Y	Y	Category S2
	MS108EUP	Limited Lifetime ¹	Y	Y	Y	Category 2
	XS708E	Limited Lifetime ¹	Y	Y	Y	Category 1
	XS716E	Limited Lifetime ¹	Y	Y	Y	Category 2
	XS512EM	Limited Lifetime ¹	Y	Y	Y	Category 2
	XS724EM	Limited Lifetime ¹	Y	Y	Y	Category 2
Smart SOHO Switches	GS308T	5 yr	Y	N	Y	Category S1
	GS310TP	5 yr	Y	N	Y	Category S2
	GS324T	5 yr	Y	N	Y	Category S2
	GS324TP	5 yr	Y	N	Y	Category 1
	GS348T	5 yr	Y	N	Y	Category 1
Smart Switches	FS728TP	Limited Lifetime ¹	Y	Y	Y	Category 1
	GS108T	Limited Lifetime ¹	Y	Y	Y	Category S1
	GS110TP	Limited Lifetime ¹	Y	Y	Y	Category S2
	GS510TLP	Limited Lifetime ¹	Y	Y	Y	Category S2
	GS510TP	Limited Lifetime ¹	Y	Y	Y	Category 1

NETGEAR ProSUPPORT

Availability by Product (continued)

Product Category	Product Family	Hardware Warranty ^{1,2} (yrs)	90-Days FREE 24x7 Tech Support ³	Limited Lifetime 24/7 Online Chat Tech Support ^{3,4,5}	NBD Replacement During HW Warranty Period	Extended ProSUPPORT Category ⁶	
Smart Switches	GS510TPP	Limited Lifetime ¹	Y	Y	Y	Category 1	
	GS516TP	Limited Lifetime ¹	Y	Y	Y	Category 1	
	GS716T	Limited Lifetime ¹	Y	Y	Y	Category 1	
	GS724T	Limited Lifetime ¹	Y	Y	Y	Category 1	
	GS748T	Limited Lifetime ¹	Y	Y	Y	Category 1	
	MS510TX	Limited Lifetime ¹	Y	Y	Y	Category 2	
	MS510TXPP	Limited Lifetime ¹	Y	Y	Y	Category 2	
	XS708T	Limited Lifetime ¹	Y	Y	Y	Category 1	
	XS712T	Limited Lifetime ¹	Y	Y	Y	Category 2	
	XS716T	Limited Lifetime ¹	Y	Y	Y	Category 2	
	XS728T	Limited Lifetime ¹	Y	Y	Y	Category 3	
	XS748T	Limited Lifetime ¹	Y	Y	Y	Category 4	
	Smart Switches with optional Insight Remote/ Cloud Management	GS110TPP	Limited Lifetime ¹	Y	Y	Y	Category 1
		GS110TUP	Limited Lifetime ¹	Y	Y	Y	Category 1
		GS710TUP	Limited Lifetime ¹	Y	Y	Y	Category 1
GS716TP		Limited Lifetime ¹	Y	Y	Y	Category 1	
GS716TPP		Limited Lifetime ¹	Y	Y	Y	Category 1	
GS724TP		Limited Lifetime ¹	Y	Y	Y	Category 1	
GS724TPP		Limited Lifetime ¹	Y	Y	Y	Category 1	
GS728TP		Limited Lifetime ¹	Y	Y	Y	Category 1	
GS728TPP		Limited Lifetime ¹	Y	Y	Y	Category 1	
GS752TP		Limited Lifetime ¹	Y	Y	Y	Category 2	
GS752TPP		Limited Lifetime ¹	Y	Y	Y	Category 2	
MS510TXM		Limited Lifetime ¹	Y	Y	Y	Category 1	
MS510TXUP		Limited Lifetime ¹	Y	Y	Y	Category 1	
Stackable Smart Switch Bundles		GS752TSB	Limited Lifetime ¹	Y	Y	Y	Category 2
		GS752TPSB	Limited Lifetime ¹	Y	Y	Y	Category 2
Stackable Smart Switches	GS728TX	Limited Lifetime ¹	Y	Y	Y	Category 2	
	GS728TXP	Limited Lifetime ¹	Y	Y	Y	Category 2	
	GS752TX	Limited Lifetime ¹	Y	Y	Y	Category 2	
	GS752TXP	Limited Lifetime ¹	Y	Y	Y	Category 3	

NETGEAR ProSUPPORT

Availability by Product (continued)

Product Category	Product Family	Hardware Warranty ^{1,2} (yrs)	90-Days FREE 24x7 Tech Support ³	Limited Lifetime 24/7 Online Chat Tech Support ^{3,4,5}	NBD Replacement During HW Warranty Period	Extended ProSUPPORT Category ⁶
Insight Managed Smart Cloud Switches	GC108P	5 Yr	Y	N	Y	Category S2
	GC108PP	5 Yr	Y	N	Y	Category S2
	GC510P	5 Yr	Y	N	Y	Category S2
	GC510PP	5 Yr	Y	N	Y	Category S2
	GC728X	5 Yr	Y	N	Y	Category 1
	GC728XP	5 Yr	Y	N	Y	Category 1
	GC752X	5 Yr	Y	N	Y	Category 2
	GC752XP	5 Yr	Y	N	Y	Category 2
Fully Managed Switches	GSM5212	Limited Lifetime ¹	Y	Y	Y	Category 2
	GSM7212F	Limited Lifetime ¹	Y	Y	Y	Category 2
	GSM7224	Limited Lifetime ¹	Y	Y	Y	Category 2
	GSM7224P	Limited Lifetime ¹	Y	Y	Y	Category 2
	GSM7226LP	Limited Lifetime ¹	Y	Y	Y	Category 2
	GSM7248	Limited Lifetime ¹	Y	Y	Y	Category 3
	GSM7248P	Limited Lifetime ¹	Y	Y	Y	Category 3
	GSM4212P	Limited Lifetime ¹	Y	Y	Y	Category 2
	GSM4212PX	Limited Lifetime ¹	Y	Y	Y	Category 2
	GSM4212UX	Limited Lifetime ¹	Y	Y	Y	Category 2
	MSM4214X	Limited Lifetime ¹	Y	Y	Y	Category 2
	XSM4216F	Limited Lifetime ¹	Y	Y	Y	Category 2
	GSM4210P	Limited Lifetime ¹	Y	Y	Y	Category 2
	GSM4328PA	Limited Lifetime ¹	Y	Y	Y	Category 3
	GSM4328PB	Limited Lifetime ¹	Y	Y	Y	Category 3
	GSM4328S	Limited Lifetime ¹	Y	Y	Y	Category 3
	GSM4352PA	Limited Lifetime ¹	Y	Y	Y	Category 3
	GSM4352PB	Limited Lifetime ¹	Y	Y	Y	Category 3
	GSM4352S	Limited Lifetime ¹	Y	Y	Y	Category 3
	XSM4316PA	Limited Lifetime ¹	Y	Y	Y	Category 3
	XSM4316PB	Limited Lifetime ¹	Y	Y	Y	Category 3
	XSM4316S	Limited Lifetime ¹	Y	Y	Y	Category 3
	XSM4324CS	Limited Lifetime ¹	Y	Y	Y	Category 4
	XSM4324FS	Limited Lifetime ¹	Y	Y	Y	Category 4
	XSM4324S	Limited Lifetime ¹	Y	Y	Y	Category 4
	XSM4348CS	Limited Lifetime ¹	Y	Y	Y	Category 4

NETGEAR ProSUPPORT

Availability by Product (continued)

Product Category	Product Family	Hardware Warranty ^{1,2} (yrs)	90-Days FREE 24x7 Tech Support ³	Limited Lifetime 24/7 Online Chat Tech Support ^{3,4,5}	NBD Replacement During HW Warranty Period	Extended ProSUPPORT Category ⁶	
Fully Managed Switches	XSM4348FS	Limited Lifetime ¹	Y	Y	Y	Category 4	
	XSM4348S	Limited Lifetime ¹	Y	Y	Y	Category 4	
	XSM4396K0	Limited Lifetime ¹	Y	Y	Y	Category 4	
	XSM4396K1	Limited Lifetime ¹	Y	Y	Y	Category 4	
	CSM4532	Limited Lifetime ¹	Y	Y	Y	Category 4	
	XSM4556	Limited Lifetime ¹	Y	Y	Y	Category 4	
	GSM7328FS	Limited Lifetime ¹	Y	Y	Y	Category 3	
	Fully Managed Switch Chassis and Modules	XCM8903SK	Limited Lifetime ¹	Y	Y	Y	Category 4
XCM8903SX		Limited Lifetime ¹	Y	Y	Y	Category 4	
XCM8903SF		Limited Lifetime ¹	Y	Y	Y	Category 4	
Wireless 802.11ac Access Points	WAC104	3 Yr	Y	N	N	Category S1	
	WAC124	3 Yr	Y	N	N	Category S1	
	WAC510	5 Yr	Y	N	Y	Category S2	
	WAC510PA	5 Yr	Y	N	Y	Category S2	
	WAC510B03	5 Yr	Y	N	Y	Category S2	
	WAC510P8	5 yr	Y	N	Y	Category 1	
	WAC540	5 yr	Y	N	Y	Category 1	
	WAC540B03	5 Yr	Y	N	Y	Category 1	
	WAC540PA	5 Yr	Y	N	Y	Category 1	
	WAC720	Limited Lifetime ¹	Y	Y	Y	Category 1	
	WAC720B03	Limited Lifetime ¹	Y	Y	Y	Category 1	
	WAC730	Limited Lifetime ¹	Y	Y	Y	Category 1	
	WAC730B03	Limited Lifetime ¹	Y	Y	Y	Category 1	
	WAC740	Limited Lifetime ¹	Y	Y	Y	Category 1	
	WBC502	5 Yr	Y	N	Y	Category 1	
	WBC502B2	5 Yr	Y	N	Y	Category 1	
	Wireless 802.11ax Access Points	WAX610	5 Yr	Y	N	Y	Category 1
		WAX610PA	5 Yr	Y	N	Y	Category 1
		WAX610Y	5 Yr	Y	N	Y	Category 1
	Wireless 802.11n Access Points	WN370	Limited Lifetime ¹	Y	Y	Y	Category 1
WND930		Limited Lifetime ¹	Y	Y	Y	Category 2	

NETGEAR ProSUPPORT

Availability by Product (continued)

Product Category	Product Family	Hardware Warranty ^{1,2} (yrs)	90-Days FREE 24x7 Tech Support ³	Limited Lifetime 24/7 Online Chat Tech Support ^{3,4,5}	NBD Replacement During HW Warranty Period	Extended ProSUPPORT Category ⁶
Wireless 802.11ax Access Points	WAX202	3 Yr	Y	N	N	Category S2
	WAX204	3 Yr	Y	N	N	Category S2
	WAX206	3 Yr	Y	N	N	Category S1
	WAX214	3 Yr	Y	N	N	Category S2
	WAX214PA	3 Yr	Y	N	N	Category S2
	WAX218	3 Yr	Y	N	N	Category 1
	WAX218PA	3 Yr	Y	N	N	Category 1
	WAX610	5 Yr	Y	Y	Y	Category 1
	WAX610PA	5 Yr	Y	Y	Y	Category 1
	WAX610Y	5 Yr	Y	Y	Y	Category 1
	WAX620	5 Yr	Y	N	Y	Category 1
	WAX620PA	5 Yr	Y	N	Y	Category 1
	WAX630	5 Yr	Y	N	Y	Category 2
	WAX630PA	5 Yr	Y	N	Y	Category 2
	WAX630E	5 Yr	Y	N	Y	Category 2
	WAX630EP	5 Yr	Y	N	Y	Category 2
Wireless Management Bundles	WB7520	Limited Lifetime ¹	Y	Y	Y	Category 3
	WB7530	Limited Lifetime ¹	Y	Y	Y	Category 3
	WB7620	Limited Lifetime ¹	Y	Y	Y	Category 4
Wireless Management Systems	WC7500	Limited Lifetime ¹	Y	Y	Y	Category 3
	WC7600	Limited Lifetime ¹	Y	Y	Y	Category 3
	WC9500	Limited Lifetime ¹	Y	Y	Y	Category 4
WiFi Systems - Orbi Pro	SRK60	5 Yr	Y	N	Y	Category 1
	SRK60B03	5 Yr	Y	N	Y	Category 1
	SRK60B04	5 Yr	Y	N	Y	Category 1
	SRK60B05	5 Yr	Y	N	Y	Category 1
	SRK60B06	5 Yr	Y	N	Y	Category 1
	SRR60	5 Yr	Y	N	Y	Category 1
	SRS60	5 Yr	Y	N	Y	Category 1
	SRC60	5 Yr	Y	N	Y	Category 1
	SXK80	5 Yr	Y	N	Y	Category 2
	SXK80B3	5 Yr	Y	N	Y	Category 2
	SXK80B4	5 Yr	Y	N	Y	Category 2
	SXR80	5 Yr	Y	N	Y	Category 1
	SXS80	5 Yr	Y	N	Y	Category 1
	SXK50	5 Yr	Y	N	Y	Category 2
	SXK50B3	5 Yr	Y	N	Y	Category 2
	SXR50	5 Yr	Y	N	Y	Category 1
	SXS50	5 Yr	Y	N	Y	Category 1

NETGEAR ProSUPPORT

Availability by Product (continued)

Product Category	Product Family	Hardware Warranty ^{1,2} (yrs)	90-Days FREE 24x7 Tech Support ³	Limited Lifetime 24/7 Online Chat Tech Support ^{3,4,5}	NBD Replacement During HW Warranty Period	Extended ProSUPPORT Category ⁶	
WiFi Systems - Orbi Pro	SRK60	5 Yr	Y	N	Y	Category 1	
	SRK60B03	5 Yr	Y	N	Y	Category 1	
	SRK60B04	5 Yr	Y	N	Y	Category 1	
	SRK60B05	5 Yr	Y	N	Y	Category 1	
	SRK60B06	5 Yr	Y	N	Y	Category 1	
	SRR60	5 Yr	Y	N	Y	Category 1	
	SRS60	5 Yr	Y	N	Y	Category 1	
	SRC60	5 Yr	Y	N	Y	Category 1	
	SXK80	5 Yr	Y	N	Y	Category 2	
	SXK80B3	5 Yr	Y	N	Y	Category 2	
	SXK80B4	5 Yr	Y	N	Y	Category 2	
	ReadyNAS Desktop RN210 Series	RN21200	3 Yr	Y	N	Y	Category 1
		RN212D22	3 Yr	Y	N	Y	Category 1
		RN21400	3 Yr	Y	N	Y	Category 2
RN214D42		3 Yr	Y	N	Y	Category 2	
ReadyNAS Desktop RN420 Series	RN42200	5 Yr	Y	N	Y	Category 2	
	RN422D2	5 Yr	Y	N	Y	Category 2	
	RN422D4	5 Yr	Y	N	Y	Category 2	
	RN422D6	5 Yr	Y	N	Y	Category 2	
	RN422E2	5 Yr	Y	N	Y	Category 2	
	RN422E4	5 Yr	Y	N	Y	Category 2	
	RN422E6	5 Yr	Y	N	Y	Category 2	
	RN42400	5 Yr	Y	N	Y	Category 2	
	RN424D2	5 Yr	Y	N	Y	Category 2	
	RN424D4	5 Yr	Y	N	Y	Category 2	
	RN424D6	5 Yr	Y	N	Y	Category 2	
	RN424E2	5 Yr	Y	N	Y	Category 2	
	RN424E4	5 Yr	Y	N	Y	Category 2	
RN424E6	5 Yr	Y	N	Y	Category 2		
ReadyNAS Desktop RN620X Series	RN626X00	5 Yr	Y	N	Y	Category 3	
	RN626XE4	5 Yr	Y	N	Y	Category 3	
	RN626XE6	5 Yr	Y	N	Y	Category 3	

NETGEAR ProSUPPORT

Availability by Product (continued)

Product Category	Product Family	Hardware Warranty ^{1,2} (yrs)	90-Days FREE 24x7 Tech Support ³	Limited Lifetime 24/7 Online Chat Tech Support ^{3,4,5}	NBD Replacement During HW Warranty Period	Extended ProSUPPORT Category ⁶
ReadyNAS Rackmount RR2300 Series	RR230400	5 Yr	Y	N	Y	Category 2
	RR2304G2	5 Yr	Y	N	Y	Category 2
	RR2304G4	5 Yr	Y	N	Y	Category 2
	RR2304G6	5 Yr	Y	N	Y	Category 2
	RR231200	5 Yr	Y	N	Y	Category 3
	RR331200	5 Yr	Y	N	Y	Category 4
	RR2312G4	5 Yr	Y	N	Y	Category 3
	RR3312G4	5 Yr	Y	N	Y	Category 4
	RR2312G6	5 Yr	Y	N	Y	Category 3
	RR3312G6	5 Yr	Y	N	Y	Category 4
	RR2312G8	5 Yr	Y	N	Y	Category 3
	RR2312H8	5 Yr	Y	N	Y	Category 3
ReadyNAS Rackmount RN3100 Series	RN3138	5 Yr	Y	N	Y	Category 3
	RN31842E	5 Yr	Y	N	Y	Category 3
	RN31844E	5 Yr	Y	N	Y	Category 3
ReadyNAS Rackmount RR3300 Series	RR3312G2	5 Yr	Y	N	Y	Category 4
	RR3312G4	5 Yr	Y	N	Y	Category 4
	RR3312G6	5 Yr	Y	N	Y	Category 4
	RR331200	5 Yr	Y	N	Y	Category 4
ReadyNAS Rackmount RR4300 Series	RR4312S0	5 Yr	Y	N	Y	Category 4
	RR4312S0	5 Yr	Y	N	Y	Category 4
	RR4312S4	5 Yr	Y	N	Y	Category 4
	RR4312S4	5 Yr	Y	N	Y	Category 4
	RR4312S6	5 Yr	Y	N	Y	Category 4
	RR4312S8	5 Yr	Y	N	Y	Category 4
	RR4312X0	5 Yr	Y	N	Y	Category 4
	RR4312X0	5 Yr	Y	N	Y	Category 4
	RR4312X4	5 Yr	Y	N	Y	Category 4
	RR4312X4	5 Yr	Y	N	Y	Category 4
	RR4312X6	5 Yr	Y	N	Y	Category 4
	RR4312X8	5 Yr	Y	N	Y	Category 4
ReadyNAS Rackmount RR4300 Series	RR4360X0	5 Yr	Y	N	Y	Category 4
	RR4360S0	5 Yr	Y	N	Y	Category 4



CONNECTED HOME PRODUCTS



NIGHTHAWK®

Advance the way you WiFi

NETGEAR Nighthawk brand is known for the most advanced, high-performance WiFi technology and home networking products of its time. Nighthawk products are full-featured, customizable home networking solutions with advanced utility well beyond just Internet connectivity. Innovation with cutting edge WiFi and networking technology are hallmarks to NETGEAR Nighthawk.

From the world's fastest WiFi routers and mobile routers, to next generation WiFi range extenders, cable and WiFi adapters, Nighthawk products stand out on speed, performance, and reliability. Using

the fastest dual and quad-core processors available, Nighthawk breaks network speed barriers with innovative WiFi technology and wired connectivity. The Nighthawk WiFi routers and extenders offer reliable coverage throughout very large homes with the capability to support the latest connected devices for the smart home.

Nighthawk WiFi products' iconic looks, powerful antennas and elegant LED displays have won internationally recognized awards for excellence in product design.

Advanced features

The fastest available WiFi 5, WiFi 6, and WiFi 6E speeds

High-end processors for optimized performance

Feature-rich products with technologies such as Dynamic QoS, Beamforming+, FastLane, VPN, OFDMA, and Smart Connect

Gigabit and Multi-Gig Ethernet ports for faster file sharing and transfers

Port aggregation to improve the aggregated file transfer speed

USB 3.0 ports for backup and easy access to your stored media

High-performance antennas for better WiFi coverage and faster speeds

Nighthawk solutions are the most customizable home networking solutions with advanced utility well beyond just Internet connectivity. The latest software integrations include:

NETGEAR Armor™ Powered by Bitdefender®

ReadySHARE USB

NETGEAR Smart Parental Controls

Voice Control using Amazon Alexa and the Google Assistant

Learn more: www.netgear.com/nighthawk



ORBI™ WHOLE HOME MESH WIFI SYSTEMS

Enjoy faster, stronger, smarter WiFi for your entire home.
Better WiFi. Everywhere.

Orbi™ WiFi 6 and WiFi 6E Systems are built with the latest and fastest WiFi 6 technology to provide the ultimate smart home experience with WiFi coverage and connection capacity beyond belief.

Keep your WiFi connections strong, throughout your home, all the time with enough bandwidth for all your devices, multiple 4K/8K UHD streaming, music for your WiFi connected speakers, online games, smart lights, WiFi security devices and more.

Dedicated quad-stream WiFi 6 backhaul allows for streaming 4K or 8K videos without delay. These systems are ideal for Gigabit and multi-gigabit Internet speed service, supporting up to 2.5Gbps download speeds. Our Orbi Whole Home Mesh lineup has options with and without a built-in DOCSIS 3.1 Cable Model. With a piece of mind security option, all Orbi products support NETGEAR Armor™, delivering advanced cyber threat protection for your home and all your devices and making your Orbi WiFi home network even more secure.

Learn more: www.netgear.com/orbi



WELCOME TO ULTRA-FAST, NEXT-GENERATION WIFI

WiFi 6E is the latest leap in WiFi, delivering a massive increase in speed and device capacity. It gives WiFi 6E-compatible devices VIP access to an all-new 6GHz band, where they'll experience faster WiFi and lower network congestion. With WiFi 6E, your smart home can stream 4K and 8K video, experience lag-free gaming, and enjoy interruption-free video conferencing all at once, without any impact on speed or performance.



5G: A NEW ERA SPEED AND POWER

5G delivers next-level capabilities, offering up to 10X more speed than 4G and 10x the capacity*. So it's faster, even in densely populated areas where more devices are competing for competition. The result is an unparalleled Internet experience, where even speed-intensive activities like 4K streaming and VR gaming are possible.

* 5G 10X speed and low latency claim is based on ITU vision for IMT-2020 compared to IMT-advanced

HOME NETWORKING PRODUCTS

NETGEAR M5 5G WiFi 6 Mobile Router



NETGEAR Mobile Routers elevate the secure mobile WiFi experience for your business and your teams. The NETGEAR® Nighthawk® M5 Mobile Router brings WiFi 6 together with 5G, combining the latest WiFi and cellular technologies to deliver blazing fast 5G or LTE speeds to all your connected devices. Fast speed for downloading, streaming and media sharing - everything you do at the office, can now be done virtually anywhere you go. NETGEAR Mobile Routers are also remote manageable with NETGEAR Insight Pro.

Learn more: netgear.com/home/mobile-wifi/hotspots/mr5200/

NETGEAR Nighthawk M1 4G LTE Mobile Router



NETGEAR Mobile Routers elevate the secure mobile WiFi experience for your business and your teams.

The Nighthawk M1 Mobile Router is the world's first commercial Gigabit Class LTE Mobile Router to achieve maximum download speeds of 1Gbps and provides the best Internet connection experience possible whether it is used on-the-go, at home, or during business travel. NETGEAR Mobile Routers are also remote manageable with NETGEAR Insight Pro.

Learn more: netgear.com/home/mobile-wifi/hotspots/mr1100/

NIGHTHAWK® WiFi ROUTERS

Leading the New Era of WiFi

Nighthawk® RAXE500 Tri-Band WiFi Router



NETGEAR® Nighthawk® Tri-band RAXE500 WiFi Router uses the latest WiFi 6E technology to provide faster speeds and less congestion with up to 200% more spectrum than dual-band. Now you can enjoy blazing-fast speed, smoother streaming, and lower latency when using high-bandwidth applications like 4K/8K video streaming and AR/VR gaming. This router keeps up with everything you do in your hyper-connected home.

Learn more: netgear.com/home/wifi/routers/raxe500/

Nighthawk® RAXE300 Tri-Band WiFi 6E Router



Unleash ultra-fast 7.8Gbps† speeds and experience WiFi 6E's new 6GHz "express lane" with the NETGEAR® Nighthawk® RAXE300 Tri-Band WiFi 6E Router. With eight WiFi streams and unmatched performance, the RAXE300 boosts capacity and reduces interference for smoother 4k/8K video streaming and AR/VR gaming. Your most demanding tech gets wired connections with one 2.5G and five Gigabit Ethernet ports. Sending maximum Gigabit Internet speeds across your 2,500-square-foot home, this exceptional value keeps up with everything your family does.

Learn more: netgear.com/home/wifi/routers/raxe300/

† Maximum wireless signal rate derived from IEEE® 802.11 specifications. Actual data throughput and wireless coverage will vary and be lowered by network and environmental conditions, including network traffic volume, device limitations, and building construction. NETGEAR makes no representations or warranties about this product's compatibility with future standards. Up to 7,800Mbps wireless speeds achieved when connecting to other 802.11ax 7800Mbps devices.

Nighthawk® AX4 4G LTE Modem + WiFi 6 Router




Maximize your speeds in your home office or business premises where cable, DSL or fiber Internet are limited or unavailable. Plug in an active SIM card from your service provider and instantly access the LTE network for your laptop, payment processing system or any device. Also works with any WiFi router or system.

Learn more: netgear.com/home/mobile-wifi/routers/lax20/

SMART PARENTAL CONTROLS AND ARMOR

Add-in Services


NETGEAR Smart Parental Controls™



NETGEAR Smart Parental Controls™ is an easy way for parents to manage their kids' time online across their connected devices.

Learn more: netgear.com/home/services/smart-parental-controls/

NETGEAR Armor™ Powered by Bitdefender®

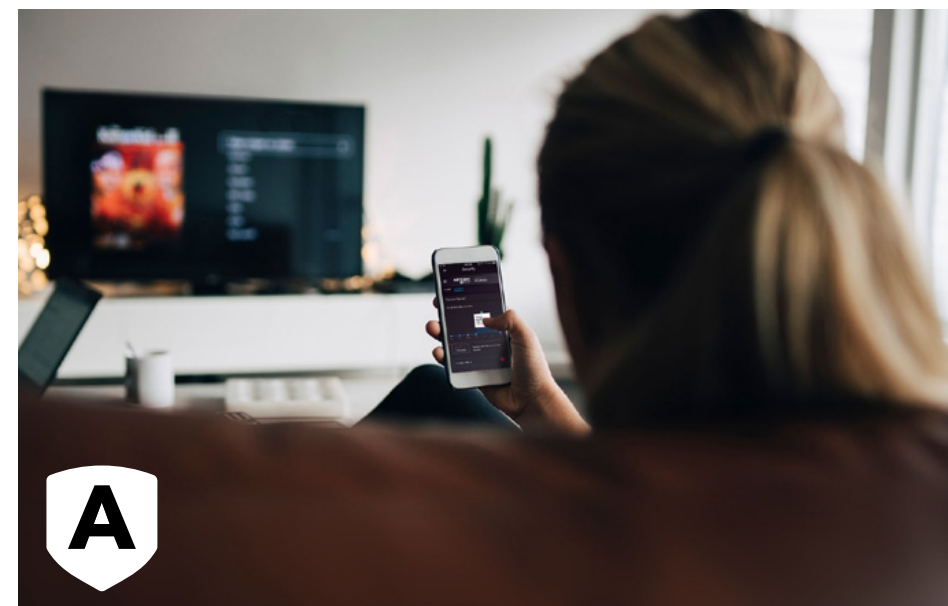

NETGEAR Armor™ is the one-stop Internet security solution for your home that delivers added protection and greater peace of mind.

Learn more: netgear.com/home/services/armor/