



SCORPION

PRODUCT CATALOG

DRYWALL, FRAMING, DECK AND ACOUSTICAL FASTENERS

www.scorpionscrews.com



TABLE OF CONTENTS

Scorpion Categories Fastener Selector Guide Scorpion Color Guide

Page 3

Page 3

Page 4

Drywall

Page 5-6

Bugle Head Drywall Laminator Screw	5
Type HT Bugle Head Drywall Screw	5
Bugle Head Construction Screw	5
Bugle Head Construction Screw	5
Flat Head Interior Grade Construction Screw	6

Light Gauge Metal Framing (25-20 ga.)

Page 6-8

Type S/P Pan Head Framing Screw	6
Type S/P Low Profile Pan Head Framing Screw	6
Type S/P Bugle Head Drywall Screw, Gray Phosphate	6
Type S/P Bugle Head Drywall Screw, Zinc	7
Type SST Bugle Head Drywall Screw	7
Type SSTZ Bugle Head Drywall Screw	7
Type S/P Lath Head Screw	7
Type SPTR Trim Head Screw	8

Heavy Gauge Metal (20-12 ga.)

Page 8-10

Type D/P Framing Screw, Clear Zinc	8
Type D/P Framing Screw, Gray Phosphate	8
Type D/P Low Profile Pan Head Framing Screw	8
Type D/P Super-Tek Framing Screw	8
Type D/P Low Profile Super-Tek Framing Screw	9
Type D/P Drywall Screw	9
Type DPXT Sheathing Exterior Screw	9
Type D/P Drywall Screw	10
Type D/P Lath Head Drywall Screw	10
Type DPTR Drywall Trim Head Screw	10

Cement Board to Wood & Metal

Page 11

Type INSP Indenter High-Low Cement Board Screw	11
Type BBSP Wafer Head Backer Board Screw	11
Type INDP Indenter Cement Board Screw	11

Heavy Gauge Metal Framing

Page 12-14

Type T2H Hex Washer Head Framing Screw	12
Type T2P Pan Head Framing Screw	12
Type T3P Pan Head Framing Screw	12
Type T3HH High Hex Head Framing Screw	12
Type T3H Hex Washer Head Framing Screw	13
Type T4H Hex Head Framing Screw	13
Type T5H Hex Head Framing Screw	14

Wood to Metal

Page 14-16

PlyLite® Screw	14
Type T3PB Bugle Head PHB Sheathing Screw	15
Type T3PF Flat Head Winged Sheathing Screw	15
Type T3PW Flat Head Winged Sheathing Screw	15
Hex Head Neoprene Washer Metal Siding Screw	15
T3H Hex Neoprene Washer Head Metal Sheathing Screw	16
Type T4PF Flat Head Winged Sheathing Screw	16
Type T5PF Flat Head Sheathing Screw	16

Wood to Wood

Page 17

Type XT Flat Head Exterior Deck and Fence Screw	17
Type XT Trim Head Exterior Deck and Fence Screw	17

Stainless Steel

Page 18-19

Type ST 305 Stainless Steel Exterior Screw	18
Stainless 305 Trim Head Deck and Fence Screw	18
Painted Trim Head Stainless 305 Screw	19

Driver Accessories

Page 19

Nails

Page 19

Type CC Cement Coated Smooth Shank

Acoustical Fasteners

Page 20-21

Acoustical Drill Point Eye Lag Screw	20
Acoustical Eye Lag Screw	20
Acoustical Pierce Point Eye Lag Screw	20
Acoustical Eye Lag Pole	20
Tension Pins	20
Wedge Anchor	20
SpringShot	21
Scorpion 2 Hole Angle Brackets	21
Acoustical Pre-Tie Hanger Wire	21
Acoustical Straight Wire	21
Acoustical Fence Staples Galvanized	21
Acoustical Spool Wire	22
Acoustical U-Hank Wire	22
Rivets	22

EZ Framing Collars

Page 22

Coatings and Finishes

Page 23





SELF DRILLING FASTENERS SELECTOR GUIDE



PERFORMANCE RANGE			
SCREW DIAMETER	POINT NUMBER	RANGE	MAXIMUM
8	2	.035 - .100	1/8
10	3	.110 - .175	3/16
12	3	.110 - .210	3/16
14	3	.110 - .210	3/16
12	4	.175 - .250	1/4
12	5	.250 - .500	1/2

"SCORPION QUICK-PICK™"							
<ul style="list-style-type: none"> FIND YOUR APPLICATION FROM GROUP A (for example: 20 ga. to 18 ga.) USE SCREW FROM GROUP B. When approaching maximum, use next screw size up. 							
A	GAUGE OF STEEL APPLICATION	20 to 20	18-18	16-16	14 to 14	14-12	STRUCTURAL TO 1/2
		20 to 20	18-16	16-14	14 to 12	12-12	
		18 to 18	16-16	14-14	-	1/4	
B	USE SCREW	#8 DIA.	#10 DIA.	#12 DIA.	#14 DIA.	#12 DIA.	#12 DIA.
		2 POINT	3 POINT	3 POINT	3 POINT	4 POINT	5 POINT

SHEET STEEL GAUGE									
GAUGE NO.	25	20	18	16	14	12	10	1/4	1/2
DECIMAL EQUIVALENT	0.019	0.035	0.045	0.057	0.071	0.102	0.124	0.250	0.500

Self Drilling fasteners listed are stock sizes. Specialty styles, lengths, and finishes are available.

CALL SCORPION INFO LINE 800 • 477 • 8876





SCORPION COLOR GUIDE

★ One (1) and Five (5) pound packs are estimated quantity piece counts.

Coarse Thread



Type HT (Coarse thread) drywall fasteners for wood studs and wood to wood applications.



Type S/P — Fine Thread



Type S/P (Fine Thread) drywall fasteners for light gauge metal studs and general purpose fastening up to 20 gauge.



Type SST™ — SuperThread



Type SST (SuperThread) drywall fasteners system for wood and metal studs up to 20 gauge.



Type D/P — Drill Point Drywall



Type D/P (Drill Point) drywall fasteners for metal studs up to 12 gauge.



Self Drilling Construction



General construction fasteners for steel up to 1/2-in thick.



Ceramic Coated



Type XT (Ceramic Coated) fasteners for outdoor use in fence and decking.



Stainless Steel



Type ST (Stainless Steel) fasteners for outdoor use in fence and decking.



Acoustical



Acoustical fasteners for attaching ceilings.





COARSE THREAD

Bugle Head Drywall Laminator Screw ◆



For temporary fastening of gypsum to gypsum.

- No. 2 Phillips recess
- Bugle head
- Coarse thread

Coating: Gray phosphate


Bit: ZP2 (No. 2 Phillips)

COARSE THREAD Drywall to Drywall

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
10 x 1-1/2-in	LAM / 5,000	LAMCP / 500	LAMFP / 675	LAMPP / 135

Use with Grabber drywall adhesive, item number: **GDWAW**

Type HT Bugle Head Drywall Screw ◆



Designed for attaching gypsum board to wood studs, and general purpose wood to wood applications

- No. 2 Phillips recess
- Bugle head
- Coarse thread

Coating: Gray phosphate

Bit: ZP2 (No. 2 Phillips)

COARSE THREAD Drywall to Wood

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
6 x 1-in	HT100 / 10,000	HT100CP / 1,000	HT100FP / 1,650	HT100PP / 330
6 x 1-1/8-in	HT118 / 10,000	HT118CP / 1,000	HT118FP / 1,450	HT118PP / 290
6 x 1-1/4-in	HT114 / 8,000	HT114CP / 1,000	HT114FP / 1,325	HT114PP / 265
6 x 1-5/8-in	HT158 / 5,000	HT158CP / 500	HT158FP / 1,100	HT158PP / 220
6 x 2-in	HT200 / 3,500	HT200CP / 500	HT200FP / 900	HT200PP / 180
6 x 2-1/4-in	HT214 / 3,000	HT214CP / 350	HT214FP / 750	HT214PP / 150
8 x 2-1/2-in	HT212 / 2,500	HT212CP / 250	HT212FP / 550	HT212PP / 110
8 x 3-in	HT300 / 2,000	HT300CP / 250	HT300FP / 450	HT300PP / 90
10 x 3-1/2-in	HT312 / 1,000	HT312CP / 200	HT312FP / 275	HT312PP / 55
10 x 4-in	HT400 / 1,000	HT400CP / 200	HT400FP / 250	HT400PP / 50

Bugle Head Construction Screw ◆



Designed for attaching gypsum board to wood studs, and general purpose wood to wood applications

- No. 2 Phillips recess
- Bugle head
- Coarse thread

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

COARSE THREAD Drywall to Wood

SIZE	BULK ITEM NO/PCS
6 x 1-1/4-in	HT114Z / 8,000
6 x 1-5/8-in	HT158Z / 5,000
6 x 2-in	HT200Z / 3,500
8 x 2-1/2-in	HT212Z / 2,500
8 x 3-in	HT300Z / 2,000



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Bugle Head Construction Screw ◆



Designed for attaching gypsum board to wood studs, and general purpose wood to wood applications

- No. 2 Phillips recess
- Bugle head
- Coarse thread

Coating: Yellow Zinc


Bit: ZP2 (No. 2 Phillips)

COARSE THREAD Drywall to Wood

SIZE	BULK ITEM NO/PCS
6 x 1-1/4-in	HTYZ114 / 8,000
6 x 1-5/8-in	HTYZ158 / 5,000
6 x 2-in	HTYZ200 / 3,000
8 x 2-1/2-in	HTYZ212 / 2,500
8 x 3-in	HTYZ300 / 2,000



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

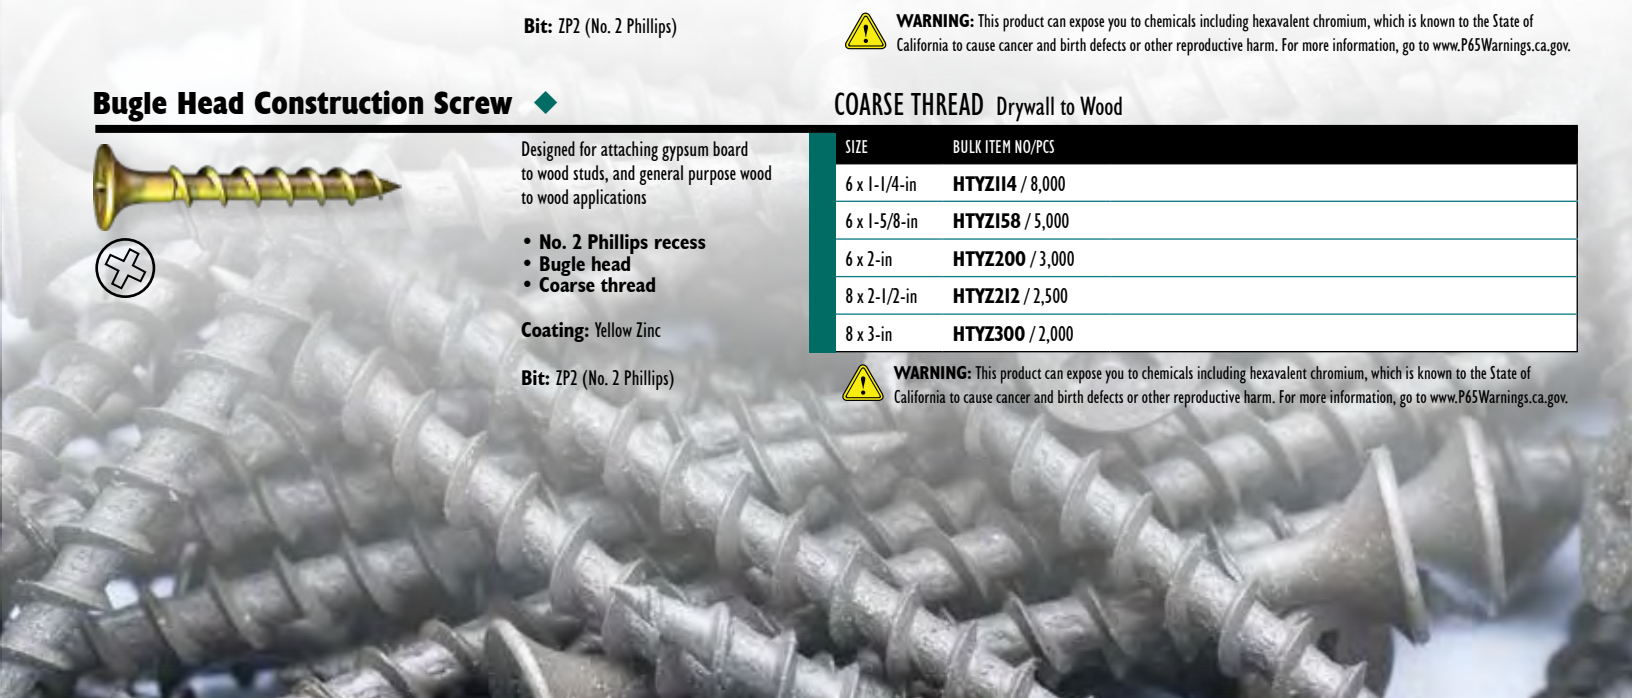



Flat Head Interior Grade Construction Screw ◆



Designed for attaching wood to wood studs, and general purpose wood to wood applications

- No. 2 Square recess
- Flat head
- Coarse thread
- Type 17 Point

Coating: Clear Zinc

Bit: ZSQ2 (No. 2 Square)

COARSE THREAD Wood to Wood

SIZE	BULK ITEM NO/PCS
8 x 3/4-in	HT8034Z / 10,000
8 x 1-in	HT8100Z / 13,000
8 x 1-1/4-in	HT8114Z / 8,000
8 x 1-1/2-in	HT8112Z / 6,000
8 x 1-3/4-in	HT8134Z / 4,000
8 x 2-in	HT8200Z / 3,500
8 x 2-1/4-in	HT8214Z / 3,000
8 x 2-1/2-in	HT8212Z / 2,500
8 x 3-in	HT8300Z / 2,000



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

LIGHT GAUGE METAL FRAMING

Type S/P Pan Head Framing Screw ◆



Type S/P light gauge steel framing screws for metal framing up to 20 gauge.

- No. 2 Phillips recess
- Pan head
- Serration under head
- Fine thread

Coating: Gray Phosphate

Bit: ZP2 (No. 2 Phillips)

FINE THREAD Light Gauge Metal to Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
7 x 7/16-in	SP716 / 15,000	SP716CP / 1,500	SP716FP / 1,900	SP716PP / 380

Type S/P Low Profile Pan Head Framing Screw ◆



Type S/P light gauge steel framing screws for metal framing up to 20 gauge.

- No. 2 Phillips recess
- Low profile pan head
- Fine thread
- Sharp point

Coating: Gray Phosphate

Bit: ZP2 (No. 2 Phillips)

FINE THREAD Light Gauge Metal to Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
6 x 7/16-in	SP716L / 10,000	SP716LCP / 1,500	SP716LFP / 2,750	SP716LPP / 550

Type S/P Bugle Head Drywall Screw ◆



Type S/P fine thread screws designed for attaching gypsum board and other materials up to 20 gauge metal studs.

- No. 2 Phillips recess
- Bugle head
- Fine thread
- Sharp point

Coating: Gray Phosphate

Bit: ZP2 (No. 2 Phillips)

FINE THREAD Drywall to Wood or Light Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
6 x 1-in	SPI00 / 10,000	SPI00CP / 1,000	SPI00FP / 1,650	SPI00PP / 330
6 x 1-1/8-in	SPI18 / 10,000	SPI18CP / 1,000	SPI18FP / 1,450	SPI18PP / 290
6 x 1-1/4-in	SPI14 / 8,000	SPI14CP / 1,000	SPI14FP / 1,325	SPI14PP / 265
6 x 1-5/8-in	SPI58 / 5,000	SPI58CP / 500	SPI58FP / 1,100	SPI58PP / 220
6 x 2-in	SP200 / 3,500	SP200CP / 500	SP200FP / 900	SP200PP / 180
6 x 2-1/4-in	SP214 / 3,000	SP214CP / 350	SP214FP / 750	SP214PP / 150
8 x 2-1/2-in	SP212 / 2,500	SP212CP / 250	SP212FP / 550	SP212PP / 110
8 x 3-in	SP300 / 2,000	SP300CP / 250	SP300FP / 450	SP300PP / 90
10 x 3-1/2-in	SP312 / 1,000	SP312CP / 200	SP312FP / 275	SP312PP / 55
10 x 4-in	SP400 / 1,000	SP400CP / 200	SP400FP / 250	SP400PP / 50



Type S/P Bugle Head Drywall Screw



Type S/P fine thread screws designed for attaching gypsum board and other materials up to 20 gauge metal studs.

- No. 2 Phillips recess
- Bugle head
- Fine thread
- Sharp point

Coating: Zinc

Bit: ZP2 (No. 2 Phillips)

FINE THREAD Drywall to Wood or Light Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
6 x 1-in	SPI00Z / 10,000	SPI00ZCP / 1,000	SPI00ZFP / 1,650	SPI00ZPP / 330
6 x 1-1/4-in	SPII4Z / 8,000	SPII4ZCP / 1,000	SPII4ZFP / 1,325	SPII4PP / 265

Type SST Bugle Head Drywall Screw



Type SST Scorpion Superthread screws are designed for attaching gypsum boards to wood or light gauge steel studs up to 20 gauge. This special alternating thread combining coarse and fine thread increases holding power and reduces strip-outs.

- No. 2 Phillips recess
- Bugle head
- Scorpion Superthread
- High-Low thread

Coating: Gray Phosphate

Bit: ZP2 (No. 2 Phillips)

SUPERTHREAD Drywall to Wood or Light Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
6 x 3/4-in	SST034 / 12,000	SST034CP / 1,500	SST034FP / 2,125	SST034PP / 425
6 x 1-in	SST100 / 10,000	SST100CP / 1,000	SST100FP / 1,625	SST100PP / 325
6 x 1-1/4-in	SSTI14 / 8,000	SSTI14CP / 1,000	SSTI14FP / 1,300	SSTI14PP / 260
6 x 1-5/8-in	SSTI58 / 5,000	SSTI58CP / 500	SSTI58FP / 1,075	SSTI58PP / 215
6 x 2-in	SST200 / 3,500	SST200CP / 500	SST200FP / 875	SST200PP / 175
7 x 2-1/4-in	SST214 / 3,000	SST214CP / 350	SST214FP / 700	SST214PP / 140
8 x 2-1/2-in	SST212 / 2,500	SST212CP / 250	SST212FP / 525	SST212PP / 105
8 x 3-in	SST300 / 2,000	SST300CP / 250	SST300FP / 425	SST300PP / 85
10 x 3-1/2-in	SST312 / 1,000	SST312CP / 200	SST312FP / 275	SST312PP / 55
10 x 4-in	SST400 / 1,000	SST400CP / 200	SST400FP / 250	SST400PP / 50
10 x 4-1/2-in	SST412 / 1,000	SST412CP / 150	SST412FP / 220	
10 x 5-in	SST500 / 1,000	SST500CP / 150	SST500FP / 200	
10 x 6-in	SST600 / 1,000		SST600FP / 165	

Type SSTZ Bugle Head Drywall Screw



Type SST Scorpion Superthread screws are designed for attaching gypsum boards to wood or light gauge steel studs up to 20 gauge. This special alternating thread combining coarse and fine thread increases holding power and reduces strip-outs.

- No. 2 Phillips recess
- Bugle head
- Scorpion Superthread
- High-Low thread

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

SUPERTHREAD Drywall to Wood or Light Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS
6 x 1-1/4-in	SSTZ14 / 8,000	SSTZ14CP / 1,000
6 x 1-5/8-in	SSTZ158 / 5,000	SSTZ158CP / 500
6 x 2-in	SSTZ200 / 3,500	SSTZ200CP / 500
8 x 2-1/2-in	SSTZ212 / 2,500	SSTZ212CP / 250
8 x 3-in	SSTZ300 / 2,000	SSTZ300CP / 350



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type S/P Lath Head Screw



Type S/P lath head fine thread screws are designed for attaching wire lathing, framing and other materials to metal studs up to 20 gauge metal to metal.

- No. 2 Phillips recess
- Lath head (truss)
- Fine thread

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

FINE THREAD Metal to Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
8 x 9/16-in	SPLH916 / 10,000	SPLH916CP / 1,000	SPLH916FP / 1,350	SPLH916PP / 270
8 x 1-1/4-in	SPLH114 / 5,000	SPLH114CP / 500	SPLH114FP / 800	SPLH114PP / 160
8 x 2-1/2-in	SPLH212 / 2,500			



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.



Type SPTR Trim Head Screw ◆



Type SPTR fine thread trim head screws are designed for attaching wood, metal, plastic finish trim to wood or light gauge metal (up to 20 ga.).

- No. 1 Square recess
- Trim head
- Fine thread

Coating: Gray Phosphate

Bit: ZSQ1 (No. 1 Square)

FINE THREAD Wood to Wood or Light Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
6 x 1-5/8-in	SPTR158 / 5,000	SPTR158CP / 500	SPTR158FP / 1,300	SPTR158PP / 260
6 x 2-1/4-in	SPTR214 / 3,000	SPTR214CP / 350	SPTR214FP / 900	SPTR214PP / 180
8 x 3-in	SPTR300 / 2,000	SPTR300CP / 250	SPTR300FP / 500	SPTR300PP / 100

HEAVY GAUGE METAL

Type D/P Framing Screw ◆



Type D/P Drill Point Framer for attaching heavier gauge steel framing.

- No. 2 Phillips recess
- Pan head
- Drill point

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
6 x 7/16-in	DPZ716 / 15,000	DPZ716CP / 1,500	DPZ716FP / 1,900	DPZ716PP / 380



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type D/P Framing Screw ◆



Type D/P Drill Point Framer for attaching heavier gauge steel framing.

- No. 2 Phillips recess
- Pan head
- Drill point

Coating: Gray phosphate

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
6 x 7/16-in	DP716 / 15,000	DP716CP / 1,500	DP716FP / 1,900	DP716PP / 380

Type D/P Low Profile Pan Head Framing Screw ◆



Type D/P Drill Point Framer for attaching heavier gauge steel.

- No. 2 Phillips recess
- Low profile pan head
- Drill point

Coating: Gray phosphate

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS
6 x 7/16-in	DP716L / 10,000	DP716LCP / 1,500	DP716LFP / 2,525

Type D/P Super-Tek Framing Screw ◆



Type D/P Super-Tek Drill Point are designed for extra heavy gauge metal framing.

- No. 2 Phillips recess
- Pan head
- Drill point
- .125 head height

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
10 x 5/8-in	DPZ058 / 8,000	DPZ058CP / 1,000	DPZ058FP / 975	DPZ058PP / 195



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.



Type D/P Low Profile Super-Tek Framing Screw ◆



Type D/P Super-Tek low profile pan head (.100) for attaching extra heavy duty steel framing.

- No. 2 Phillips recess
- Low profile pan head
- Drill point
- .100 head height

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO./PCS	COUNT PK ITEM NO./PCS	5-lb ITEM NO./PCS
10 x 5/8-in	DPZ058L / 8,000	DPZ058LCP / 1,150	DPZ058LFP / 1,150



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type D/P Drywall Screw ◆



Type D/P Drill Point fasteners are designed for attaching gypsum board and other materials to heavier gauge metal studs. Bugle head No. 2 Phillips.

- No. 2 Phillips recess
- Bugle head
- Drill point

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Drywall to Heavy Gauge Metal

SIZE	BULK ITEM NO./PCS	COUNT PK ITEM NO./PCS	5-lb ITEM NO./PCS	1-lb ITEM NO./PCS
6 x 1-in	DPZ100 / 10,000	DPZ100CP / 1,000	DPZ100FP / 1,500	DPZ100PP / 300
6 x 1-1/4-in	DPZ114 / 8,000	DPZ114CP / 1,000	DPZ114FP / 1,250	DPZ114PP / 250
6 x 1-5/8-in	DPZ158 / 5,000	DPZ158CP / 500	DPZ158FP / 1,000	DPZ158PP / 200
6 x 1-7/8-in	DPZ178 / 4,000	DPZ178CP / 500	DPZ178FP / 875	DPZ178PP / 175
8 x 2-3/8-in	DPZ238 / 3,000	DPZ238CP / 350	DPZ238FP / 525	DPZ238PP / 105
8 x 2-5/8-in	DPZ258 / 2,500	DPZ258CP / 250	DPZ258FP / 475	DPZ258PP / 95
8 x 3-in	DPZ300 / 2,000	DPZ300CP / 250	DPZ300FP / 425	DPZ300PP / 85
10 x 3-1/2-in	DPZ312 / 1,000	DPZ312CP / 200	DPZ312FP / 275	DPZ312PP / 55
10 x 4-in	DPZ400 / 1,000			
10 x 5-in	DPZ500 / 1,000			
10 x 6-in	DPZ600 / 1,000			



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type DPXT Sheathing Exterior Screw ◆



Type DPXT Drill Point Exterior Screws are designed for attaching exterior sheathing up to 10-gauge metal.

- No. 2 Phillips recess
- Bugle head
- Drill point

Coating: NanoGard™

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Sheathing to Heavy Gauge Metal

SIZE	BULK ITEM NO./PCS	COUNT PK ITEM NO./PCS
7 x 1-1/4-in	DPXT114 / 8,000	DPXT114CP / 1,000
7 x 1-7/8-in	DPXT178 / 4,000	DPXT178CP / 500
8 x 2-3/8-in	DPXT238 / 3,000	
8 x 2-5/8-in	DPXT258 / 2,500	DPXT258CP / 350
8 x 3-in	DPXT300 / 2,000	DPXT300CP / 250
10 x 3-3/4-in	DPXT334 / 1,000	DPXT334CP / 200
10 x 4-3/8-in	DPXT438 / 800	DPXT438CP / 150
10 x 5-1/2-in	DPXT512 / 500	DPXT512CP / 100





Type D/P Drywall Screw ◆



Type D/P Drill Point fasteners are designed for attaching gypsum board and sheathing to heavier gauge metal studs.

- No. 2 Phillips recess
- Bugle head
- Drill point

Coating: Gray Phosphate

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Drywall to Heavy Gauge Metal

SIZE	BULK ITEM NO./PCS	COUNT PK ITEM NO./PCS	5-lb ITEM NO./PCS
6 x 1-in	DPI00 / 10,000	DPI00CP / 1,000	DPI00FP / 1,500
6 x 1-1/4-in	DPI14 / 8,000	DPI14CP / 1,000	DPI14FP / 1,250
6 x 1-5/8-in	DPI58 / 5,000	DPI58CP / 500	DPI58FP / 1,000
6 x 1-7/8-in	DPI78 / 4,000	DPI78CP / 500	DPI78FP / 875
8 x 2-3/8-in	DP238 / 3,000	DP238CP / 350	DP238FP / 525
8 x 2-5/8-in	DP258 / 2,500	DP258CP / 250	DP258FP / 475
8 x 3-in	DP300 / 2,000	DP300CP / 250	DP300FP / 425

Type D/P Lath Head Drywall Screw ◆



Type D/P Lath Head Drill Point are designed for attaching wire lath to heavier gauge metal studs.

- No. 2 Phillips recess
- Lath head
- Drill point

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Lath to Heavy Gauge Metal

SIZE	BULK ITEM NO./PCS	COUNT PK ITEM NO./PCS	5-lb ITEM NO./PCS	1-lb ITEM NO./PCS
8 x 3/4-in	DPLH034 / 8,000	DPLH034CP / 500	DPLH034FP / 1,050	DPLH034PP / 210
8 x 1-1/4-in	DPLH114 / 5,000	DPLH114CP / 500	DPLH114FP / 750	DPLH114PP / 150
8 x 1-5/8-in	DPLH158 / 4,000			
8 x 2-1/4-in	DPLH214 / 2,500	DPLH214CP / 350	DPLH214FP / 500	DPLH214PP / 100
8 x 2-1/2-in	DPLH212 / 2,500			
10 x 3/4-in	DPLHI0034 / 5,000			



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type DPTR Drywall Trim Head Screw ◆



Type DPTR Drill Point Trim Head are designed for attaching wood, metal or plastic finish trim to heavier gauge metal (20-12 ga).

- No. 1 Square recess
- Trim head
- Drill point

Coating: Clear Zinc

Bit: ZSQ1 (No. 1 Square)

DRILL POINT Trim to Heavy Gauge Metal

SIZE	BULK ITEM NO./PCS	COUNT PK ITEM NO./PCS	5-lb ITEM NO./PCS	1-lb ITEM NO./PCS
7 x 1-5/8-in	DPTRI58 / 5,000	DPTRI58CP / 500	DPTRI58FP / 900	DPTRI58PP / 180
7 x 2-1/4-in	DPTR214 / 3,000	DPTR214CP / 350	DPTR214FP / 700	DPTR214PP / 140
8 x 3-in	DPTR300 / 2,000	DPTR300CP / 250	DPTR300FP / 450	DPTR300PP / 90



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.





CEMENT BOARD

Type INSP Indenter High-Low Cement Board Screw ◆ HIGH-LOW THREAD Cement Board to Wood or Light Gauge Metal



Type INSP Indenter High-Low cement board fasteners are designed for attaching cement type boards to wood or (up to 20 gauge) metal stud. Indenter screws have a large wafer head with countersinking nibs that allows flush seating.

The screws offer an increased bearing surface that provides greater pull-through resistance. It is the ideal attachment of cement board in interior high moisture areas.

- No. 2 Phillips recess
- Special wafer head
- High-Low thread
- Spoon point

Coating: NanoGard™

Bit: ZP2 (No. 2 Phillips)

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	ITEM NO/100 COUNT PK
8 x 1-1/4-in	INSP114 / 5,000	INSP114CP / 500	INSP114C / 100
8 x 1-5/8-in	INSP158 / 4,000	INSP158CP / 500	INSP158C / 100
8 x 2-1/4-in	INSP214 / 2,500	INSP214CP / 350	INSP214C / 100



Type BBSP Wafer Head Backer Board Screw ◆ HIGH-LOW THREAD Backer Board to Wood or Light Gauge Metal



Type BBSP wafer head hi-low thread screws are designed for attaching cement board and high density backer board to wood or light gauge metal (up to 20 gauge). Countersinking nibs and wafer head seat flush.

- No. 2 square recess
- Special wafer head
- Hi-Lo thread
- Spoon point

Coating: NanoGard™

Bit: ZSQ2 (No. 2 Square)

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	ITEM NO/100 COUNT PK
10 x 1-1/4-in	BBSP114 / 3,500	BBSP114CP / 500	BBSP114C / 100
10 x 1-5/8-in	BBSP158 / 4,000	BBSP158CP / 500	BBSP158C / 100



Type INDP Indenter Cement Board Screw ◆ DRILL POINT Cement Board to Heavy Gauge Metal



Type INDP Indenter drill point cement board fasteners are designed for attaching cement board to metal (up to 12 gauge). Indenter screws have a large wafer head with countersinking nibs that allows flush seating.

- No. 2 Phillips recess
- Special wafer head
- Drill point

Coating: NanoGard™

Bit: ZP2 (No. 2 Phillips)

SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	ITEM NO/100 COUNT PK
8 x 1-1/4-in	INDP114 / 5,000	INDP114CP / 500	INDP114C / 100
8 x 1-5/8-in	INDP158 / 4,000	INDP158CP / 500	INDP158C / 100
8 x 2-1/4-in	INDP214 / 2,500	INDP214CP / 350	INDP214C / 100





HEAVY GAUGE METAL FRAMING

Type T2H Hex Washer Head Framing Screw ◆



Type T2H hex washer head drill point screws are designed for heavy gauge metal to metal framing applications. Performance range is .035 to .100.

- Hex washer head
- 1/4 Drive
- #2 Drill point

Coating: Clear Zinc


Nut Setter: MSHL14 (Hex)

DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS
8-18 x 1/2-in	T2HW8012 / 10,000	T2HW8012M / 5,000	T2HW8012S / 500
8-18 x 3/4-in	T2HW8034 / 10,000	T2HW8034M / 5,000	T2HW8034S / 500
8-18 x 1-in	T2HW8100 / 8,000	T2HW8100M / 4,000	T2HW8100S / 400
8-18 x 1-1/4-in	T2HW8114 / 5,000	T2HW8114M / 2,500	T2HW8114S / 250
8-18 x 1-1/2-in	T2HW8112 / 5,000	T2HW8112M / 2,500	T2HW8112S / 250

WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type T2P Pan Head Framing Screw ◆



Type T2P pan head drill point screws are designed for heavy gauge metal to metal framing applications. These screws feature a drill point and #2 Phillips recess. Performance range is .035 to .100.

- Pan head
- No. 2 Phillips recess
- #2 Drill point

Coating: Clear Zinc


Bit: ZP2 (No. 2 Phillips)

DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS
8-18 x 1/2-in	T2PP8012 / 10,000	T2PP8012M / 5,000	T2PP8012S / 500
8-18 x 3/4-in	T2PP8034 / 10,000	T2PP8034M / 5,000	T2PP8034S / 500
8-18 x 1-in	T2PP8100 / 8,000	T2PP8100M / 4,000	T2PP8100S / 400
8-18 x 1-1/4-in	T2PP8114 / 5,000	T2PP8114M / 2,500	T2PP8114S / 250
8-18 x 1-1/2-in	T2PP8112 / 5,000	T2PP8112M / 2,500	T2PP8112S / 250

WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type T3P Pan Head Framing Screw ◆



Type T3P pan head drill point screws are designed for heavy gauge metal to metal framing applications. These screws feature a drill point and #2 Phillips recess. Performance range is .110 to .175.

- Pan head
- No. 2 Phillips recess
- Drill point
- #3 Drill point

Coating: Clear Zinc

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS
10-16 x 1/2-in	T3PPI0012 / 10,000	T3PPI0012M / 5,000	T3PPI0012S / 500
10-16 x 3/4-in	T3PPI0034 / 8,000	T3PPI0034M / 4,000	T3PPI0034S / 400
10-16 x 1-in	T3PPI0100 / 5,000	T3PPI0100M / 2,500	T3PPI0100S / 250

WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type T3HH High Hex Head Framing Screw ◆



Type T3H drill point screws are designed for heavy gauge metal to metal framing applications. High Hex Head for greater bit engagement. These screws feature a drill point.
10 = performance range of .110 to .175
12 = performance range of .110 to .210

- High Hex Head
- #3 Drill point

Coating: Clear Zinc

Nut Setter: MSHL516 (Hex)


DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS
10 x 3/4-in	T3HHW10075 / 5,000
10 x 3/4-in	T3HHW10034 / 8,000
10 x 3/4-in	T3HHW100345M / 5,000
12 x 3/4-in	T3HHW12034 / 1,000

WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.



Type T3H Hex Washer Head Framing Screw ◆



Type T3H hex washer head drill point screws are designed for heavy gauge metal to metal framing applications. Performance range is .110 to .210.

- Hex washer head
- 5/16 Drive
- #3 Drill point

Coating: Clear Zinc

Nut Setter: MSHLS16 (Hex)

DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS	
.175 MAX	10-16 x 1/2-in	T3HWI0012 / 10,000	T3HWI0012M / 5,000	T3HWI0012S / 250
	10-16 x 3/4-in	T3HWI0034 / 8,000	T3HWI0034M / 4,000	T3HWI0034S / 400
	10-16 x 1-in	T3HWI0100 / 5,000	T3HWI0100M / 2,500	T3HWI0100S / 250
	10-16 x 1-1/2-in	T3HWI0112 / 3,000	T3HWI0112M / 1,500	T3HWI0112S / 150
	10-16 x 2-in	T3HWI0200 / 2,500	T3HWI0200M / 1,250	T3HWI0200S / 100
	10-16 x 2-1/2-in	T3HWI0212 / 2,000		
.210 MAX	10-16 x 3-in	T3HWI0300 / 1,500		
	12-14 x 3/4-in	T3HWI2034 / 5,000	T3HWI2034M / 2,500	T3HWI2034S / 250
	12-14 x 1-in	T3HWI2100 / 4,000	T3HWI2100M / 2,000	T3HWI2100S / 200
	12-14 x 1-1/4-in	T3HWI2114 / 3,000	T3HWI2114M / 1,500	T3HWI2114S / 150
	12-14 x 1-1/2-in	T3HWI2112 / 3,000	T3HWI2112M / 1,500	T3HWI2112S / 150
	12-14 x 2-in	T3HWI2200 / 2,000	T3HWI2200M / 1,000	T3HWI2200S / 100
	12-14 x 3-in	T3HWI2300 / 1,000		
	12-14 x 2-1/2-in	T3HWI2212 / 1,000	T3HWI2212M / 1,000	T3HWI2212S / 50
	14-14 x 3/4-in	T3HWI4034 / 4,000	T3HWI4034M / 2,000	T3HWI4034S / 200
	14-14 x 1-in	T3HWI4100 / 3,000	T3HWI4100M / 1,500	T3HWI4100S / 150
.210 MAX	14-14 x 1-1/4-in	T3HWI4114 / 2,000	T3HWI4114M / 1,000	T3HWI4114S / 100
	14-14 x 1-1/2-in	T3HWI4112 / 2,000	T3HWI4112M / 1,000	T3HWI4112S / 100
	14-14 x 2-in	T3HWI4200 / 1,500	T3HWI4200M / 750	T3HWI4200S / 100
	14-14 x 2-1/2-in	T3HWI4212 / 1,000		
	14-14 x 3-in	T3HWI4300 / 1,000	T3HWI4300M / 500	T3HWI4300S / 50
	14-14 x 4-in	T3HWI4400 / 750		
14-14 x 5-in	T3HWI4500 / 500			
14-14 x 6-in	T3HWI4600 / 250			



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Type T4H Hex Head Framing Screw ◆



Type T4 hex head drill point screws are designed for heavy gauge metal to metal framing applications. These screws feature NanoGard exterior grade coating for improved corrosion resistance. Performance range is .175 to .250.

- Hex head
- 5/16 Drive
- #4 Drill point

Coating: NanoGard™

Nut Setter: MSHLS16 (Hex)

DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS
12-24 x 7/8-in	T4HWI2078XT / 5,000	T4HWI2078XTM / 2,500	T4HWI2078XTS / 250
12-24 x 2-in	T4HWI2200XT / 2,000		





Type T5H Hex Head Framing Screw



Type T5 hex head drill point screws are designed for heavy gauge metal to metal framing applications. These screws feature NanoGard exterior grade coating for improved corrosion resistance. Performance range is .250 to .500.

- Hex head
- 5/16 Drive
- #5 Drill point

Coating: NanoGard™

Nut Setter: MSHLS16 (Hex)

DRILL POINT Metal to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS
12-24 x 1-1/4-in	T5HWI2114XT / 4,000	T5HWI2114XTM / 2,000	T5HWI2114XTS / 200
12-24 x 1-1/2-in	T5HWI2112XT / 2,500		
12-24 x 2-in	T5HWI2200XT / 2,000	T5HWI2200XTM / 1,000	T5HWI2200XTS / 100
12-24 x 2-1/4-in	T5PFI2214XT / 1,500		
12-24 x 2-1/2-in	T5HWI2121XT / 1,000		
12-24 x 3-in	T5HWI2300XT / 1,000	T5HWI2300XTM / 750	T5HWI2300XTS / 50
14 x 4-in	T5HWI4400XT / 750		
14 x 6-in	T5HWI4600XT / 500		



WOOD TO METAL

PlyLite® Screw



Fastening plywood to light gauge steel is difficult, if not impossible. PlyLite fastens plywood to (up to 20 gauge) steel studs quickly, easily and securely.

With PlyLite fasteners threaded points, smooth shanks and countersinking nibs, the interior contractor will find fastening plywood to light gauge studs as easy as applying gypsum wallboard. PlyLite innovative design reduces ride-up.

- No. 2 Phillips recess
- Flat head
- Threaded point

Coating: Yellow Zinc

Bit: ZP2 (No. 2 Phillips)

SELF PIERCING POINT Plywood to Light Gauge Metal

SIZE	BULK ITEM NO/PCS	5-LB ITEM NO/PCS	1-LB ITEM NO/PCS	FOUR USE WITH
7 x 1-1/2-in	GPLY150 / 7,500	VBGLPL150 / 1,155	XGPLY150 / 232	3/8 - 1-1/2-in PLYWOOD
7 x 2-in	GPLY200 / 5,000	VBGPLY200 / 954	XGPLY200 / 190	5/8 - 3/4-in PLYWOOD
7 x 2-3/4-in	GPLY275 / 3,000	VBGPLY275 / 718	XGPLY275 / 144	PLYWOOD OVER GYPSUM

WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

A Grabber Construction Products item

★ GRABBER PRODUCT COLOR CODING





Type T3PB Bugle Head PHB Sheathing Screw ◆



Type T3PB bugle head leader point screws are designed for attaching sheathing to heavy gauge metal. NanoGard exterior grade coating improves corrosion resistance.

- No. 2 & No. 3 Phillips recess
- Bugle head
- PHB Pilot point

Coating: NanoGard™

Bit: ZP2 (No. 2 Phillips)

PILOT POINT Sheathing to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS	GAUGE
8-18 x 1-15/16-in	T3PB811516 / 4,000	T3PB811516M / 2,000	T3PB811516S / 200	20-18 ga
10-16 x 2-in	T3PB102 / 3,000	T3PB102M / 1,500	T3PB102S / 150	20-16 ga
10-16 x 3-5/8-in	T3PB10358 / 1,000	T3PB10358M / 500		20-16 ga



SIZE	SUBSTRATE	RECESS
8 - 18 x 1-15/16-in	1/4 - 3/4-in LUMBER	No. 2 PHILLIPS
10 - 16 x 2-in	3/8 - 1-in LUMBER	No. 2 PHILLIPS
10 - 16 x 3-5/8-in	5/8 - 1-3/4-in LUMBER	No. 2 PHILLIPS

Type T3PF Flat Head Winged Sheathing Screw ◆



Type T3PF flat head winged drill point screws are designed for attaching plywood and sheathing to heavy gauge metal. NanoGard exterior grade coating improves corrosion resistance. Performance range is lumber (3/8 to 3/4") to heavier gauge metal.

- No. 2 Phillips recess
- Flat head
- #3 Winged drill point

Coating: NanoGard™

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Plywood to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS	GAUGE
10-16 x 1-5/8-in	T3PFI0158 / 3,000	T3PFI0158M / 1,500	T3PFI0158S / 200	16-12 ga



Type T3PW Flat Head Winged Sheathing Screw ◆



Scorpion Type T3PW flat head winged drill point screws are designed for attaching plywood and sheathing to heavy gauge metal. Performance range is lumber (1/4 to 3/4") to 16-10 gauge steel.

- No. 2 Phillips recess
- Flat head
- #3 Winged drill point

Coating: NanoGard™

Bit: ZP2 (No. 2 Phillips)

DRILL POINT Plywood to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS
10-24 x 1-1/4-in	T3PW1014XTNW / 3,500		
10-24 x 1-5/8-in	T3PW10158 / 3,000	T3PW10158M / 1,500	T3PW10158S / 150



Hex Head Neoprene Washer Metal Siding Screw ◆



Scorpion hex head high-low thread roofing fasteners are designed for attaching metal roofing and siding

- Hex head Neoprene washer
- 1/4 Drive
- Type I7 Point

Coating: NanoGard™

Nut Setter: MSHL14 (Hex)


SHARP POINT Metal to Wood

SIZE	BULK ITEM NO/PCS
10 x 1-in	T1710100WXT / 5,000
10 x 1-1/2-in	T1710112WXT / 3,000
10 x 2-in	T1710200WXT / 2,000
10 x 2-1/2-in	T1710212WXT / 1,000
10 x 3-in	T1710300WXT / 1,000





T3H Hex Neoprene Washer Head Metal Sheathing Screw ◆ DRILL POINT Metal to Heavy Gauge Metal



Scorpion hex head fine thread sheathing screws are designed for attaching metal roofing

- Hex head Neoprene washer
- 1/4 Drive
- Tek 3 Drill Point

Coating: NanoGard™

Nut Setter: MSHL14 (Hex)

SIZE	BULK ITEM NO/PCS
10 x 1-1/2-in	T3HW10112WXT / 3,000
12 x 3/4-in	T3HW12034WXT / 3,500
12 x 1-in	T3HW12100WXT / 3,000
12 x 1-1/4-in	T3HW12114WXT / 2,500
12 x 1-1/2-in	T3HW12112WXT / 2,000
12 x 2-in	T3HW12200WXT / 1,500
12 x 2-1/2-in	T3HW12212WXT / 1,000
12 x 3-in	T3HW12300BWXT / 1,000
12 x 4-in	T3HW12400BWXT / 1,000
14 x 2-1/2-in	T3HW14212WXT / 1,000
14 x 4-in	T3HW14400WXT / 750



Type T4PF Flat Head Winged Sheathing Screw ◆



Type T4PF flat head Tek 4 winged drill point screws are designed for attaching plywood and sheathing to heavy gauge metal. NanoGard exterior grade coating improves corrosion resistance. Performance range is Lumber (1/4 to 1") to 16 gauge steel up to .250 steel.

- No. 3 Phillips recess
- Flat head
- Tek 4 Winged drill point

Coating: NanoGard™

Bit: ZP3 (No. 3 Phillips)

DRILL POINT Sheathing to Heavy Gauge Metal

SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS
12 - 24 x 2-in	T4PFI2200XT / 2,000	T4PFI2200XTM / 1,000	T4PFI2200XTS / 100
12 - 24 x 2-1/2-in	T4PFI2212XT / 1,500	T4PFI2212XTM / 750	T4PFI2212XTS / 100
12 - 24 x 3-1/4-in	T4PFI2314XT / 1,000	T4PFI2314XTM / 500	
14 - 20 x 2-3/4-in	T4PFI4234XT / 1,000	T4PFI4234XTM / 500	T4PFI4234XTS / 100



SIZE	SUBSTRATE
12 - 24 x 2-in	1/4 - 1-in LUMBER
12 - 24 x 2-1/2-in	1/2 - 1 1/2-in LUMBER
12 - 24 x 3-1/4-in	1/2 - 2-in LUMBER
14 - 20 x 2-3/4-in	1/2 - 1-1/2-in LUMBER

Type T5PF Flat Head Sheathing Screw ◆



Type T5PF flat head drill point screws are designed for attaching plywood and sheathing to heavy gauge metal. NanoGard exterior grade coating improves corrosion resistance. Performance range is Lumber (1/4 to 1") to 16 gauge steel to .500 steel.

- No. 3 Phillips recess
- Flat head
- Tek 5 Drill point

Coating: NanoGard™

Bit: ZP3 (No. 3 Phillips)

DRILL POINT Sheathing to Heavy Gauge Metal


SIZE	BULK ITEM NO/PCS	MINI PK ITEM NO/PCS	SHELF PK ITEM NO/PCS	GAUGE
12 - 24 x 2-1/4-in	T5PFI2214XT / 1,500	T5PFI2214M / 750	T5PFI2214S / 100	16 ga - .500 STEEL





WOOD TO WOOD

Type XT Flat Head Exterior Deck and Fence Screw ◆ COARSE THREAD Wood to Wood

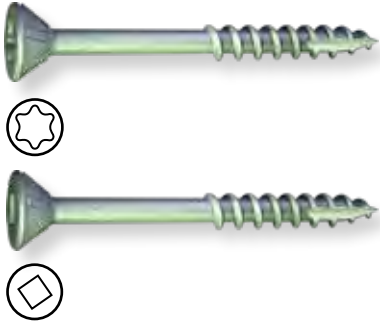

Type XT coarse thread exterior deck screws are designed for pressure treated lumber applications. Flat head, square or star drive with countersinking nibs. Deep thread for greater holding power. Type 17 cutter point eliminates the need for pre-drilling in most cases. Scorpion Draw-Tite shank pulls both wood members together for a secure fastening job.

- Star or square recess
- Flat head
- Coarse thread
- Type 17 point
- Draw-Tite™ shank


Coating: NanoGard™

Bits: 125T20S (Star 20)
S2T25 (Star 25)
ZSQ2 (No. 2 Square)

	SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
STAR 20	6 x 1-1/4-in	TXT114PAIL / 8,000	TXT114CP / 1,000	TXT114FP / 1,325	TXT114PP / 265
	6 x 1-1/2-in	TXT112PAIL / 5,000	TXT112CP / 500	TXT112FP / 1,150	TXT112PP / 230
	7 x 2-in	TXT200PAIL / 3,500	TXT200CP / 500	TXT200FP / 775	TXT200PP / 155
	8 x 2-1/4-in	TXT214PAIL / 3,000	TXT214CP / 300	TXT214FP / 575	TXT214PP / 115
	8 x 2-1/2-in	TXT212PAIL / 2,500	TXT212CP / 250	TXT212FP / 525	TXT212PP / 105
STAR 25	9 x 3-in	TXT300PAIL / 2,000	TXT300CP / 250	TXT300FP / 425	TXT300PP / 85
	10 x 3-1/2-in	TXT312PAIL / 1,000	TXT312CP / 200	TXT312FP / 275	TXT312PP / 55
	10 x 4-in	TXT400PAIL / 1,000	TXT400CP / 150	TXT400FP / 250	TXT400PP / 50
SQUARE 25	10 x 5-in	TXT500PAIL / 1,000	TXT500CP / 100	TXT500FP / 195	
	6 x 1-1/4-in	XT114PAIL / 8,000	XT114CP / 1,000	XT114FP / 1,325	XT114PP / 265
	6 x 1-1/2-in	XT112PAIL / 5,000	XT112CP / 500	XT112FP / 1,150	XT112PP / 230
	7 x 2-in	XT200PAIL / 3,500	XT200CP / 500	XT200FP / 775	XT200PP / 155
	8 x 2-1/4-in	XT214PAIL / 3,000	XT214CP / 300	XT214FP / 575	XT214PP / 115
	8 x 2-1/2-in	XT212PAIL / 2,500	XT212CP / 250	XT212FP / 525	XT212PP / 105
	9 x 3-in	XT300PAIL / 2,000	XT300CP / 250	XT300FP / 425	XT300PP / 85
	10 x 3-1/2-in	XT312PAIL / 1,000	XT312CP / 200	XT312FP / 275	XT312PP / 55
10 x 4-in	XT400PAIL / 1,000	XT400CP / 150	XT400FP / 250	XT400PP / 50	
10 x 5-in	XT500PAIL / 1,000	XT500CP / 100	XT500FP / 195		



Type XT Trim Head Exterior Deck and Fence Screw ◆ COARSE THREAD Wood to Wood

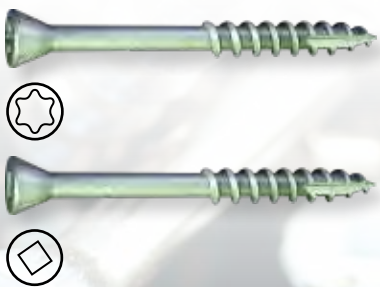

Type XT coarse thread exterior deck screws are designed for use in wood and pressure treated lumber applications. Trim Head Star or square drive with countersinking nibs. Deep thread for greater holding power. Type 17 cutter point eliminates pre-drilling in most cases. Scorpion Draw-Tite shank pulls both wood members together for a secure fastening job.

- Star or Square recess
- Trim head
- Coarse thread
- Type 17 point
- Draw-Tite™ shank

Coating: NanoGard™

Bit: ZSQ1 (No. 1 Square)
S2T15 (Star 15)
S2T20 (Star 20)

	SIZE	BULK ITEM NO/PCS	COUNT PK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
STAR 15	7 x 1-5/8-in	TXTR158PAIL / 5,000	TXTR158CP / 500	TXTR158FP / 925	TXTR158PP / 185
	7 x 2-1/4-in	TXTR214PAIL / 3,000	TXTR214CP / 350	TXTR214FP / 675	TXTR214PP / 135
SQUARE No. 1 20	8 x 3-in	TXTR300PAIL / 2,000	TXTR300CP / 250	TXTR300FP / 450	TXTR300PP / 90
	7 x 1-5/8-in	XTTR158PAIL / 5,000	XTTR158CP / 500	XTTR158FP / 925	XTTR158PP / 185
	7 x 2-1/4-in	XTTR214PAIL / 3,000	XTTR214CP / 350	XTTR214FP / 675	XTTR214PP / 135
	8 x 3-in	XTTR300PAIL / 2,000	XTTR300CP / 250	XTTR300FP / 450	XTTR300PP / 90





STAINLESS STEEL

Type ST 305 Stainless Steel Exterior Screw



STAINLESS STEEL

Type ST 305 stainless steel exterior fasteners are designed for all outdoor wood applications, eliminates staining or streaking around fastener head when used with cedar, redwood, mahogonies and wood composites. Flat Head star drive with countersinking nibs. Deep thread for greater holding power. Type 17 cutter point eliminates pre-drilling in most cases. Draw-Tite shank pulls both wood members together for a secure fastening job.

- Star recess
- Flat head with countersinking nibs
- Type 17 cutter point
- Draw-Tite™ shank

Metal: 305 Stainless Steel

Bit: S2T20 (Star 20)
S2T25 (Star 25)

COARSE THREAD Wood to Wood

	SIZE	BULK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS	BLISTER PACK
STAR 20	8 x 1-1/4-in	GTST125 / 5,000	VBGST125 / 1,005	XGST125 / 190	BPGST125 / 25
	8 X 1-1/2-in	GTST150 / 4,000	VBGST150 / 840	XGST150 / 170	BPGST150 / 25
	8 x 2-in	GTST200 / 3,000	VBGST200 / 625	XGST200 / 125	BPGST200 / 25
	8 x 2-1/2-in	GTST250 / 2,500	VBGST250 / 390	XGST250 / 115	BPGST250 / 25
STAR 25	10 x 3-in	GTST300 / 2,000	VBGST300 / 325	XGST300 / 80	BPGST300 / 25
	10 x 3-1/2-in	GTST350 / 1,500	VBGST350 / 275	XGST350 / 65	BPGST350 / 25
	10 x 4-in	GTST400 / 1,000	VBGST400 / 250	XGST400 / 55	BPGST400 / 25



WARNING: This product can expose you to chemicals including nickel (metallic), which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.



A Grabber Construction Products item

★ GRABBER PRODUCT COLOR CODING

Stainless 305 Trim Head Deck and Fence Screw



Type ST 305 stainless steel exterior fasteners are designed for all outdoor wood applications, eliminates staining or streaking around fastener head when used with cedar, redwood, mahogonies and wood composites. Trim head star drive with counter-sinking nibs. Deep thread for greater holding power. Type 17 cutter point eliminates pre-drilling in most cases. Draw-Tite shank pulls both wood members together for a secure fastening job.

- Star recess
- Trim head
- Type 17 point
- Draw-Tite™ shank

Metal: 305 Stainless

Bit: S2T15 (Star 15)
S2T20 (Star 20)

COARSE THREAD Wood to Wood

	SIZE	BULK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
STAR 15	7 x 1-5/8-in	GTSTTR158 / 5,000	VBGSTTR125 / 953	XGSTTR158 / 185
	7 x 2-1/4-in	GTSTTR225 / 3,000	VBSTTR225 / 690	XGSTTR225 / 135
20	8 x 3-in	GTSTTR300 / 2,000	VBGSTTR300 / 450	XGSTTR300 / 90



WARNING: This product can expose you to chemicals including nickel (metallic), which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.



A Grabber Construction Products item

★ GRABBER PRODUCT COLOR CODING



Painted Trim Head Stainless 305 Screw



WHITE PAINTED HEAD

Type ST 305 stainless steel exterior fasteners are designed for all outdoor wood applications, eliminates staining or streaking around fastener head when used with cedar, redwood, mahoganies and wood composites. Trim Head with countersinking nibs. Deep thread for greater holding power. Type 17 cutter point eliminates pre-drilling in most cases. Draw-Tite shank pulls both wood members together for a secure fastening job.

- Star recess
- Painted trim head
- Type 17 cutter point
- Draw-Tite™ shank

Metal: 305 Stainless steel

Bit: S2T15 (Star 15)

COARSE THREAD Wood to Wood

SIZE	BULK ITEM NO/PCS	5-lb ITEM NO/PCS	1-lb ITEM NO/PCS
7 x 1-5/8-in	GTPHTRI58W / 5,000	VBGTPHTRI58W / 935	XGTPHTRI58W / 190
7 x 2-1/4-in	GTPHTR225W / 3,000	VBGTPHTR225W / 690	XGTPHTR225W / 135



WARNING: This product can expose you to chemicals including nickel (metallic), which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.



A Grabber Construction Products item

★ GRABBER PRODUCT COLOR CODING

DRIVER ACCESSORIES

For satisfactory performance, self drilling fasteners should be driven with a 4-6 amp screwgun at 2500 RPM or less and equipped with a depth location nosepiece.



DRIVE BITS

PHILLIPS		
POINT	LENGTH	
P-2	1-in, 2-in, 3-1/2-in, 6-in	
P-2-R	1-in	
P-3	1-in, 2-in	
SQUARE		
SQ-1	1-in, 2-in	
SQ-2	1-in, 2-in	
STAR		
T-15	1-in, 2-in	
T-20	1-in, 2-in	
T-25	1-in, 2-in	

3-IN MAGNETIC BIT HOLDER

2 PIECE STAINLESS STEEL



2 9/15-IN MAGNETIC HEX DRIVERS



1/4-in, 5/16-in, 3/8-in

NAILS

Type CC Coated Smooth Shank



Drywall Nails are designed for attaching drywall to wood studs. Features include I3 ga head to create dimple in drywall and Type CC rosin coat to increase holding power in stud.

- Smooth shank

Coating: Cement coated

DRYWALL NAIL Drywall to Wood

SIZE	BULK ITEM/WEIGHT	5-lb ITEM
1-1/2-in	DWCCI50 / 50-lbs	NCCI2FP / 5-lbs
1-3/8-in	DWCCI38 / 50-lbs	NCCI38FP / 5-lbs



A Grabber Construction Products item



ACOUSTICAL

Acoustical Drill Point Eye Lag Screw ◆



Scorpion Self-Drilling eye lag fasteners are designed for attaching suspended ceilings hanger wire to steel (22 to 16 gauge). Features include Yellow zinc dicromate, cutting thread and ratchet collar. Installation tools see #ALD14 and #TOPI23 lag pole.

EYE LAG SCREW For Metal

SIZE	BULK ITEM NO./PCS.	MINI BULK NO./PCS.	COUNT PK ITEM NO./PCS
1/4 x 2-in	ALDP200 / 1,000	ALDP2005C / 500	ALDP200CP / 100
1/4 x 3-1/4-in	ALDP314 / 1,000		ALDP314CP / 100

WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Acoustical Eye Lag Screw ◆



Scorpion Acoustical eye lags fasteners are designed for attaching suspended ceiling hanger wire to wood. Features include yellow zinc dicromate finish, type 17 point and deep thread for best performance. These sharp point screws go in with ease using the eye-lag installation tool #ALD14 or #ALD516

EYE LAG SCREW For Wood

SIZE	BULK ITEM NO./PCS.	COUNT PK ITEM NO./PCS
1/4 x 3-in	AL300 / 1,000	AL300CP / 100
1/4 x 4-in	AL400 / 1,000	AL400CP / 100
1/4 x 5-in	AL500 / 1,000	AL500CP / 100
5/16 x 3-1/2-in	AL312 / 1,000	AL312CP / 100

* Large hole accepts 1/4-in pencil rod

WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Acoustical Pierce Point Eye Lag Screw ◆



Scorpion Pierce Point eye lag fasteners are designed for attaching suspended ceiling hanger wire to steel (22 to 20 gauge). Features include Yellow zinc dicromate and ratchet collar. Installation tools see #ALD14 and #TOPI23 lag pole.

EYE LAG SCREW For Steel

SIZE	BULK ITEM NO./PCS.	COUNT PK ITEM NO./PCS
1/4 x 2-3/4-in	ALSP234 / 1,000	ALSP234CP / 100

WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Acoustical Eye Lag Pole ◆



Lag pole tool provides an efficient method for attaching wire to a ceiling with an eye-lag screw. Power the pole with any 3/8" or 1/2" drill. Installs eye-lag screws from ground level without the need for ladders, scaffolding, or scissor lifts. Black anodized aircraft-quality aluminum.

LAG POLE INSTALATION TOOL

SIZE	ITEM NO.
4-ft, 8-ft, 12-ft 3 SECTION	TOPI23
6-ft, 12-ft, 18-ft 3 SECTION	TOPI8

Tension Pins ◆



Tension Pins are tempered steel designed for attaching clips, hangers, furring strips, etc. to concrete blocking.

MOLDING NAILS

SIZE	BULK ITEM NO./WT.	5-lb ITEM NO./WT.
1-1/8-in	TPII8 / 50-lb	VBTPII8 / 5-lb

Wedge Anchor ◆



Scorpion Tie-Wire Wedge Anchors are designed for attaching suspended ceiling wire to concrete ceilings. Features include 302 stainless steel expansion clip, carbon steel roll formed body, and 5/16 hole.


ACOUSTICAL TIE WIRE WEDGE ANCHOR

SIZE	BULK ITEM NO./PCS.	COUNT PK ITEM NO./PCS
1/4 x 2-3/16-in	ATWM / 1,000	ATWCP / 100

WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.



SpringShot ◆

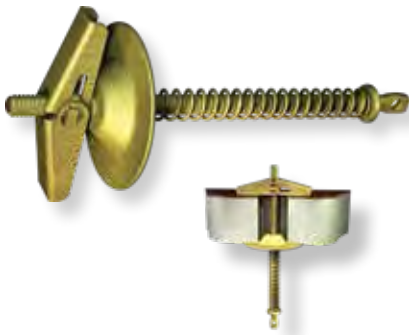

The patented SpringShot Acoustical Toggle is widely popular with the trades because of its ease of installation. Designers have recognized the SpringShot Acoustical toggle's features as a significant advancement to traditional overhead fastening toggle bolts rendering the old fashion toggles obsolete. The SpringShot's self-centering washer is a vast improvement over old style acoustical toggles, making correct installation effortless.

- Self tightening & self-seating
- One size fits all applications
- Helps eliminate migrating sounds
- Will not loosen under vibration
- Project designer preferred

ACOUSTICAL TOGGLE BOLT

SIZE	BULK ITEM NO./PCS.
1/4 x 5-in	SFAST / 100

The patented spring action provides continuous pressure keeping the toggle fixed and secure, and won't loosen over time even with vibration.



WARNING: This product can expose you to chemicals including hexavalent chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

Scorpion 2 Hole Angle Brackets ◆



Scorpion 2 hole Angle Brackets are designed for attaching suspended ceiling wire or wire chain drops from wood, steel, or concrete.

ACOUSTICAL ANGLE BRACKETS

SIZE	BULK ITEM NO./PCS.	COUNT PK ITEM NO./PCS
3/16 x 5/16-in HOLES	A2H / 1,000	A2HCP / 100

Acoustical Pre-Tie Hanger Wire ◆



Pre-tied 12ga. galvanized wire with 1" clip and pin assembly.

CLIP AND PIN

SIZE	ITEM NO./BUNDLE PCS.	DESCRIPTION
4-ft x 12 ga	DHWI204PI00 / 100	RAMSET SDC100 1-in CLIP AND PIN
6-ft x 12 ga	DHWI206PI00 / 100	RAMSET SDC100 1-in CLIP AND PIN
8-ft x 12 ga	DHWI208PI00 / 100	RAMSET SDC100 1-in CLIP AND PIN
12-ft x 12 ga	DHWI212PI00 / 100	RAMSET SDC100 1-in CLIP AND PIN

* Other sizes available upon request

Acoustical Straight Wire ◆



Straight end cut 12ga. galvanized wire with
50-lb per bundle

STRAIGHT WIRE

SIZE	ITEM NO./WEIGHT	DESCRIPTION
12-ft x 12 ga	HWI21250 / 50-lbs	HANGER WIRE, STRAIGHT END CUT
16-ft x 12 ga	HWI21650 / 50-lbs	HANGER WIRE, STRAIGHT END CUT

Acoustical Fence Staples Galvanized ◆



Fence Staples are designed for attaching suspended ceiling wall angle to wood or gypsum.

FENCE STAPLES

SIZE	BULK ITEM NO./WT.	5-lb ITEM NO./WT.
9 x 1-1/2-in	GFS150 / 50-lb	AFSI2FP / 5-lb
9 x 1-3/4-in	GFS175 / 50-lb	AFSI34FP / 5-lb

A Grabber Construction Products item



Scorpion acoustical products technical data and specifications can be found on the Scorpion web site:
www.scorpionscrews.com/technicaldata.aspx



Acoustical Spool Wire ◆



Suspending main tees from eye lag screws in installation of drop ceiling.

CEILING TILE HANGER WIRE

SIZE	ITEM NO./BUNDLE PCS.	DESCRIPTION
18-ga. x 166-ft	TW18166S / Roll	HANGER WIRE, SPOOL

Acoustical U-Hank Wire ◆




Suspending acoustical tile, plaster or drywall channel, attache metal lath.

CEILING TILE HANK WIRE

SIZE	ITEM NO./WEIGHT.	DESCRIPTION
18-ga. x 48-in	TW1848 / 25-lbs	PRECUT GALVANIZED WIRE

Rivet ◆

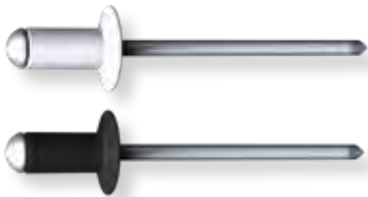

Scorpion grid match rivets are designed for suspended ceiling grid installations. #42 and #44 White or Black

- 1/8-in Diameter
- 1/8-in Grip Range
- White or Black

POP RIVETS For Assembling Ceiling Grid

	SIZE	BULK ITEM NO./APPROX PCS.	COUNT PK ITEM NO./PCS
WHITE	#42 1/8-in dia	ARW4210M / 10,000	ARW42CP / 1,000
	#44 1/8-in dia	ARW4410M / 10,000	ARW44CP / 1,000
BLACK	#42 1/8-in dia	ARB4210M / 10,000	ARB42CP / 1,000
	#44 1/8-in dia	ARB4410M / 10,000	ARB44CP / 1,000

FRAMING COLLARS

E-Z COLUMN Framing Collar

Framing support columns has never been easier

Quickly frame round support columns for finishing with drywall, paneling, etc.

E-Z Column Framing Collars are a hinged one piece construction for fast, easy framing around round columns. Collars fit both standard 3" and 3-1/2" steel columns. Use our blue collar for 4" supports.



Use yellow collar with 3" and 3-1/2" Columns

Use blue collar with 4" Columns

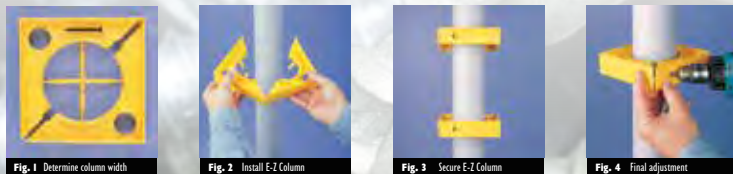


Fig. 1 Determine column width

Fig. 2 Install E-Z Column

Fig. 3 Secure E-Z Column

Fig. 4 Final adjustment

A Grabber Construction Products item





COATINGS AND FINISHES

Black/Gray Phosphate Salt spray results **ASTM B117 24 hours, no red rust**
Recommended for interior applications

Clear Zinc Salt spray results **ASTM B117 24 hours, no red rust**
Recommended for interior applications and exterior applications where the fastener will be encapsulated, i.e. the attachment of lathing prior to the application of stucco.

Yellow Zinc Salt spray results **ASTM B117 48 hours, no red rust**
Recommended for interior applications and exterior applications where the fastener will be encapsulated, i.e. the attachment of lathing prior to the application of stucco.



Salt spray results ASTM B117 1000 hours, 15 cycles Kesternich per DIN 50018, no red rust
GrabberGard® metal finish is a high-grade proprietary metal surface processing technology that prevents corrosion. It is a duplex coating constituting a zinc substrate and organic polymer topcoat. The distinguishing feature of GrabberGard® is the joining and encapsulation of the substrate with the fused organic surface coating. These layers are bonded together through thermal fusion, and this unique method of combining layers results in a combination of the coating films. GrabberGard® treatment does not attribute its anti-corrosion properties to any single material, but the synergy of these two layers, which when combined has superb corrosion resistant qualities. Suitable for use in non coastal areas with all pressure treated lumbars including ACQ.



305 Stainless Steel Non-Coastal Grade
305 stainless steel is a nickel chromium austenitic grade of stainless steel and is inherently non-magnetic. This material is not hardened by heat treatment and provides very good corrosion protection. Higher carbon content than the 304 series increases strength. Suitable for exterior grade that is not in coastal areas when used in conjunction with treated or untreated wood, including ACQ.



Mechanical Galvanized
Scorpion's Mechanical Galvanized screws are treated to meet or exceed the criterion outlined in ASTM B695 - 04(2009) standard specification coatings of zinc mechanically deposited on steel are Class 55, with a minimum thickness of 53 um, and are considered equivalent to ASTM A153 / A153M - 09 Hot Dipped Galvanized products. This cold-weld process is used to apply zinc coating without the introduction of hydrogen to the steel hardware for advanced corrosion protection, ductility and SST performance.



Salt spray results ASTM B117 1000 hours, 15 cycles Kesternich per DIN 50018, no red rust
Grabber's NanoGard™ product is an innovative nano scale surface treatment technology providing, high quality and extreme corrosion resistance properties. Suitable for use in non coastal areas with all pressure treated lumbars including ACQ.

ALSO AVAILABLE THROUGH SCORPION

<p>Mesh Tape</p>	<p>Chop Saw Blade</p>	<p>Particulate Masks</p>	<p>Sanding Sponges</p>	<p>Dump Bins</p>
<p>Fire Caulk</p>	<p>SuperDrive</p>	<p>Adhesives</p>		



SCORPION BRAND

INNOVATION SINCE 1975

Scorpion offers fasteners specifically designed for your applications:

Drywall Fasteners

Fine Thread Fasteners

Drywall to Wood or Light Gauge Metal Fasteners

Drill Point Drywall Fasteners

Self Drilling Construction Fasteners

Landscaping and Timber Fasteners

Ceramic Coated Fasteners

Hex Head Framing Screws

Stainless Steel Deck Fasteners

Acoustical Fasteners

Cement Board Fasteners

Coarse Thread Fasteners

www.scorpionscrews.com • 800-477-8876



Scorpion Fasteners Inc.

Go to scorpionscrews.com or grabberpro.com to find a Grabber location near you.
Grabber General Toll Free Phone: (800) 477-8876



© Copyright Grabber Construction Products Inc., 2020.
All rights reserved.