

RackStation

RS18017xs+



Engineered for scalability to meet any storage demands, Synology RackStation RS18017xs+ provides reliable, high-performance network attached storage for enterprises seeking flexible storage solutions. With scalability of up to 180 drives, RS18017xs+ allows simple data management with minimal time investment required for setup and maintenance. Synology RS18017xs+ is backed by Synology's 5-year limited warranty.

Powerful Storage Solution with Ample Upgradability

Powered by an **Intel Xeon D-1531 6-core** CPU and **16GB DDR4 ECC RDIMM** (expandable up to **128GB**), Synology RS18017xs+ is the ideal companion for intensive data processing, video post-productions, and virtualization applications that increasingly require more storage space.

RS18017xs+ comes natively with dual 10GBase-T ports and four Gigabit ports, along with two 8-lane PCIe 3.0 slots for additional high-performance network interface cards (NICs). When configured with 6 x 10GbE ports with Link Aggregation enabled, RS18017xs+ provides ultra-high **sequential throughput at over 4,800 MB/s** and **568,000 sequential IOPS¹**.

RS18017xs+ features **12 x 3.5" drive bays in a 2U form factor** and allows pairing **up to 7 expansion units** for a combined **180 drives** or **96 drives** when paired with **Synology Expansion Unit RX2417sas** or **RX1217sas** respectively².

- 7 x RX1217sas for additional 84 x 3.5" / 2.5" SAS / SATA HDD / SSD drives
- 7 x RX2417sas for additional 168 x 2.5" SAS / SATA HDD / SSD drives

Rock-Solid Data Protection

The **Snapshot Replication** application provides schedulable, near-instantaneous data protection. It replicates **65,000** system-wide backup copies to offsite servers and local volumes, bringing near-instantaneous data protection and ensuring data in shared folders or virtual machines in iSCSI LUNs remain available in the event of a disaster.

With block-level incremental backup and cross-version deduplication, **Synology Hyper Backup** provides multi-version backup with optimized storage space utilization and allows multiple backup destinations to local shared folders, external hard drives, network shared folders, rsync server, and public cloud services.

Highlights

- Ultra-high performance of over 4,800 MB/s sequential read throughput and 568,000 sequential read IOPS¹
- Intel Xeon D-1531 6-core CPU and 16GB (up to 128GB) DDR4 ECC RDIMM
- Dual 10GBase-T ports and optional 10GbE NICs, providing up to 6 x 10GbE ports for maximum performance throughput
- Scale up to 96 drives with 7 x RX1217sas / 180 drives with 7 x RX2417sas²
- Complete virtualization solution for VMware, Citrix, Microsoft Hyper-V, and OpenStack
- Advanced Btrfs file system offering 65,000 system-wide snapshots and 1,024 snapshots per shared folder
- Backed with 5 year, next business day replacement service

Btrfs: Next Generation Storage Efficiency

RS18017xs+ integrates the **Btrfs** file system, bringing the most advanced storage technologies to meet the management needs of modern large-scale businesses:

- **Flexible Shared Folder / User Quota System** provides comprehensive quota control on all user accounts and shared folders.
- **Advanced snapshot technology** with customizable backup schedule allows up to **1,024** copies of shared folder backups and **65,000** copies of system-wide snapshots without occupying huge storage capacity and system resources.
- **File or folder level data restoration** brings huge convenience and saves time for users who wish to restore only a specific file or folder.
- **File self-healing:** Btrfs file system is able to auto-detect corrupted files with mirrored metadata, and recover broken data using the supported RAID volumes, which include RAID 1, 5, 6, and 10.

Virtualization Ready

RS18017xs+ provides seamless storage solutions for virtualization environments, including **VMware**, **Citrix**, **Hyper-V**, and **OpenStack**. With **VMware vSphere 6 and VAAI** integration certified, RS18017xs+ helps offload specific storage operations and optimizes computation power for unparalleled performance and efficiency in VMware environments. **Windows Offloaded Data Transfer (ODX)** and **Synology Advanced LUN** support greatly improve the efficiency of massive data transfer and migration. With **OpenStack** support, RS18017xs+ can be used as a block-based storage component for servers complying with the **Cinder API**.

Comprehensive Business Applications


Powered by the innovative Synology **DiskStation Manager (DSM)**, RS18017xs+ comes fully-equipped with applications and features designed specifically for large-scale business:

- **Windows® AD and LDAP** support allow easy integration with existing business directory services without recreating user accounts.
- **Windows ACL** support provides fine-grained access control and efficient privilege settings, allowing RS18017xs+ to fit seamlessly into current infrastructure.
- **MailPlus** allows your business to set up a secure, reliable, and private mail server while giving your employees a modern mail client for receiving and sending messages.
- **Powerful collaboration suite** that includes **Synology Office**, **Calendar** and **Chat** for secure and high-performance private communications and user-friendly content organization.



Virtualization Ready

Synology RS18017xs+ is an optimized and certified storage solution for a various virtualization environments.




Synology Collaboration Suite

Powerful and secure private cloud solution for business collaboration and organization with simple but effective management options.

Reliability, Availability & Disaster Recovery

System reliability is of paramount importance to businesses which depend upon their commercial servers every day. RS18017xs+ responds to these concerns with wide-ranging availability and redundancy features:

- **Synology High Availability** ensures a seamless transition between clustered servers in the event of server failure with minimal impact on applications.
- **Redundant power supplies, system fans** and **network ports** with failover support ensure maximum continuous service uptime.
- High-reliability system design, including **fan-less CPU heatsink** and passive cooling technology, prevents single points of failure.
- **DDR4 ECC RDIMM** reduces power consumption and has error detection and correction capabilities during data transmission.

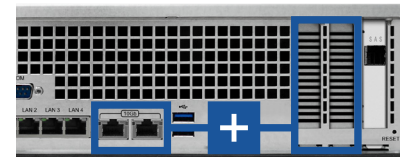

Future-proof Networking


Equipped with two 10GbE and four 1GbE ports, RS18017xs+ can accommodate two additional PCIe network interface cards for flexible network bandwidth management.

Hardware Overview

Front



Rear

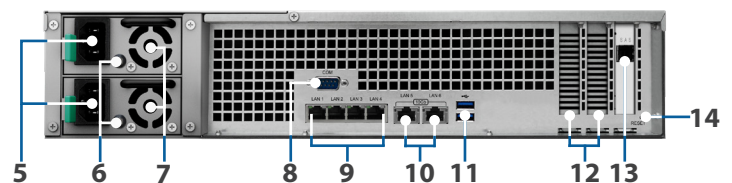

| | | | | | | | |
|----|----------------------------|----|-----------------------------------|----|--------------|----|------------------------|
| 1 | Power button and indicator | 2 | Beep off button | 3 | Drive tray | 4 | Drive status indicator |
| 5 | Power port | 6 | PSU indicator and beep off button | 7 | PSU fan | 8 | Console port |
| 9 | 1GbE RJ-45 port | 10 | 10GbE RJ-45 (10GBase-T) port | 11 | USB 3.0 port | 12 | PCIe expansion slot |
| 13 | Expansion port | 14 | Reset button | | | | |

Technical Specifications

Hardware

| | |
|----------------------------|--|
| CPU | Intel Xeon D-1531 6-core 2.2GHz, burst up to 2.7GHz |
| Hardware encryption engine | Yes (AES-NI) |
| Memory | 16 GB DDR4 ECC RDIMM, expandable up to 128GB |
| Compatible drive type | 12 x 3.5 / 2.5" SAS / SATA HDD / SSD |
| External ports | <ul style="list-style-type: none">• 2 x USB 3.0 port• 1 x Expansion port |
| Size (HxWxD) | <ul style="list-style-type: none">• 88 x 430.5 x 692 mm• 88 x 482 x 724 mm (with server ears)• 2RU |
| Weight | 14.5 kg |
| LAN | <ul style="list-style-type: none">• 2 x 10GbE RJ45 (10GBase-T)• 4 x 1GbE RJ45 |
| PCIe 3.0 slot | <ul style="list-style-type: none">• 2 x 8-lane x8 slot• High-performance network interface card support |
| Scheduled power on / off | Yes |
| System fan | 4 (80 x 80 x 32 mm) |
| AC input power voltage | 100V to 240V AC |
| Power frequency | 50 to 60Hz, single phase |
| Operating temperature | 5°C to 35°C (40°F - 95°F) |
| Storage temperature | -20°C to 60°C (-5°F to 140°F) |
| Relative humidity | 5% to 95% RH |
| Maximum operating altitude | 5,000 m (16,400 ft) |

General

| | |
|-------------------------|--|
| Networking protocol | CIFS, AFP, NFS, FTP, WebDAV, CalDAV, iSCSI, Telnet, SSH, SNMP, VPN (PPTP, OpenVPN™, L2TP) |
| File system | <ul style="list-style-type: none">• Internal: Btrfs, ext4• External: Btrfs, ext4, ext3, FAT, NTFS, HFS+, exFAT³ |
| Storage management | <ul style="list-style-type: none">• Maximum single volume size: 108TB / 200TB (at least 32GB RAM required, for RAID 5 or RAID 6 groups only)• Maximum internal volumes: 1,024• Maximum iSCSI Targets: 128• Maximum iSCSI LUNs: 512• iSCSI LUN clone / snapshot support |
| Supported RAID type | Basic, JBOD, RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 |
| File sharing capability | <ul style="list-style-type: none">• Maximum user account: 16,000• Maximum user group: 512• Maximum shared folder: 512• Maximum concurrent CIFS / AFP / FTP connections: 2,048 |
| Privilege | Windows Access Control List (ACL) |
| Virtualization | VMware vSphere® 6, Microsoft Hyper-V®, Citrix®, OpenStack® |
| Directory service | Windows® AD integration: Domain users login via Samba (CIFS) / AFP / FTP / File Station, LDAP integration |
| Security | FTP over SSL / TLS, IP auto-block, firewall, encrypted network backup over rsync, HTTPS connection |
| Utilities | Synology Web Assistant, Cloud Station Drive, Cloud Station Backup, Cloud Sync Decryption Tool, Evidence Integrity Authenticator, Photo Station Uploader, Snapshot Manager for VMware, Snapshot Manager for Windows, NFS Plug-in for VMware VAAI |
| Supported clients | Windows 7 onward, Mac OS X® 10.10 onward |
| Supported browsers | Chrome®, Firefox®, Internet Explorer® 9 onwards, Safari® 8 onwards; Safari (iOS 7 onwards), Chrome (Android™ 4.0 onwards) on tablets |
| Language | English, Deutsch, Français, Italiano, Español, Dansk, Norsk, Svensk, Nederlands, Русский, Polski, Magyar, Português do Brasil, Português Europeu, Türkçe, Český, 日本語, 한국어, 繁體中文, 简体中文 |

Applications

| | |
|-----------------------------|--|
| File Station | Virtual drive, remote folder, Windows ACL editor, compress / extract archived files, bandwidth control for specific users or groups, creating sharing links, transfer logs |
| Backup solutions | Network backup; local backup; desktop backup; configuration backup; OS X Time Machine; backup data to public cloud; shared folder sync - maximum task number: 32 |
| FTP Server | Bandwidth control for TCP connections, custom FTP passive port range, anonymous FTP, FTP SSL / TLS and SFTP protocol, boot over the network with TFTP and PXE support, transfer logs |
| High Availability Manager | Combines two RS18017xs+ into one high-availability cluster |
| Security Advisor | Malware detection / removal, user account / password, network, system-related security scan |
| iOS / Android™ applications | DS cloud, DS file, DS finder, DS cam, DS note, MailPlus, Chat |
| Windows Phone® applications | DS file, DS finder |

Add-on Packages

| | |
|----------------------|---|
| Antivirus Essential | Full system scan, scheduled scan, white list customization, virus definition auto update |
| Chat | A messaging service that runs locally, ensuring the safety of sensitive corporate information stored on company's premises and providing users a messaging experience equivalent to that of using a public cloud. Built to work with Office and Calendar seamlessly. |
| Cloud Station Suite | Maximum concurrent file transfers: 2,000, retain historical and deleted file versions |
| Cloud Sync | One or two-way synchronization with public cloud storage providers including Amazon Cloud Drive, Amazon S3-compatible storage, BaiduYun, Box, Dropbox, Google Cloud Storage, Google Drive, hubiC, Megafon Disk, Microsoft OneDrive, OpenStack Swift-compatible storage, WebDAV servers, Yandex Disk |
| Log Center | SSL connection, log rotation: 6 months, 1 year, 2 years, 3 years, email notification |
| MailPlus | Intuitive webmail interface for MailPlus Server; customizable mail labels, filters and user interface |
| MailPlus Server | Secure, reliable, and private mail solution with High-availability, load balancing, security and filtering design (Includes 5 free email account licenses, additional accounts require the purchasing of additional licenses) |
| Note Station | Rich-text note organization and versioning, encryption, sharing, media embedding and attachments |
| Office | Real-time collaboration on your private cloud. Collaborate on documents and spreadsheets on your secured company network while enjoying the convenience equivalent to that of a public cloud. |
| Storage Analyzer | Volume and quota usage, total size of files, volume usage and trends based on past usage, size of shared folders, largest / most / least frequently modified files |
| Surveillance Station | Maximum IP camera: 90 (total of 2,700 FPS at 720p, H.264) (Includes two free camera licenses, additional cameras require the purchasing of additional licenses) |
| VPN Server | Maximum connections: 30; supported VPN protocol: PPTP, OpenVPN™, L2TP |
| Web Station | Virtual host (up to 30 websites), PHP / MariaDB®, 3rd-party applications support |
| Other packages | Additional 3rd-party packages are available on Package Center |

Environment and Packaging

| | |
|----------------------|---|
| Environment safety | RoHS compliant |
| Package content | <ul style="list-style-type: none"> • RS18017xs+ main unit • Quick Installation Guide • Accessory pack • 2 x AC power cord |
| Optional accessories | <ul style="list-style-type: none"> • 16GB / 32GB DDR4-2133 ECC RDIMM (RAMRG2133DDR4-16G / RAMRG2133DDR4-32G) • Synology E10G17-F2 / E10G15-F1 10Gbps Ethernet adapters • Synology Expansion Unit RX1217sas / RX2417sas • Synology RKS1317-Rail Kit Sliding • Synology Surveillance Video Decoder VS360HD • Surveillance Device License Pack • MailPlus License Pack • Docker DSM License Pack |
| Warranty | 5 years |

*Model specifications are subject to change without notice. Please refer to www.synology.com for the latest information.

1. Performance figures may vary depending on environment, usage and configuration.
2. RS18017xs+ supports up to 7 Synology Expansion Unit RX1217sas / RX2417sas, sold separately.
3. exFAT Access is purchased separately in Package Center.

SYNOLOGY INC.

Synology is dedicated to taking full advantage of the latest technologies to bring businesses and home users reliable and affordable ways to centralize data storage, simplify data backup, share and sync files across different platforms, and access data on-the-go. Synology aims to deliver products with forward-thinking features and the best in class customer services.

Copyright © 2018, Synology Inc. All rights reserved. Synology, the Synology logo are trademarks or registered trademarks of Synology Inc. Other product and company names mentioned herein may be trademarks of their respective companies. Synology may make changes to specification and product descriptions at anytime, without notice.

RS18017xs+-2018-ENU-REV002

Headquarters

Synology Inc. 9F., No.1, Yuandong Rd., Banqiao Dist., New Taipei City 220, Taiwan Tel: +886 2 2955 1814 Fax: +886 2 2955 1824

China

Synology Shanghai
20070, Room 516, No. 638,
Hengfeng Rd., Zhabei Dist.,
Shanghai, China

France

Synology France SARL
39 rue Louis Blanc, 92400
Courbevoie, France
Tel: +33 147 176288

North & South America

Synology America Corp.
3535 Factoria Blvd SE #200,
Bellevue, WA 98006, USA
Tel: +1 425 818 1587

United Kingdom

Synology UK Ltd.
Unit C, Denbigh West
Business Park, Third Avenue,
Bletchley, Milton Keynes,
MK1 1DH, UK
Tel: +44 1908 366380

Germany

Synology GmbH
Grafenberger Allee
125 40237 Düsseldorf
Deutschland
Tel: +49 211 9666 9666