


ThinkSystem SR650 Platform Specifications

Product Specifications Reference (PSREF)

| Components | Specification | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|--|---|------------------|-------------|--------------|------------------|------------------|----------|---------|--------|------------|----------|-------------|-----|------|------|-----|---|--------|------------|----------|-------------|-----|-----|------|----|---|--------|------------|----------|------------------|-----|-----|--------------|-----|---|---------|------------|----------|------------------|-----|-----|--------------|-----|---|---------|------------|----------|------------------|-----|-----|--------------|-----|---|--------|------------|----------|---|-----|------|------|---|---|---------|------------|----------|---|-----|------|------|---|---|--------|------------|----------|------------------|-----|-----|--------------|-----|---|--------|------------|----------|---|-----|------|------|---|---|---------|------------|----------|---|-----|------|------|---|---|
| Form factor | 2U rack | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dimensions | Height: 86.5 mm (3.4 in). Width: 482 mm (19.0 in) with rack latches. Depth: 763.7 mm (30.1 in) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Weight | Maximum configuration: 70.54 lb (32 kg) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Processor | Up to two 205W Intel Xeon Scalable family processors, Bronze, Silver, Gold, or Platinum. Up to 28 cores at 2.5GHz, up to 3.6GHz with 4 cores. Two processors are connected with two UPI (Ultra Path Interconnect) links up to 10.4GT/s | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Chipset | Intel C624 Platform Controller Hub | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Memory | Up to 24 DIMM sockets. Each processor supports up to 12 DIMM sockets with 6 channels. DDR4-2666. RDIMMs, LRDIMMs, 3DS RDIMMs are supported, but memory types cannot be intermixed. 3DS RDIMM is planned to available later | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Memory capacity | Up to 768GB with 24 x 32 GB RDIMMs and two processors. Or up to 1.5TB with 24 x 64 GB LRDIMMs and two processors. Or up to 3TB with 24 x 128 GB 3DS LRDIMMs and two -M suffix processors. -M suffix processor supports 1.5TB memory per socket, non -M suffix processor supports 768GB memory per socket | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Memory protection | ECC, memory mirroring, and memory sparing | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Storage controllers | One dedicated internal RAID slot for most RAID/HBA adapters. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>Feature</th> <th>Interface</th> <th>Drive type</th> <th>RAID levels</th> <th>JBOD</th> <th>Cache</th> <th>Cache protection</th> <th>FastPath</th> <th>Max qty</th> </tr> </thead> <tbody> <tr> <td>530-8i</td> <td>12Gbps SAS</td> <td>SATA/SAS</td> <td>0/1/10/5/50</td> <td>Yes</td> <td>None</td> <td>None</td> <td>Yes</td> <td>2</td> </tr> <tr> <td>730-8i</td> <td>12Gbps SAS</td> <td>SATA/SAS</td> <td>0/1/10/5/50</td> <td>Yes</td> <td>1GB</td> <td>None</td> <td>No</td> <td>3</td> </tr> <tr> <td>930-8i</td> <td>12Gbps SAS</td> <td>SATA/SAS</td> <td>0/1/10/5/50/6/60</td> <td>Yes</td> <td>2GB</td> <td>Flash backup</td> <td>Yes</td> <td>3</td> </tr> <tr> <td>930-16i</td> <td>12Gbps SAS</td> <td>SATA/SAS</td> <td>0/1/10/5/50/6/60</td> <td>Yes</td> <td>4GB</td> <td>Flash backup</td> <td>Yes</td> <td>1</td> </tr> <tr> <td>930-24i</td> <td>12Gbps SAS</td> <td>SATA/SAS</td> <td>0/1/10/5/50/6/60</td> <td>Yes</td> <td>4GB</td> <td>Flash backup</td> <td>Yes</td> <td>1</td> </tr> <tr> <td>430-8i</td> <td>12Gbps SAS</td> <td>SATA/SAS</td> <td>-</td> <td>Yes</td> <td>None</td> <td>None</td> <td>-</td> <td>3</td> </tr> <tr> <td>430-16i</td> <td>12Gbps SAS</td> <td>SATA/SAS</td> <td>-</td> <td>Yes</td> <td>None</td> <td>None</td> <td>-</td> <td>1</td> </tr> <tr> <td>930-8e</td> <td>12Gbps SAS</td> <td>SATA/SAS</td> <td>0/1/10/5/50/6/60</td> <td>Yes</td> <td>4GB</td> <td>Flash backup</td> <td>Yes</td> <td>5</td> </tr> <tr> <td>430-8e</td> <td>12Gbps SAS</td> <td>SATA/SAS</td> <td>-</td> <td>Yes</td> <td>None</td> <td>None</td> <td>-</td> <td>5</td> </tr> <tr> <td>430-16e</td> <td>12Gbps SAS</td> <td>SATA/SAS</td> <td>-</td> <td>Yes</td> <td>None</td> <td>None</td> <td>-</td> <td>5</td> </tr> </tbody> </table> | Feature | Interface | Drive type | RAID levels | JBOD | Cache | Cache protection | FastPath | Max qty | 530-8i | 12Gbps SAS | SATA/SAS | 0/1/10/5/50 | Yes | None | None | Yes | 2 | 730-8i | 12Gbps SAS | SATA/SAS | 0/1/10/5/50 | Yes | 1GB | None | No | 3 | 930-8i | 12Gbps SAS | SATA/SAS | 0/1/10/5/50/6/60 | Yes | 2GB | Flash backup | Yes | 3 | 930-16i | 12Gbps SAS | SATA/SAS | 0/1/10/5/50/6/60 | Yes | 4GB | Flash backup | Yes | 1 | 930-24i | 12Gbps SAS | SATA/SAS | 0/1/10/5/50/6/60 | Yes | 4GB | Flash backup | Yes | 1 | 430-8i | 12Gbps SAS | SATA/SAS | - | Yes | None | None | - | 3 | 430-16i | 12Gbps SAS | SATA/SAS | - | Yes | None | None | - | 1 | 930-8e | 12Gbps SAS | SATA/SAS | 0/1/10/5/50/6/60 | Yes | 4GB | Flash backup | Yes | 5 | 430-8e | 12Gbps SAS | SATA/SAS | - | Yes | None | None | - | 5 | 430-16e | 12Gbps SAS | SATA/SAS | - | Yes | None | None | - | 5 |
| | Feature | Interface | Drive type | RAID levels | JBOD | Cache | Cache protection | FastPath | Max qty | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 530-8i | 12Gbps SAS | SATA/SAS | 0/1/10/5/50 | Yes | None | None | Yes | 2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 730-8i | 12Gbps SAS | SATA/SAS | 0/1/10/5/50 | Yes | 1GB | None | No | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 930-8i | 12Gbps SAS | SATA/SAS | 0/1/10/5/50/6/60 | Yes | 2GB | Flash backup | Yes | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 930-16i | 12Gbps SAS | SATA/SAS | 0/1/10/5/50/6/60 | Yes | 4GB | Flash backup | Yes | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 930-24i | 12Gbps SAS | SATA/SAS | 0/1/10/5/50/6/60 | Yes | 4GB | Flash backup | Yes | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 430-8i | 12Gbps SAS | SATA/SAS | - | Yes | None | None | - | 3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 430-16i | 12Gbps SAS | SATA/SAS | - | Yes | None | None | - | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 930-8e | 12Gbps SAS | SATA/SAS | 0/1/10/5/50/6/60 | Yes | 4GB | Flash backup | Yes | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 430-8e | 12Gbps SAS | SATA/SAS | - | Yes | None | None | - | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 430-16e | 12Gbps SAS | SATA/SAS | - | Yes | None | None | - | 5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <i>Note: 730-8i is available in China only. 930-8e, 430-8e, and 430-16e will be placed in slot 4 firstly. 930-24i will be placed in slot 1 firstly.</i> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Disk drive bays | Supports 8 front 3.5" SATA/SAS HS bays, or 12 front 3.5" SATA/SAS HS bays with maximum 4 AnyBay, or 8 front 2.5" SATA/SAS HS bays with maximum 4 AnyBay, or 16 front 2.5" SATA/SAS HS bays with maximum 8 AnyBay, or 24 front 2.5" SATA/SAS HS bays with maximum 4 AnyBay. Optional 2 rear 3.5" HS bays are supported on 12 x 3.5" model, takes place in riser card 1 location. Optional one or two internal M.2 SSD for boot, dual M.2 SSD supports mirroring | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Internal storage | For 3.5" bay | 3.5" HDD, SATA6Gbps, 7.2K 3.5" HDD, SAS12Gbps, 7.2K | 1TB/2TB/4TB/6TB/8TB/10TB 1TB/2TB/4TB/4TB SED FIPS/6TB/10TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | For 2.5" bay | 2.5" HDD, SAS12Gbps, 15K 2.5" SSD, SATA6Gbps | 300GB/600GB 240GB/480GB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 2.5" NVMe SSD, AnyBay | 960GB/1.92TB/3.84TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | 2.5" HDD, SATA6Gbps, 7.2K 2.5" HDD, SAS12Gbps, 7.2K | 1TB/2TB 1TB/2TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | PCle 3.0 x4, HHL adapter M.2 boot drive | 2.5" HDD, SAS12Gbps, 10K | 300GB/300GB SED/600GB/600GB SED/900GB/1.2TB/1.8TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.5" HDD, SAS12Gbps, 15K | | 300GB/600GB/900GB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.5" SSD, SAS12Gbps | | 400GB/800GB/3.84TB/7.68TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2.5" SSD, SATA6Gbps | | 240GB/480GB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Optical | PCle 3.0 x4, HHL adapter | 2.5" NVMe SSD, AnyBay | 800GB/960GB/1.6TB/1.92TB/3.84TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | M.2 boot drive | NVMe SSD | 1.6TB/1.92TB/3.2TB/3.84TB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Network interfaces | | M.2 SATA SSD | 32GB/128GB | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Security features | Power-on and admin password. Trusted Platform Module, TCG 1.2 compliant, upgrade to 2.0 via UEFI setting. Optional TCM in China only. Optional lockable security bezel | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operating systems supported | Microsoft Windows Server 2016/2012 R2. Red Hat Enterprise Linux 7.3/6.9. SUSE Linux Enterprise Server 12 SP2/11 SP4. VMware vSphere (ESXi) 6.5/6.0 U3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Systems management | XClarity Controller Standard, optional upgrades to Advanced or Enterprise are available. Energy Manager. XClarity Administrator. Lenovo Capacity Planner. Provisioning Manager. Essentials. Light Path Diagnostics | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| GPU support | Up to two optional GPU, requires riser card with PCle x16 slot. 2nd GPU requires 2nd CPU. Supports Intel Xeon Phi 7240P, NVIDIA Quadro M60, or Quadro P100 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| Components | Specification | |
|-----------------------------|--|---|
| Base warranty | MT 7X05: 1-year limited onsite service with 9x5/NBD MT 7X06: 3-year limited onsite service with 9x5/NBD | |
| Power supply | Up to two redundant hot-swap 550W/750W/1100W/1600W 80 PLUS Platinum qualified AC power supplies. Or up to two redundant hot-swap 750W Titanium qualified AC power supplies. 750W Titanium and 1600W Platinum are 200V - 240V, others are 100V - 240V | |
| Video | Integrated Matrox G200 in XClarity Controller | |
| Cooling | Five fans (4+1) for single processor model, six fans (5+1) for dual processor model | |
| Front ports | One XClarity Controller USB connector, one USB 3.0, one optional VGA | |
| Rear ports | One VGA, two USB 3.0, one XClarity Controller network connector. Optional COM port | |
| Environmental specification | Supports ASHRAE A4 with limitations. | |
| | Temperature - operating | A4: 5°C to 45°C (41°F to 113°F) A3: 5°C to 40°C (41°F to 104°F) A2: 10°C to 35°C (50°F to 95°F) |
| | Temperature - non operating (no package) | -10°C to 60°C (14°F to 140°F) |
| | Temperature - non operating (with package) | -40°C to 70°C (-40°F to 158°F) |
| | Altitude - operating | (Unpressurized): 0-10000ft (0-3048m) |
| | Humidity - operating, non-condensing | A4: 8%-90%. A3:8%-85%. A2:20%~80% |
| | Humidity - storage (with package), non-condensing | 8%~90% |
| | <i>Models should meet the following requirements to support A3 and A4:</i> | |
| | <ul style="list-style-type: none"> NVMe drives not installed PCle flash adapter not installed Graphic processing unit (GPU) not installed Must have redundant PSU Certain processors not installed: <ul style="list-style-type: none"> Processors with TDP more than or equal to 150-watt not installed On 16 x 2.5", 24 x 2.5", and 12 x 3.5" models, the following processors not installed: Intel Xeon 4112, 5122, 6126, 6128*, 6132*, 6134, 6134M*, and 8156 processors (Processors marked with * will be available later) | |
| | Environmental certification | Energy Star Server 2.1 certified. More environmental information please see: www.lenovo.com/social_responsibility/us/en/environment/ |

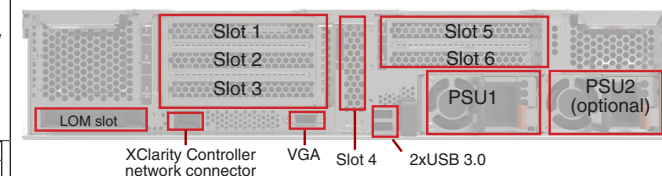

| Expansion slots | Specification |
|-------------------------|---|
| Slot 1-3 (riser card 1) | Supports one of the following for riser card 1: Option 1: PCIe 3.0 x8/x8/x8 (slot 1-3). Full height, half length. Option 2: PCIe 3.0 x16/x8 (slot 1 and 3). Full height, full length for x16. Full height, half length for x8 Option 3: PCIe 3.0 x8/x8/x8 ML2 (slot 1-3). Full height, half length Option 4: PCIe 3.0 x8/x16 ML2 (slot 1 and 3). Full height, half length Option 5: Two rear 3.5" disk bays, 12 x 3.5" models only |
| Slot 4 (onboard) | PCle 3.0 x8, low profile |
| Slot 5 (riser card 2) | PCle 3.0 x16, full height, full length, requires 2nd CPU |
| Slot 6 (riser card 2) | PCle 3.0 x16, full height, half length, requires 2nd CPU |

| System unique options | |
|-----------------------|--|
| 7XH7A06253 | ThinkSystem SR590/SR650 Rear HDD Kit |
| 7XH7A02681 | ThinkSystem SR650 x8/x16ML2 PCle FH Riser 1 Kit |
| 7XH7A02680 | ThinkSystem SR550/SR590/SR650 x8/x8x8ML2 PCle FH Riser 1 Kit |
| 7XH7A02678 | ThinkSystem SR550/SR590/SR650 x16/x8 PCle FH Riser 1 Kit |
| 7XH7A02677 | ThinkSystem SR550/SR590/SR650 x8/x8/x8 PCle FH Riser 1 Kit |
| 7XH7A02679 | ThinkSystem SR550/SR590/SR650 x16/x8(or x16) PCle FH Riser 2 Kit |
| 7XH7A06251 | ThinkSystem SR650 2.5" AnyBay 8-Bay Backplane Kit |
| 7XH7A06254 | ThinkSystem SR550/SR650 2.5" SATA/SAS 8-Bay Backplane Kit |
| Z217A02578 | ThinkSystem SR550/SR590/SR650 EIA Latch w/ VGA Upgrade Kit |
| Z217A02580 | ThinkSystem 2U Security Bezel |
| Z217A02577 | ThinkSystem COM Port Upgrade Kit |
| 7XH7A05899 | ThinkSystem SR650 2nd GPU Upgrade Kit |
| 7XH7A05897 | ThinkSystem SR650 GPU Thermal Kit |
| 7XH7A05898 | ThinkSystem SR650(GPU) 1U Heatsink Option Kit |